

FACTORY AUTOMATION

# Mitsubishi Electric AC Servo System MELSERVO-J5

Innovate Together



MITSUBISHI ELECTRIC SERVO SYSTEM

**MELSERVO-J5**



## Automating the World



Our Factory Automation business is focused on "Automating the World" to make it a better, more sustainable environment supporting manufacturing and society, celebrating diversity and contributing towards an active and fulfilling role.

Mitsubishi Electric is involved in many areas including the following:

### **Energy and Electric Systems**

A wide range of power and electrical products from generators to large-scale displays.

### **Electronic Devices**

A wide portfolio of cutting-edge semiconductor devices for systems and products.

### **Home Appliance**

Dependable consumer products like air conditioners and home entertainment systems.

### **Information and Communication Systems**

Commercial and consumer-centric equipment, products and systems.

### **Industrial Automation Systems**

Maximizing productivity and efficiency with cutting-edge automation technology.



The Mitsubishi Electric Group is actively solving social issues, such as decarbonization and labor shortages, by providing production sites with energy-saving equipment and solutions that utilize automation systems, thereby helping towards a sustainable society.


# OVERVIEW

- **Concept** ..... 4
- **Product Lines** ..... 10
- **Servo System** ..... 14
- **Servo System Controllers** ..... 24
- **Embedded Type Servo System Controller** ..... 60
- **MELSERVO-J5** ..... 68
- **Utilization of SSCNET III/H Device Assets** ..... 100
- **Mitsubishi Electric Solutions/Partners/FA Global Website** .....106
- **Common Specifications (Combinations of Servo Motors and Servo Amplifiers, etc.)** ..... 1-1
- **Product Specifications of Servo System Controllers** ..... 2-1
- **MELSERVO-J5 Product Specifications**
  - Servo Amplifiers ..... 3-1
  - Rotary Servo Motors ..... 4-1
  - Linear Servo Motors..... 5-1
  - Direct Drive Motors ..... 6-1
  - Options/Peripheral Equipment ..... 7-1
  - Low-Voltage Switchgear/Wires ..... 8-1
- **Product List** ..... 9-1
- **Precautions** ..... 10-1
- **Support** .....11-1



# Create new value with MELSERVO-J5. Unlock performance with a total drive solution.

Maximize system performance

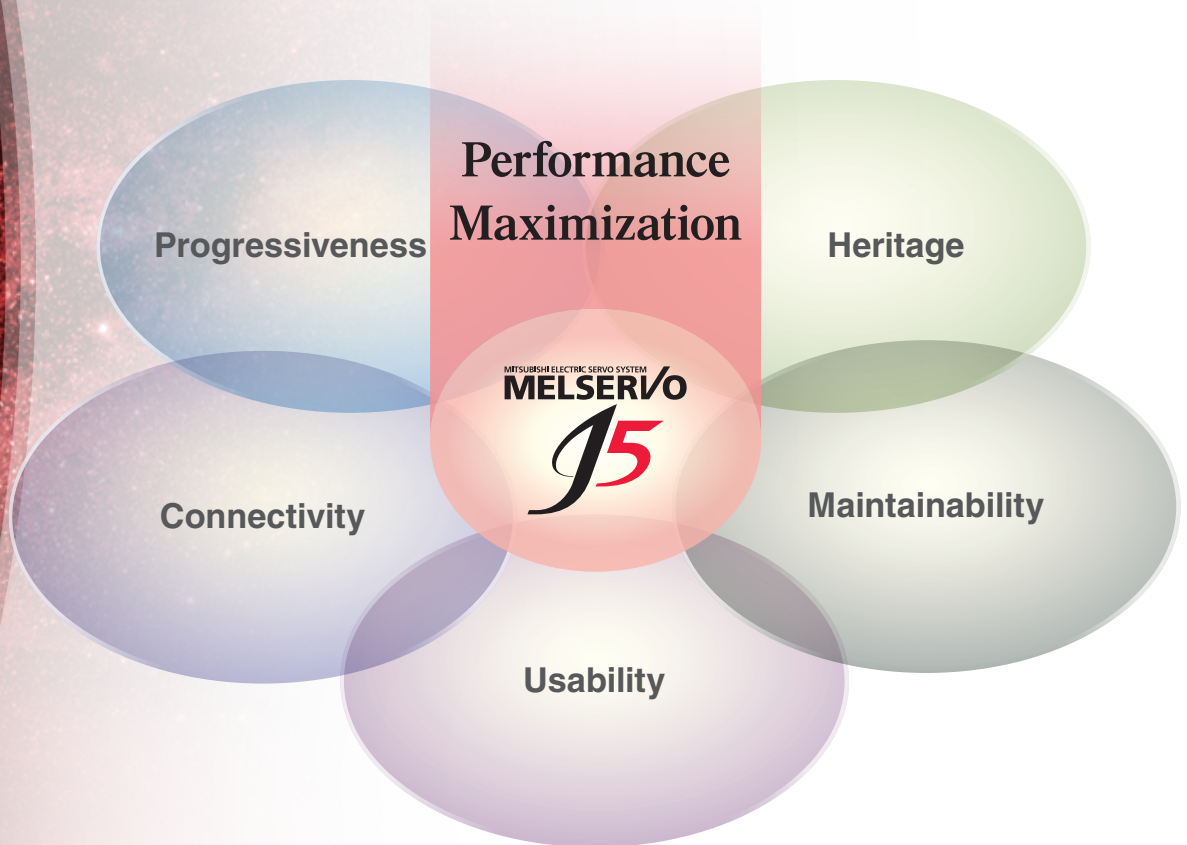

## Progressiveness



For evolution of machines

- Performance improvement
- Program standardization

## Connectivity



For flexible system configurations

- Integration with connectable devices

## Usability



For quick operation start

- Tool enhancement
- Improved drive system usability

## Maintainability



For prompt detection and diagnosis of failures

- Predictive/preventative maintenance
- Corrective maintenance
- Zero maintenance

## Heritage



For utilization of existing devices

- Interchangeability with previous generation models

# Create a cutting-edge servo system together with MELSERVO-J5

## Maximize the performance of your system and equipment with MELSERVO-J5 total drive solutions

### Progressiveness



#### For evolution of machines

The dramatically improved basic performance of MELSERVO-J5 and CC-Link IE TSN enable total drive solutions that help to increase production efficiency and keep your equipment on the cutting edge.

##### Performance improvement

- High-speed/high-accuracy/multi-axis
- Vibration suppression
- Compact and energy efficient

##### Program standardization

- Conforms to IEC 61131-3
- Function blocks for motion control
- Synchronous control /cam control

### Connectivity



#### For flexible system configurations

CC-Link IE TSN enables a high degree of compatibility with IoT technology. Our servo system provides new opportunities for value creation with highly integrated connectable devices and a dramatically expanded range of compatible devices.

##### Integration with connectable devices

- CC-Link IE TSN
- Connection with TCP/IP devices

### Usability



#### For quick operation start

Our intuitive and user-friendly products are designed to make program development as simple as possible. From system design to maintenance, efficiency is improved at each step of the development process through software and sizing tool enhancement.

##### Tool enhancement

- Simple programming
- Drive system sizing software/  
FA Integrated Selection Tool
- Collaboration with partners

##### Improved drive system usability

- Single connector/one-touch lock
- Single/dual cable types
- Servo adjustment



## Maintainability



### For prompt detection and diagnosis of failures

Not only realization of zero maintenance, but the machine downtime can be significantly reduced by prompt error detection and diagnostics. Years of technical know-how and state of the art drive technology can realize predictive and planned maintenance.

#### Predictive/preventive maintenance

- Machine diagnosis

#### Corrective maintenance

- Servo system recorder

#### Zero maintenance

- Batteryless absolute position encoder

## Heritage



### For utilization of existing devices

Incorporate existing manufacturing devices into your new system and benefit from reduced costs and faster construction speed.

#### Interchangeability with previous generation models

- Simple Motion mode
- SSCNET III/H-compatible MR-J5-B

# Created using a brand-new approach, this new-generation servo system contributes to reducing the TCO through improved productivity

Focused on improving total performance.

The MELSERVO-J5 series servo system boasts industry-leading level basic performance.

The high-speed, high-precision capabilities of MELSERVO-J5 help to increase the productivity of your machines.

CC-Link **IE TSN**

MELSEC **iQ-F**  
series

MELSEC **iQ-R**  
series



FX5-SSC-G

RD78GH

RD78G

## Motion Module

|                            |                                |
|----------------------------|--------------------------------|
| Minimum operation cycle *1 | Max. number of control axes *1 |
| <b>31.25</b><br>µs         | <b>256</b><br>axes             |

\*1. The values are applicable when RD78GH is used.

CC-Link **IE TSN**

## Personal Computer Embedded Type Servo System Controller



## Motion Control Software SWM-G

|                            |                             |
|----------------------------|-----------------------------|
| Minimum operation cycle *2 | Max. number of control axes |
| <b>125</b><br>µs           | <b>128</b><br>axes          |

\*2. The minimum operation cycle depends on the number of control axes and the CPU of the personal computer.

## CC-Link IE TSN

CC-Link IE TSN supports TCP/IP communications and applies it to industrial architectures through its support of TSN enabling real-time communications. With its flexible system architecture and extensive setup and troubleshooting features make CC-Link IE TSN ideal for building an IIoT infrastructure across the manufacturing enterprise.

\* TSN: Time Sensitive Networking  
\* IIoT: Industrial Internet of Things

CC-Link **IE TSN**

## Servo System Controllers

Motion modules and Motion Control Software are available in our product lines. Select a controller suitable for your machine.

### Motion Modules

The following operation modes are selectable: Simple Motion mode that enables utilization of existing projects and PLCopen® motion control FB mode that enables structured programming. MELSEC iQ-R series Motion modules utilize a multi-core processor to achieve enhanced performance.

### Motion Control Software

Installed on a personal computer, Motion Control Software can perform motion control.



## MELSERVO-J5 series servo amplifiers

MITSUBISHI ELECTRIC SERVO SYSTEM  
**MELSERVO-J5**

Speed frequency  
response

**3.5**  
kHz

Minimum  
communication cycle<sup>\*3</sup>

**31.25**  
μs


\*3. MR-J5-G/MR-J5D1-G4 support 31.25 μs.



**CC-Link IE TSN**

**SSCNET III/H**  
SERVO SYSTEM CONTROLLER NETWORK

MR-J5-G  
MR-J5W2-G  
MR-J5W3-G  
MR-J5D1-G4  
MR-J5D2-G4  
MR-J5D3-G4  
MR-J5-B  
MR-J5W2-B  
MR-J5W3-B

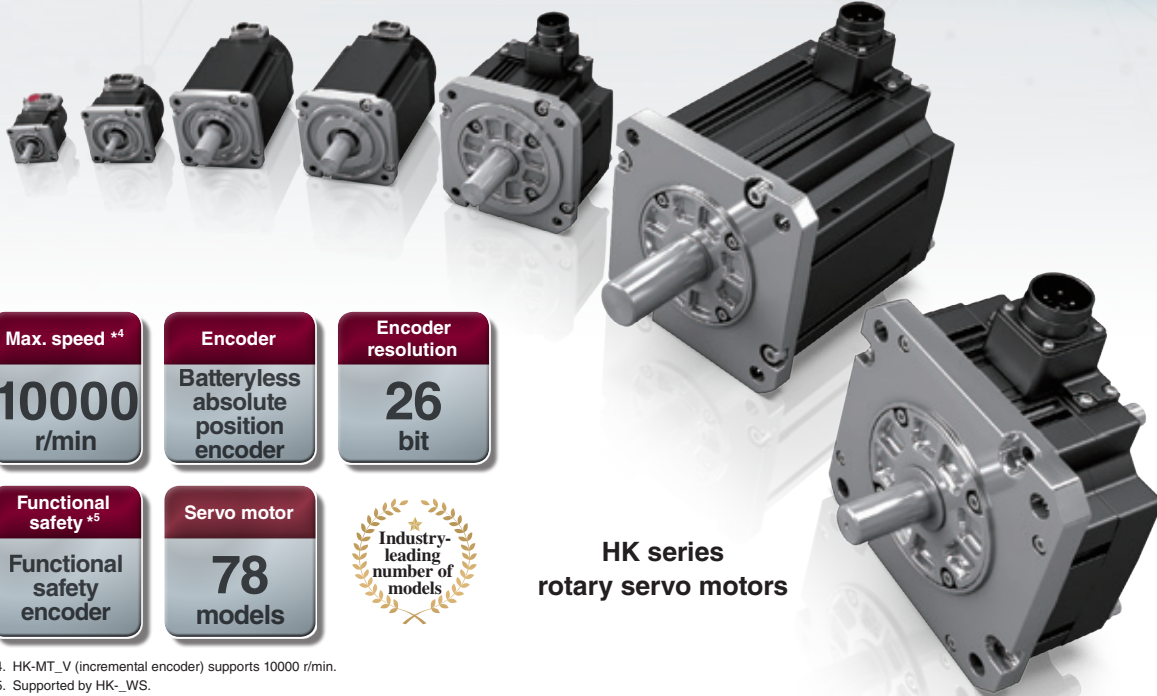

Max. speed<sup>\*4</sup>

**10000**  
r/min

Encoder

Batteryless  
absolute  
position  
encoder

Encoder  
resolution

**26**  
bit

Functional  
safety<sup>\*5</sup>

Functional  
safety  
encoder

Servo motor

**78**  
models



**HK series  
rotary servo motors**

**Flat type  
(176 × 176)  
(NEW)**

\*4. HK-MT\_V (incremental encoder) supports 10000 r/min.

\*5. Supported by HK\_WS.

### Servo Amplifiers

The MELSERVO-J5 series high-performance, industry-leading servo amplifiers feature a unique control engine that is more powerful than ever before.

MR-J5W-G/MR-J5W-B multi-axis servo amplifiers and MR-J5D-G4 drive units simplify wiring and enable a compact machine.

#### CC-Link IE TSN-Compatible Servo Amplifiers

MR-J5-G/MR-J5D-G4 servo amplifiers can connect to CC-Link IE TSN to perform high-speed, high-precision control.

#### SSCNET III/H-Compatible Servo Amplifiers

MR-J5-B servo amplifiers can connect to SSCNET III/H and utilize the existing program assets to improve the machine performance.

### Rotary Servo Motors

The HK series rotary servo motors are equipped with a 26-bit resolution batteryless absolute position encoder as standard.

#### Batteryless Absolute Position Encoders

Mitsubishi Electric's unique multi-revolution detection method allows the saving of absolute position data without a battery.

#### Single Connector/One-Touch Lock/Single Cable Type

The servo motor power supply, encoder, and electromagnetic brake can be connected using only a single cable. The one-touch lock makes wiring easy.

\* "Industry-leading level" refers to results from a Mitsubishi Electric December 2023 research study.

# Innovate Together

## CONTROLLER

### Programmable Controllers



MELSEC iQ-R



MELSEC iQ-F

### CC-Link IE TSN- Compatible Motion Control Software



SWM-G

### CC-Link IE TSN-Compatible Motion Modules



RD78G



RD78GH



FX5-SSC-G

\* SWM-G-N1 is also compatible with EtherCAT®.

## INTERFACE

### CC-Link IE TSN

## CC-Link IE TSN

## SERVO AMPLIFIER

### CC-Link IE TSN- Compatible Servo Amplifiers



MR-J5-G

### CC-Link IE TSN- Compatible 2-Axis Servo Amplifiers



MR-J5W2-G

### CC-Link IE TSN- Compatible 3-Axis Servo Amplifiers



MR-J5W3-G

\* MR-J5-G/MR-J5D1-G4 are also compatible with CC-Link IE Field Network Basic.

\* MR-J5-G-N1/MR-J5W2-G-N1/MR-J5W3-G-N1/MR-J5D-G4-N1 are compatible with EtherCAT®.

## SERVO MOTOR

### Rotary Servo Motors



Small capacity, low inertia  
**HK-KT Series**  
Capacity: 0.05 to 2 kW



Small capacity, ultra-low inertia  
**HK-MT Series**  
Capacity: 0.05 to 1 kW



Medium capacity, medium inertia  
**HK-ST Series**  
Capacity: 0.5 to 7 kW



Medium capacity, ultra-low inertia  
**HK-RT Series**  
Capacity: 1 to 7 kW

## SOLUTION



We take full advantage of Mitsubishi Electric's technological capability that achieved development of FA devices, along with our connectivity technology which makes it possible to connect FA with IT.

e-F@ctory optimizes manufacturing overall by connecting all devices and equipment, and then analyzing and utilizing the vast amount of data collected.

Create new value with MELSERVO-J5.  
Unlock performance with a total drive solution

**Graphic Operation Terminals**



GOT2000

**Programmable Controllers**



MELSEC iQ-R



MELSEC-Q

**SOFTWARE**

MELSOFT GX Works3

MELSOFT MT Works2

MELSOFT MR Configurator2

MELSOFT Motorizer

**SSCNET III/H-Compatible Motion Modules**



RnMTCPU



Q17nDSCPU

**SSCNET III/H-Compatible Simple Motion Modules**



RD77MS



QD77MS

**Positioning Modules**



RD75P  
RD75D



QD75PN  
QD75DN

**CC-Link IE TSN**

**SSCNET III/H**

**Pulse Train/ Analog Voltage**



**CC-Link IE TSN- Compatible 1/2/3-Axis Drive Units**



MR-J5D-G4

**SSCNET III/H- Compatible Servo Amplifiers**



MR-J5-B

**SSCNET III/H- Compatible 2-Axis Servo Amplifiers**



MR-J5W2-B

**SSCNET III/H- Compatible 3-Axis Servo Amplifiers**



MR-J5W3-B

**General Purpose Interface-Compatible Servo Amplifiers**



MR-J5-A

\* An MR-CV (400 V class) is required for the drive units.

**Linear Servo Motors**



Core type  
**LM-H3 Series**  
Rating: 70 to 960 N



Core type  
**LM-AJ Series**  
Rating: 68.1 to 446.8 N




Core type (natural/liquid cooling)  
**LM-F Series**  
Rating: 300 to 1200 N (natural cooling)  
Rating: 600 to 2400 N (liquid cooling)



Core type with magnetic attraction counter-force  
**LM-K2 Series**  
Rating: 120 to 2400 N




Coreless type  
**LM-U2 Series**  
Rating: 50 to 800 N



Coreless type  
**LM-AU Series**  
Rating: 28 to 350 N

**Direct Drive Motors**



Low-profile flange type  
**TM-RG2M Series**  
Rating: 2.2 to 9 N-m



Low-profile table type  
**TM-RU2M Series**  
Rating: 2.2 to 9 N-m






High-rigidity  
**TM-RFM Series**  
Rating: 2 to 240 N-m



Through powerful alliances between Mitsubishi Electric, who boasts a broad-ranging product appeal in the FA domain, and partners that participate in the FA partnership program (e-F@ctory Alliance) promoted by Mitsubishi Electric, we will achieve new business creation and new monozukuri.

# Product Lines







## Servo System Controllers <sup>(Note 3)</sup>

|                         | Servo system controller  | Number of control axes                      | Features   |
|-------------------------|--|---|--|
| Motion modules          | <br>RD78G RD78GH              | RD78G: 4, 8, 16, 32, 64<br>RD78GH: 128, 256 | MELSEC iQ-R series CC-Link IE TSN-compatible Motion module <ul style="list-style-type: none"> <li>Performs motion control (positioning, synchronous, cam, speed, and torque control)</li> <li>Maximum number of connectable stations: 120 <sup>(Note 2)</sup></li> <li>Minimum operation cycle<br/>RD78G: 62.5 [μs], RD78GH: 31.25 [μs]</li> <li>Number of slots occupied<br/>RD78G: 1, RD78GH: 2</li> </ul>   |
|                         | <br>FX5-SSC-G                 | FX5-40SSC-G: 4<br>FX5-80SSC-G: 8            | MELSEC iQ-F series CC-Link IE TSN-compatible Motion module <ul style="list-style-type: none"> <li>Performs motion control (positioning, synchronous, cam, speed, and torque control)</li> <li>Maximum number of connectable stations<br/>FX5-40SSC-G: 20, FX5-80SSC-G: 24 <sup>(Note 2)</sup></li> <li>Minimum operation cycle: 500 [μs]</li> <li>Number of connectable modules: 4 modules/FX5U or FX5UC</li> </ul>  |
| Motion Control Software | <br>SWM-G <sup>(Note 4)</sup> | 16, 32, 64, 128                             | CC-Link IE TSN-compatible Motion Control Software for personal computers <sup>(Note 1)</sup> <ul style="list-style-type: none"> <li>Performs motion control (positioning, synchronous, cam, speed, and torque control)</li> <li>Maximum number of connectable stations: 128 <sup>(Note 2)</sup></li> <li>Includes Real Time OS (RTX64), which enables SWM-G to perform a real-time operation without being affected by the operation on Windows®</li> <li>Programming language: Visual C++®</li> </ul> |

- Notes: 1. A personal computer and Visual Studio® are not included and must be prepared by the user.  
 2. The multi-axis servo amplifiers MR-J5W2-G/MR-J5W3-G/MR-J5D2-G4/MR-J5D3-G4 occupy one station.  
 3. For SSCNET III/H-compatible servo system controllers, refer to catalogs and manuals of MELSEC iQ-R series and MELSEC-Q series.  
 4. SWM-G-N1 is also compatible with EtherCAT®.

## Servo Amplifiers





●: Supported –: Not supported

| Servo amplifiers   | Number of control axes  | Power supply specifications <sup>(Note 2)</sup> | Rated output [kW] <sup>(Note 1)</sup>     | Command interface <sup>(Note 3)</sup> |                               |              |             | Control mode   |          |                | Compatible servo motor series |                           |       |       |       |       |       |       |      |       |       |       |         |         |        |   |   |   |
|--|---|---|---|---------------------------------------|-------------------------------|--------------|-------------|----------------|----------|----------------|-------------------------------|---------------------------|-------|-------|-------|-------|-------|-------|------|-------|-------|-------|---------|---------|--------|---|---|---|
|  |   |   |   | CC-Link IE TSN                        | EtherCAT® <sup>(Note 5)</sup> | SSCNET III/H | Pulse train | Analog voltage | Position | Velocity/Speed | Torque                        | Fully closed loop control | HK-KT | HK-MT | HK-ST | HK-RT | LM-H3 | LM-AJ | LM-F | LM-K2 | LM-U2 | LM-AU | TM-RG2M | TM-RU2M | TM-RFM |   |   |   |
| <br>MR-J5-G                       | 1 axis  | 200 V AC  | 0.1, 0.2, 0.4, 0.6, 0.75, 1, 2, 3.5, 5, 7 | ●                                     | ●                             | –            | –           | –              | ●        | ●              | ●                             | ●                         | ●     | ●     | ●     | ●     | ●     | ●     | ●    | ●     | ●     | ●     | ●       | ●       | ●      | ● |   |   |
|  |   | 400 V AC  | 0.6, 1, 2, 3.5, 5, 7                      | ●                                     | ●                             | –            | –           | –              | ●        | ●              | ●                             | ●                         | ●     | ●     | ●     | ●     | ●     | ●     | ●    | ●     | ●     | ●     | ●       | ●       | ●      | ● | ● |   |
|  | <br>MR-J5W-G | 2 axes  | 200 V AC                                  | 0.2, 0.4, 0.75, 1                     | ●                             | ●            | –           | –              | –        | ●              | ●                             | ●                         | ●     | ●     | ●     | ●     | –     | ●     | ●    | ●     | ●     | ●     | ●       | ●       | ●      | ● | ● |   |
|  |   | 3 axes  |   | 0.2, 0.4                              | ●                             | ●            | –           | –              | –        | ●              | ●                             | ●                         | –     | ●     | ●     | ●     | ●     | –     | ●    | ●     | ●     | ●     | ●       | ●       | ●      | ● | ● | ● |
| <br>MR-J5D-G4 <sup>(Note 4)</sup> | 1 axis  | 400 V AC  | 1, 2, 3.5, 5, 7                           | ●                                     | ●                             | –            | –           | –              | ●        | ●              | ●                             | ●                         | ●     | ●     | ●     | –     | ●     | ●     | ●    | ●     | ●     | ●     | ●       | ●       | ●      | ● | ● |   |
|  | 2 axes  |   | 1, 2, 3.5, 5, 7                           | ●                                     | ●                             | –            | –           | –              | ●        | ●              | ●                             | ●                         | ●     | ●     | ●     | ●     | –     | ●     | ●    | ●     | ●     | ●     | ●       | ●       | ●      | ● | ● | ● |
|  | 3 axes  |   | 1, 2                                      | ●                                     | ●                             | –            | –           | –              | ●        | ●              | ●                             | –                         | ●     | ●     | ●     | ●     | –     | ●     | ●    | ●     | ●     | ●     | ●       | ●       | ●      | ● | ● | ● |
| <br>MR-J5-B                       | 1 axis  | 200 V AC  | 0.1, 0.2, 0.4, 0.6, 0.75, 1, 2, 3.5, 5, 7 | –                                     | –                             | ●            | –           | –              | ●        | ●              | ●                             | ●                         | ●     | ●     | ●     | –     | ●     | ●     | ●    | ●     | –     | ●     | ●       | ●       | ●      | ● |   |   |
|  |   | 400 V AC  | 0.6, 1, 2, 3.5, 5, 7                      | –                                     | –                             | ●            | –           | –              | ●        | ●              | ●                             | ●                         | ●     | ●     | ●     | ●     | –     | ●     | ●    | ●     | ●     | –     | ●       | ●       | ●      | ● | ● |   |
| <br>MR-J5W-B                      | 2 axes  | 200 V AC  | 0.2, 0.4, 0.75, 1                         | –                                     | –                             | ●            | –           | –              | ●        | ●              | ●                             | ●                         | ●     | ●     | ●     | –     | ●     | ●     | ●    | ●     | –     | ●     | ●       | ●       | ●      | ● |   |   |
|  | 3 axes  |   | 0.2, 0.4                                  | –                                     | –                             | ●            | –           | –              | ●        | ●              | ●                             | –                         | ●     | ●     | ●     | ●     | –     | ●     | ●    | ●     | ●     | –     | ●       | ●       | ●      | ● | ● |   |
| <br>MR-J5-A                       | 1 axis  | 200 V AC  | 0.1, 0.2, 0.4, 0.6, 0.75, 1, 2, 3.5, 5, 7 | –                                     | –                             | –            | ●           | ●              | ●        | ●              | ●                             | ●                         | ●     | ●     | ●     | –     | ●     | ●     | ●    | ●     | ●     | ●     | ●       | ●       | ●      | ● |   |   |
|  |   | 400 V AC  | 0.6, 1, 2, 3.5, 5, 7                      | –                                     | –                             | –            | ●           | ●              | ●        | ●              | ●                             | ●                         | ●     | ●     | ●     | ●     | –     | ●     | ●    | ●     | ●     | –     | ●       | ●       | ●      | ● | ● |   |

- Notes: 1. The value listed is the servo amplifier rated output. Refer to "Combinations of Servo Motors and Servo Amplifiers" for compatible servo motors.  
 2. 200 V AC servo amplifiers are also compatible with DC power supply input as standard.  
 3. MR-J5-G/MR-J5D1-G4 are also compatible with CC-Link IE Field Network Basic.  
 4. An MR-CV\_4 power regeneration converter unit is required for MR-J5D-G4 drive units.  
 5. EtherCAT® is supported by MR-J5-G-N1/MR-J5W-G-N1/MR-J5D-G4-N1.

## Rotary Servo Motors

●: Supported –: Not supported

| Rotary servo motor series |   | Rated speed [r/min] (Note 2) | Rated output [kW] (Note 1)   | With an electro-magnetic brake (B) | With a gear reducer (G1, G5, G7) (Note 4) | IP rating (Note 3) | Replaceable series      | Features   | Application examples  |
|---------------------------|---|------------------------------|--|------------------------------------|---|--------------------|-------------------------|--|---|
| Small capacity            | HK-KT series<br> | 3000 (6700)                  | 0.05, 0.1, 0.15, 0.2, 0.4, 0.6, 0.75, 1.0, 1.5, 2.0<br>0.4, 0.6, 0.75, 1.0, 1.5, 2.0     | ●                                  | ●   | IP67               | HG-KR<br>HG-JR          | Low inertia<br>Batteryless absolute position encoder<br>Includes flat type models<br>Has a single connector                      | Belt drives<br>Robots<br>X-Y tables<br>Semiconductor manufacturing systems                                |
|                           | HK-MT series<br> | 3000 (6700/10000)            | 0.05, 0.1, 0.15, 0.2, 0.4, 0.6, 0.75, 1.0  | ●                                  | –   | IP67               | HG-MR                   | Ultra-low inertia<br>Batteryless absolute position encoder<br>Includes high-speed type models (Note 5)<br>Has a single connector | Inserters<br>Mounters<br>Ultra-high-throughput material handling systems                                  |
| Medium capacity           | HK-ST series<br> | 2000/3000 (4000/6700)        | 0.5, 0.75, 1.0, 1.75, 2.0, 3.0, 3.5, 5.0, 7.0<br>0.5, 1.0, 1.75, 2.0, 3.0, 3.5, 5.0, 7.0 | ●                                  | ●   | IP67               | HG-SR<br>HG-JR<br>HG-UR | Medium inertia<br>Batteryless absolute position encoder<br>Includes flat type models<br>Offers two rated speeds                  | Material handling systems<br>Battery manufacturing systems<br>Printing systems<br>Food packaging machines |
|                           | HK-RT series<br> | 3000 (6700)                  | 1.0, 1.5, 2.0, 3.5, 5.0, 7.0<br>1.0, 1.5, 2.0, 3.5, 5.0, 7.0                             | ●                                  | –   | IP67               | HG-RR                   | Ultra-low inertia<br>Batteryless absolute position encoder<br>Has a single connector (1 to 2 kW)                                 | X-Y tables<br>Ultra-high-throughput material handling systems   |

Notes: 1. : For 400 V.







2. The value in brackets indicates the maximum speed. The speed varies by the model type. Refer to "Rotary Servo Motors Specifications" for details.

3. The shaft-through portion is excluded. For geared servo motors, IP rating of the reducer part is equivalent to IP44.



4. G1 indicates a gear reducer for general industrial machines, and G5 and G7 indicate a gear reducer for high precision applications. HK-KT series servo motors are available in 200 V only. Refer to "Rotary Servo Motors Specifications" for details.

5. The high-speed type models (maximum speed of 10000 r/min) are equipped with an incremental encoder.

## Linear Servo Motors

| Linear servo motor series |   | Maximum speed [m/s] | Continuous thrust [N]                                 | Maximum thrust [N]                                       | Cooling method                    | Features   | Application examples   |
|---------------------------|---|---------------------|---|--|-----------------------------------|--|--|
| Core type                 | LM-H3 series<br> | 3.0                 | 70, 120, 240, 360, 480, 720, 960                      | 175, 300, 600, 900, 1200, 1800, 2400                     | Natural cooling                   | Suitable for space-saving<br>Compact size and high thrust<br>Maximum speed: 3 m/s  | Mounters<br>Wafer cleaning systems<br>FPD assembly machines<br>Material handlings                |
|                           | LM-AJ series<br> | 2.0 to 6.5          | 68.1, 117.0, 136.2, 174.5, 223.4, 234.0, 348.9, 446.8 | 214.7, 369.0, 429.4, 550.2, 704.5, 738.1, 1100.4, 1409.1 | Natural cooling                   | Low installation height, and suitable for compact X-Y tables   | Semiconductor manufacturing systems<br>FPD assembly machines                                     |
|                           | LM-F series<br>  | 2.0                 | 300, 600, 900, 1200<br>600, 1200, 1800, 2400          | 1800, 3600, 5400, 7200                                   | Natural cooling<br>Liquid cooling | Compact size<br>The integrated liquid-cooling system doubles the continuous thrust.  | Press feeders<br>NC machine tools<br>Material handlings  |
|                           | LM-K2 series<br> | 2.0                 | 120, 240, 360, 720, 1200, 1440, 2400                  | 300, 600, 900, 1800, 3000, 3600, 6000                    | Natural cooling                   | High thrust density<br>Magnetic attraction counter-force structure enables longer life of the linear guides and lower audible noise. | Mounters<br>Wafer cleaning systems<br>FPD assembly machines                                      |
| Coreless type             | LM-U2 series<br> | 2.0                 | 50, 75, 100, 150, 225, 400, 600, 800                  | 150, 225, 300, 450, 675, 1600, 2400, 3200                | Natural cooling                   | No cogging and small speed fluctuation<br>No magnetic attraction force structure extends life of the linear guides.                  | Screen printing systems<br>Scanning exposure systems<br>Inspection systems<br>Material handlings |
|                           | LM-AU series<br> | 2.0 to 4.5          | 28, 44, 57, 85, 88, 113, 132, 176, 264, 350           | 122, 274, 280, 411, 549, 561, 842, 970, 1684, 1764       | Natural cooling                   | No cogging and small speed fluctuation<br>No magnetic attraction force structure extends life of the linear guides.                  | Screen printing systems<br>Scanning exposure systems<br>Inspection systems<br>Material handlings |

## Direct Drive Motors

| Direct drive motor series |  | Motor outer diameter [mm] | Hollow shaft diameter [mm] | Rated speed [r/min] | Maximum speed [r/min] | Rated torque [N·m] | Maximum torque [N·m] | IP rating (Note 1) | Features   | Application examples   |
|---------------------------|--|---------------------------|----------------------------|---------------------|-----------------------|--------------------|----------------------|--------------------|--|--|
| Low-profile               | TM-RG2M series/<br>TM-RU2M series<br> | ø130                      | ø20                        | 300                 | 600                   | 2.2                | 8.8                  | IP40               | Suitable for low-speed and high-torque operations<br>Smooth operation with less audible noise<br>The motor's low-profile design contributes to compact construction and a low center of gravity for enhanced machine stability.<br>Clean room compatible | Semiconductor manufacturing devices<br>Liquid crystal manufacturing devices<br>Machine tools |
|                           |  | ø180                      | ø47                        | 300                 | 600                   | 4.5                | 13.5                 | IP40               |  |  |
|                           |  | ø230                      | ø62                        | 300                 | 600                   | 9                  | 27                   | IP40               |  |  |
| High-rigidity             | TM-RFM series<br>                     | ø130                      | ø20                        | 200                 | 500                   | 2, 4, 6            | 6, 12, 18            | IP42               |  |  |
|                           |  | ø180                      | ø47                        | 200                 | 500                   | 6, 12, 18          | 18, 36, 54           | IP42               |  |  |
|                           |  | ø230                      | ø62                        | 200                 | 500                   | 12, 48, 72         | 36, 144, 216         | IP42               |  |  |
|                           |  | ø330                      | ø104                       | 100                 | 200                   | 40, 120, 240       | 120, 360, 720        | IP42               |  |  |

Notes: 1. Connectors and the gap along the rotor (output shaft) are excluded.


## Construct a high-performance servo system using our extensive product line

We understand that each system is different and has unique drive control requirements.

To meet these demands, we have expanded the product line for our next-generation servo system to offer simple converters, engineering software, servo system controllers, servo amplifiers, servo motors, and a variety of other components.

Mitsubishi Electric is dedicated to satisfying all of our customers' needs.

### Simple programming

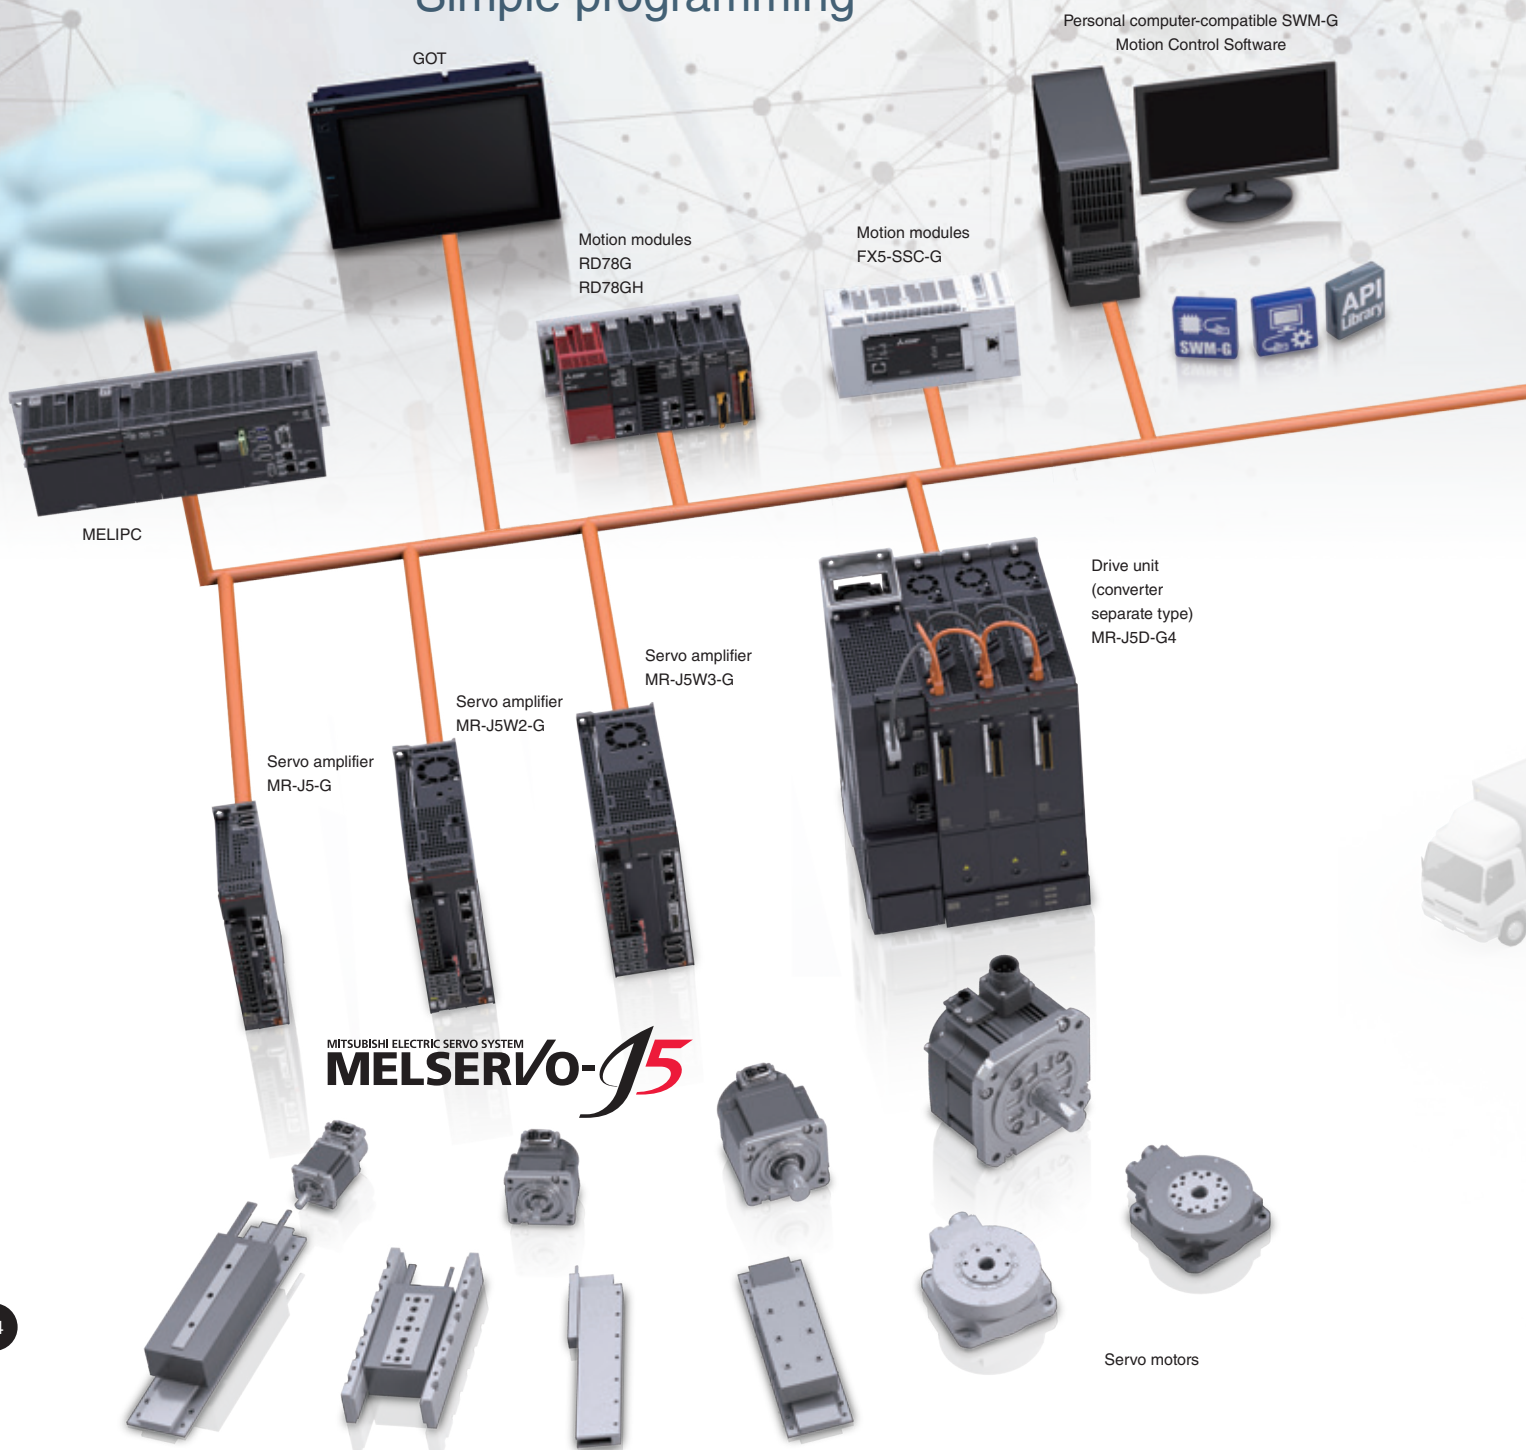



## Collaborating with our extensive group of partners allows us to flexibly support your system needs

Servo systems are constructed using iQ Platform devices such as controllers, servo drivers, actuators, and sensors, and collaboration with our partner companies allows us to expand the number of possibilities available to customers. For example, partner products such as stepping motors, direct drive motors, vision systems, and various types of software are available to keep your equipment on the cutting edge.



## Single network

# CC-Link IE TSN

Safety I/O combined module



I/O module

Analog output module

Inverter



## CC-Link IE TSN safety communication function Deterministic control even when mixed with TCP/IP communication and safety control communication

CC-Link IE TSN enables mixing of safety and non-safety communications.\*<sup>1</sup> Safety sub-functions (STO, SS1, SS2, SOS, SLS, SBC, SSM, SDI, SLI, SLT) are also supported for drive-control devices that are on the network.

Deterministic performance of cyclic communication is maintained even when mixed with slower information data (non real-time). This enables TCP/IP communication devices to be used without affecting overall control.


\*1. Some devices cannot be connected to CC-Link IE TSN depending on the system configuration.

# Open integrated networking across the manufacturing enterprise

## CC-Link IE TSN


CC-Link IE TSN supports TCP/IP communications and applies it to industrial architectures through its support of TSN enabling real-time communications. With its flexible system architecture and extensive setup and troubleshooting features make CC-Link IE TSN ideal for building an IIoT infrastructure across the manufacturing enterprise.

\* TSN: Time Sensitive Networking  
 \* IIoT: Industrial Internet of Things

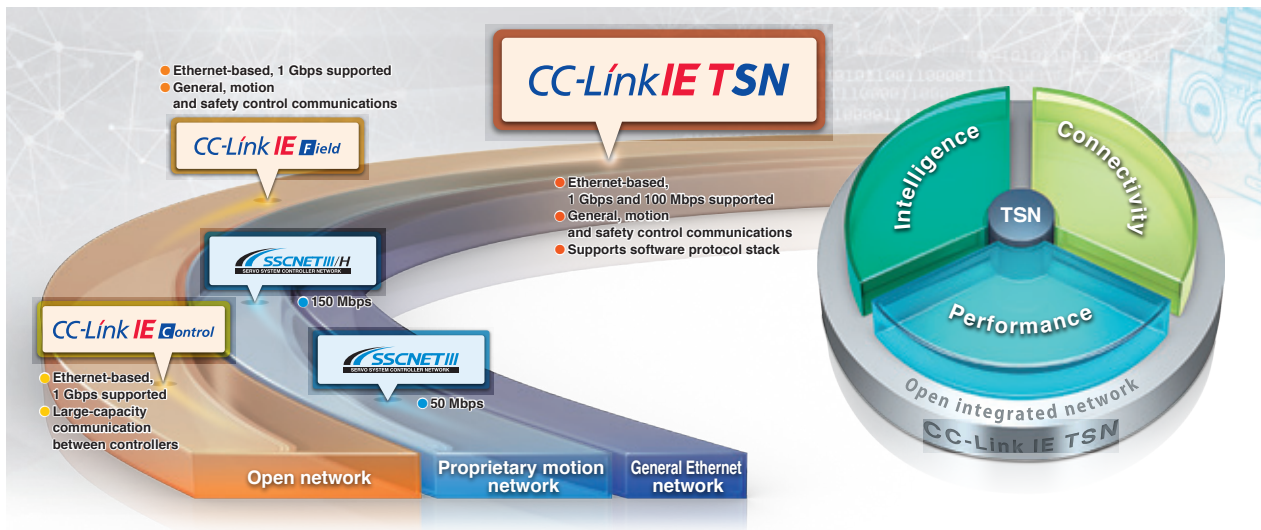

### Real-Time Network Performance Even When Integrated with Information Data

TSN technology enables mixing of deterministic communications with IT system information data on the same network. Giving higher priority to CC-Link IE TSN cyclic communications and TCP/IP communications by allocating increased network bandwidth, devices using general Ethernet communications can be connected on the same network while maintaining real-time control communication performance.


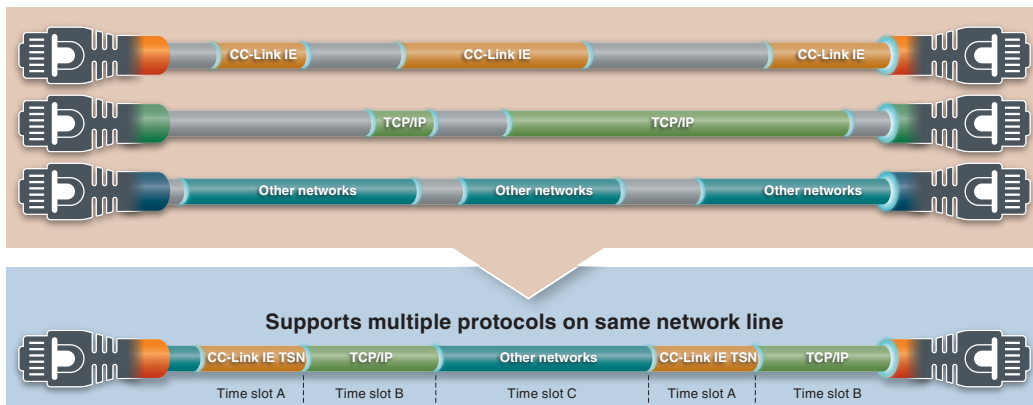




## Deterministic Control Even When Mixed with TCP/IP Communication

Deterministic performance of cyclic communication is maintained even when mixed with slower information data (non real-time). This enables TCP/IP communication devices to be used without affecting overall control.


\* Some devices cannot be connected to CC-Link IE TSN depending on the system configuration.

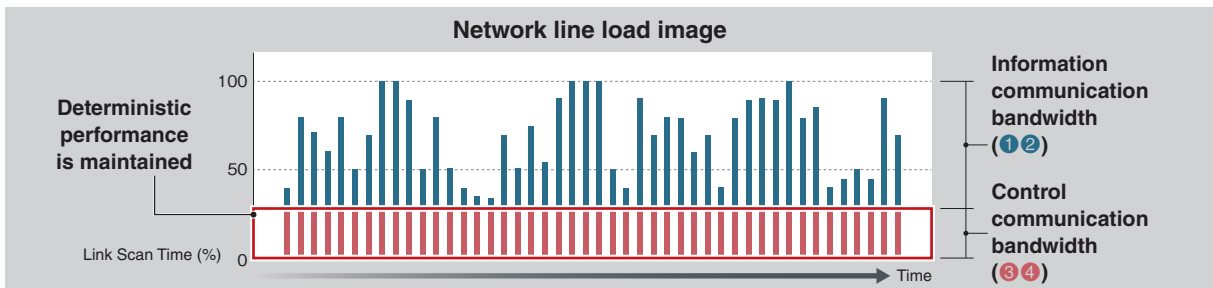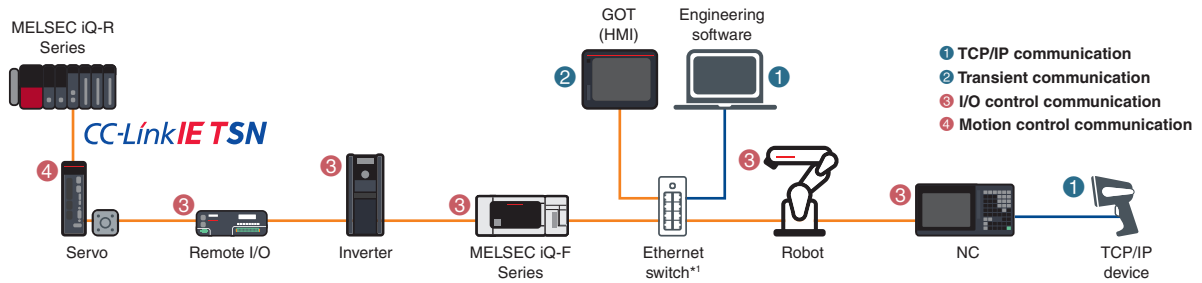

\*1. Class B switching hub supporting CC-Link IE TSN recommended by the CC-Link Partner Association.

## Integrated Network

Current network systems use multiple networks to enable communication between IT and control systems on the shop floor. CC-Link IE TSN is a one-stop solution for integrating different networks, thereby realizing flexibility in topology and reducing wiring cost.

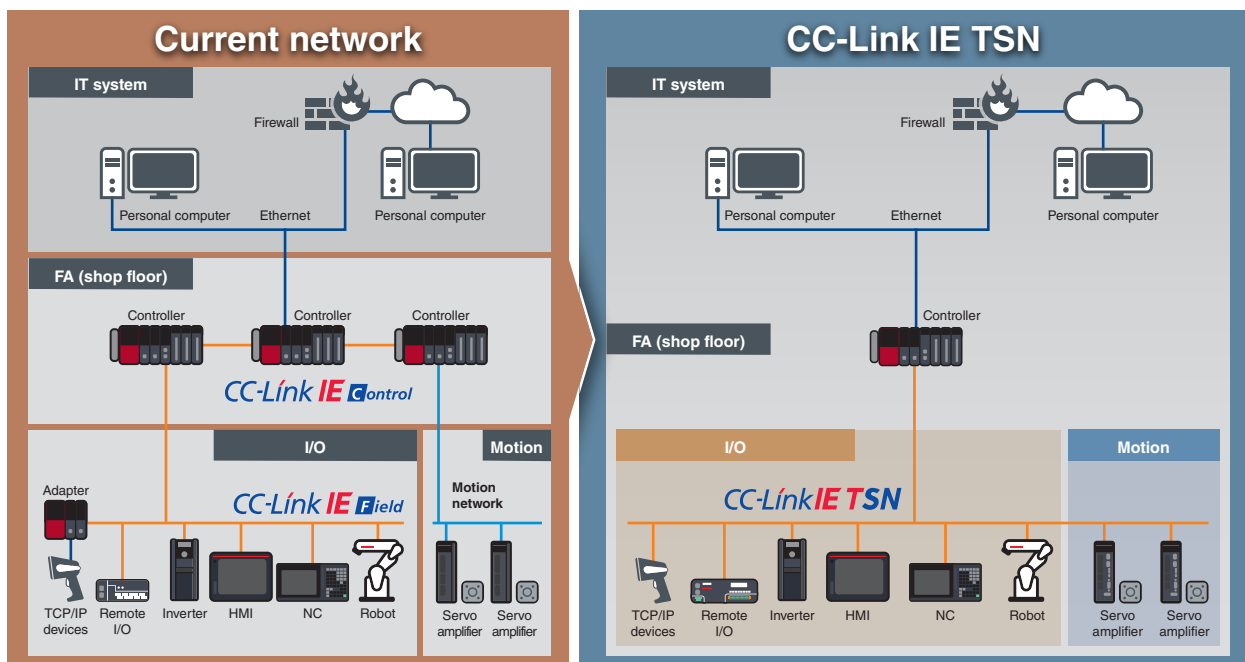


Network configuration example (includes functions and products planned for future support/release.)

## High-Speed, High-Accuracy Motion Control


CC-Link IE TSN controls I/O modules while also maintaining high-speed motion control. The single network boosts machine performance.

- Motion control (high-speed processing)
- I/O control (low-speed processing)

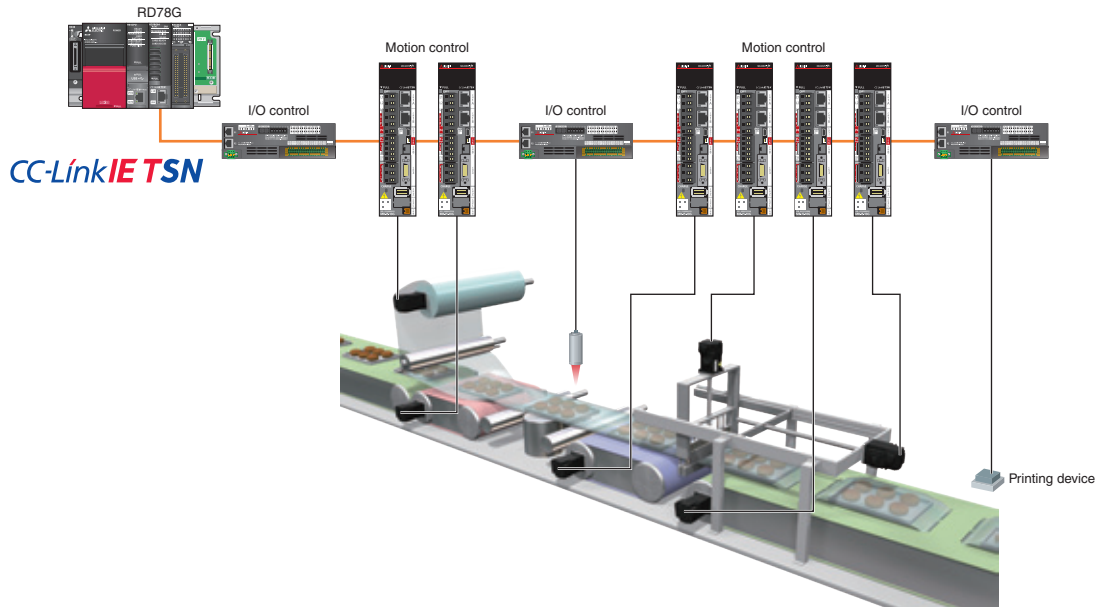

## Time Synchronization

Set time is completely synchronized among servo amplifiers, Motion modules, and PLC CPUs. This time synchronization enables accurate recording of the event history in chronological order, making it simple to identify the cause of errors.

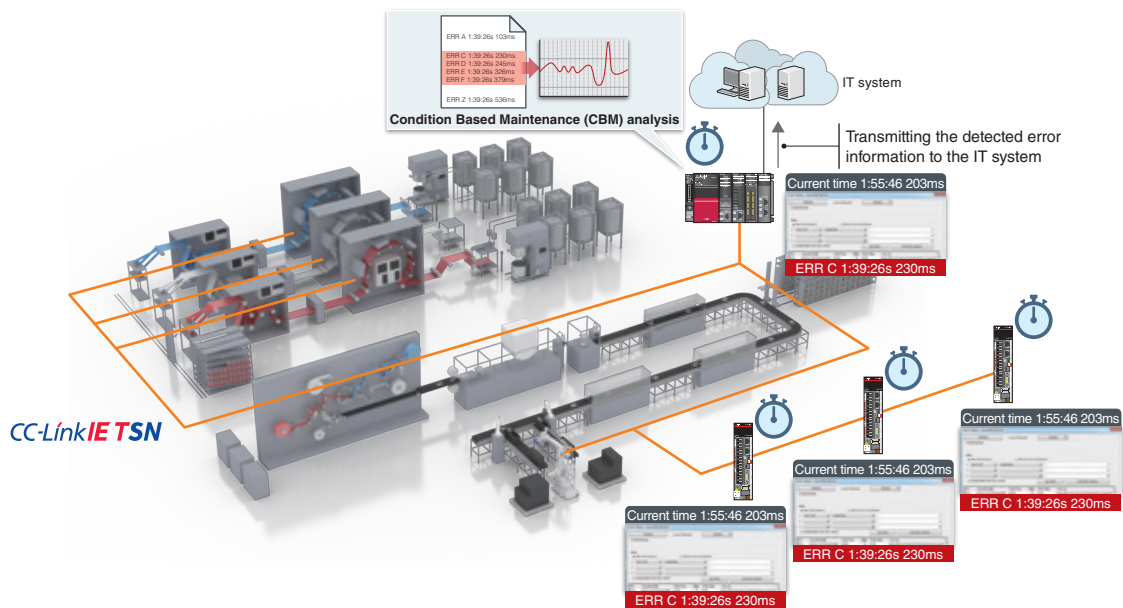


## Seamless Connectivity Between TCP/IP Devices and a Servo System

TCP/IP communication (information communication) can be mixed in the same line with the real-time control communications of CC-Link IE TSN.


CC-Link IE TSN device stations and TCP/IP devices can be connected on the same network, achieving a flexible and integrated network system.

Note that the TCP/IP devices must be connected after servo amplifiers and I/O modules.

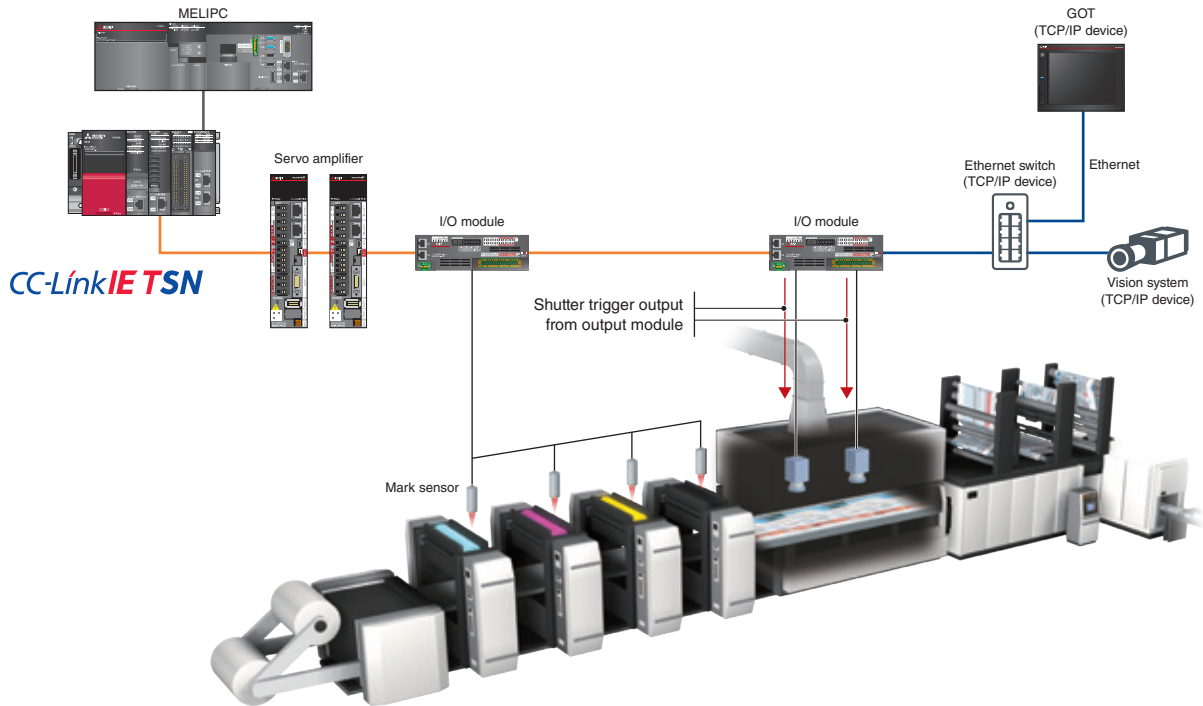

## Large-Capacity Data Communications

CC-Link IE TSN is a high-speed, large-capacity 1 Gbps communications network that is capable of sending and receiving large amounts of data, such as manufacturing, quality, and control data from the production process. The network can transmit large recipe data or traceability data at high speeds without degrading the performance of servo system communications. In addition, Ethernet supported devices can directly and seamlessly connect to controllers on the same network line.

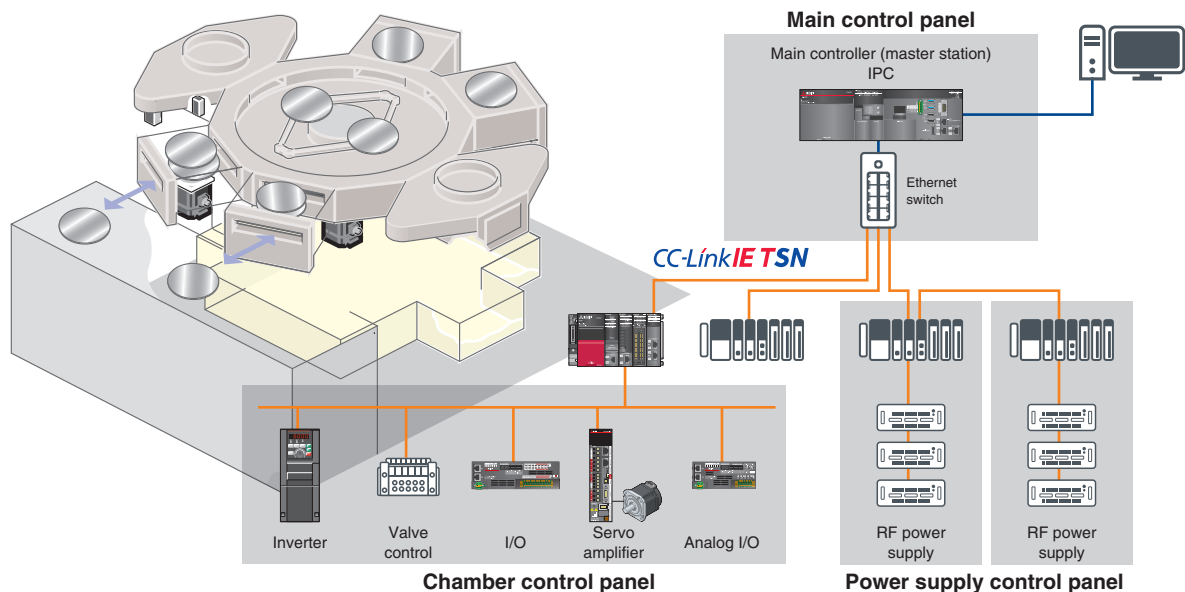

Network configuration example (includes functions and products planned for future support/release.)

Simple maintenance

# Comprehensive diagnostic functions contribute to improved maintenance

Increasing the capacity of your production line is an important factor in this fiercely cost-competitive market. The MELSERVO-J5 series servo system provides various kinds of maintenance functions that predict and prevent unforeseen problems and enable quick recovery when trouble arises. These functions contribute to reduced downtime and increased productivity while protecting the quality of your products.

MELSERVO-J5 series servo amplifiers and servo motors are equipped with various predictive and preventative maintenance functions.


## Predictive Maintenance (CBM)

Predictive maintenance, also known as Condition Based Maintenance (CBM), is the practice of detecting changes in machine vibration and friction so that parts can be replaced accordingly before they fail. Performing predictive maintenance leads to increased machine capacity and helps to avoid system failure, reduce maintenance time, and improve both productivity and product quality.


### Detects Changes in Vibration and Friction to Predict the Service Life of Mechanical Drive Components

**[Machine diagnosis function]**


The machine diagnosis function detects age-related deterioration based on the frictions and vibrations of mechanical drive components such as ball screws, belts, and gears. This function automatically generates a failure warning limit, detects errors, and outputs a warning upon signs of failure. Results of the failure are transmitted via CC-Link IE TSN to the Motion module and IT system and can be used for maintenance and overall machine diagnostics.

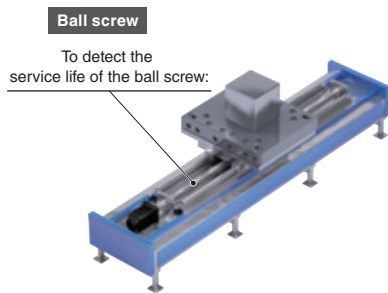


- Friction failure prediction with the friction estimation function
- Vibration failure prediction with the vibration estimation function



Estimated friction value is displayed.



- Static friction failure prediction
- Belt tension deterioration prediction



Estimated static friction and belt tension are displayed.



- Backlash estimation function
- Gear failure prediction



Estimated backlash value is displayed.


## Preventative Maintenance (TBM) \*1

\*1. TBM stands for Time Based Maintenance.

### Machine Diagnosis (Mechanical Drive Components)

This function estimates when a machine failure will occur based on the total travel distance of the servo motor and notifies when it is time for replacement if the rated service life of the mechanical drive components is set.


- Machine total travel distance failure prediction

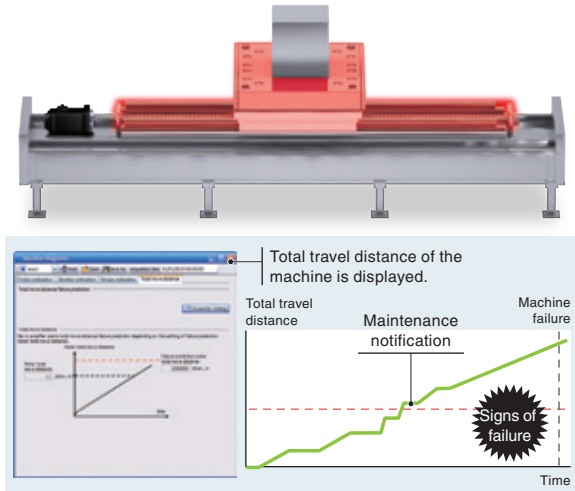

### Servo Amplifier Life Diagnosis

This function displays the cumulative energization time and the number of inrush relay on/off times. The data can be used to check service life of the parts as a rough guide.


- Cumulative energization time (Smoothing condenser/cooling fan life span)
- The number of inrush relay on/off times (Inrush relay life)

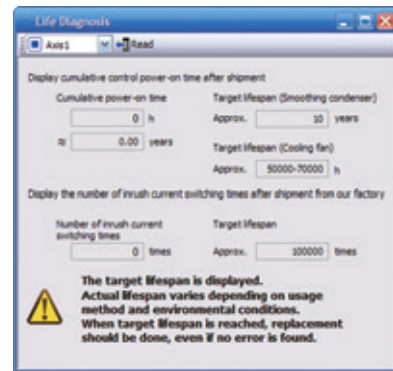

## Corrective Maintenance

### Servo System Data Recording

The servo system recorder of RD78G/RD78GH Motion module automatically collects data of all the servo amplifiers when an error occurs. The drive recorder of the servo amplifier continuously monitors the servo status and records the status transition such as a trigger condition before and after an alarm for a fixed period of time.

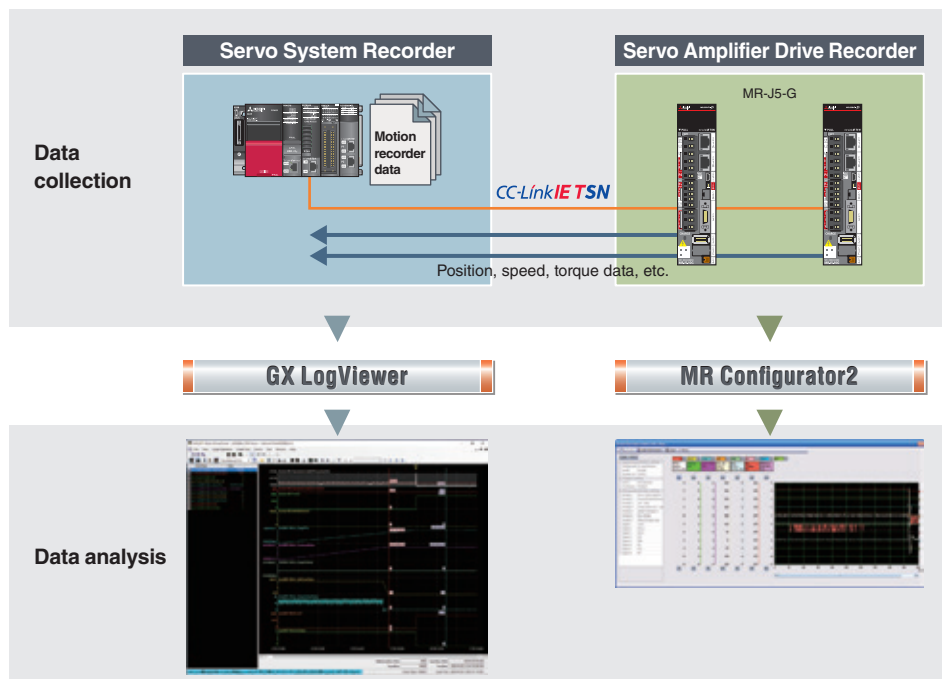

An engineering environment that provides common, consistent usability throughout all product development phases

Programmable Controller Engineering Software

# MELSOFT GX Works3

Program creation is largely dependent on the ability of the programmer; therefore, an enormous amount of time is often spent on creating a servo program where a high level of programming expertise is required.


"MELSOFT GX Works3" introduces a more intuitive, efficient, and user-friendly programming environment that revolutionizes the programming process and minimizes hassles.

## Engineering Environment for Maximizing Your Machine Performance

- Mitsubishi Electric offers a complete, consistent engineering environment which covers all aspects of the product development cycle - from network configuration all the way to programming with function blocks, startup, and maintenance.

### System Design

### Programming

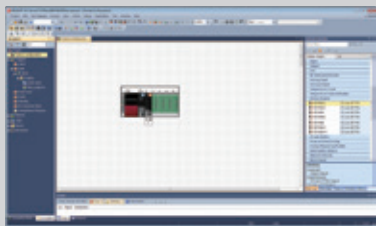

System configuration




Network configuration



Programming




e-Manual

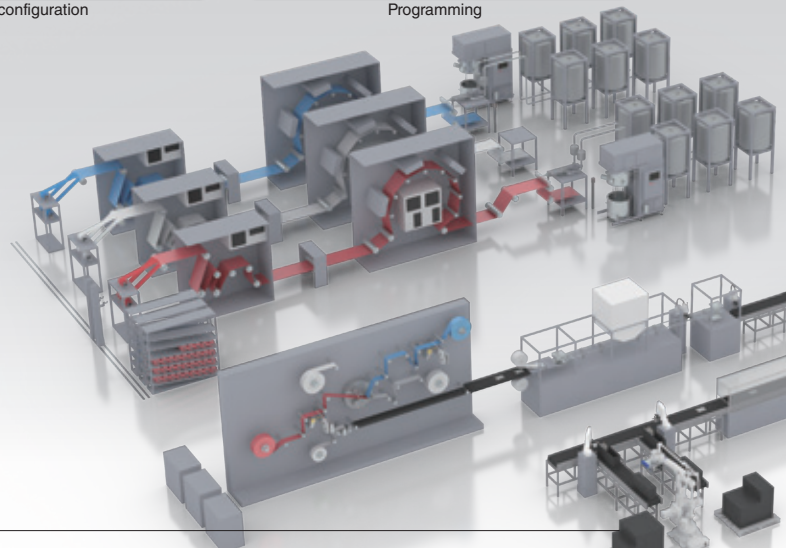

## Useful Servo Software


### [MELSOFT MR Configurator2]

The software has a variety of features which help users start up and conduct maintenance for servo amplifiers. Parameter settings, monitor display, diagnosis, test operation, and servo adjustments are easily performed.

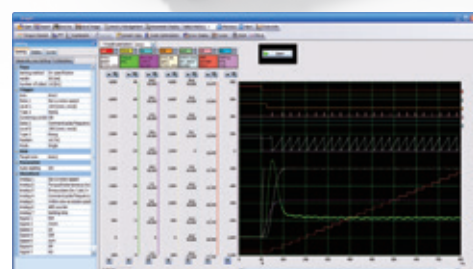




- All-in-one engineering platform MELSOFT GX Works3 allows you to set different modules in a single project, including the setting of a wide range of areas from servo amplifier parameters to PLC CPU data.

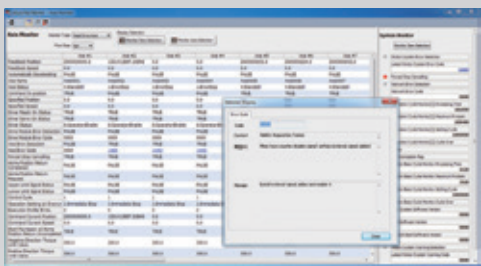


Monitor



Real-time monitor



Servo adjustment<sup>\*1</sup>



Event history

<sup>\*1</sup>. The servo adjustment is enabled via MR Configurator2.

## Globalization

### [PLCopen® Motion Control FB]

PLCopen® Motion Control FB is a standardized interface, and therefore people other than the program designer can understand the programming, leading to reduced design and maintenance time.




### [Conforms to IEC 61131-3]

MELSOFT GX Works3 realizes structured programming such as ladder and ST, making project standardization across multiple users even easier.

### [Multi-language support for global operations]

To adhere to today's global production needs, MELSOFT GX Works3 supports multi-language features at various levels, from the multiple language software menu system to device comment language switching features.

Supported languages: English, Japanese, and Chinese.

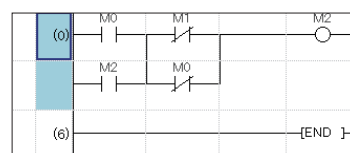

Heritage



# Simple Motion Mode Simple Motion

The Simple Motion mode is an operation mode that enables the Motion module to utilize an existing project for driving servo amplifiers via CC-Link IE TSN. Reusing existing projects helps reduce program development time.

**CC-Link IE TSN**

Motion Module

**MELSEC iQ-R**  
series

**RD78G**

**MELSEC iQ-F**  
series

**FX5-SSC-G**



Motion profile table

Advanced synchronous control

Digital oscilloscope




## Features of Simple Motion Mode

- Positioning control can be easily performed with motion profile tables. Synchronous control can be executed only with parameter settings.
- Remote devices are connected via CC-Link IE TSN and programmed from PLC CPUs.
- Data that is synchronized with the motion operation cycle can be collected with the digital oscilloscope. The collected data is displayed in waveforms for operation verification.

An example of programming by a PLC CPU

**Program**  
Ladder,  
FBD/LD,  
ST language

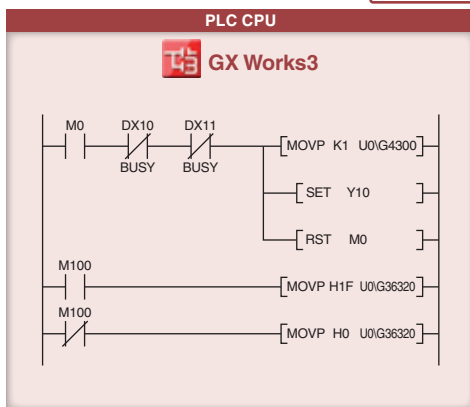

Starts positioning

**Motion module**  
Simple Motion Module Setting

Motion profile table method

| No. | Operation pattern | Control system    | Acceleration time No. | Deceleration time No. | Positioning address | Command speed  |
|-----|-------------------|-------------------|-----------------------|-----------------------|---------------------|----------------|
| 1   | 1: CONT           | 0Bh: INC Linear 2 | 0: 1000               | 0: 1000               | 200000.0 μm         | 20000.0 mm/min |
| 2   | 0: END            | 0Bh: INC Linear 2 | 0: 1000               | 0: 1000               | -200000.0 μm        | 10000.0 mm/min |

Motion control

Advanced synchronous control

## Product Lines



**CC-Link IE TSN**  
**MELSEC iQ-R**  
series

RD78G4: 4 axes  
RD78G8: 8 axes  
RD78G16: 16 axes



**CC-Link IE TSN**  
**MELSEC iQ-F**  
series

FX5-40SSC-G: 4 axes  
FX5-80SSC-G: 8 axes



Progressiveness



# PLCopen® Motion Control FB Mode PLCopen®

The PLCopen® motion control FB mode is an operation mode that supports programming with PLCopen® Motion Control FBs, enabling structured/component programming for standardization. When selecting this mode, the Motion module executes motion control with various advanced technologies such as programming using PLCopen® Motion Control FBs in ST language and logging of motion control data.

**CC-Link I<sup>E</sup> TSN**  
Motion Module

**MELSEC iQ-R**  
series

**RD78GH**

**RD78G**

Select




- ST language
- PLCopen® Motion Control FB
- Logging
- Advanced synchronous control FB

## Features of PLCopen® Motion Control FB Mode

- The Motion modules are programmed in ST language. PLC CPUs are in ladder, FBD/LD, and ST language.
- The library of PLCopen® Motion Control FBs, which are compliant with international standards, is available for programming.
- Users can analyze the operation status with logging data on GX LogViewer, which improves debug efficiency.

### An example of programming by PLC CPU


[Programming by PLC CPU only]

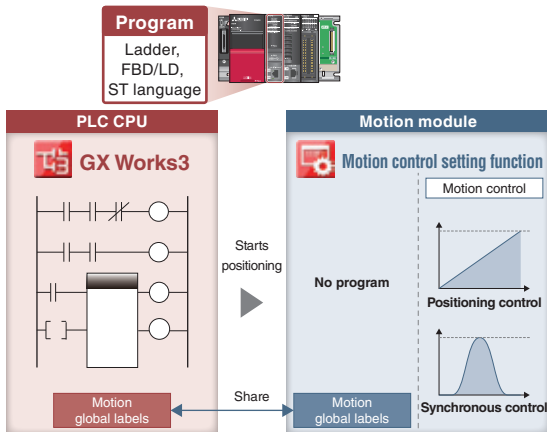

A PLC CPU program starts operation of the Motion module, eliminating the need for users to create another program for the Motion module, reducing programming burden.

### An example of programming by each module

[Programming by PLC CPU and Motion modules]

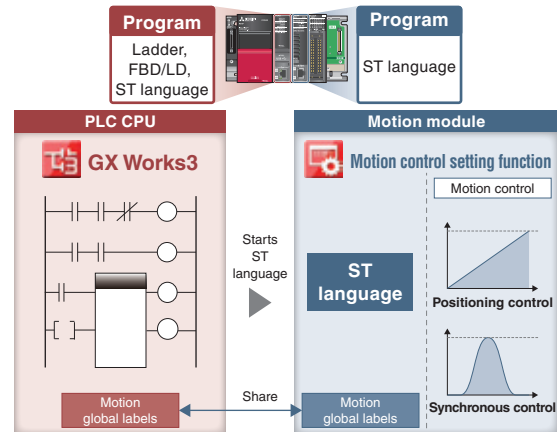

Motion modules can execute operations in place of the PLC CPU. This reduces the operation burden on the PLC CPU and results in a shorter cycle time.

## Product Lines



**CC-Link I<sup>E</sup> TSN**  
**MELSEC iQ-R**  
series

RD78GHV: 128 axes  
RD78GHW: 256 axes



**CC-Link I<sup>E</sup> TSN**  
**MELSEC iQ-R**  
series

RD78G4: 4 axes  
RD78G8: 8 axes  
RD78G16: 16 axes  
RD78G32: 32 axes  
RD78G64: 64 axes

## Taking evolution to the next step with Simple Motion mode

# Simple Motion Mode Simple Motion

**CC-Link IETSU**  
Motion Module

**MELSEC iQ-R**  
series

**RD78G**

**MELSEC iQ-F**  
series

**FX5-SSC-G**



Combined with a CC-Link IE TSN-compatible servo amplifier, the Motion modules create a high-performance servo system that improves machine capability.

- Connects remote I/O modules and FR-A800-GN inverters via CC-Link IE TSN.
- Connects TCP/IP devices, enabling a flexible system configuration.
- Possible to reuse the existing projects of Simple Motion modules.

### Product Lines

Simple Motion



**MELSEC iQ-R**  
series

**RD78G4**  
**RD78G8**  
**RD78G16**

- Maximum number of control axes:  
RD78G16: 16 axes/module
- Minimum operation cycle\*1: 250 [μs]



**MELSEC iQ-F**  
series

**FX5-40SSC-G**  
**FX5-80SSC-G**

- Maximum number of control axes:  
FX5-80SSC-G: 8 axes/module
- Minimum operation cycle\*1: 500 [μs]
- Maximum number of connected modules\*2:  
4 modules/system


\*1. The operation cycle varies by the number of control axes and the models.  
\*2. This refers to the total number of the Motion modules and one FX5-CCLGN-MS (master station).

### Reuse of Existing Projects

The existing projects of a Simple Motion module can be reused. This enables reduction in program development time.


#### RD77MS → RD78G

Select [Change Module] in the navigation menu of GX Works3 to convert the Simple Motion module project to a Motion module project. After the conversion, set the network parameters, servo amplifier parameters, and other parameters.

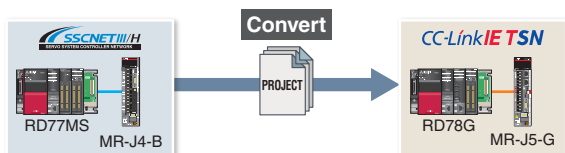

#### QD77MS → RD78G


Select [Import Simple Motion Module Data] in the navigation menu of GX Works3 to import the parameters of QD77MS. After the import, set the network parameters, servo amplifier parameters, and other parameters.

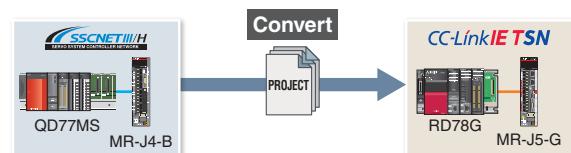

## Improved Performance

Simple Motion

The minimum operation cycle of RD78G in Simple Motion mode is approximately 1.7 to 3.5 times faster than that of the previous models. The data from the servo amplifiers and input/output signals can be received at high speeds, which reduces the cycle time.

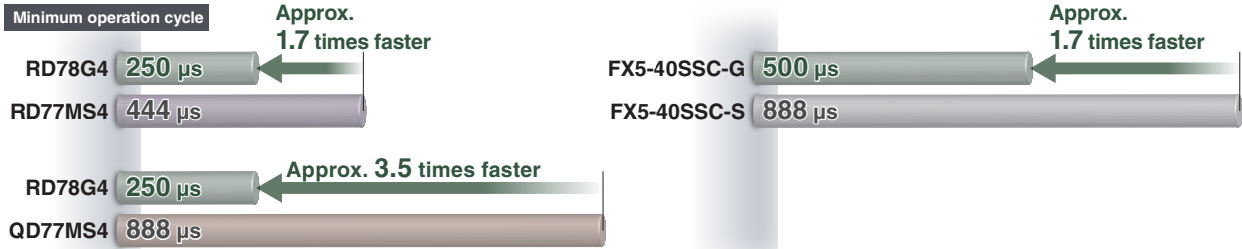


## System Configuration

Simple Motion

The Motion module can function as a master station of CC-Link IE TSN.\*1

This feature enables users to create a system more flexibly by connecting various devices, such as servo amplifiers, remote I/O modules, and TCP/IP devices, to the Motion module.\*4

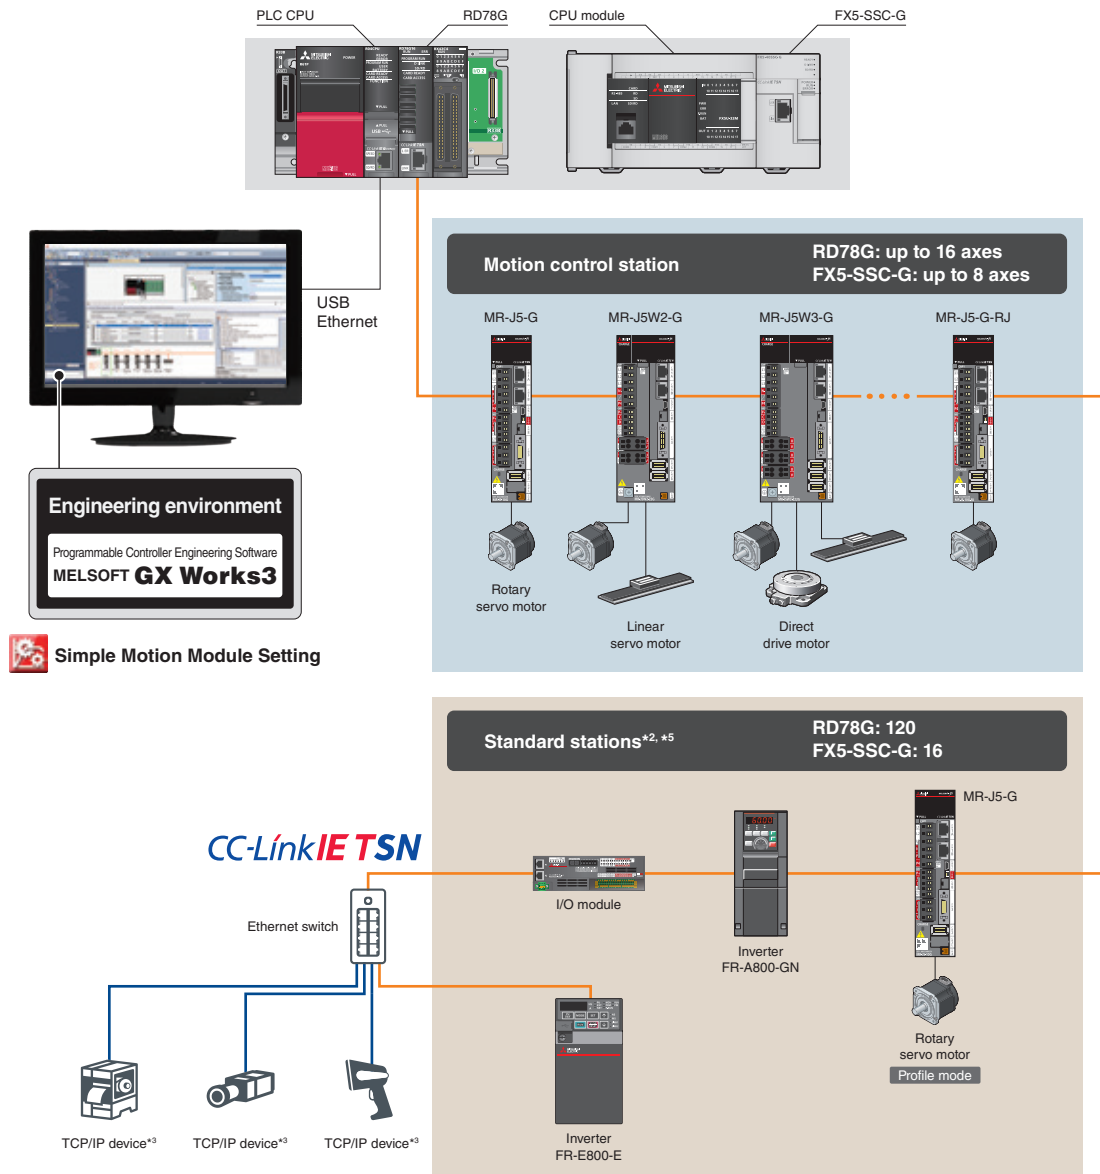

\*1. Sub-master station is not supported.

\*2. Standard stations refer to device stations other than motion control stations on CC-Link IE TSN.

\*3. TCP/IP devices are not included in the standard stations.


\*4. Refer to manuals for precautions when CC-Link IE TSN Class B and A devices are mixed.

\*5. RD78G can connect up to 120 stations, which is the total number of the motion control stations and standard stations. FX5-SSC-G can connect 16 standard stations and the motion control stations.

**Positioning Control** Simple Motion



Positioning control is easily executed using a motion profile table.

- To meet various application needs, the Motion module offers various types of positioning control, such as linear interpolation, 2-axis circular interpolation, fixed-pitch feed, and continuous path control.
- Positioning control can be executed easily by setting the positioning address, the speed, and other setting items in a sequence program.
- Powerful sub-functions, such as M-code output, skip, speed change, and target position change functions, are available.

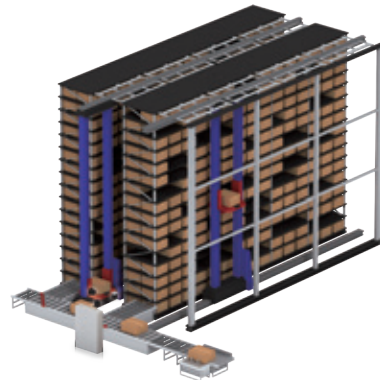


**Programming**

The Motion module easily executes positioning operation with the instruction in a sequence program that starts a positioning data of the motion profile table.

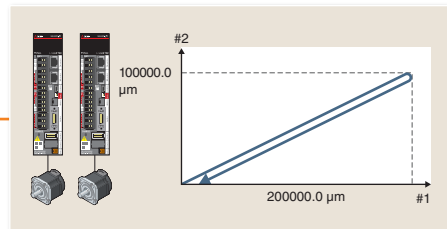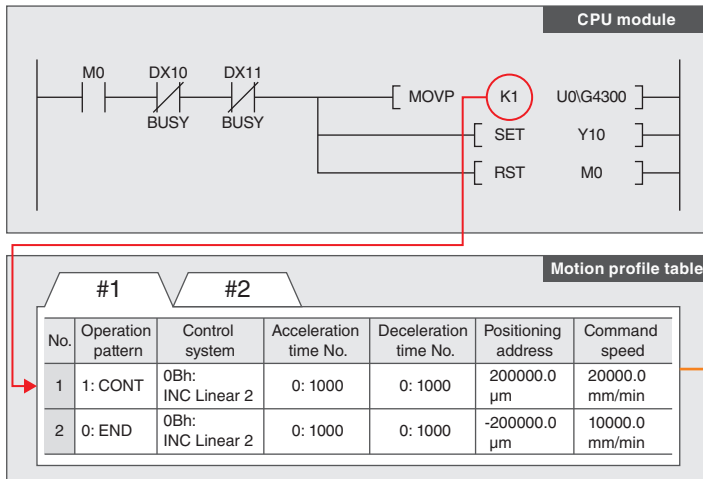


**Target Position Change Function**

The target position can be changed at any time even when the products are being moved (1-axis linear control). The product is examined with the vision system while being moved to the next line. If a faulty product is found, the target position is changed so that the faulty product is put in a separate tray for those rejected.

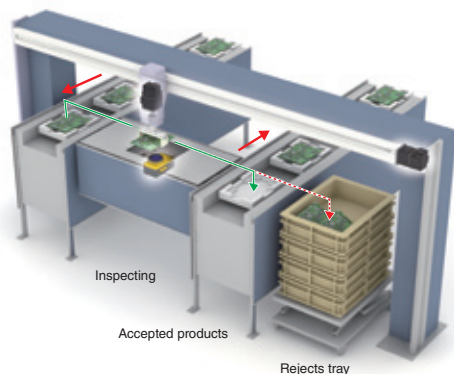

— Normal transfer route for accepted products  
 ..... Change to the rejects tray route


[Time chart]

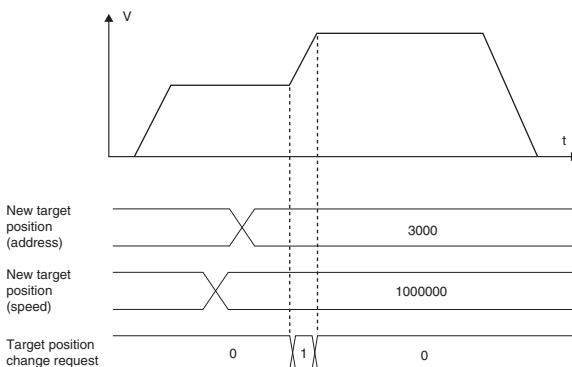

Synchronous control can be achieved using software instead of controlling mechanically with gears, shafts, clutches, speed change gears, cams, etc.

- Synchronous control can be flexibly started/ended for each axis, enabling the synchronous control axis and positioning control axis to be used within the same program.
- Command generation axis, servo input axis, or synchronous encoder axis can be set as the input axis.
- The output axis is operated with a cam. The following three operations can be performed with the cam functions: linear operation, two-way operation, and feed operation.
- An incremental synchronous encoder\*1 can be connected via a servo amplifier.

**Command generation axis**

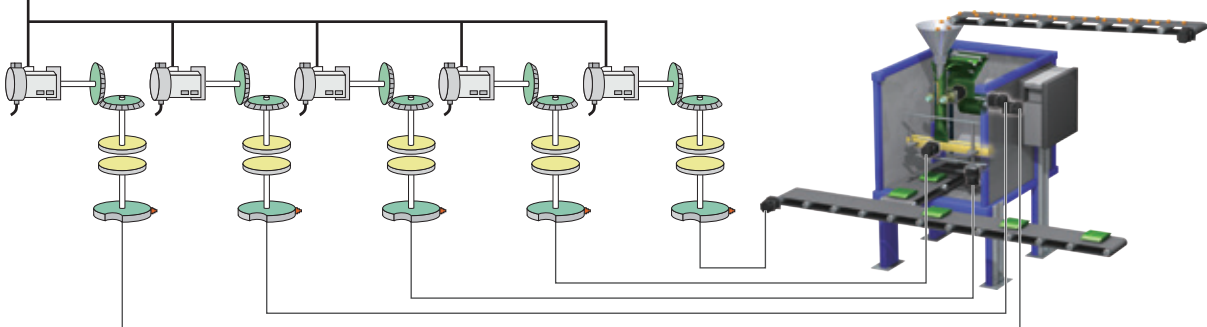


\*1. When connecting an absolute position synchronous encoder, use an encoder of HK series servo motors.

**[Command generation axis]**


Command generation axis is the axis that performs only the command generation. It is controlled independently of other axes connected to servo amplifiers. (not counted as a control axis)

**Parameter Settings**

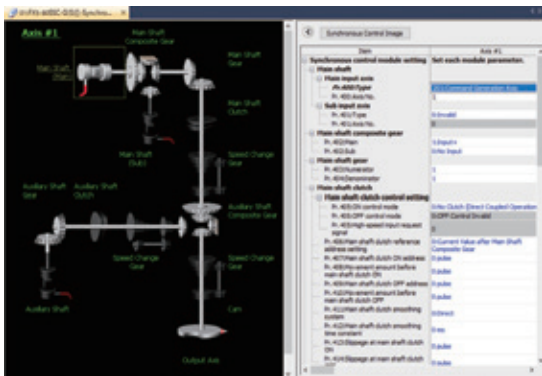

Synchronous control is executed by setting parameters of the input axis, output axis, gear, and clutch for synchronous control and turning on the synchronous control start signal.


**Cam Data (Operation Profile Data)**

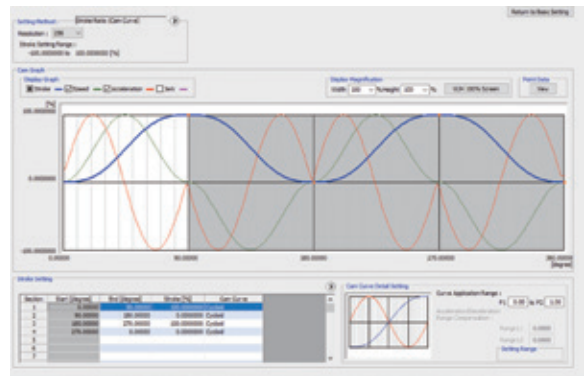

The cam graph can be flexibly and easily created through drag & drop. The waveform is changed according to the pointer's movement.

**Start/Stop**

Synchronous control can be executed after synchronous parameters are set for each output axis. When synchronous control start signal is turned on, the synchronous control parameters are analyzed, and the status is changed to during synchronous control. The output axis is operated by the commands transmitted from the input axis.

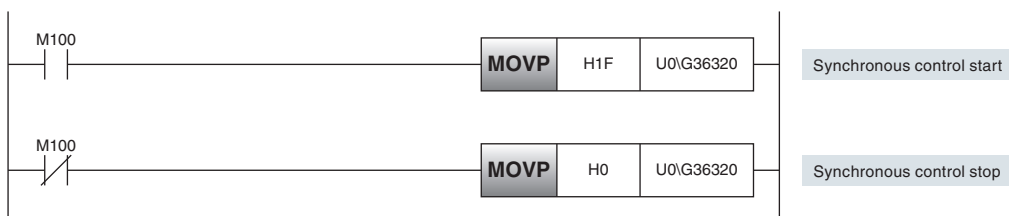


**Selectable Speed Control to Best Fit Your System Needs** Simple Motion

Two types of speed control are available: speed control that includes position loop and speed control that does not include position loop.


**Speed Control That Does Not Include Position Loop**

- Control mode setting of the servo amplifier: velocity control mode
- Minimizes speed deviation by flexibly responding to speed changes, such as those that occur when the load changes.
- Suitable for machines which keep driving the motors at constant speed, such as a wind/unwind machine.

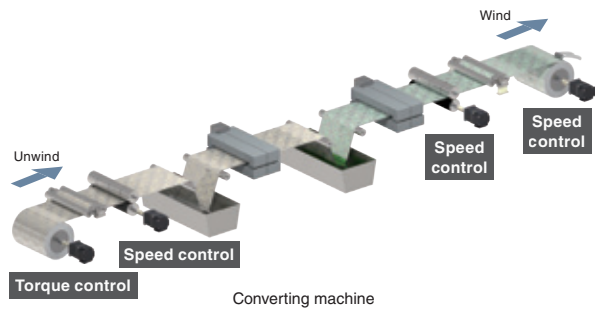

**Speed Control That Includes Position Loop**


- Control mode setting of the servo amplifier: position control mode
- Suitable for operations that repeatedly switch between speed and position control.

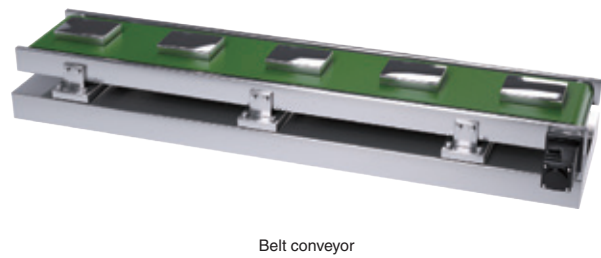

**Torque Control** Simple Motion


**Torque Control**

The axes in torque control are controlled to run at the constant torque by following the torque command. When the load is light and the speed increases to the set limit, the torque control switches to speed control.

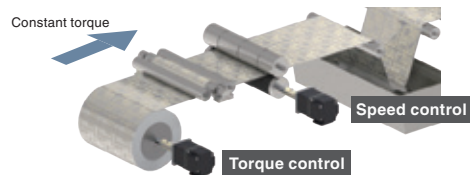

**Continuous Operation to Torque Control**


The axes are controlled to run at the constant torque by following the torque command while the current position is being tracked. The position control can be switched smoothly to the torque control without stopping the servo motor.

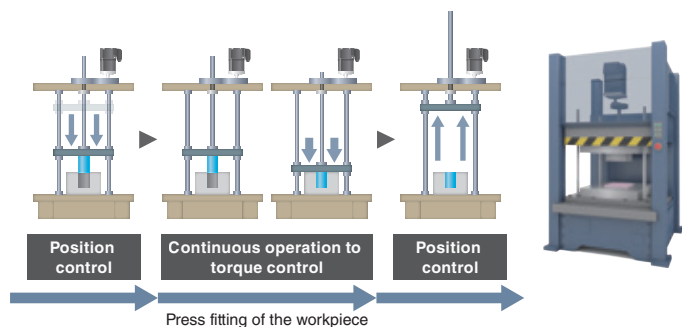

## Inter-Module Synchronization\*1

The inter-module synchronization function can synchronize the control timing between multiple Motion modules on the same base unit.


Even different machines can be synchronized through this function when each machine uses Motion modules.

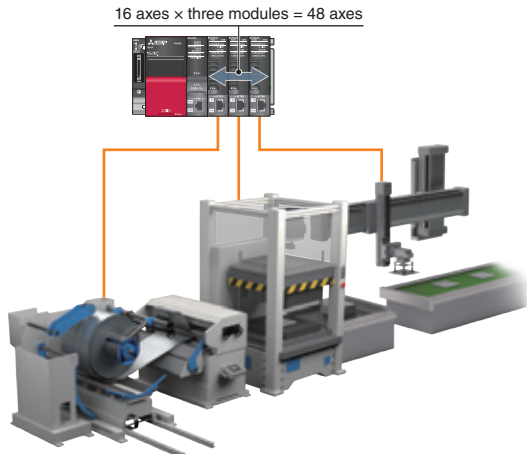

\*1. The function is available with RD78G.


## Automatic Return

When device stations are back to normal status after disconnected due to a data link error, this function automatically returns the disconnected stations to the network and restarts data link. Only the machine where an error occurred can be turned off, and parts can be replaced without turning off the power of the entire system.

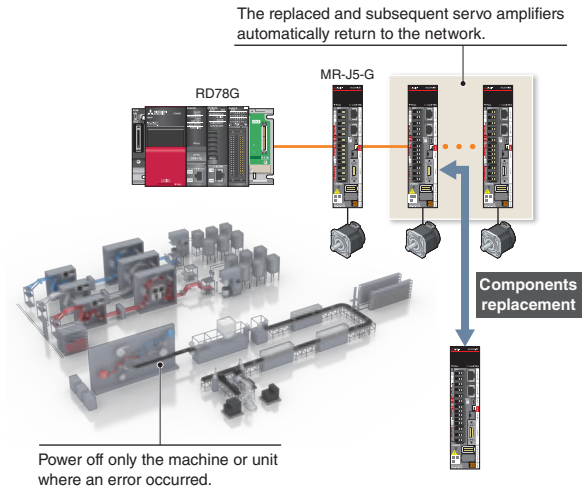


## Read/Write Operation of Standard Stations

- The PLC CPU sends/receives link devices to/from standard stations (device stations other than the motion control stations) through a Motion module.
- One-to-one communication is possible between the master and device stations.
- The PLC CPU can be programmed using the signals of the device stations.

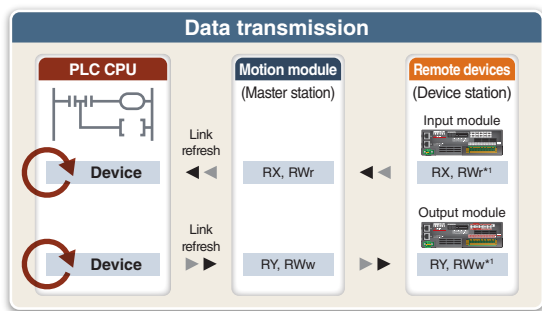

\*1. RX and RY are not available for some remote devices.

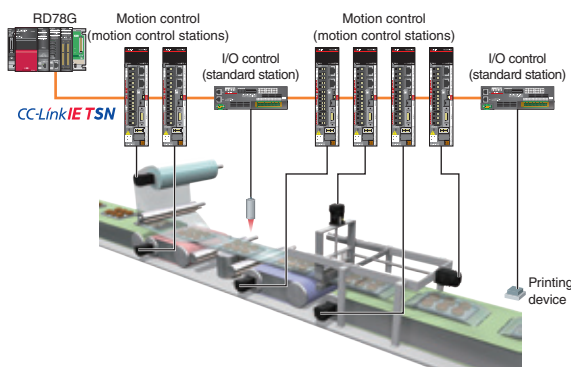


## Mark Detection

This function latches data responding to a trigger signal input to a servo amplifier.

The compensation amount is calculated based on the latched data, and the error is compensated using a compensation axis.

A high-accuracy mark detection at 1 μs is possible.

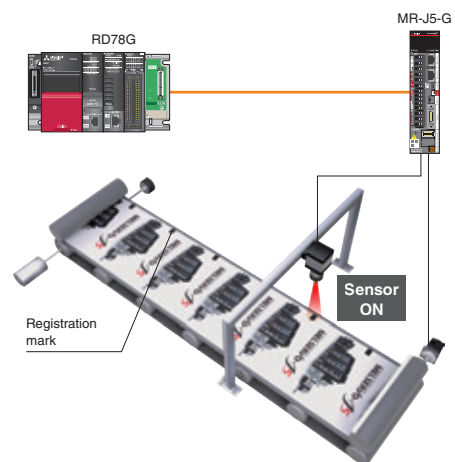


## CC-Link IE TSN Safety Communication Function Simple Motion

CC-Link IE TSN enables control of safety and non-safety communications realizing a flexible system whereby safety communications can be easily incorporated into the main control network.

In the following system which integrates safety and non-safety communications, the safety CPU checks the safety signals received via the safety remote I/O module and outputs the safety signals (STO, etc.) to the servo amplifiers. Outputting safety signals via the network eliminates the need for wiring of safety signals to a safety controller and a servo amplifier.


The CC-Link IE TSN safety communication function is available with iQ-R series Motion modules.

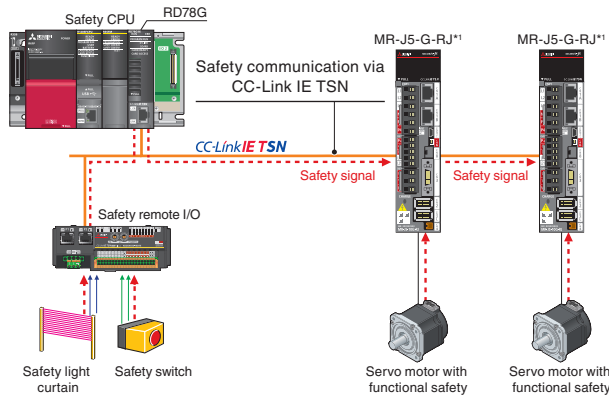

\*1. For servo amplifiers that support the safety communication function, refer to "Safety Sub-Functions" in section 1 of this catalog.


## Optional Data Monitor Simple Motion

Servo operation is monitored with extensive servo data acquired via CC-Link IE TSN. The acquired data can be transferred to IT system or transferred and displayed on any user-created GOT screen in the network. The target data for monitoring can be flexibly changed during operation.

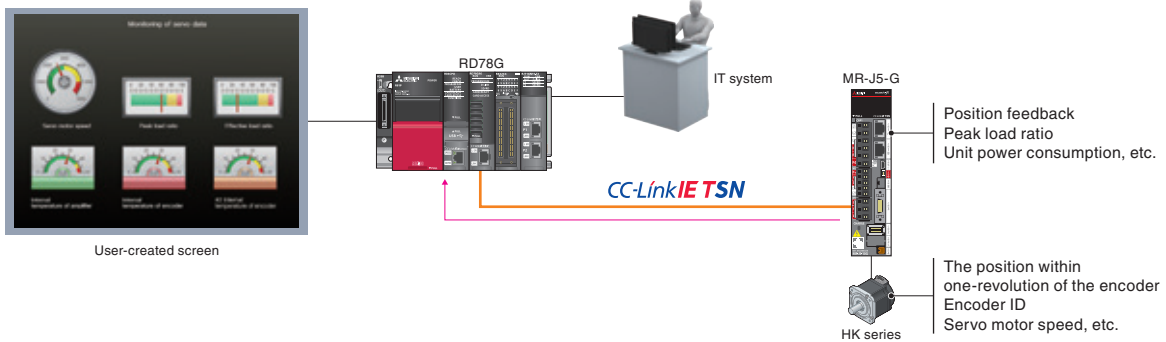


## Driver Communication Function\*1 Simple Motion

By using the driver communication function of the servo amplifier, the master axis is controlled with the Motion module, while the following axes are controlled by data communication between servo amplifiers (driver communication) without using the Motion module. The Motion module can drive multiple axes by controlling only the master axis.

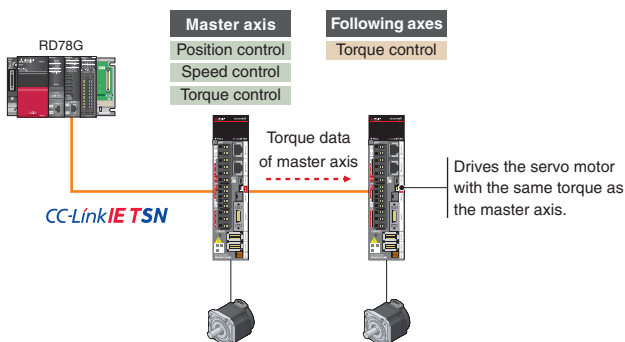

### Application examples

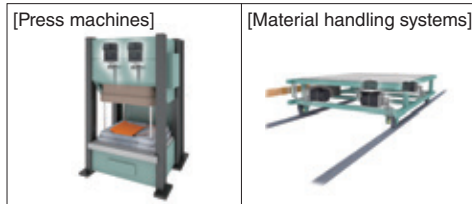

\*1. This function is available with RD78G.



## A Wide Variety of Features

Simple Motion

### JOG operation

Moves a workpiece in the designated direction while the JOG start signal is ON.

JOG operation can be executed without completing home position return.

### Absolute position system

Restores the absolute position of the designated axis.

Once the home position return is executed at the start of the system, it is unnecessary to perform the home position return again when the power is turned ON next time.

### Stroke limit functions

Establish the physical movable range for a machine. The hardware stroke limit function and the software stroke limit function are available.

### Target position change

Changes a target position to a newly designated target position at any timing during the position control (1-axis linear control).

### Acceleration/deceleration processing function

Adjusts the acceleration/deceleration of each motion control so that the acceleration/deceleration curve is suitable for the machine.

### Override

Changes the command speed by a specified percentage (0 to 300 %) for all controls to be executed.

### Stop operation functions

The forced stop, the axis stop, and the forced stop of servo amplifiers are available.

### Virtual servo amplifier

Enables operations of a virtual servo amplifier as if an actual unit is connected.

When the virtual servo amplifier is set as a servo input axis of synchronous control, the Motion module executes synchronous control with virtually generated input commands.

In addition, this function is used to simulate an axis without an actual connection.

### Home position return control

Establishes a position as the starting point (or "Home position") of positioning control and performs positioning toward that starting point.

### Torque limit function

Limits the torque generated by the servo motor. This function is used to protect the gear reducer and limit the pushing force applied to a stopper. It can control torque so that excessive force will not be applied to loads and machines.


### Event history

Saves the error information and the operation for the module as an event in the CPU module and the Motion module.

## One software, many possibilities

Programmable Controller Engineering Software

# GX Works3

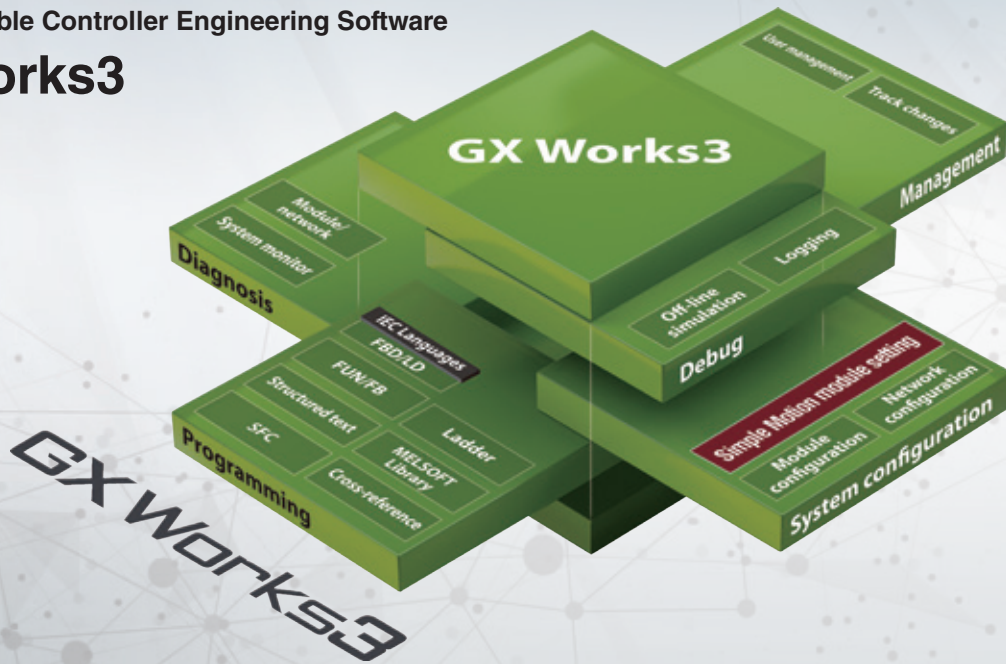

MELSOFT GX Works3 covers various aspects of development processes - parameter settings, servo adjustments, and debugging of Motion modules as well as sequence program creation. This software offers an engineering environment that provides comfortable design environment.

## Engineering Environment

Simple Motion

Various features are integrated into GX Works3, which allows users not only to easily create projects but also maintain consistency through the entire development processes.

### System Design

- System configuration by simply selecting modules from a list
- Easy parameter settings for each module
- Parameters settable for reduction ratio and electronic gear

### Programming

- Easy positioning data creation with a variety of functions
- Synchronous control only with parameter settings
- Highly flexible cam data creation

### Debug

- Simulation without actual devices
- Automatic servo adjustments
- Digital oscilloscope that allows operation verification and quick troubleshooting


### Maintenance



## System Design

System Design

Module configuration

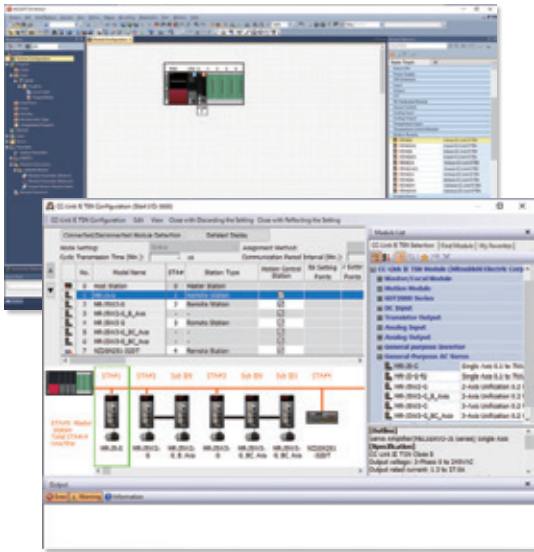

Network configuration

- Module configuration
- Network configuration
- Data settings for servo amplifiers
- Settings for remote I/O
- Parameter conversion function

## Programming (Positioning)

Programming

Positioning data setting



Offline simulation


Automatic calculation of command speed

- Programming with Ladder, SFC, FBD/LD
- Positioning data settings
- Offline simulation, automatic calculation of command speed

## Programming (Advanced Synchronous Control)

Programming

Synchronous control parameter

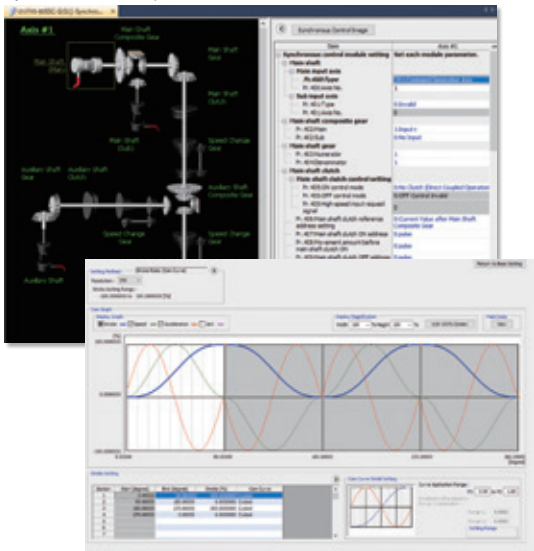

Cam data creation


- Synchronous control parameter
- Cam data creation, cam data list

## Debug/Maintenance

Debug

Maintenance

Axis monitor

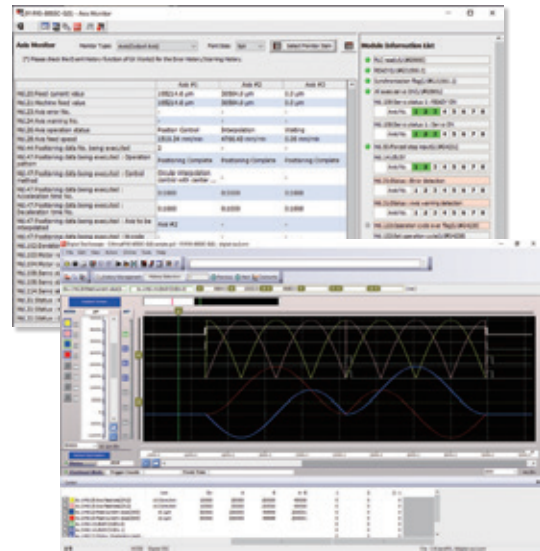

Digital oscilloscope

- Event history
- Current value history, start history, axis monitor
- Servo monitor
- Digital oscilloscope

## Unlock new system capabilities together with CC-Link IE TSN

# PLCopen® Motion Control FB Mode PLCopen®

CC-Link IE TSN  
Motion Module

# RD78GH RD78G



These Motion modules with multiple-core processors enable to configure a high-speed, large system by supporting the CC-Link IE TSN real-time open network.

- Performs positioning control such as linear interpolation using function blocks. The programming is easy: users just need to set positioning data to the function blocks.
- Connects to various modules such as servo amplifiers and I/O modules via CC-Link IE TSN. This connectivity allows you to configure a servo system more flexibly.
- Supports a consistent engineering environment that is capable of handling tasks ranging from system design to debugging and maintenance.

### Product Lines

PLCopen®



CC-Link IE TSN  
**MELSEC iQ-R**  
series

**RD78GHV  
RD78GHW**

- Maximum number of control axes:  
RD78GHV: 128 axes/module  
RD78GHW: 256 axes/module
- Minimum operation cycle \*1: 31.25 μs
- ST language program capacity:  
Built-in ROM max. 64 MB  
+ SD memory card

RD78GHV/RD78GHW are designed with a quad-core processor that enables higher-speed control. These Motion modules can be directly programmed to distribute load control with PLC CPUs.

This ensures that performance will not be degraded even when the number of axes is increased.



CC-Link IE TSN  
**MELSEC iQ-R**  
series

**RD78G4/RD78G8  
RD78G16/RD78G32  
RD78G64**

- Maximum number of control axes:  
RD78G64: 64 axes/module
- Minimum operation cycle \*1: 62.5 μs
- ST language program capacity:  
Built-in ROM max. 16 MB + SD memory card


RD78G4/RD78G8/RD78G16/RD78G32/RD78G64 are designed with a dual-core processor and can be programmed to enable various types of control, such as positioning, synchronous, cam, speed, and torque control.

\*1. The operation cycle varies by the number of control axes and the models.

# Improved Performance

PLCopen®

The minimum operation cycle of RD78GH in PLCopen® motion control FB mode is approximately 4.1 to 6.2 times faster than that of the previous models, and the number of maximum control axes is 4 to 8 times more. The data from the servo amplifiers and input/output signals can be received at high speeds, which reduces the cycle time.

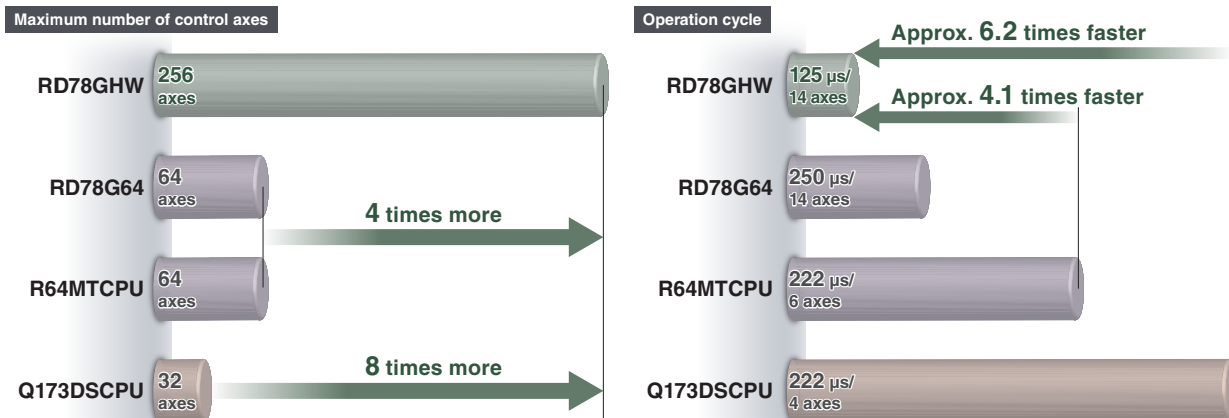


**System Configuration**



The Motion Module executes motion control while functioning as a master station of CC-Link IE TSN.\*1

This feature enables users to create a system more flexibly by connecting various devices, such as servo amplifiers, remote I/O modules, and TCP/IP devices, to the Motion module.\*2

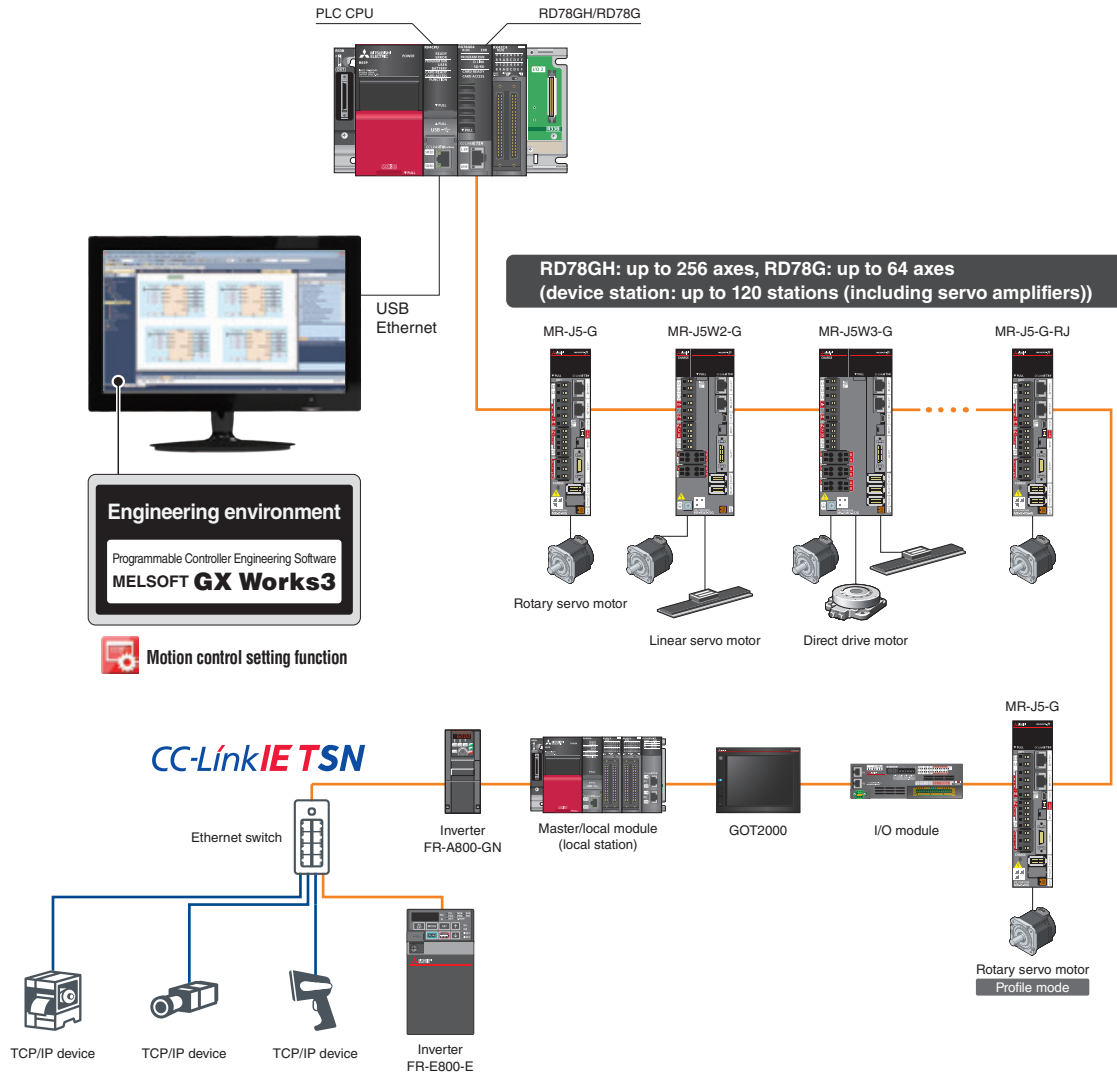

\*1. Sub-master station is not supported.

\*2. Refer to manuals for precautions when CC-Link IE TSN Class B and A devices are mixed.

## Inter-Module Synchronization

PLCopen®

The inter-module synchronization function can synchronize the control timing between multiple Motion modules on the same base unit.

Even different machines can be synchronized through this function when each machine uses Motion modules.

Inter-module synchronization  
256 axes × 3 modules = 768 axes



## Positioning Control

PLCopen®

Two types of positioning control are available: single-axis and multi-axis positioning control.



This variety allows you to meet various control needs.

| Item                | Control types |                      |
|---------------------|---------------|----------------------|
| Single-axis control | Positioning   | Absolute positioning |
|                     |               | Relative positioning |
|                     | Homing        |                      |
|                     | JOG operation |                      |



| Item                                     | Control types          |                                 |
|--|------------------------|---------------------------------|
| Multi-axis control                       | Linear interpolation   | Absolute linear interpolation   |
|  |                        | Relative linear interpolation   |
|  | Circular interpolation | Absolute circular interpolation |
|  |                        | Relative circular interpolation |
| Multiple axes positioning data operation |                        |                                 |

### Main Control



#### Linear interpolation



#### Circular interpolation



#### Multiple axes positioning data operation




## Acceleration/Deceleration Methods PLCopen®

Three types of acceleration/deceleration methods are available: trapezoidal acceleration/deceleration, jerk acceleration/deceleration, and acceleration/deceleration time fixed.


### Trapezoidal acceleration/deceleration

After starting, maximum acceleration is maintained until the target speed is reached.  
 For example, when a vehicle loaded with a workpiece accelerates suddenly, the workpiece will swing back and forth due to the impact of the sudden acceleration.  
 To reduce impacts and vibrations in a case such as this, the vehicle must accelerate at a slower rate.  
 The speed creates a trapezoidal shape.

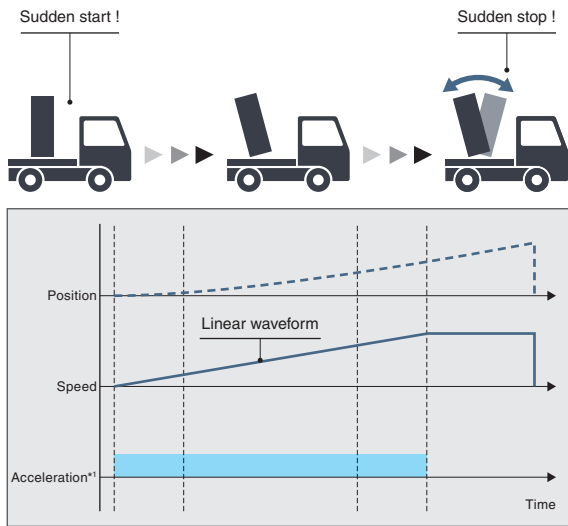


### Jerk acceleration/deceleration

The acceleration changes gradually.  
 For example, when a vehicle loaded with a workpiece accelerates gradually, the load will not swing back and forth after acceleration.  
 The jerk is maintained during acceleration. When the vehicle has almost reached the target speed, the jerk is decelerated. Adjusting jerk in this way achieves smooth acceleration/deceleration while also shortening the time it takes to reach the target speed.  
 The speed creates a S-curve shape.

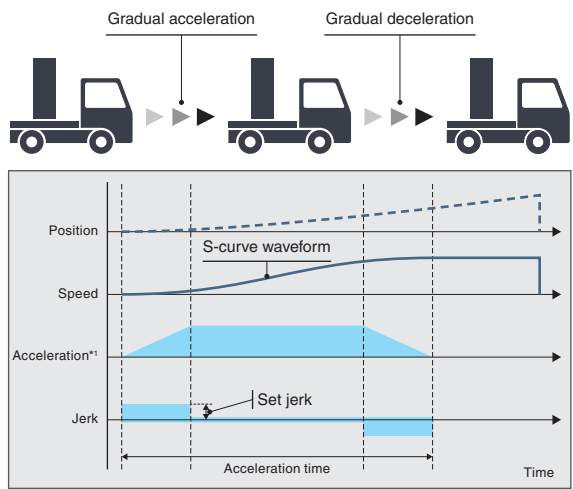

### Acceleration/deceleration time fixed method

This method executes acceleration/deceleration based on the time specified, regardless of the commanded speed.

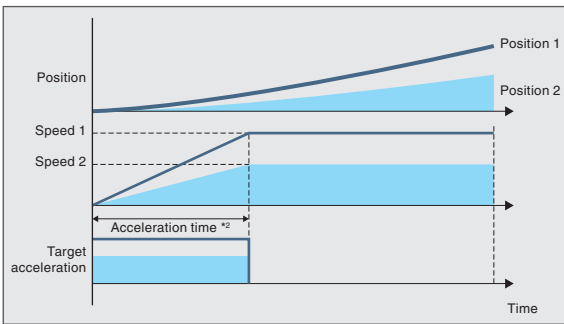

\*1. Input acceleration.  
 \*2. Specify acceleration time.



MEMO

# Synchronous Control PLCopen®


Synchronous control is performed using function blocks that operate as software-based mechanical modules such as gears, shafts, speed change gears, and cams.

- Positioning and synchronous control can be performed together in the same program.
- Synchronous control using a synchronous encoder as an input axis is also possible.
- The output axis is operated based on cam data (operation profile).

## Flexibly Combining Synchronous Modules

The number and the combination of the synchronous modules are flexibly selected, achieving optimized operation.


### [An example of packing machine program]

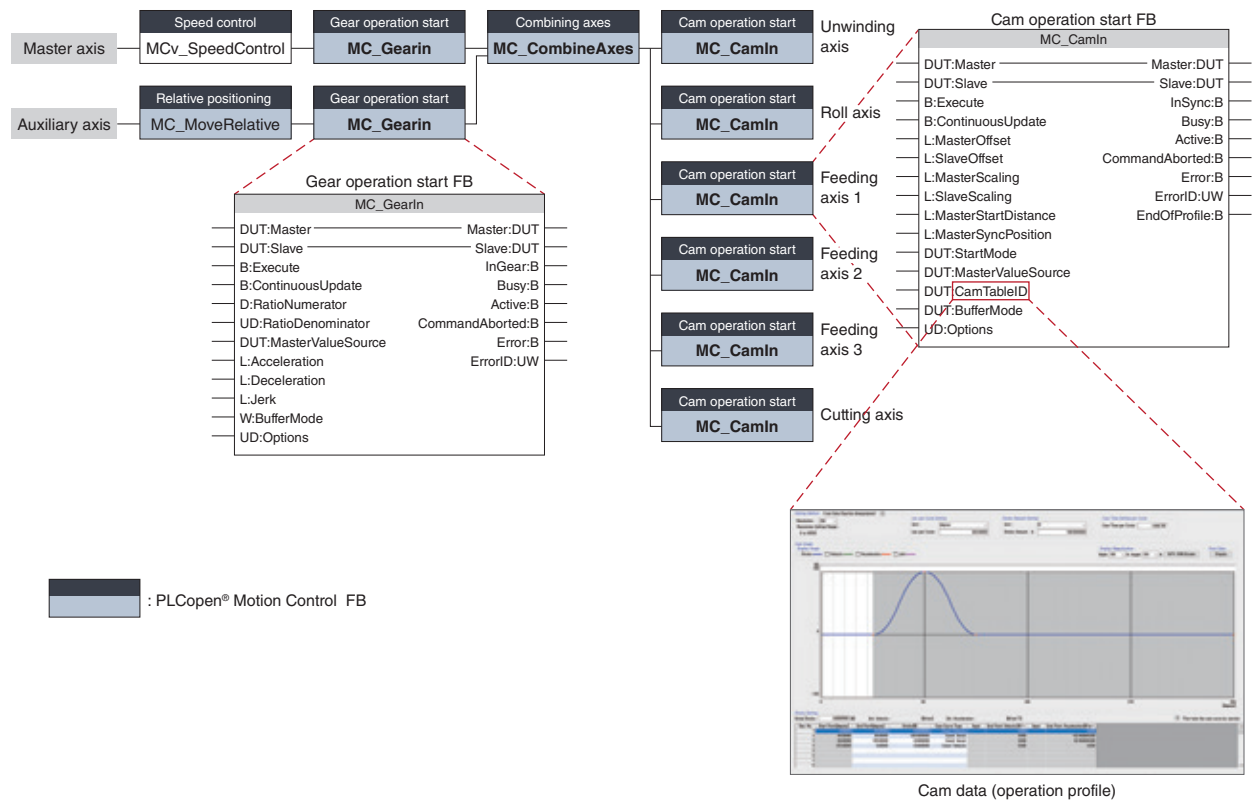


## Application examples

### [Packing machines]

This application synchronizes all the axes, from the cutting axis through the unwinding axis, with the master axis. Cutting operation is performed with the cutting axis and the feeding axis 3.


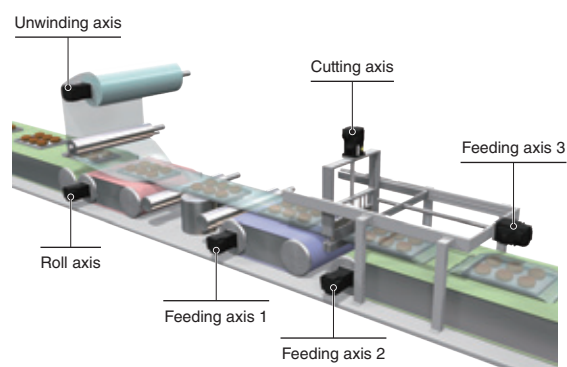


### Time chart of film cutting operation

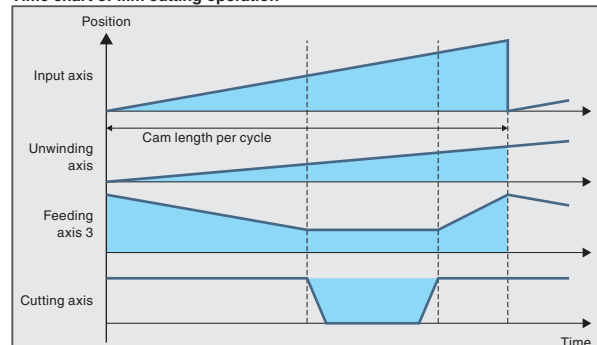

## Advanced Synchronous Control FB Settings with Graphic-Based Interface

Synchronous control can be executed by setting synchronous modules with parameters and starting the advanced synchronous control FB. Synchronous modules such as the auxiliary shafts, gears, clutches, and speed change gears can be set with a graphic-based interface.

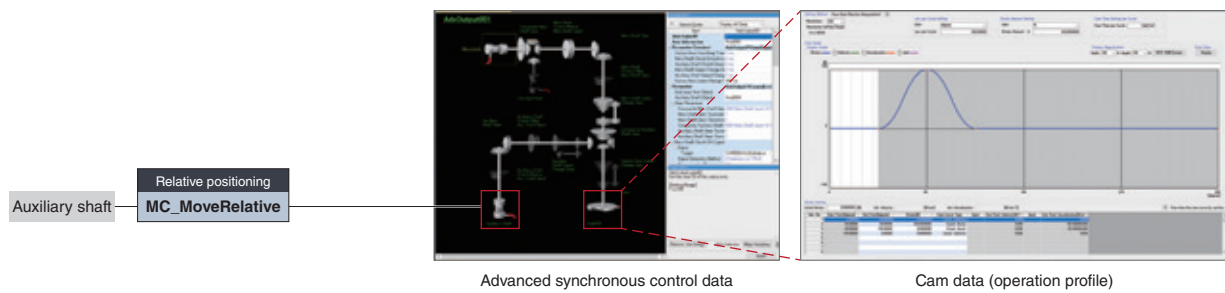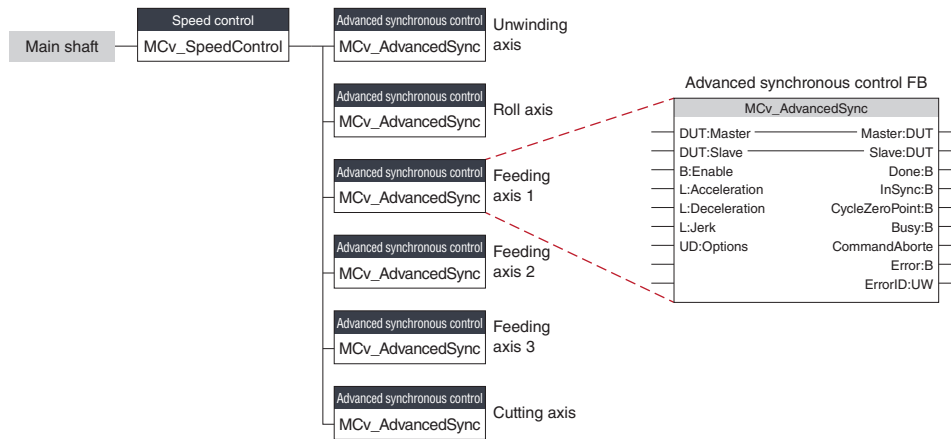


 : PLCopen® Motion Control FB

### Advanced synchronous control data

Images of enabled synchronous modules are highlighted, allowing easy verification of set data through visualization.

- Input axis data
- Synchronous parameter (output axis)
- Auxiliary shaft data
- Clutch data
- Gear data
- Speed change gear data
- Cam data (operation profile)
- Cam waveform type

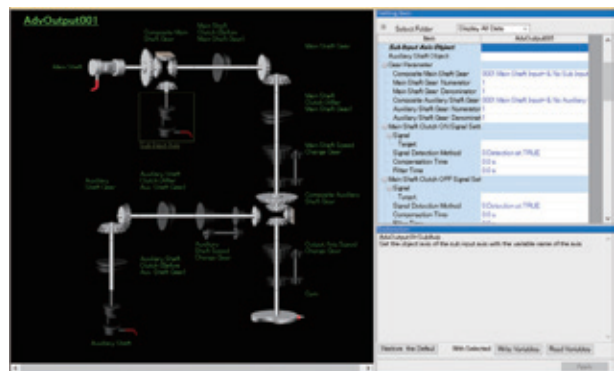


**Clutch**

The clutch is used to transmit/disengage command pulses from the main/auxiliary shaft input side through turning the clutch ON/OFF, which controls the operation/stop of the output axis.

The clutch can be set to the main shaft clutch and the auxiliary shaft clutch.

| Clutch ON control mode                | Clutch OFF control mode                |
|---------------------------------------|--|
| Invalid<br>(Direct coupled operation) | Invalid<br>(OFF control invalid)       |
| Clutch command                        | Clutch command<br>(One-shot operation) |
| Clutch command leading edge           | Clutch command leading edge            |
| Clutch command trailing edge          | Clutch command trailing edge           |
| Address mode                          | Address mode                           |
| I/O data specification                | I/O data specification                 |


A clutch can be used through the advanced synchronous control FB.

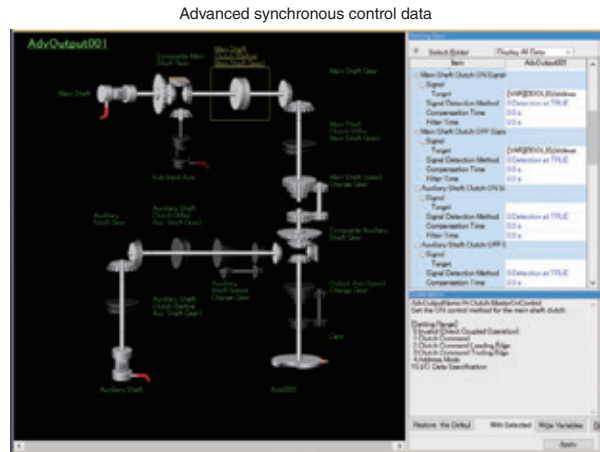

**Restarting synchronous control**

In case that the synchronous positions become misaligned due to an emergency stop, etc., synchronous control can be restarted by using the synchronous control analysis mode.

In the synchronous control analysis mode, the cam set position is updated on the basis of the input axis. The synchronous position can be aligned using the updated cam set position before starting synchronous control.

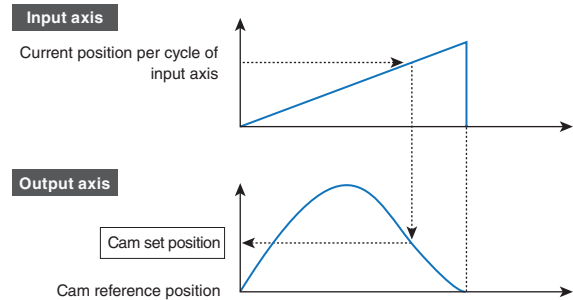


## Synchronous Encoder

The Motion module easily performs synchronous control by setting a synchronous encoder to "Real encoder axis" and creating a program with function blocks.

The number of command pulses can be adjusted using the function block (MC\_GearIn) or a parameter.


An incremental synchronous encoder\*1 can be connected via a servo amplifier.

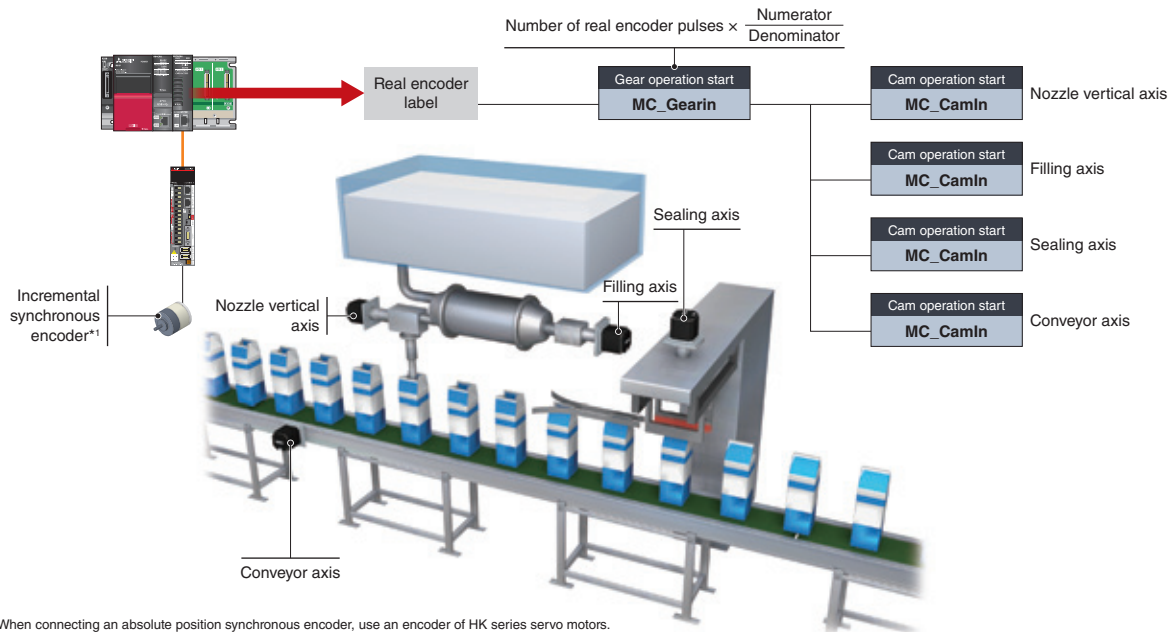

\*1. When connecting an absolute position synchronous encoder, use an encoder of HK series servo motors.

## Switching Cam Control

The cam being executed can be flexibly switched to another cam without stopping the servo motor. Similarly, cam control is smoothly switched to position control with no need of stopping the motor.

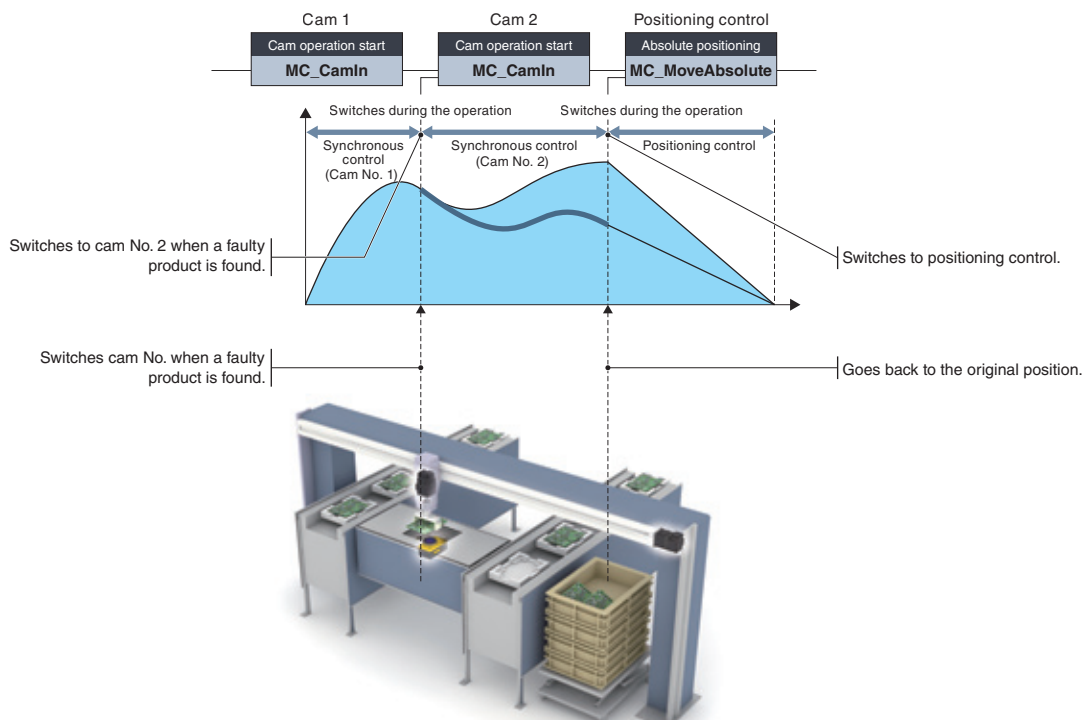

## Cam Data (Operation Profile Data) PLCopen®

Create cam data (operation profile data<sup>\*1</sup>) according to your application. The created cam data is used to control an output axis.


\*1. "Operation profile data" is a general name for waveform data, which is used for various applications.

### Cam Operation

The following three cam operations are available: linear operation, two-way operation, and feed operation. Choose one according to your application.


#### Linear operation

The cam pattern is a linear line.  
This pattern is used for a ball screw and a rotary table.

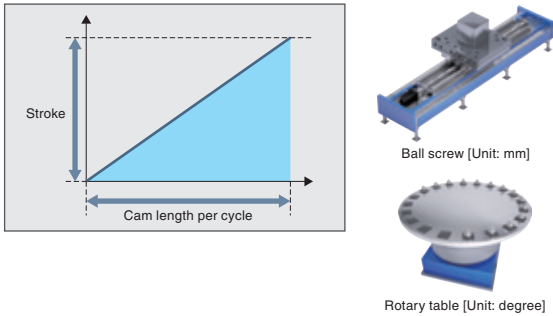


#### Two-way operation

The beginning and the end of the cam pattern are the same.  
Mechanical cams fall into this category.

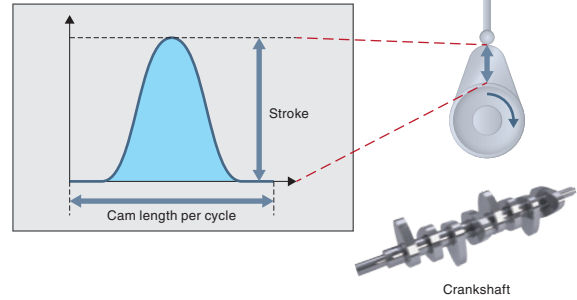


#### Feed operation

The beginning and the end of the cam pattern differ.  
This pattern is used for fixed-amount feed operations and intermittent operations.  
Set the end point for the feed operation to a position of your choice.

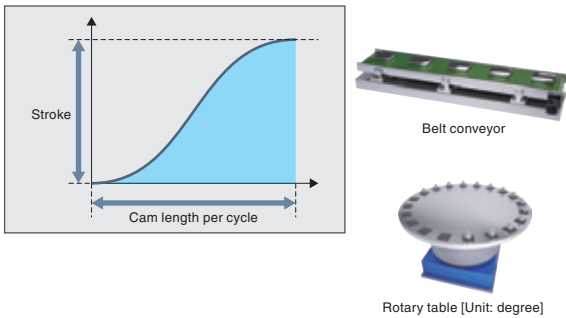


### Application examples

#### [Machine with all axes synchronized]

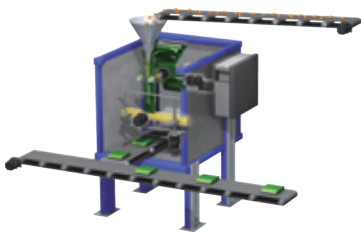


All the axes of the machine are in synchronization.

#### [Machine with only certain of the axes synchronized]




Only two axes are synchronized.  
The other axes perform positioning operation while the two axes execute synchronous control.



The two arms can avoid interference by synchronizing with each other, shortening the cycle time.

## Cam Data Types

The cam data (operation profile data) has the following two types.

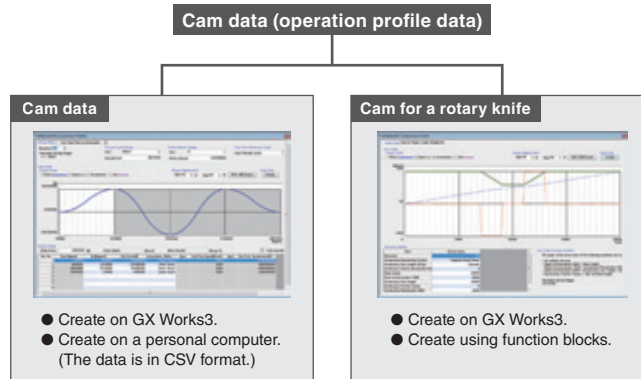

## Easy Cam Creation for a Rotary Knife


Cam for a rotary knife is easily created by setting the sheet length and sheet synchronization width.

### [Automatic cam creation from the motion control FB]

Setting the sheet length and sheet synchronization width, etc., to the function block and starting it create a cam automatically.


### [Cam creation with MELSOFT GX Works3]

Setting the sheet length and sheet synchronization width, etc. creates a cam.

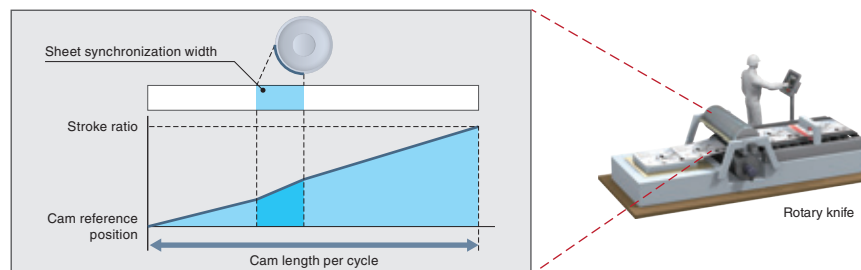

## Cam Data in CSV Format

The cam data (operation profile data) in a CSV format on a personal computer can be imported directly to a Motion module.

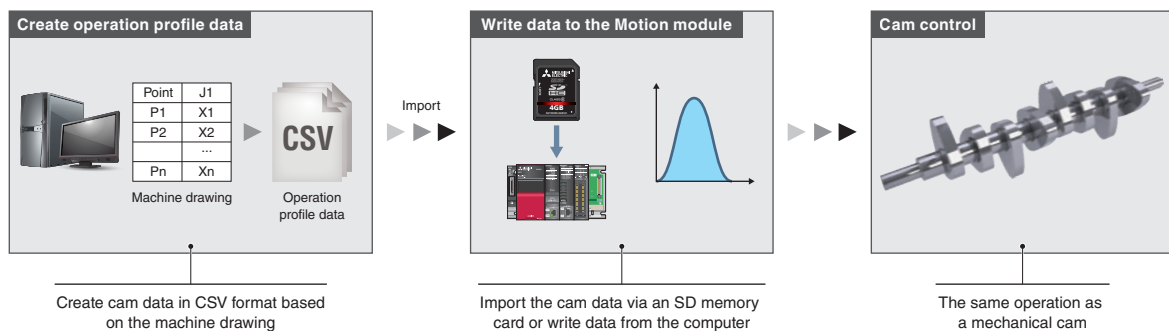

**Servo Amplifier Control Mode** PLCopen®

The servo amplifier has three control modes: position, velocity, and torque control modes.

Execution of MC\_MoveVelocity transitions the mode to the velocity control mode, and execution of MC\_TorqueControl to the torque control mode.

In the velocity control mode or torque control mode, the mode transitions to the position control mode in the following cases.


- At stop completion or error occurrence
- When a Motion control FB is changed/aborted

**[Control mode]**

Position control mode: Moves to the target position  
(Speed control that includes position loop)

Velocity control mode: Drives at the specified speed  
(Speed control that does not include position loop)

Torque control mode: Drives at the specified torque

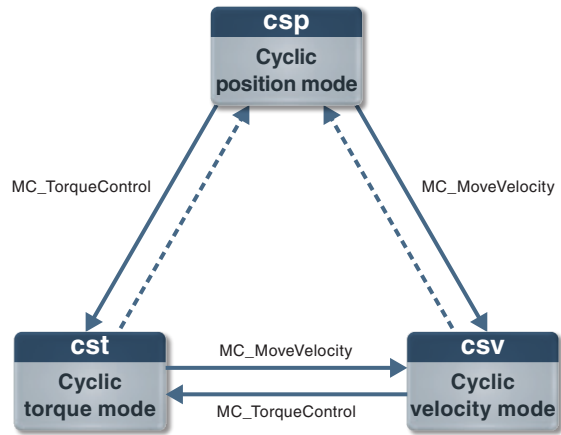


**Selectable Speed Control to Best Fit Your System Needs** PLCopen®

Two types of speed control are available: speed control that includes position loop and speed control that does not include position loop.


**Speed Control That Does Not Include Position Loop**

- Control mode setting of the servo amplifier: velocity control mode
- Minimizes speed deviation by flexibly responding to speed changes, such as those that occur when the load changes.
- Suitable for machines which keep driving the motors at constant speed, such as a wind/unwind machine.

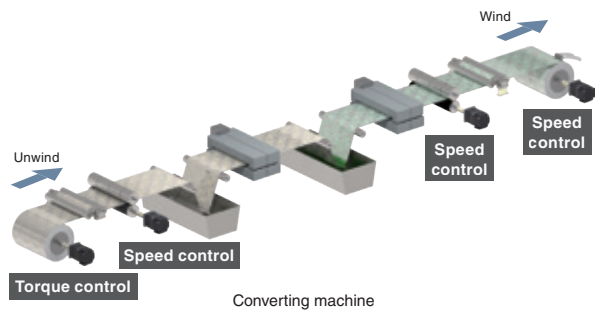

**Speed Control That Includes Position Loop**


- Control mode setting of the servo amplifier: position control mode
- Suitable for operations that repeatedly switch between speed and position control.

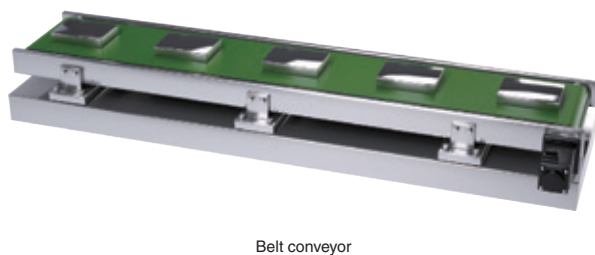



## Torque Control Mode


The axes in torque control are controlled to run at the constant torque by following the torque command. When the load is light and the speed increases to the set limit, the torque control switches to speed control.

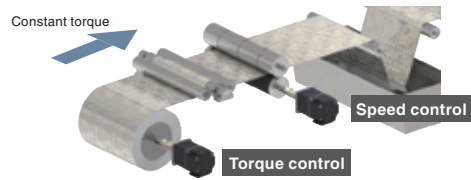

### Application example


#### [Unwinding axis of converting machines]

Torque control unwinds film at constant tension to prevent wrinkling in the film. The tension can be kept constant by sequentially controlling the torque commands. This type of control is perfect for unwinding machines that need to keep the tension of unwound materials constant.

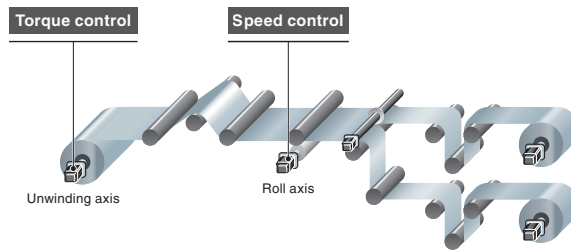

## Continuous Operation to Torque Control Mode





The axes are controlled to run at the constant torque by following the torque command while the current position is being tracked. The position control can be switched smoothly to the torque control without stopping the servo motor.

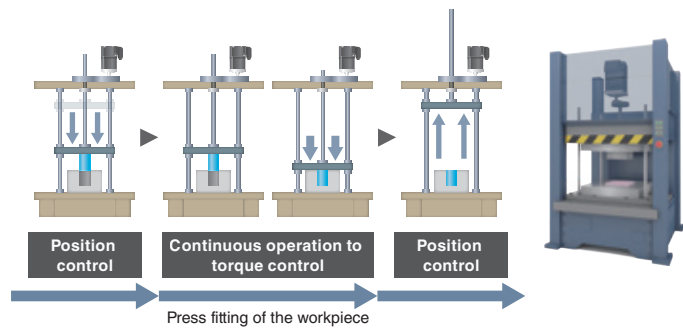

### Application example

#### [An example of continuous operation to torque control]

This control is applicable to a variety of machines, such as bonding, press-fit, punching, and clamping machines.

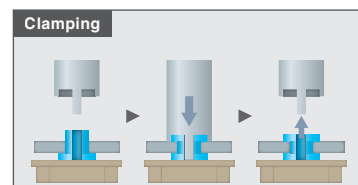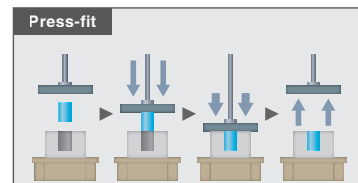


**Flexible System Configuration with Multiple Topologies** **PLCopen®**

Line, star, and ring topologies are supported, allowing a flexible system configuration.


**[Line topology]**

Use a line topology for high-speed, high-performance control. This is realized when a system is configured with CC-Link IE TSN-compatible device stations only without additional branch lines.

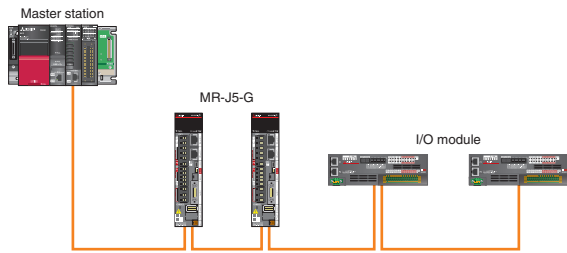


**[Star topology]**

Choose a star topology if a more flexible system configuration is needed. Using Ethernet switches, device stations can be easily distributed to achieve the desired system configuration.

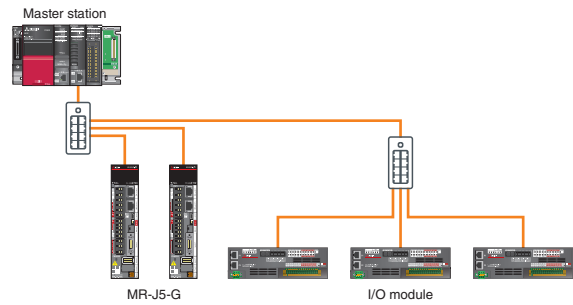

**[Ring topology]\*1** **NEW**

A ring topology is ideal for systems requiring high reliability. Data communication continues via multi-directional communication with normal stations even if a cable is disconnected or an error occurs on a device station.


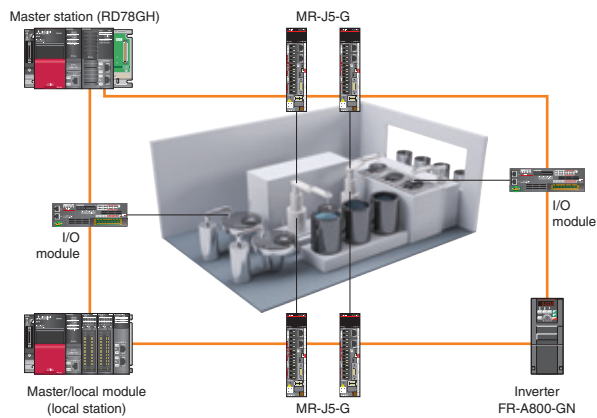


\*1. Available with RD78GH

The Motion module automatically collects data of all servo amplifiers when an error occurs. The collected data, such as the command and the feedback values, greatly helps you analyze the error cause.

- Automatic collection of data, such as position, speed, and torque data, without programming
- Collecting data of all axes helps you locate the error cause even when the error is caused by the other axes without an error.
- The co-recording function collects data even when an error occurs in other recording devices.

### [Data collection]

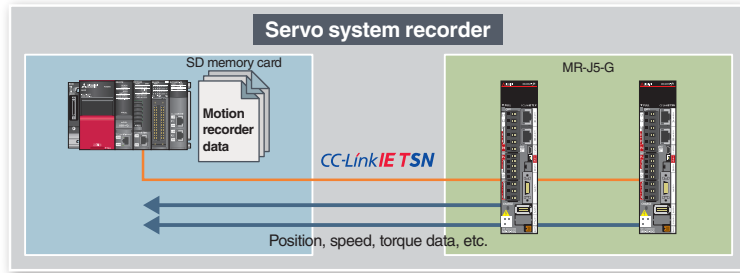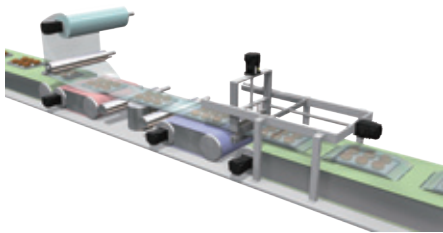


### GX LogViewer

## GX LogViewer

The collected data can be checked on GX LogViewer. The operation status before and after an error is displayed in waveforms, which allows more detailed analysis and identification of the error cause.

### [Features]

- Displays the collected data and events graphically.
- Enables users to adjust a graph easily by automatic adjustment function and drag operation.

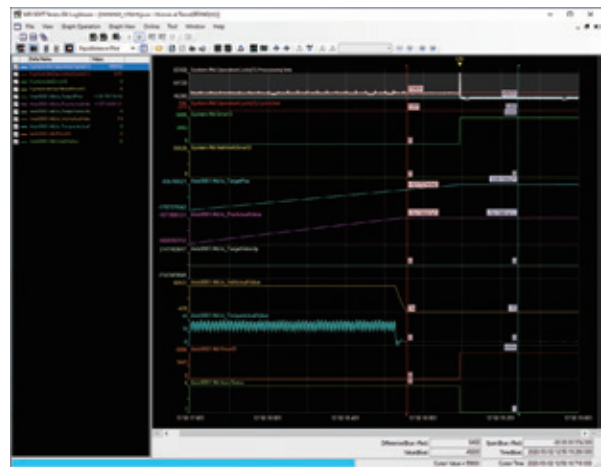


## Analyzing Data

Analyzing operation transition of the Motion modules and the servo amplifiers before and after an error helps you locate the error cause.

### [Example]

1. An error has occurred.
2. The speed and torque decreased even though the command position was increasing.

By analyzing the data in the recorder (1 and 2 above), users can find out a possible cause of the error, such as a disconnection of a power cable during operation.

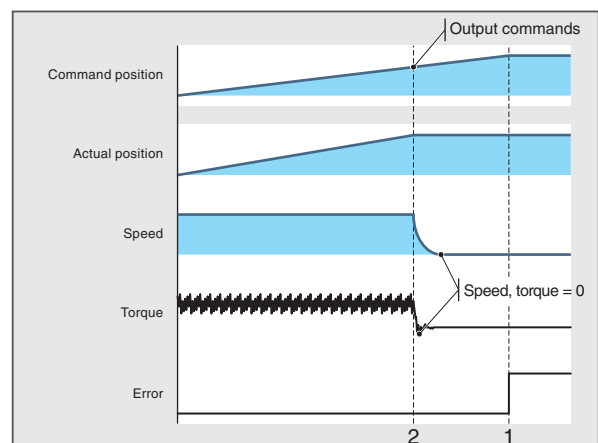


## Touch Probe Function PLCopen®

This function latches data responding to a trigger signal input to a servo amplifier.


The compensation amount is calculated based on the latched data, and the error is compensated using a compensation axis.

A high-accuracy touch probe at 1 μs is possible.

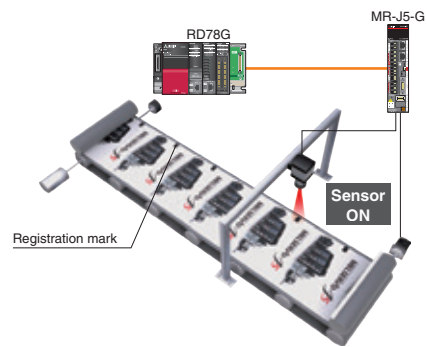

## Monitoring of Servo Data PLCopen®


Servo data can be monitored during operation. Operation status of servo amplifiers and servo motors can be obtained via CC-Link IE TSN and transferred to IT system or displayed on any user-created GOT screen in the network.

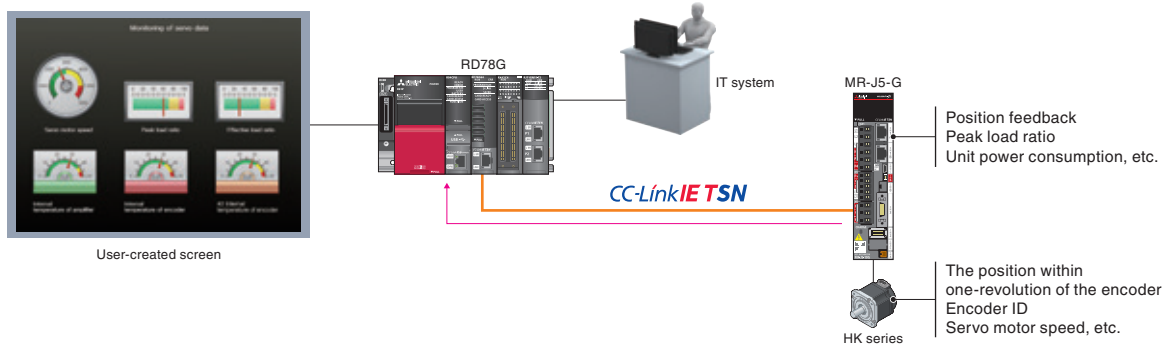

## CC-Link IE TSN Safety Communication Function PLCopen®

CC-Link IE TSN enables control of safety and non-safety communications realizing a flexible system whereby safety communications can be easily incorporated into the main control network.

In the following system which integrates safety and non-safety communications, the safety CPU checks the safety signals received via the safety remote I/O module and outputs the safety signals (STO, etc.) to the servo amplifiers. Outputting safety signals via the network eliminates the need for wiring of safety signals to a safety controller and a servo amplifier. The CC-Link IE TSN safety communication function is available with iQ-R series Motion modules.

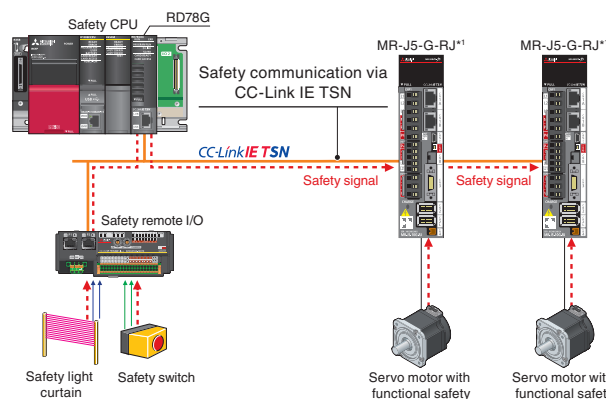

\*1. For servo amplifiers that support the safety communication function, refer to "Safety Sub-Functions" in section 1 of this catalog.

## A Wide Variety of Features

PLCopen®

### JOG operation

The Motion module outputs commands to an axis and operates the axis to the specified direction while the positive/reverse rotation JOG command is inputted.

### Absolute position system

Restores the absolute position of the designated axis. Once the home position return is executed at the start of the system, it is unnecessary to perform the home position return again when the power is turned ON next time.

### Stroke limit functions

Establish the physical movable range for a machine. The hardware stroke limit function and the software stroke limit function are available.

### Target position change

A target position can be changed using the buffer mode. During execution of an FB for position control, another FB to move to a new target position can be started at any timing.

### Acceleration/deceleration processing function

Adjusts the acceleration/deceleration of each motion control so that the acceleration/deceleration curve is suitable for the machine.

### Override

Sets the factor for the velocity and performs the control to change the target velocity. The following two methods are available for changing the override factor: a method of using the dedicated FB and a method of changing the control data.

### Stop operation functions

The forced stop, the axis stop, the axes group stop, and the forced stop of the servo amplifier are available.

### Axis emulate

Enables operations of a virtual servo amplifier as if an actual unit is connected. This function enables to debug the user program at the startup of the device or verify the positioning operation.

### File transfer

Executes file operation and data backup/restore based on the specified command.

### Torque limit function

Limits the torque generated by the servo motor. This function is used to protect the gear reducer and limit the pushing force applied to a stopper. It can control torque so that excessive force will not be applied to loads and machines. The following two methods are available for changing the torque limit value: a method of using the dedicated FB and a method of changing the control data.


### Event history

Saves the error information and the operation for the module as an event in the CPU module and the Motion module.

## One software, many possibilities

Programmable Controller Engineering Software

# GX Works3

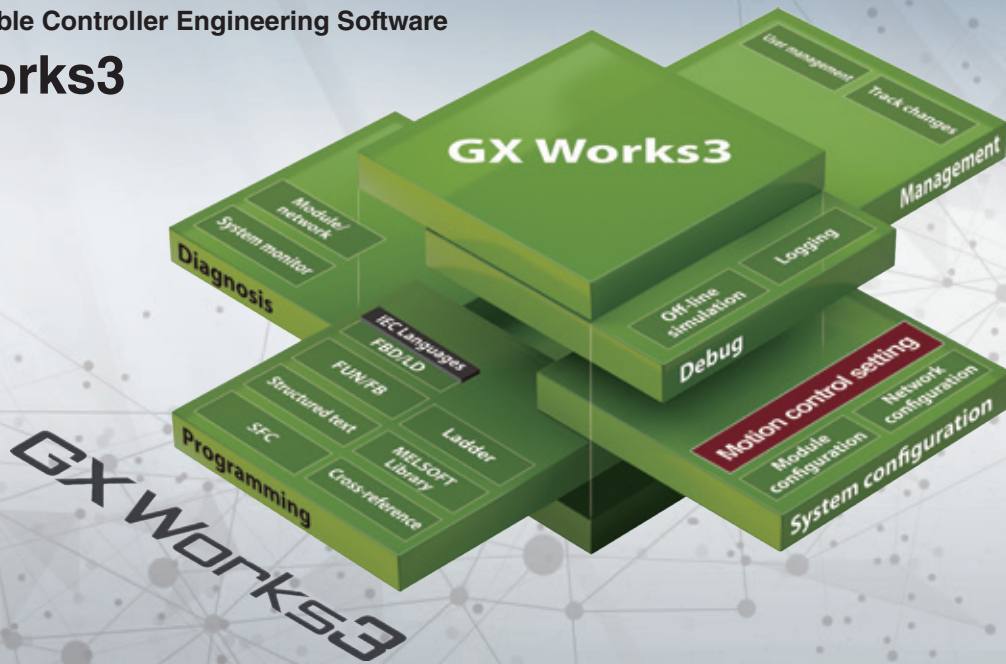

MELSOFT GX Works3 covers various aspects of development processes - parameter settings, servo adjustments, and debugging of Motion modules as well as sequence program creation. This software offers an engineering environment that provides comfortable design environment.

## Engineering Environment

Various features are integrated into GX Works3, which allows users not only to easily create projects but also maintain consistency through the entire development processes.

### System Design

- Network configuration settings
- Automatic detection of network configuration

### Programming

### Debug

### Maintenance

#### System Design

#### Programming

- Easy programming in ST language
- More intuitive programming, which eliminates the need to remember devices or buffer memory addresses
- Easy access to axis information
- Operation profile data

#### Debug

- Various monitor functions, such as axis monitor, and ST language program monitor
- A simulator that debugs a program without an actual machine
- Real-time monitor of GX LogViewer

#### Maintenance

- Various monitor functions, such as axis monitor, and event history
- Security key authentication

## Network Configuration Settings

PLCopen®

### [Network configuration settings]

- Intuitive network settings with drag-and-drop operations and a graphical screen view

### [Automatic detection]

- By clicking the [Connected/Disconnected Module Detection] button, the connection status of device stations is automatically detected and the CC-Link IE TSN configuration screen is generated.




## Operation Profile Data with Simple Settings

PLCopen®

Operation profile data, such as cam data and cam for a rotary knife, is easily created.

- The cam graph can be flexibly and easily created through drag & drop. The waveform is changed according to the pointer's movement.
- Stroke, speed, acceleration, and jerk can be set while monitoring the changes on the graph.
- By setting "5th Curve (Adj)" for the cam curve types, the speed on a section border becomes smooth.
- Operation profile data for a rotary knife can be automatically generated by settings sheet length, synchronization width, cam resolution, etc.
- The created operation profile data can be checked on the list.

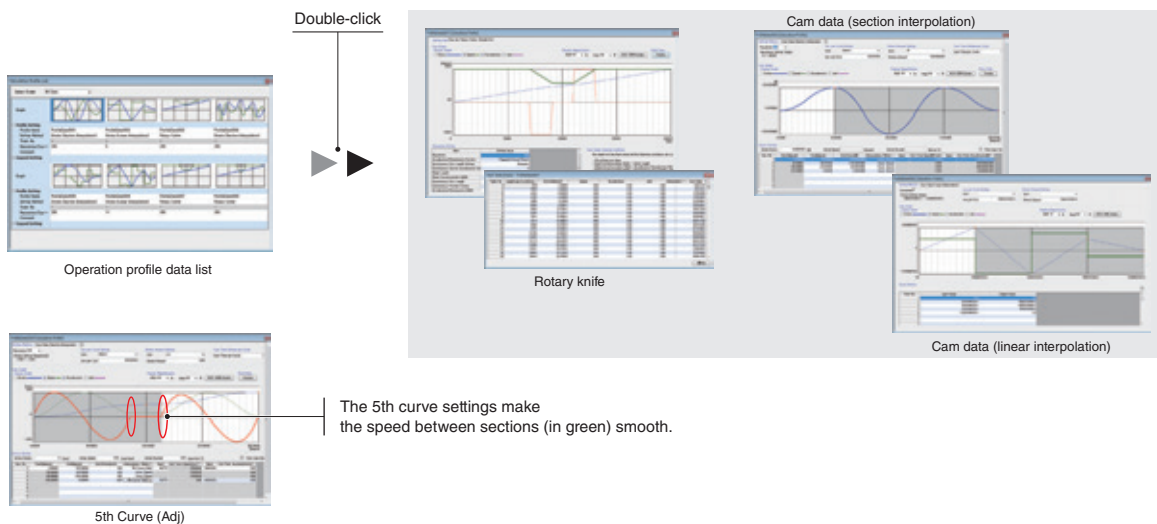


## Easy Programming through Structured Text Language PLCopen®

- Structured text programs are composed of function blocks, increasing program readability.
- Modularization of the programs increases their reusability.
- The consistent, common operability on a single engineering tool improves usability further.
- A wide selection of programming elements in the MELSOFT Library contributes to reducing programming time.
- The program is created by dragging & dropping programming elements, which simplifies the programming process.
- A startup time is reduced using the simulator of MELSOFT GX Works3 that can debug a program without an actual machine.

### Programming Using Labels

- The control axes of the Motion modules and I/O signals are defined as label variables, which enables easy reuse of programs and helps to improve programming efficiency.
- The global labels created in the Motion module project can be used in PLC CPUs.

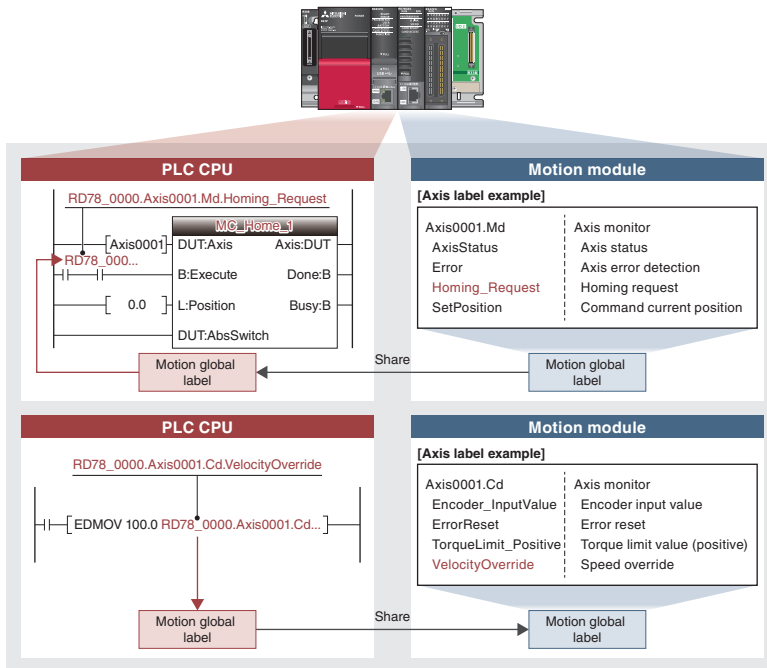

#### [Reading label data in Motion module]

The axis label data created in the Motion module can be read by the PLC CPU.

#### [Writing data to labels in Motion module]

Data in the PLC CPU program can be written to the axis labels in the Motion module.

### Axis Information is Easily Accessible

- Axis label variables can be used as an argument to refer axes in positioning function blocks.
- IntelliSense® function reduces programming mistakes.
- Access by variable names increases readability.

#### [Structured text editor]

```

18 //●Current position change (MC_SetPosition) Initial setting
19 bExecute0 := TRUE; //Execute==TRUE
20 lePosition0 := 0.0; //Target position is 0.0
21 bRelative0 := FALSE; //Relative position selection = absolute position
22 vExecutionMode0 := 1; //Start mode=1:acQueued (Stop and run)
23 doOptions0 := 0; //option (Do not allow cancellation)
24
25 //●Speed command
26 bExecute1 := TRUE;
27 bContInpos0 := TRUE;
28 leVelocity0 := 0.0;
29 leAcceleration0 := 0.0;
30 leDeceleration0 := 0.0;
31 leJerk0 := 5;
32 iDirection0 := 1;
33 iBufferMode0 := 0;
34 doOptions1 := 0;
35
36
37
38
39

```

The code editor shows a list of parameters for the 'Axis0001.Md.' function block, including AccelerationLimit, AccelerationOverride, AccelerationZeroBehavior, Analyzing, AutoDeceleration, AxisName, AxisStatus, BufferingPils, CmdInPos, and CmdInPos\_Width. A 'Settings...' dialog box is open over the list.



## GX LogViewer with Enhanced Waveform Display

PLCopen®


The graph data of both PLC CPU modules and Motion modules can be checked on GX LogViewer. This tool helps you efficiently analyze data from two different modules. The following two functions are provided for logging: data logging function (offline) and real-time monitor.

### Data Logging Function

The function performs data logging by a specified time interval based on the logging setting (trigger condition, data collection) written to the Motion module from the engineering tool. The results are saved as a data logging file.


Up to 10 data settings can be simultaneously logged for the Motion module.

The operation status before and after an error is displayed in waveforms, which allows more detailed analysis and identification of the error cause.

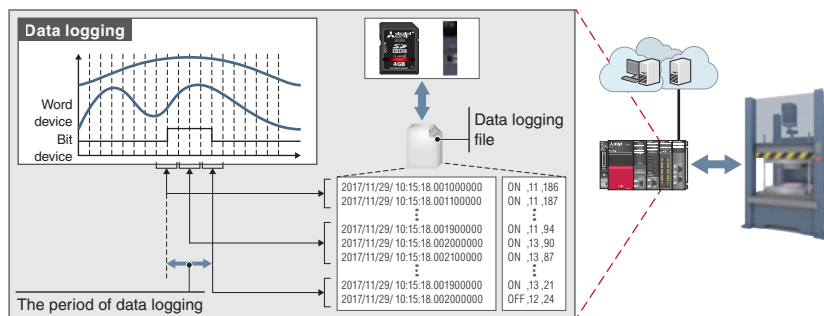

### Real-Time Monitor


Up to 32 data collected from a Motion module can be displayed in real time.

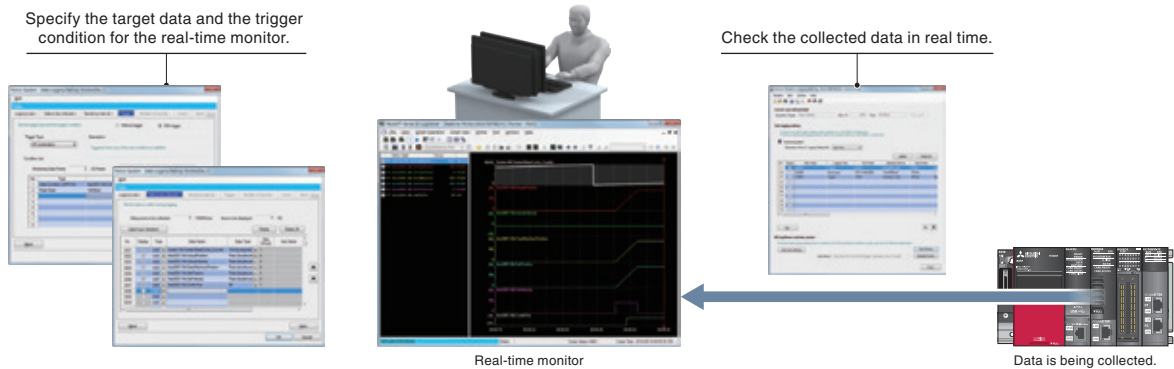

**Easy Pre-Verification and Troubleshooting** PLCopen®


**System Simulation**

The system simulator enables the Motion module and PLC CPU programs to be simulated interactively. A program operation can be checked without an actual machine during debugging process, which shortens the startup time.

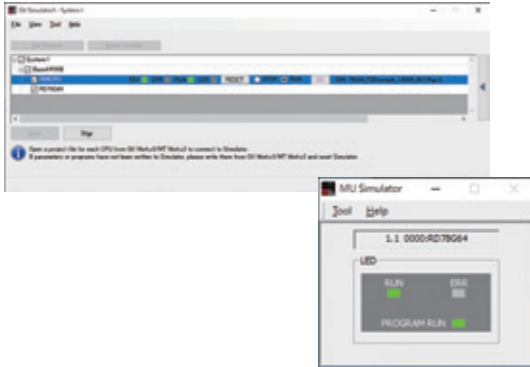


**Axis Monitor**

Users can customize the axis monitor items according to their machine, improving debug efficiency. The axis monitor can also be used during simulation.

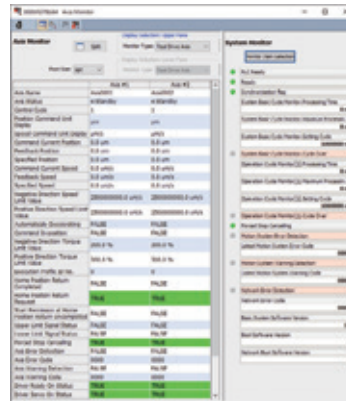

**Event History**

Event history lists information about executed operations and errors that have occurred on each module in chronological order, which helps to conduct troubleshooting.




**Program Monitor**

Debugging can be executed through both the program monitor and the watch window by using the common interface.



ST language program monitor

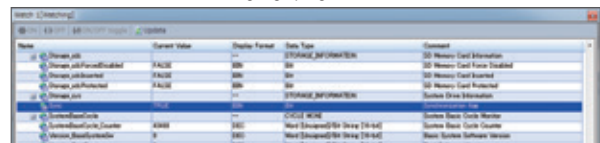

Watch window

## Security Key Authentication Function

PLCopen®

The security key authentication prevents programs from being opened on personal computers where the security key has not been registered. Furthermore, because programs can be executed only by Motion modules with the security key registered, the integrity of customer technologies and other intellectual property is not compromised.



## Software-based controller for high-precision motion control

CC-Link IE TSN

Motion Control Software

# SWM-G



Installed on a personal computer, SWM-G Motion Control Software can perform motion and network control.

- Supports a CC-Link IE TSN servo control system with the personal computer where RTX64 (real-time extension) is installed. (RTX64 is included with SWM-G.)
- Meets various application needs by offering various types of motion control, such as positioning, synchronous, cam, speed, and torque control using API library for motion control.
- Utilizes network control to connect and set various device stations (remote I/O modules, etc.) and TCP/IP devices.

### Product Lines



Download Motion Control Software from Mitsubishi Electric FA global website.

#### SWM-G Motion Control Software

- SWM-G Engine
- SWM-G API
- Network API
- SWM-G Operating Station
- Real Time OS



#### Free trial version SWM-G-W<sup>\*4</sup>

- SWM-G-W Engine
- SWM-G API
- SWM-G-W Operating Station TRIAL



Purchase the USB key (license).

#### USB key

- For 16 axes
- For 32 axes
- For 64 axes
- For 128 axes

CC-Link IE TSN

Motion Control Software<sup>\*1</sup>

## SWM-G<sup>\*3</sup>

- Maximum number of control axes: 128
- Minimum operation cycle<sup>\*2</sup>: 125 μs
- Programming language: Visual C++<sup>®</sup>

### USB key for Motion Control Software

- MR-SWMG16-U: 16 axes
- MR-SWMG32-U: 32 axes
- MR-SWMG64-U: 64 axes
- MR-SWMG128-U: 128 axes

<sup>\*1</sup>. SWM-G Motion Control Software includes SWM-G Engine, SWM-G API, Network API, SWM-G Operating Station, and Real Time OS (RTX64).


<sup>\*2</sup>. The minimum operation cycle depends on the number of control axes and the CPU of the personal computer.

<sup>\*3</sup>. SWM-G-N1 is also compatible with EtherCAT<sup>®</sup>.


<sup>\*4</sup>. A USB key (license) is not required for the free trial version SWM-G-W. To obtain SWM-G-W, contact your local sales office.

## Covering a Wide Range of Multi-Axis Applications

- SWM-G Motion Control Software is available in 16 to 128-axis control models, enabling multi-axis synchronization of various scales of machines.

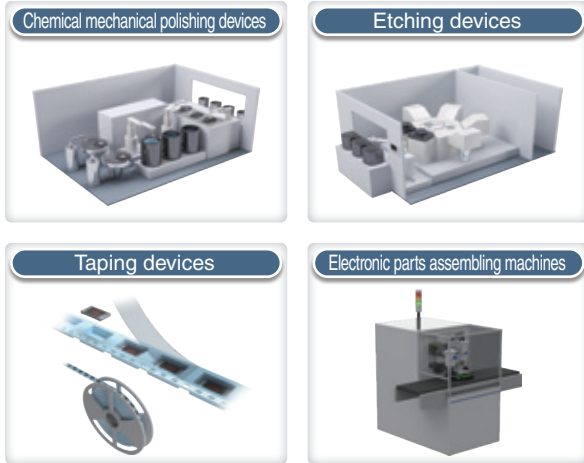


- A CPU core of the industrial personal computer is assigned for running SWM-G processing, and that enables SWM-G to perform a high-speed, real-time operation without being affected by the operation on Windows®.

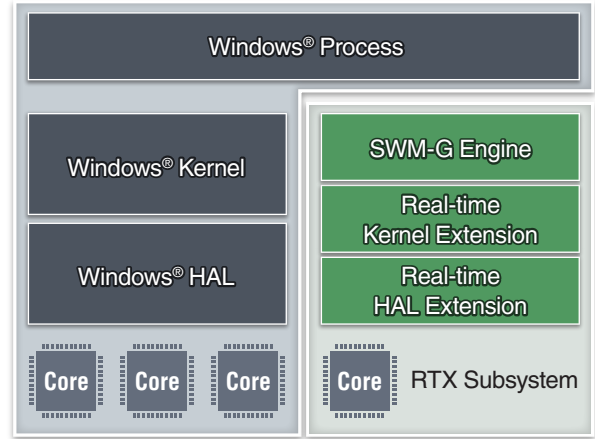

## Reduced Machine Design and Startup Time

- The integrated test tool SWM-G Operating Station covers the development processes of SWM-G from design to simulation, contributing to reduction in the total cost of ownership.
- The Operating Station enables users to check the communication settings and status of the master/remote stations, leading to reduced design time.

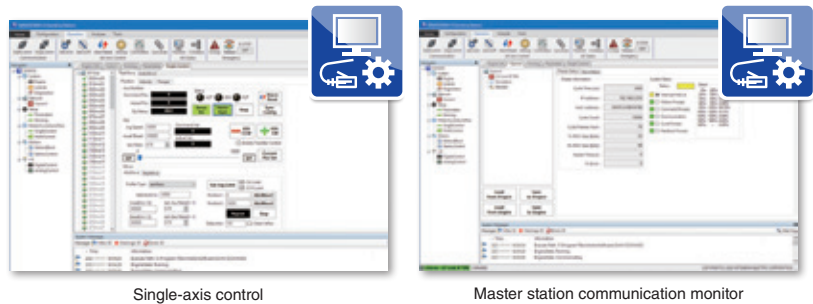

Single-axis control


Master station communication monitor

## Maintenance Solution by MELIPC with SWM-G Installed

When SWM-G is installed and operated on the MELIPC (industrial personal computer), the system offers a powerful maintenance solution utilizing the Edgexcross-compatible software.


### [Predictive/preventive maintenance]

- The user application collects data of machine diagnosis function, etc. from MR-J5-G through the communication API of SWM-G.
- The MELIPC analyzes the collected data by using the Edgexcross-compatible real-time data analyzer.

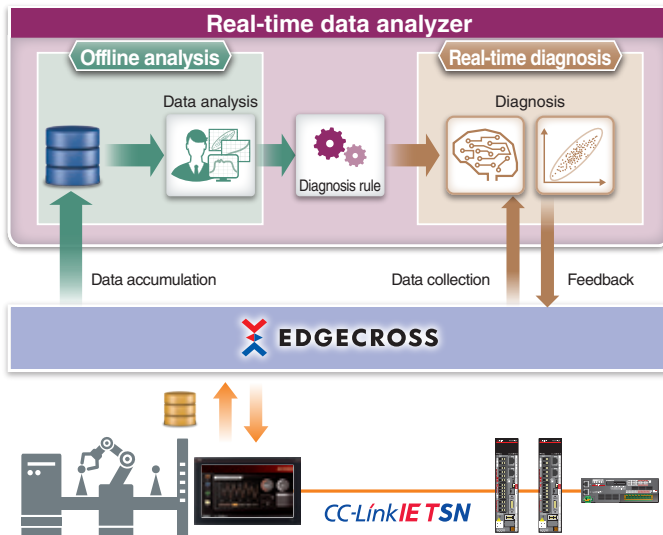

### [Corrective maintenance]

- SWM-G collects data from the drive recorder of MR-J5-G through TCP/IP communications, which reduces troubleshooting time.

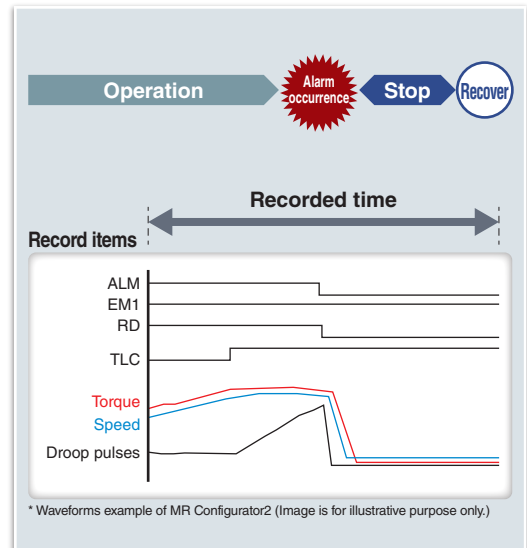




# System Configuration



SWM-G Motion Control Software executes motion control while functioning as a master station of CC-Link IE TSN. \*1

This feature enables users to create a system more flexibly by connecting various devices, such as servo amplifiers, remote I/O modules, and TCP/IP devices, to SWM-G.

High-speed control is achieved even when control at low- and high-speed communication cycles is mixed within the same control communication.

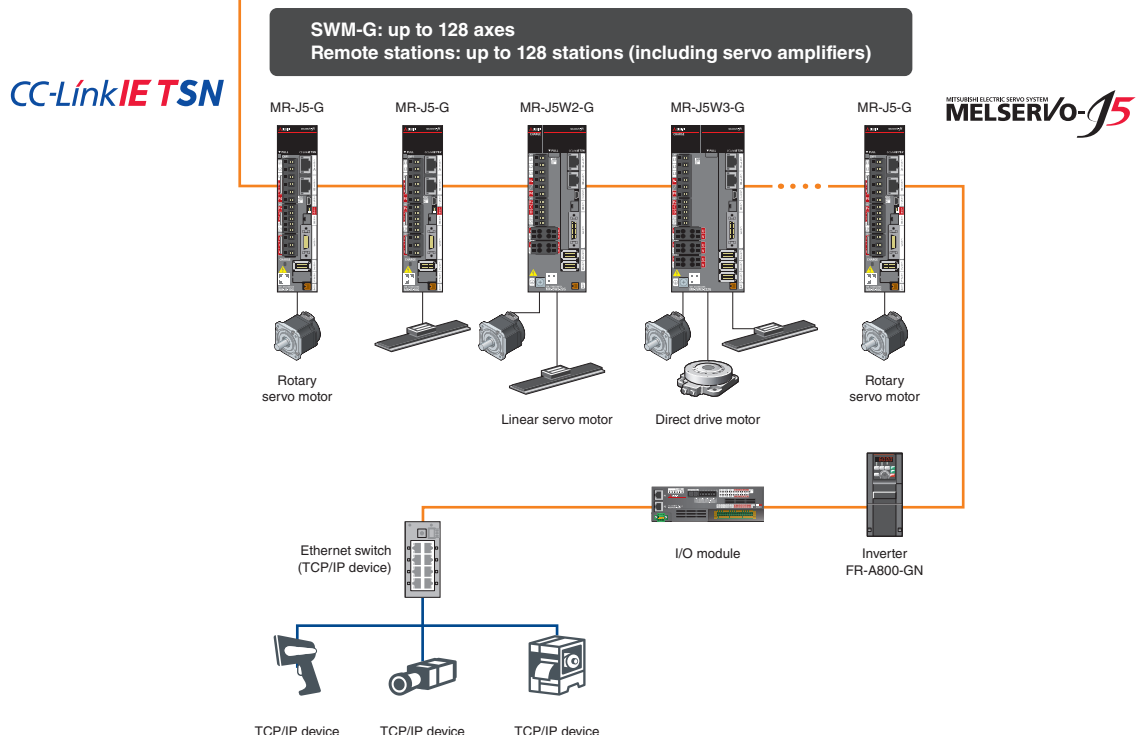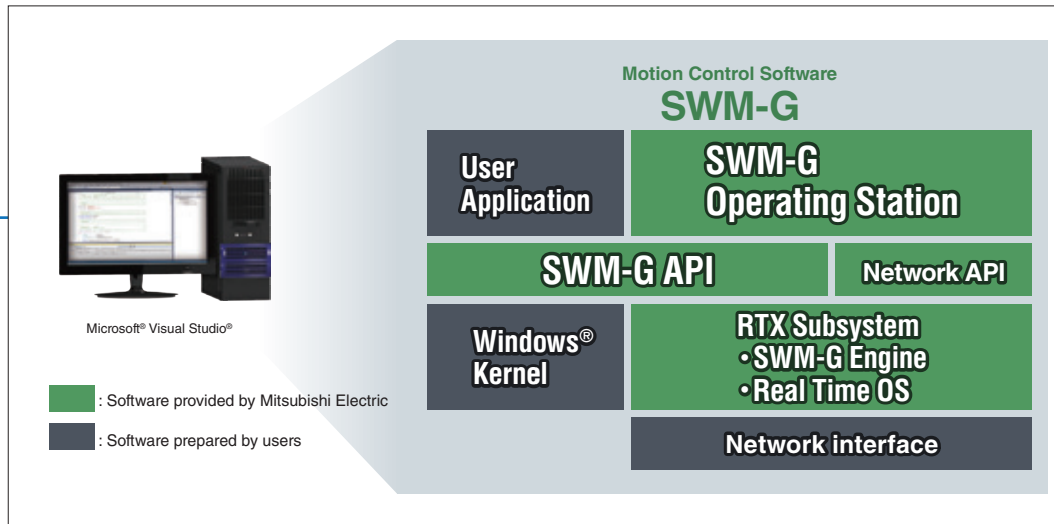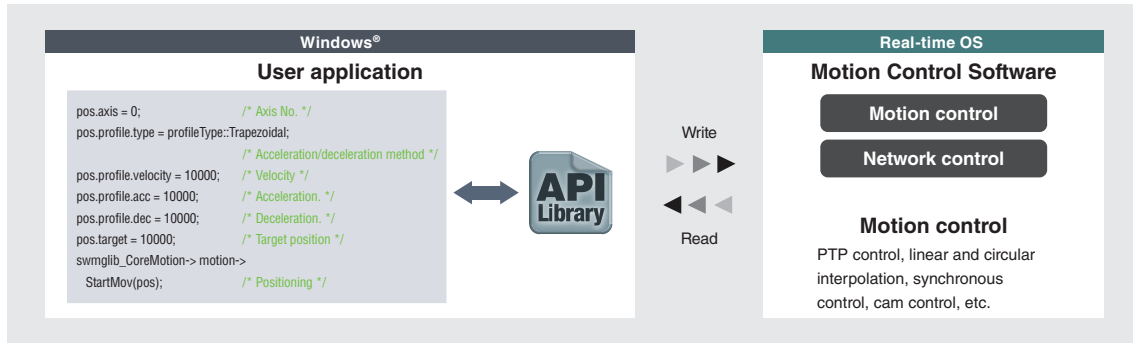

\*1. The following functions are not provided: sub-master station, local station, multi-master configuration, backup/restore function, data communication function with standard stations, and safety communication.

## Integrated Test Tool SWM-G Operating Station




This tool provides a variety of features - parameter settings required for application development and the test operation for JOG, inching, and positioning operations. In addition, each axis status and sampled waveforms can be displayed to help user check the start timing and the operation pattern.

### SWM-G Operating Station

#### [Communication monitor]

- Displays a list of the master communication setting
- Displays the system status, allowing users to check communication status

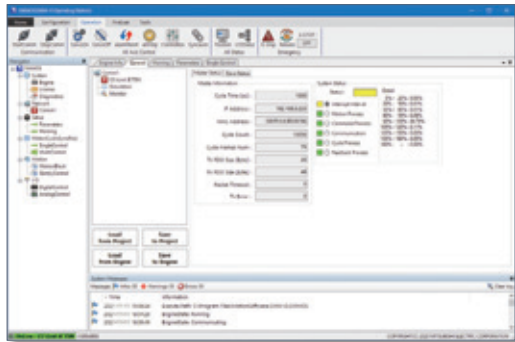


#### [Single-axis control]

- Performs a test operation for single-axis control
- Performs a reciprocating operation that is often used for a test operation



## Multiple Servo Amplifier Settings and Adjustments



MR Configurator2 enables users to easily set and adjust multiple servo amplifiers through CC-Link IE TSN which enables mixing of TCP/IP communication and other communications.

Using MR Configurator2 with the integrated test tool, users can adjust servo amplifiers while checking the servo amplifier communication status.


- Supports MR-J5-G
- Manages a multi-axis system as one project
- Parameters and the machine diagnosis can be set for all axes in a batch on MR Configurator2.




\*MR Configurator2 is not included with SWM-G Motion Control Software.

# Positioning Control


## Linear interpolation

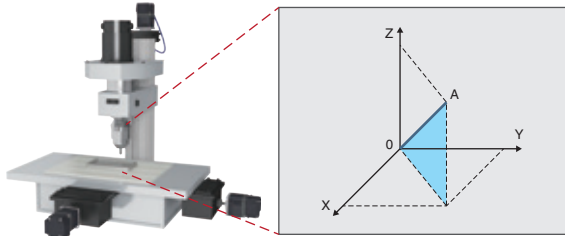


## Circular interpolation

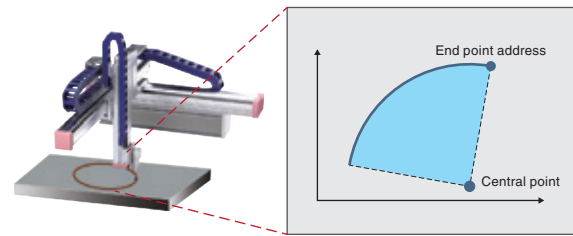


## Continuous path control (path interpolation)

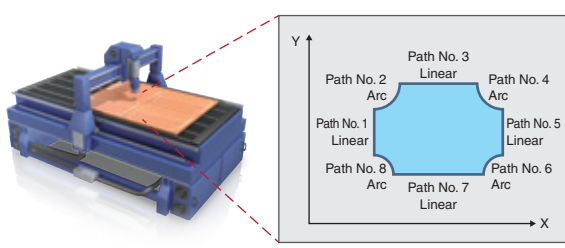

## Helical interpolation

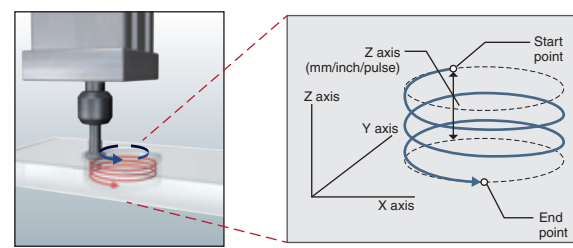

## Jerk acceleration/deceleration

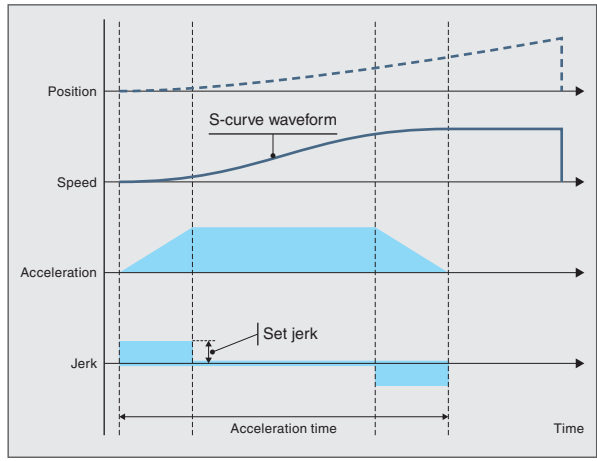


In this method, an axis can be accelerated gradually through adjusting jerk so that the vibrations of the machine can be minimized.

In the example above, the constant positive jerk is applied at the start of the operation to achieve smooth acceleration. When the axis is shifted to the constant-speed operation, the same amount of negative jerk is applied.

Adjusting jerk in this way achieves smooth acceleration/ deceleration while also shortening the time it takes to reach the target speed.

The speed creates a S-curve shape.

## Triggered motion

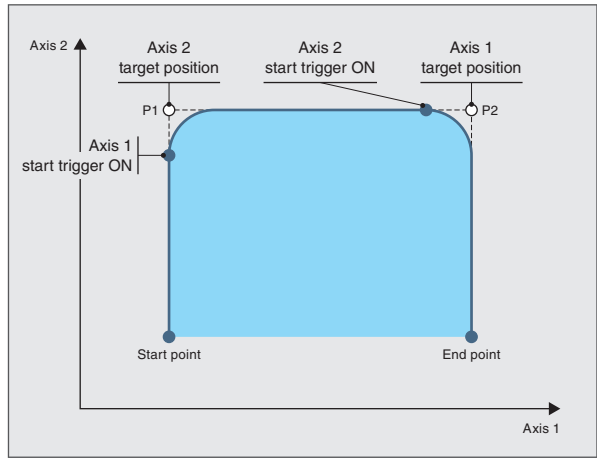

The triggered motion is a type of command that delays the execution of the motion command until the specified trigger condition is satisfied.


Axes can be started automatically based on the specified conditions by using this command, reducing the cycle time of conveyor systems, etc.

In the operation example above, right after the axis 2 starts execution of normal motion commands, the axis 1 executes the triggered motion command (delaying the execution of the command until the condition is satisfied).

When the condition is satisfied (start trigger ON) during the axis 2 operation, the axis 1 starts executing the motion command.




### Synchronous control (tandem drive)

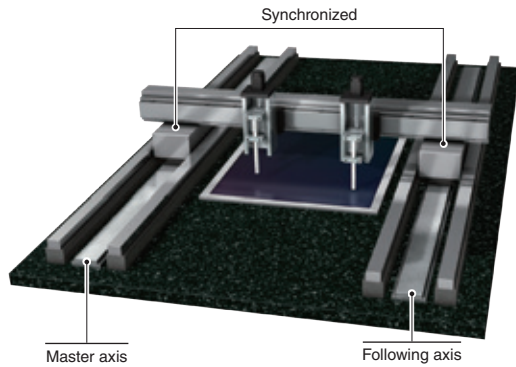

Motion Control Software enables tandem operation where the same commands can be outputted to master and following axes.

### Gantry home position return

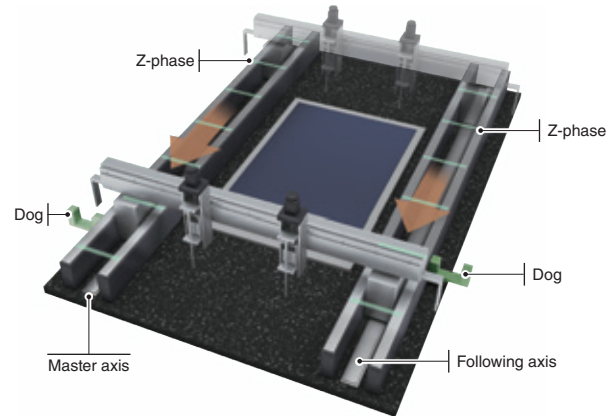

After the master and following axes pass their respective dogs, the gantry home position return stops both of the axes at the Z-phase of the master axis. This method enables two or more axes to execute home position return simultaneously, supporting gantry systems.

## A Wide Variety of Features

### Hot connect (disconnection/reconnection)

The hot connect enables a topology change during operation without requesting a communication stop. The user application disconnects and reconnects the network through API library.

### Position synchronous output (cam switch)

The output signal is turned on when a specified condition is satisfied. This function can be used as an alternative to a limit switch.

### Pitch error compensation

The set offset is applied at regularly spaced command positions. The position error of ball screws can be compensated, improving the operation accuracy.

### Acceleration/deceleration methods

The controller offers 24 types of acceleration/deceleration methods, such as trapezoidal, S-curve, jerk ratio, parabolic, sine curve, time acceleration trapezoidal, etc. Select the method according to your application.

### Monitoring of servo data

The controller obtains the status data of servo amplifiers, such as machine diagnosis information and encoder temperature, via CC-Link IE TSN. This enables visualization of machine status.

### Touch probe (mark detection)

The current value of the servo motor can be read when the touch probe signal is inputted. Software and hardware touch probes are available. Select the touch probe according to your application.


### Backlash compensation

The set offset is applied when the axis changes the travel direction. The backlash of ball screws can be compensated, which improves operation accuracy of machines.

## Programming Utilizing API Library SWM-G

### ■ Development environment \*1 (Microsoft® Visual Studio®)

Add the SWM-G API library to the project of Microsoft® Visual Studio® and create a user program.

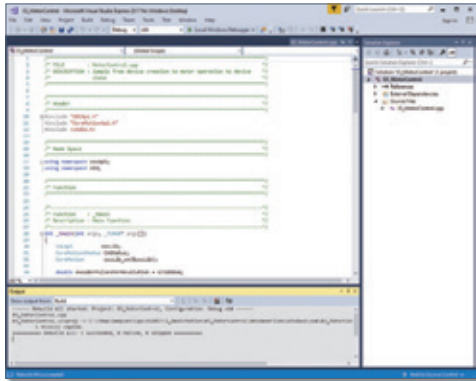

- C++, C# compile
- Debug of C language programs

\*1. Prepare a development environment with Microsoft Visual Studio®.

### ■ A program that starts positioning

```

void sample()
{
    Motion::PosCommand pos;


    /* Position command data settings */
    pos.axis = 0; /* Axis = axis 0 */
    pos.profile.type = ProfileType::Trapezoidal; /* Acceleration = trapezoidal */
    pos.profile.velocity = 10000.0; /* Velocity = 10000.0 [U/s] */
    pos.profile.acc = 10000.0; /* Acceleration = 10000.0 [U/s^2] */
    pos.profile.dec = 10000.0; /* Deceleration = 10000.0 [U/s^2] */
    pos.target = 30000.0; /* Travel distance = 30000.0 [U] */

    /* Relative positioning start */
    err = sscLib_cm.motion->StartMov(&pos);
    if (err != ErrorCode::None) { /* Error processing */ }

    /* Waiting for positioning completion */
    sscLib_cm.motion->Wait(0);
}
    
```

/\* Relative positioning start \*/  
err = sscLib\_cm.motion->StartMov(&pos);  
if (err != ErrorCode::None) { /\* Error processing \*/ }

/\* Waiting for positioning completion \*/  
sscLib\_cm.motion->Wait(0);  
}

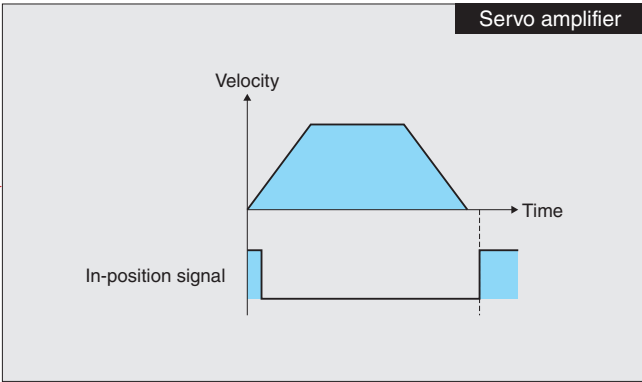

■ A program that continuously starts positioning of another axis based on the specified trigger condition

```

void sample()
{
    Motion::PosCommand pos;
    Motion::TriggerPosCommand tpos;


    /* Position command data settings (axis 0) */
    pos.axis = 0; /* Axis = axis 0 */
    pos.profile.type = ProfileType::Trapezoidal; /* Acceleration = trapezoidal */
    pos.profile.velocity = 10000.0; /* Velocity = 10000.0 [U/s] */
    pos.profile.acc = 10000.0; /* Acceleration = 10000.0 [U/s^2] */
    pos.profile.dec = 10000.0; /* Deceleration = 10000.0 [U/s^2] */
    pos.target = 30000.0; /* Travel distance = 30000.0 [U] */

    /* Relative positioning start (axis 0) */
    err = sscLib_cm.motion->StartMov(&pos);
    if (err != ErrorCode::None) { /* Error processing */ }

    /* Triggered motion position command data settings (axis 1) */
    tpos.axis = 1; /* Axis = axis 1 */
    tpos.profile.type = ProfileType::Trapezoidal; /* Acceleration = trapezoidal */
    tpos.profile.velocity = 10000.0; /* Velocity = 10000.0 [U/s] */
    tpos.profile.acc = 10000.0; /* Acceleration = 10000.0 [U/s^2] */
    tpos.profile.dec = 10000.0; /* Deceleration = 10000.0 [U/s^2] */
    tpos.target = 20000.0; /* Travel distance = 20000.0 [U] */
    tpos.trigger.triggerAxis = 0; /* Trigger axis = axis 0 */
    tpos.trigger.triggerType = TriggerType::RemainingDistance; /* Trigger condition = remaining distance */
    tpos.trigger.triggerValue = 1500.0; /* Remaining distance = 1500.0 [U] */

    /* Triggered motion relative positioning start (axis 1) */
    err = sscLib_cm.motion->StartMov(&tpos);
    if (err != ErrorCode::None) { /* Error processing */ }

    /* Waiting for positioning completion */
    sscLib_cm.motion->Wait(1);
}
    
```

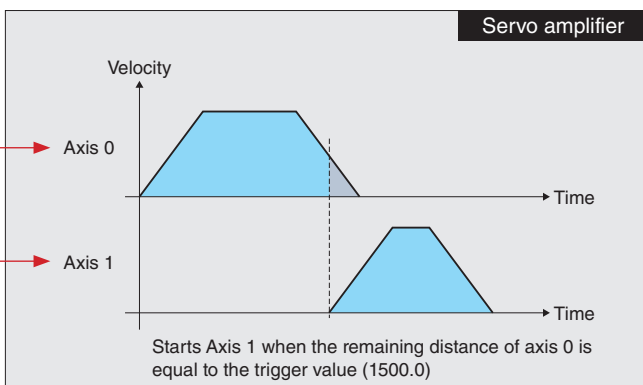

Reach new limits while inheriting existing assets.

Maximize the performance of your system with MELSERVO-J5 total drive solutions.

Progressiveness

CC-Link IE TSN-Compatible Servo Amplifiers

MR-J5-G



MR-J5-G/MR-J5W-G/MR-J5D-G4 servo amplifiers can connect to CC-Link IE TSN to perform high-speed, high precision control.

The performance and the functions have been greatly improved, contributing to innovative evolution of the machines.

CC-Link IE TSN  
Servo amplifiers

MITSUBISHI ELECTRIC SERVO SYSTEM  
MELSERVO-J5

MR-J5-G(4)

MR-J5W-G

MR-J5D-G4




Minimum communication cycle \*1  
**31.25 μs**

Functional safety  
via network

Servo system  
recorder

Features of CC-Link IE TSN-Compatible Servo Amplifiers

- Features the minimum communication cycle of 31.25 μs to perform high-speed, high-precision control
- Allows both control communication and information communication on one network and thus enables a flexible system
- Sends and receives large amounts of data, such as recipe data with a high-speed, large-capacity 1 Gbps communications network

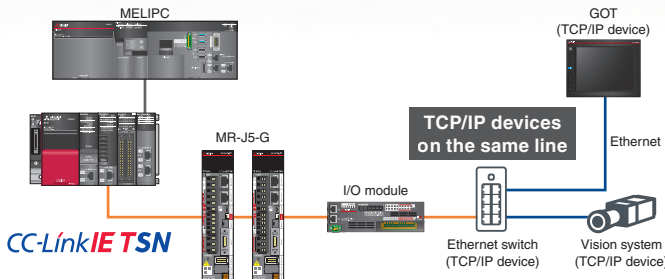


Speed frequency  
response  
**3.5 kHz**

Minimum  
communication cycle \*1  
**31.25 μs**


Encoder  
Batteryless  
absolute  
position  
encoder

\*1. MR-J5-G/MR-J5D1-G4 support 31.25 μs.

- Features safety communications via CC-Link IE TSN

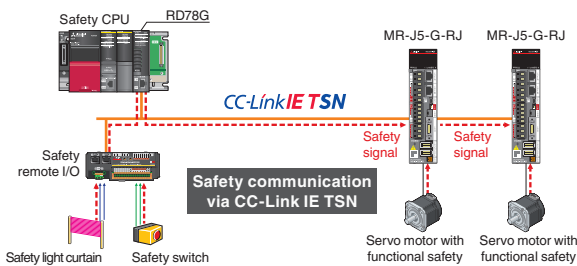

- MELSEC iQ-R series Motion modules collect data of servo amplifiers when an error occurs

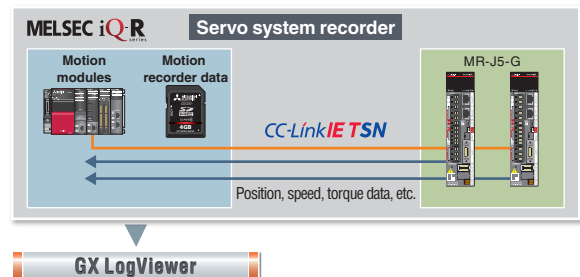

Compatible Servo System Controllers



MELSEC iQ-R  
Motion module  
RD78GHV  
RD78GHW



MELSEC iQ-R  
Motion module  
RD78G4  
RD78G8  
RD78G16  
RD78G32  
RD78G64



MELSEC iQ-F  
Motion module  
FX5-40SSC-G  
FX5-80SSC-G

Personal Computer  
Embedded Type  
Servo System Controller  
SWM-G



## Heritage



# SSCNET III/H-Compatible Servo Amplifiers MR-J5-B

MR-J5-B/MR-J5W-B servo amplifiers can connect to SSCNET III/H and utilizes the existing program assets to improve the performance of the machines.

Transition from MELSERVO-J4 series to MELSERVO-J5 is supported.



Servo amplifiers



## MR-J5-B(4)

## MR-J5W-B





Utilizing existing program assets

Optical communication

Servo system recorder

### Features of SSCNET III/H-Compatible Servo Amplifiers

- Allows the user to build a MELSERVO-J5 series servo system that utilizes the existing assets of Motion controllers and Simple Motion modules
- Enables function improvement of the machines by combining MR-J5-B servo amplifiers and HK series rotary servo motors

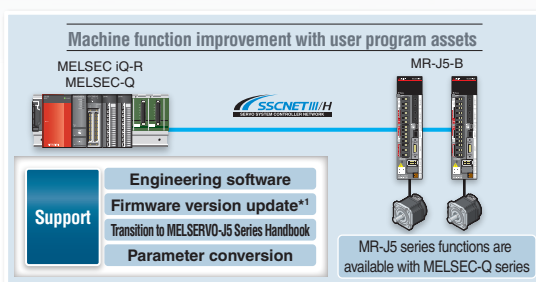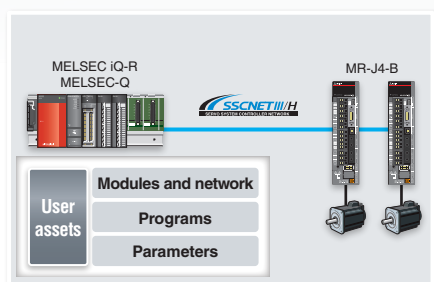

\*1. The Motion controller with the updated firmware supports MR-J5-B.


Speed frequency response

3.5 kHz


Encoder

Batteryless absolute position encoder

- Changing the servo amplifier setting from MR-J4-B to MR-J5-B converts the parameters

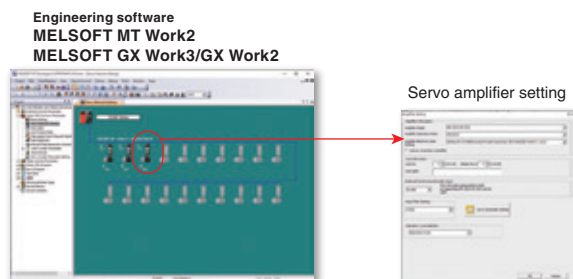

- MELSEC iQ-R series Motion modules collect data of servo amplifiers when an error occurs

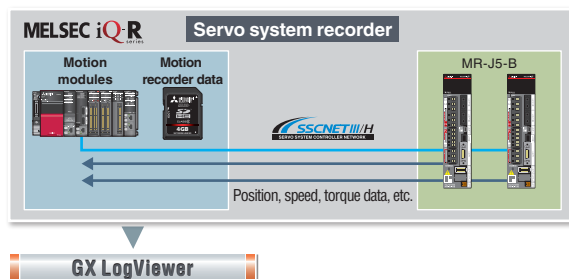

### Compatible Servo System Controllers

**MELSEC iQ-R**  
Motion controller  
R16MTCPU  
R32MTCPU  
R64MTCPU

**MELSEC iQ-R**  
Simple Motion module  
RD77MS2  
RD77MS4  
RD77MS8  
RD77MS16

**MELSEC Q** series  
Motion controller  
Q172DSCPU  
Q173DSCPU  
Q170MSCPU

**MELSEC Q** series  
Simple Motion module  
QD77MS2  
QD77MS4  
QD77MS16

## Driving a wider range of motors with more flexible options

### Servo amplifiers

MITSUBISHI ELECTRIC SERVO SYSTEM


# MELSERVO-J5

Designed for an ambient temperature of up to 60 °C.



Replaceable cooling fan

Enhanced visibility



Input and output are distinguished by color.



### CC-Link IE TSN MR-J5-G(4)

Supports Ethernet-based CC-Link IE TSN, featuring high-speed, large-capacity communication (1 Gbps). Communication cycle of  $\geq 31.25 \mu\text{s}$  and speed frequency response of 3.5 kHz enable advanced motion control.



### CC-Link IE TSN MR-J5W2-G MR-J5W3-G

Drives a maximum of two/three servo motors. This simplifies wiring, saves energy, and enables a compact machine.

## Product Lines

### Servo amplifier

●: Supported ○: Future support planned -: Not supported

| Model      | Power supply specifications<br>(Note 1) | Command interface (Note 4)           | Fully closed loop control (Note 2) | Compatible servo motors |                 |              |
|------------|---|--------------------------------------|------------------------------------|-------------------------|-----------------|--------------|
|            |   |                                      |                                    | Rotary                  | Linear (Note 3) | Direct drive |
| MR-J5-G    | 200 V AC                                | CC-Link IE TSN<br>EtherCAT® (Note 5) | ●                                  | ●                       | ●               | ●            |
| MR-J5W2-G  | 400 V AC                                |                                      | ●                                  | ●                       | ○               | -            |
| MR-J5W3-G  | 200 V AC                                |                                      | ●                                  | ●                       | ●               | ●            |
| MR-J5D1-G4 | 400 V AC                                |                                      | -                                  | ●                       | -               | -            |
| MR-J5D2-G4 |   |                                      | ●                                  | ●                       | -               | -            |
| MR-J5D3-G4 |   |                                      | -                                  | ●                       | -               | -            |
| MR-J5-B    | 200 V AC                                | SSCNET III/H                         | ●                                  | ●                       | ●               | ●            |
| MR-J5W2-B  | 400 V AC                                |                                      | ●                                  | ●                       | ○               | -            |
| MR-J5W3-B  | 200 V AC                                |                                      | -                                  | ●                       | ●               | ●            |
| MR-J5-A    | 200 V AC                                | Pulse train/Analog voltage           | ●                                  | ●                       | ●               | ●            |
|            | 400 V AC                                |                                      | ●                                  | ●                       | ○               | -            |

Notes: 1. 200 V AC servo amplifiers are also compatible with DC power supply input as standard.

2. The indicated servo amplifiers are compatible with a two-wire type serial encoder. For four-wire type serial encoders and pulse train interface (A/B/Z-phase differential output type) encoders, use MR-J5-G-RJ/MR-J5-G4-HS/MR-J5D1-G4/MR-J5-B-RJ/MR-J5-A-RJ servo amplifiers.

3. The indicated servo amplifiers are compatible only with two-wire type and four-wire type serial linear encoders. For a pulse train interface (A/B/Z-phase differential output type) linear encoder, use MR-J5-G-RJ/MR-J5-G4-HS/MR-J5-B-RJ/MR-J5-A-RJ servo amplifiers.

4. MR-J5-G/MR-J5D1-G4 are also compatible with CC-Link IE Field Network Basic.

5. EtherCAT® is supported by MR-J5-G-N1/MR-J5W2-G-N1/MR-J5W3-G-N1/MR-J5D1-G4-N1/MR-J5D2-G4-N1/MR-J5D3-G4-N1.

## Drive unit

Width: 60 mm \*1

Standard models support functional safety.

Drives one axis.

Drives two axes.

Drives three axes.



\*1. Some of the 1-axis models have a width of 75 mm.

**CC-Link IE TSN**  
**MR-J5D-G4**

The drive unit is a converter separate type servo amplifier (1/2/3-axis type available). Combined with an MR-CV\_4 power regeneration converter unit, the drive unit can create an energy-saving servo system.


**SSCNET III/H**  
**MR-J5-B(4)**  
**MR-J5W2-B**  
**MR-J5W3-B**

Supports optical network SSCNET III/H. Communication cycle of  $\geq 0.222$  ms and speed frequency response of 3.5 kHz enable advanced motion control.

**General purpose interface**  
**MR-J5-A(4)**


Enables position control by pulse train command and speed/torque control by analog voltage command. The maximum command pulse frequency is 4 Mpulses/s.

■: Future release planned

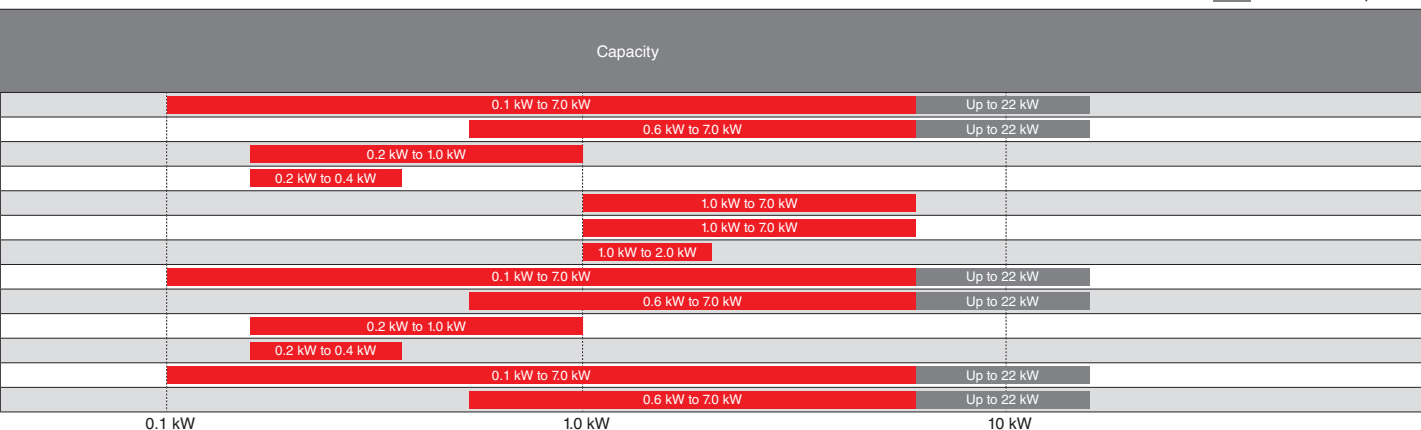


# Tuning Functions

Use the tuning methods that are optimal for your machines.

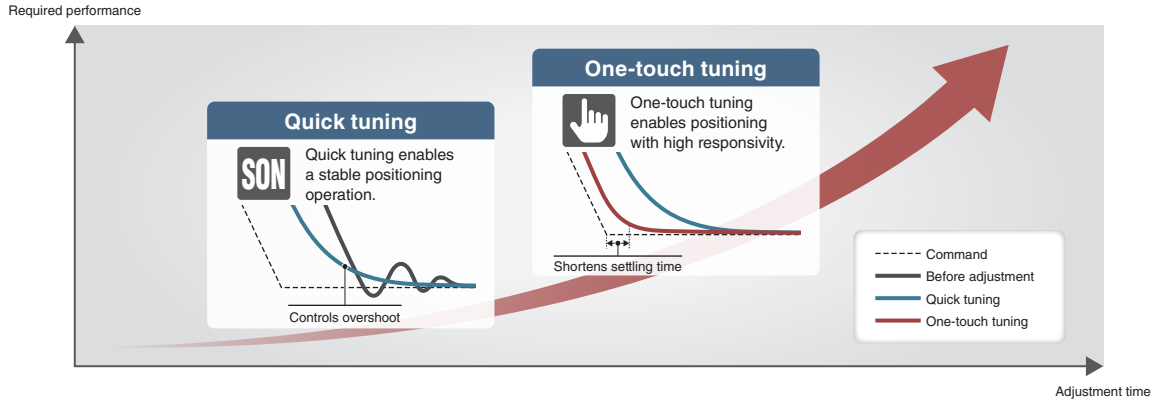


## Quick Tuning

This function automatically performs easy-to-use auto tuning that controls vibration and overshoot just by turning on the servo-on command. Before normal operation, the servo amplifier sets control gain and machine resonance suppression filters in 0.3 seconds by inputting torque to the servo motor automatically. After completing the setting, the servo amplifier starts operation normally.

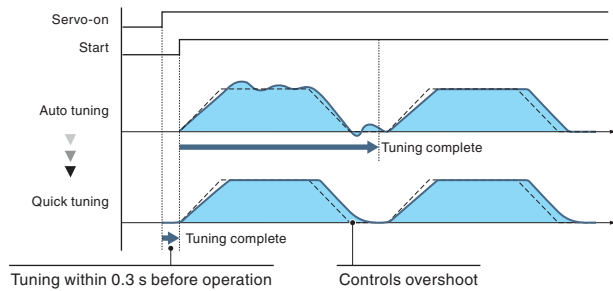


## One-Touch Tuning

This function automatically completes servo gain adjustment according to the mechanical characteristics and reduces the settling time just by turning on the one-touch tuning. The servo gain adjustment includes the machine resonance suppression filter, advanced vibration suppression control II, and the robust filter. Controlling overshoot and vibration is improved, maximizing your machine performance.

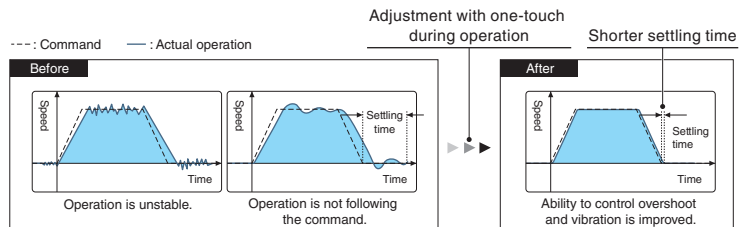

## Advanced Vibration Suppression Control II

This function suppresses two types of low frequency vibrations, owing to vibration suppression algorithm which supports three-inertia system. This function is effective in suppressing residual vibration with relatively low frequency of approximately 100 Hz or less generated at the end of an arm and in a machine, enabling a shorter settling time. Adjustment is easily performed on MR Configurator2.

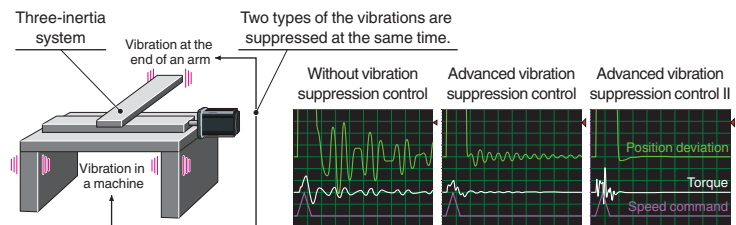

## Command Notch Filter

The frequency can be set close to the machine vibration frequency because the command notch filter has an applicable frequency range between approximately 1 Hz and 2000 Hz.

## Machine Resonance Suppression Filter


The expanded applicable frequency range is between 10 Hz and 8000 Hz. Five filters are simultaneously applicable, improving vibration suppression performance of a machine. The machine resonance frequency is detected by the machine analyzer function in MR Configurator2.



## Energy/Space Saving and Simple Wiring (200 V Class)

### Simple Converter MR-CM

The MR-CM simple converter saves energy by efficiently using regenerative power through a common bus connection and reduces the number of molded-case circuit breakers and magnetic contactors, resulting in space-saving and simple wiring. The simple converter can connect to up to six compatible servo amplifiers having a total capacity of 3 kW or lower. Using daisy connectors for passing wiring simplifies the wiring for the bus and the control circuit power supply.

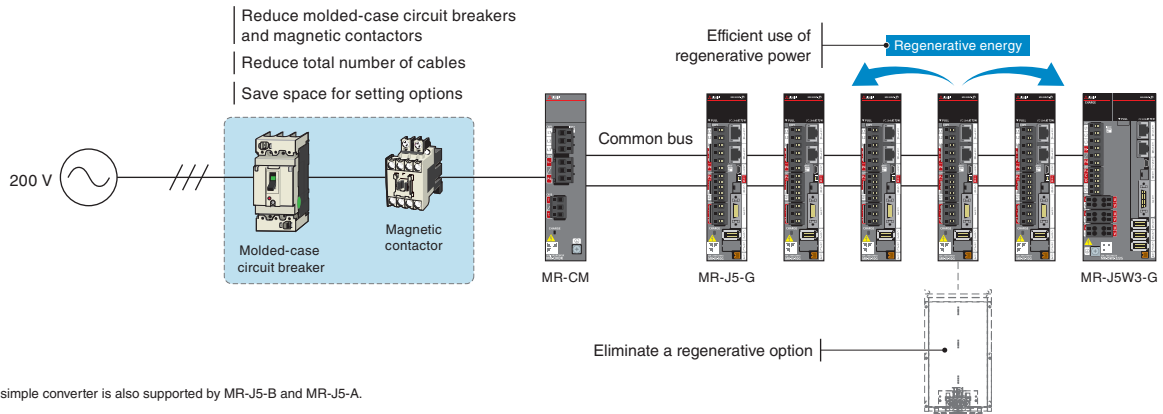


\* The simple converter is also supported by MR-J5-B and MR-J5-A.

### Application Examples


#### [Vertical form, fill & seal]

The simple converter uses regenerative energy of the packing film unwinding axis for other axes such as conveying rollers.

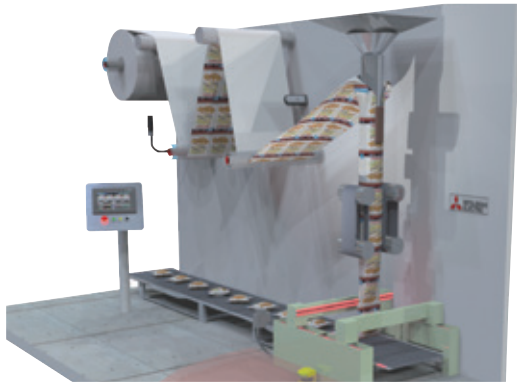

#### [Wafer prober]

The simple converter saves installation space for semiconductor manufacturing equipment in a clean room.

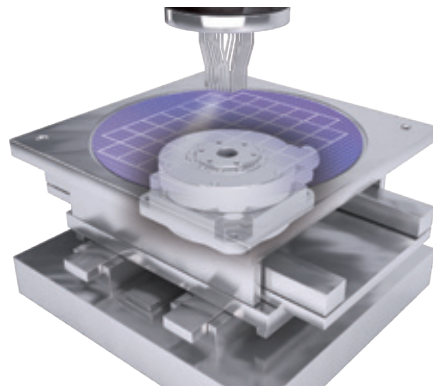

### Multi-Axis Servo Amplifiers

The 2-axis and 3-axis servo amplifiers are available for operating two and three servo motors, respectively. These servo amplifiers enable an energy-saving and compact machine.

Different types of servo motors including rotary servo motors, linear servo motors, and direct drive motors are freely combined as long as the servo motors are compatible with the servo amplifier.

#### [2-axis servo amplifier]


CC-Link IE TSN-compatible: MR-J5W2-G

SSCNET III/H-compatible: MR-J5W2-B

#### [3-axis servo amplifier]

CC-Link IE TSN-compatible: MR-J5W3-G

SSCNET III/H-compatible: MR-J5W3-B

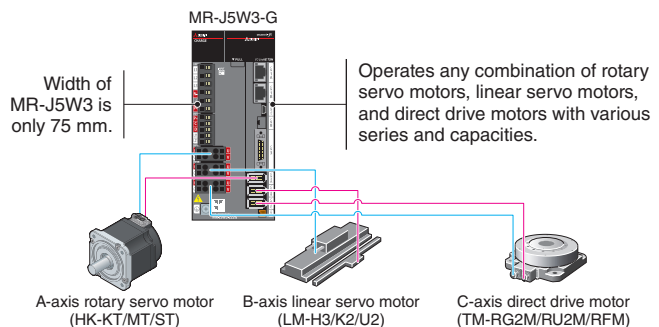


## Converter Separate Type Drive Unit in 400 V Class MR-J5D-G4

- The product lines of the 400 V include converter separate type drive units of MR-J5D-G4 available in 1-axis/2-axis/3-axis types.
- Combined with an MR-CV\_4 power regeneration converter unit, MR-J5D-G4 can configure a servo system with energy and space savings and less wiring.
- MR-J5D-G4 supports safety communication of CC-Link IE TSN, enabling functional safety without a dedicated unit. Even for a multi-axis servo system, functional safety can also be applied with network cables.

### Features of MR-J5D-G4 Drive Units

- The common DC bus connection saves energy and space, and reduces wiring.
- MR-J5D2-G4 (2-axis drive unit)/MR-J5D3-G4 (3-axis drive unit) save space and reduce wiring further.
- MR-J5D1-G4/MR-J5D2-G4/MR-J5D3-G4 support safety sub-functions as standard. The safety communication of CC-Link IE TSN enables the safety sub-functions such as STO to be set for each axis of the multi-axis drive units.
- The drive units are equipped with a replaceable cooling fan unit, which can be easily replaced by users.

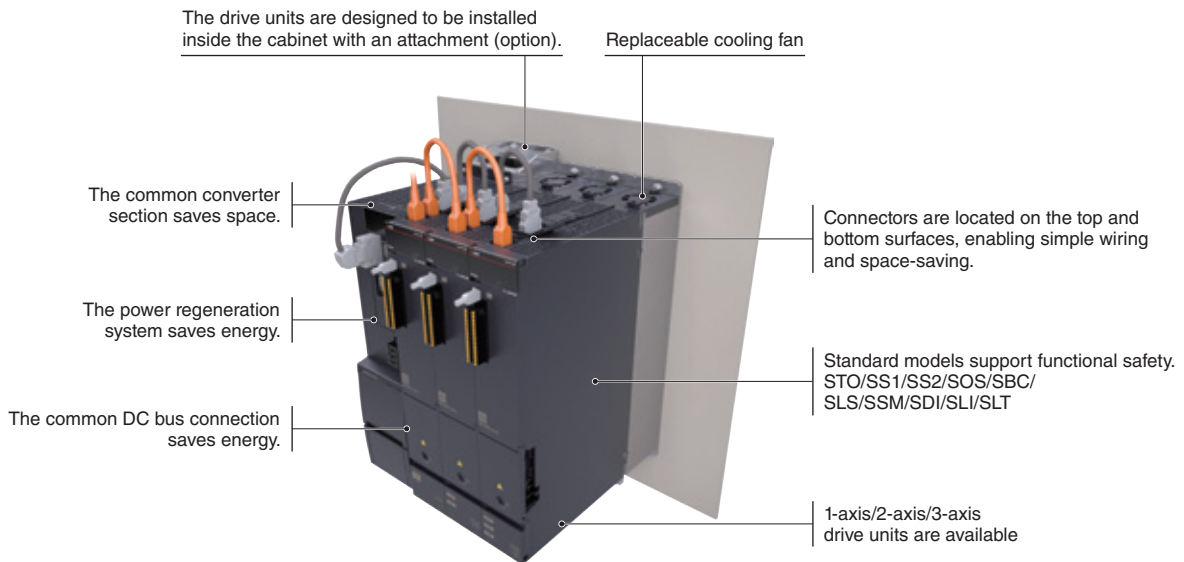


### Space-Saving with 3-Axis Drive Units (Smaller Width)

The 400 V class 3-axis drive units offer space saving.

For example, two units of 3-axis drive units for operating six axes occupy 200 mm less installation width than six units of 1-axis drive units.


In addition, using multi-axis drive units reduces the number of molded-case circuit breakers and magnetic contactors.

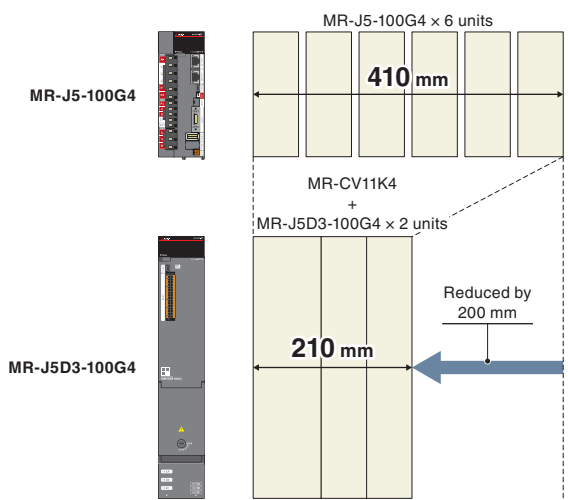


## Further Energy-Saving with Common DC Bus Connection and Power Regeneration System

Connecting multiple MR-J5D-G4 drive units to an MR-CV\_4 power regeneration converter unit by a common DC bus connection allows the drive units to use regenerative energy from the other drive units on the connection. Furthermore, the MR-CV\_4 power regeneration converter unit has a power regeneration system which returns the regenerative energy to the power supply. Other systems can use this returned regenerative energy for operation, promoting efficient energy use. A system with MR-CV\_4 does not require a regenerative option and thus reduces heat generation.

### [Common DC bus connection]

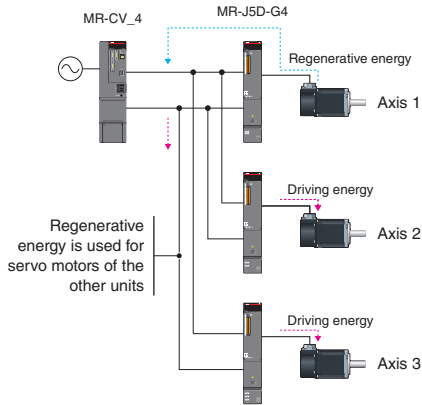


### [Power regeneration system]

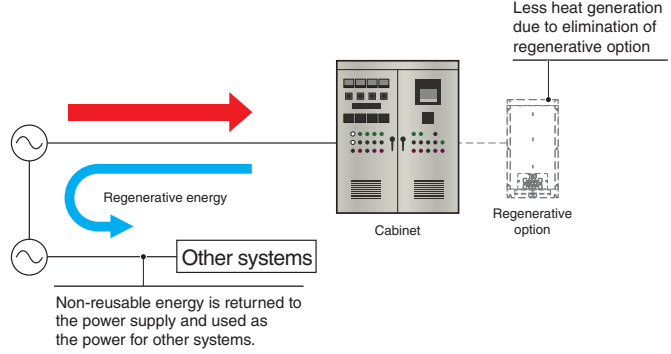

## Application Examples


### [Printing systems]

Optimal for rotary presses using sectional drive system where each printing unit is driven individually.

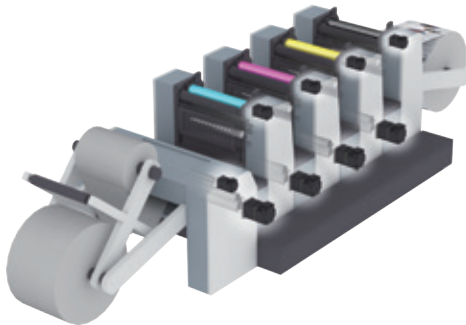

### [Slitting machines]


Optimal for converting machines consisting of unwinding axes, roller axes, and winding axes.

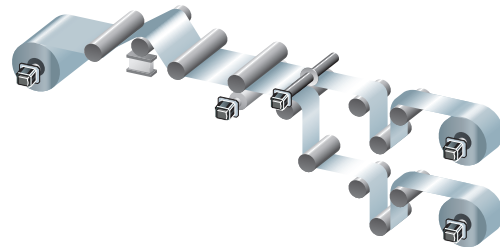

## Wider Combinations with Servo Motors (400 V Class Systems)


The 400 V class servo amplifiers can drive the HK-KT/HK-ST/HK-RT series servo motors ranging 50 W to 7 kW. The flexible combination can optimize your machines. For the available combinations, refer to "Combinations of Servo Motors and Servo Amplifiers" in this catalog.

Minimum flange size: 40 x 40  
(0.05 kW or larger)




Small capacity, low inertia  
HK-KT series

Minimum flange size: 130 x 130  
(0.5 kW or larger)



Medium capacity, medium inertia  
HK-ST series


Minimum flange size: 90 x 90  
(1 kW or larger)



Medium capacity, ultra-low inertia  
HK-RT series

Motor flange size [unit: mm]

## Predictive Maintenance






The servo amplifiers detect signs of machine failure by monitoring the operation status.

Maisart is an abbreviation for “Mitsubishi Electric’s AI creates the State-of-the-ART in technology.” Mitsubishi Electric is leveraging original AI technology to make devices smarter.

### Machine Diagnosis (Ball Screws/Linear Guides)

This function supports predictive maintenance by estimating frictions and vibrations of mechanical drive components such as ball screws and linear guides.



- Friction failure prediction with the friction estimation function
- Vibration failure prediction with the vibration estimation function

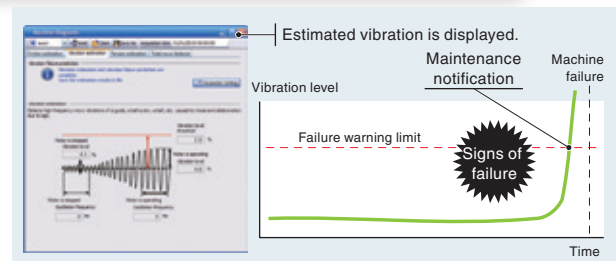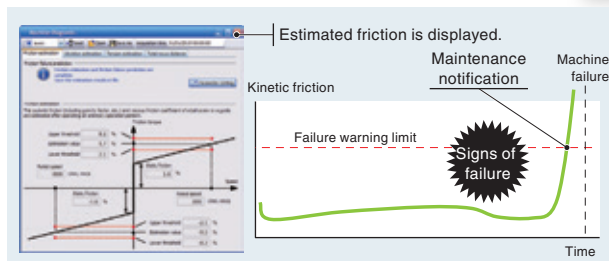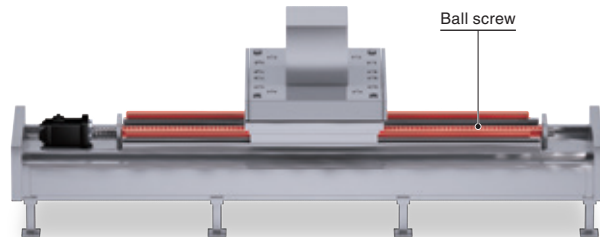

### Machine Diagnosis (Belts)

This function detects aging deterioration of belts in advance by the static friction failure prediction and the tension deterioration prediction with the belt tension estimation.


- Static friction failure prediction
- Belt tension deterioration prediction

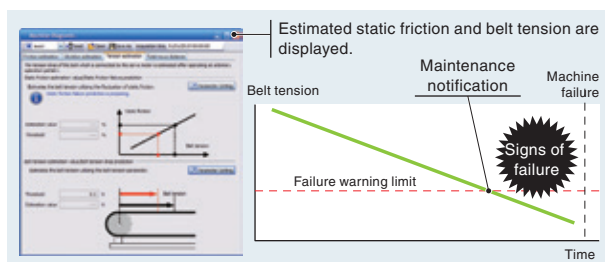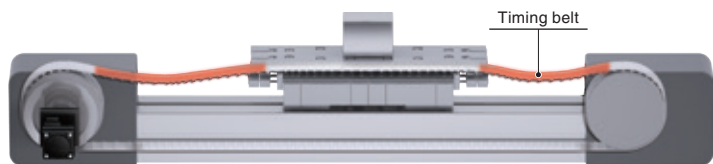

### Machine Diagnosis (Gears) \*1

With this function, the servo amplifier generates commands automatically, and executes to-and-fro positioning operation to estimate the amount of gear backlash. Gear failure is predicted based on the set nominal values for backlash.

- Backlash estimation function
- Gear failure prediction

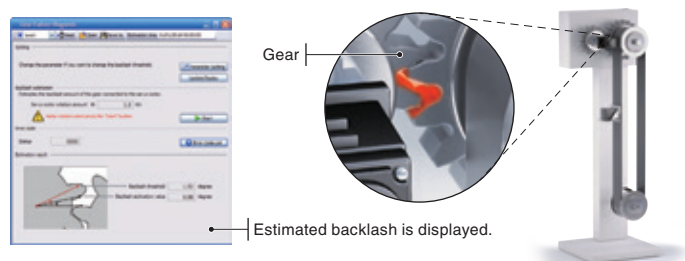


\*1. The machine diagnosis (gears) does not work during normal operation.

## Preventive Maintenance

### Machine Diagnosis (Mechanical Drive Components)

This function estimates when a machine failure will occur based on the total travel distance of the servo motor and notifies when it is time for replacement if the rated service life of the mechanical drive components is set.


- Machine total travel distance failure prediction

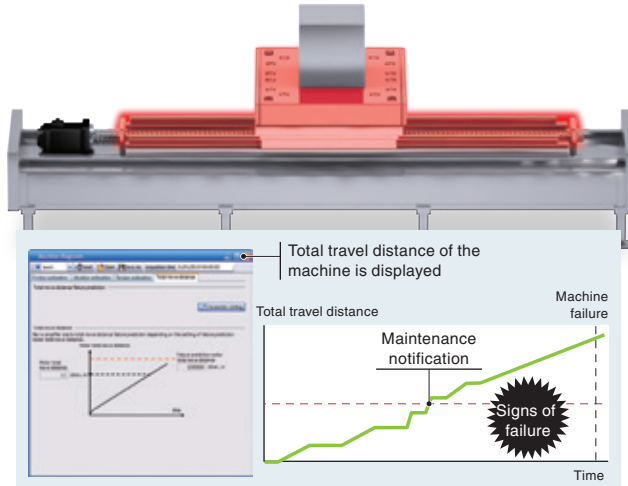

### Servo Amplifier Life Diagnosis

This function displays the cumulative energization time and the number of inrush relay on/off times. The data can be used to check the service life of the parts as a rough guide.


- Cumulative energization time (Smoothing condenser/cooling fan life span)
- The number of inrush relay on/off times (Inrush relay life)

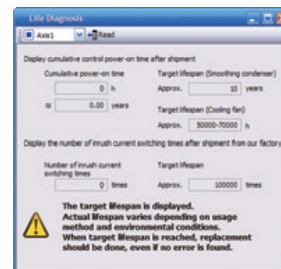

## Corrective Maintenance

### Drive Recorder


This function continuously monitors the servo status and records the status transition such as a trigger condition before and after an alarm for a fixed period of time. Reading the servo data on MR Configurator2 helps you analyze the cause of the alarm. In addition to the monitor values and the waveform of the past 16-time alarms in the alarm history, the system configuration and the servo parameters are displayed. Alarm occurrence time is also displayed when the servo amplifier and the controller are normally in communication on CC-Link IE TSN. The data can be outputted to a GX LogViewer format file.

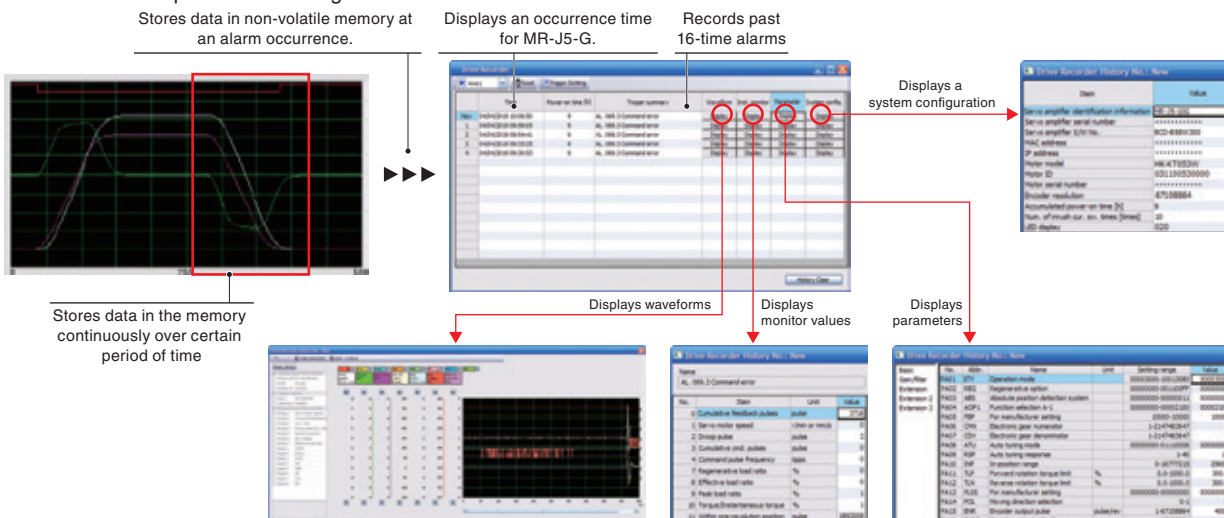

## Connection/Communication Diagnosis


### Disconnection Detection

The servo amplifiers are equipped with both input open-phase detection and output open-phase detection. Input open-phase detection detects an open phase of the main circuit power supply of the servo amplifier, and output open-phase detection detects an open phase of the servo motor power supply. The alarm can be distinguished from other alarms such as the overload alarm, reducing the time required to restore the system. MR-J5D-G4 drive units support only output open-phase detection.

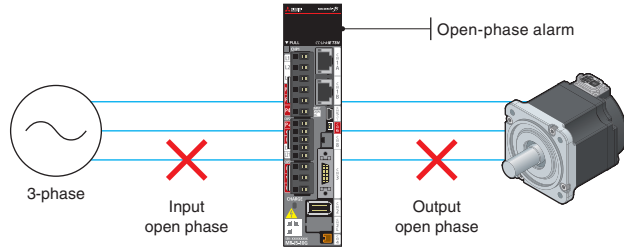

### Servo Motor Incorrect Wiring Detection


Multi-axis servo amplifiers MR-J5W2-G/ MRJ5W3-G detect servo motors with a different capacity that are incorrectly connected to the A-axis/B-axis/C-axis, contributing to servo motor protection. The servo amplifiers obtain the capacity information of the connected servo motors from the encoders and check whether the servo motors which are connected to the power connectors match the capacity information. If the information is not matched, an alarm occurs. \*1

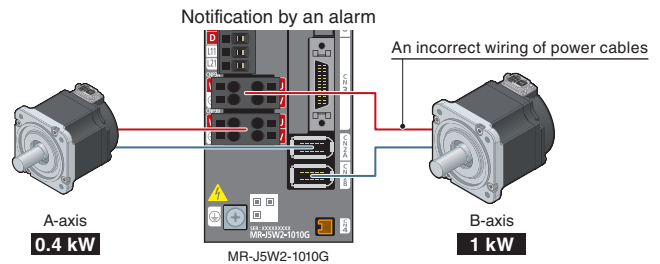

\*1. The incorrect wiring detection does not work for servo motors with the same capacity.

### Encoder Communication Diagnosis


The encoder communication diagnosis checks the encoder communication circuit in the servo amplifier. This function is useful for classifying the cause of errors (such as disconnected encoder cables) when the encoder communication alarm occurs.

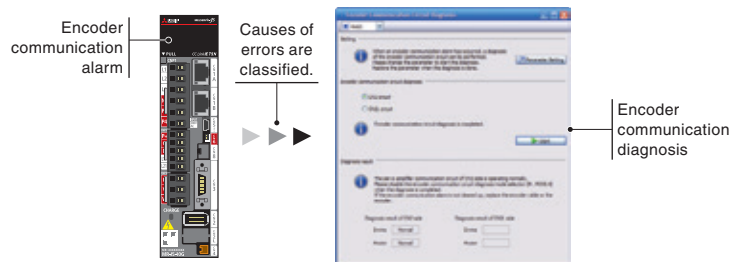

# Path Control


## Super Trace Control

This function reduces a position deviation to nearly zero not only during constant-velocity operation, but also during constant acceleration/deceleration. The path accuracy will be improved in high-rigidity machines.

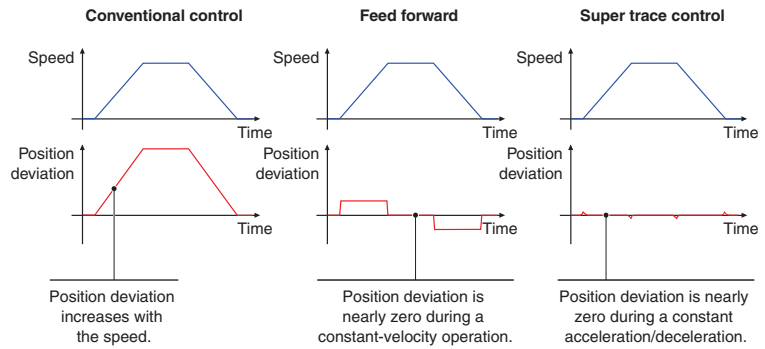


## Lost Motion Compensation

This function suppresses quadrant protrusion caused by friction and torsion generated when the servo motor rotates in a reverse direction. Therefore, the accuracy of circular path will be improved in path control used in XY table, etc.

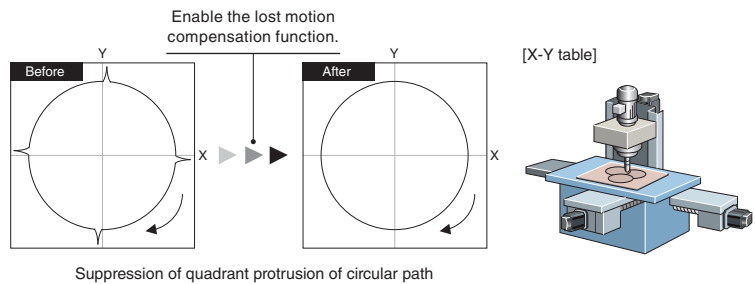

## Path Tracking Model Adaptive Control


This function reduces path errors which occur when the servo motor reciprocates. Normally, when positioning control is executed, the model adaptive control adjusts the control to shorten a settling time. Instead, this function reduces overshooting to improve path accuracy, which is suitable for machines that require high-accuracy path control such as processing machines.

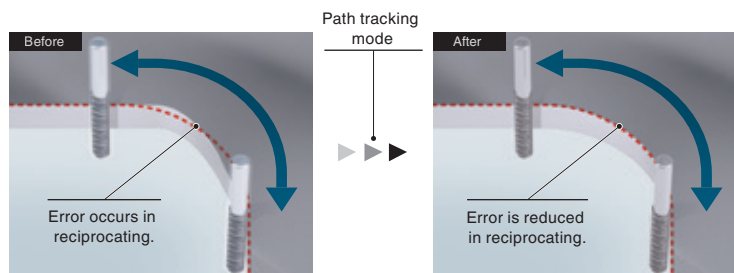


## Safety Sub-Functions

### Built-in Safety Functions and a Wide Range of Safety Sub-Functions

MR-J5-G-RJ/MR-J5-G4-HS/MR-J5W2-G/MR-J5W3-G/MR-J5D-G4 have a built-in safety control part, supporting safety sub-functions without a functional safety unit. Combining the servo amplifiers with HK-<sub>WS</sub> servo motors with functional safety further enhances the safety level. The servo amplifiers support the safety sub-functions of STO/SS1/SS2/SOS/SBC/SLS/SSM/SDI/SLI/SLT at a safety level of SIL 2 or SIL 3.

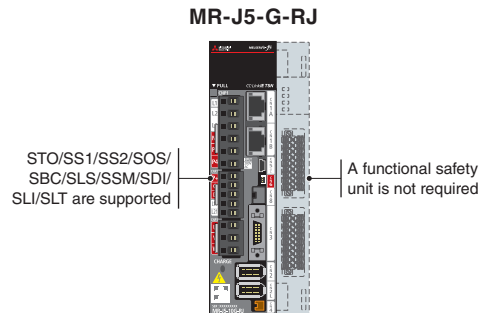


Servo motors with functional safety support the safety sub-functions at a higher safety level. The functional safety encoders provide the servo motor positions and speeds necessary for the safety sub-functions at a safety level of Category 4 PL e, SIL 3. Encoder cables for the servo motors with functional safety are the same as for the standard servo motors.

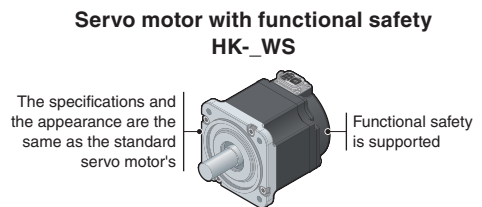

### Safety Communication Function via CC-Link IE TSN\*2

CC-Link IE TSN enables control of safety and non-safety communications realizing a flexible system whereby safety communications can be easily incorporated into the main control network. When combined with R\_SFCPU-SET safety CPU and RD78G Motion module, MR-J5-G-RJ/MR-J5-G4-HS/MR-J5W2-G/MR-J5W3-G/MR-J5D-G4 can receive safety signal data of the safety CPU through CC-Link IE TSN. Wiring the safety signals to the servo amplifiers is not necessary.

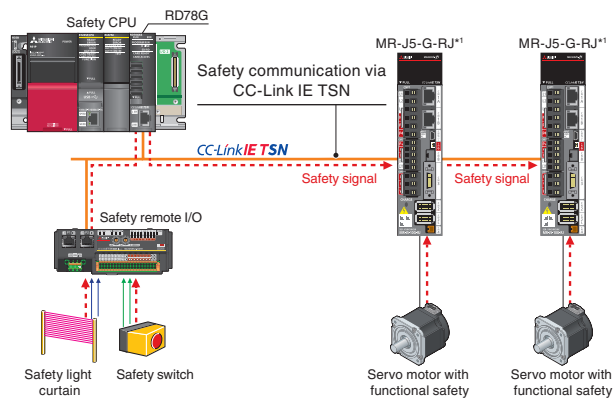

\*1. Refer to "Safety Sub-Functions" in section 1 of this catalog for the compatible servo amplifiers.  
 \*2. MR-J5-G-RJN1/MR-J5-G4-HSN1/MR-J5W2-G-N1/MR-J5W3-G-N1/MR-J5D-G4-N1 support Safety over EtherCAT® (safety data communication protocol) of EtherCAT®.


### STO Function Compliant with IEC/EN 61800-5-2

STO (Safe torque off) is integrated as standard, enabling easy configuration of a safety system which shuts off power to a servo motor in the machine.

- STO shuts off the power to the servo motor without turning off the control circuit power supply of the servo amplifier, thus shortening the restart time and eliminating the need for homing.
- A magnetic contactor for preventing unexpected motor start is not needed.\*1

| Servo amplifier model   | Safety level              |
|---|---------------------------|
| MR-J5-G/MR-J5-B/MR-J5-B-RJ/MR-J5W2-B/<br>MR-J5W3-B/MR-J5-A/MR-J5-A-RJ | Category 3 PL e, SIL 3    |
| MR-J5-G-RJ/MR-J5W2-G/MR-J5W3-G/<br>MR-J5D-G4/MR-J5-G4-HS              | Category 4 PL e, SIL 3 *2 |

\*1. Magnetic contactors are not required to meet the STO requirements. However, this illustration recommends the use of a magnetic contactor which shuts off the main circuit power supply of the servo amplifier at an alarm occurrence.  
 \*2. The listed safety level is applicable when one of the following executes safety sub-function control.  
 • MR-J5-G4-HS  
 • Programmable controller, safety CPU, or safety controller that meets Category 4 PL e, SIL 3  
 When a switch such as a safety switch is directly connected to the servo amplifier, the safety level is Category 3 PL d, SIL 2. For details, refer to "MR-J5 User's Manual".










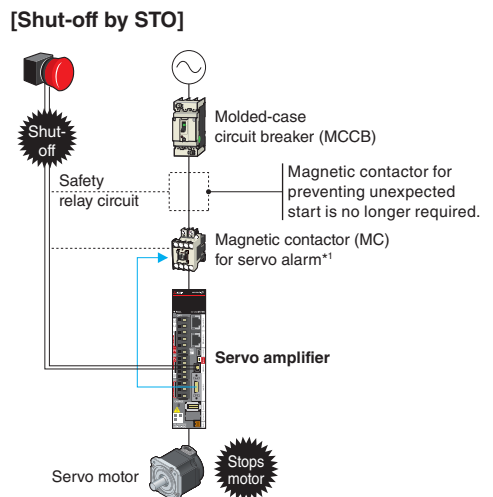




## Safety Sub-Functions Compliant with IEC/EN 61800-5-2

MR-J5-G-RJ/MR-J5-G4-HS/MR-J5W2-G/MR-J5W3-G/MR-J5D-G4 support safety sub-functions, STO/SS1/SS2/SOS/SBC/SLS/SSM/SDI/SLI/SLT.

Refer to "Safety Sub-Functions" in section 1 of this catalog for the safety sub-functions and the safety levels, which vary depending on the combinations of the servo amplifiers and the rotary servo motors (including servo motors with functional safety)/linear servo motors/direct drive motors.

|  |   |
|--|---|
| <p><b>Safe torque off (STO)</b></p> <p>Responding to the input signal from external equipment, the STO function shuts off power to the servo motor electronically using the internal circuit (shuts off through secondary-side output). This function corresponds to the Stop category 0 of IEC/EN 60204-1.</p>  <p>Execute the STO function in servo off state or when the servo motor is stopped.</p> | <p><b>Safely-limited speed (SLS)</b></p> <p>This function monitors the speed of the servo motor not to exceed the specified speed limit. If the speed exceeds the limit, the motor power is shut off by the STO.</p>                             |
| <p><b>Safe stop 1 (SS1)</b></p> <p>Responding to the input signal from external equipment, the servo motor starts to decelerate. After the set delay time for motor stop is passed, the STO function starts. Monitoring the servo motor deceleration based on the motor deceleration rate is also supported. This function corresponds to the Stop category 1 of IEC/EN 60204-1.</p>                   | <p><b>Safe speed monitor (SSM)</b></p> <p>The SSM signals are outputted when the speed of the servo motor is below the specified speed limit.</p>   |
| <p><b>Safe stop 2 (SS2)</b></p> <p>Responding to the input signal from external equipment, the servo motor starts to decelerate. After the set delay time for motor stop is passed, the SOS function starts. Monitoring the servo motor deceleration based on the motor deceleration rate is also supported. This function corresponds to the Stop category 2 of IEC/EN 60204-1.</p>                  | <p><b>Safe direction (SDI)</b></p> <p>This function monitors whether the servo motor moves in the command direction. If the servo motor moves in a different direction from the command direction, the STO function is executed.</p>           |
| <p><b>Safe operating stop (SOS)</b></p> <p>This function monitors the position of the servo motor not to deviate from the specified range. Power is still supplied to the servo motor during the SOS function.</p>    | <p><b>Safely-limited increment (SLI)</b></p> <p>This function monitors the travel distance of the servo motor not to deviate from the specified range. If the travel distance exceeds the range, the STO function is executed.</p>             |
| <p><b>Safe brake control (SBC)</b></p> <p>The SBC signals are outputted for external brake control.</p>   | <p><b>Safely-limited torque (SLT)</b></p> <p>This function monitors the torque (or the thrust) of the servo motor not to deviate from the specified range. If the torque (or the thrust) exceeds the range, the STO function is executed.</p>  |


Function activation area

## Supporting Flexible Driving System

### Fully Closed Loop Control

Supporting a fully closed loop control system\*<sup>1</sup> as standard, MR-J5-G/MR-J5W2-G/MR-J5D1-G4/MR-J5D2-G4/MR-J5-B/MR-J5W2-B/MR-J5-A servo amplifiers enable further precise positioning.

\*1. MR-J5-G/MR-J5W2-G/MR-J5-B/MR-J5W2-B/MR-J5-A servo amplifiers are compatible only with two-wire type serial encoders. For four-wire type serial and pulse train interface (A/B/Z-phase differential output type) encoders, use MR-J5-G-RJ/MR-J5-G4-HS/MR-J5D1-G4/MR-J5-B-RJ/MR-J5-A-RJ.

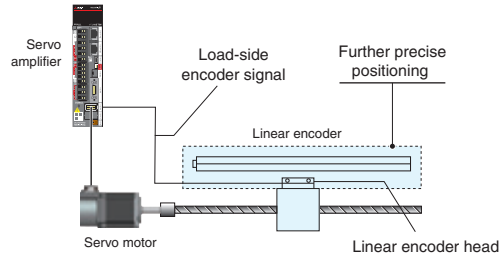

### Scale Measurement Function

The scale measurement function transmits scale measurement data of a scale measurement encoder to a controller via network when the scale measurement encoder such as a linear or rotary encoder is connected to a servo amplifier. This function enables flexible wiring from the scale measurement encoder.

Servo amplifiers supporting the scale measurement function

#### [CC-Link IETSN-compatible]

For two-wire type encoder:

- MR-J5-G/MR-J5-G-RJ/MR-J5-G4-HS/
- MR-J5W2-G/MR-J5D1-G4/MR-J5D2-G4

For four-wire type encoder:

- MR-J5-G-RJ/MR-J5-G4-HS/MR-J5D1-G4


#### [SSCNET III/H-compatible]

For two-wire type encoder:

- MR-J5-B/MR-J5-B-RJ/MR-J5W2-B

Four-wire type encoder:

- MR-J5-B-RJ

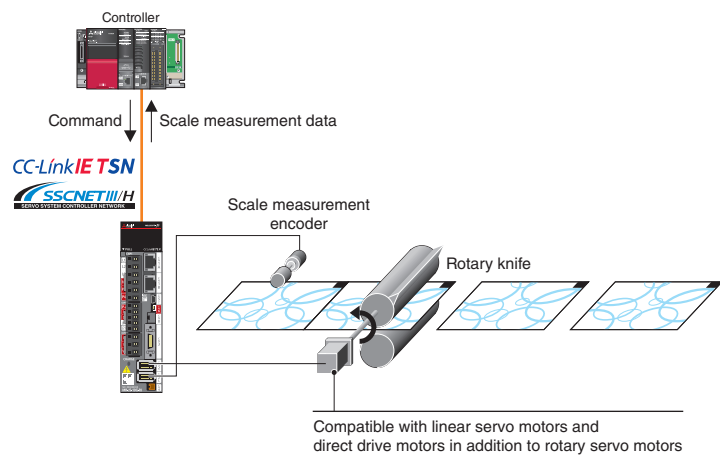


### Touch Probe Function

When a touch probe (sensor) that detects the position of workpieces is connected to a servo amplifier, the touch probe function latches (stores) the position detected by the touch probe. The controller reads and uses the latched value for position correction. The latch accuracy of this function is 1 μs.

Servo amplifiers supporting the touch probe function

#### [CC-Link IETSN-compatible]

- MR-J5-G\*<sup>1</sup>/MR-J5-G-RJ/MR-J5-G4-HS/
- MR-J5W2-G/MR-J5W3-G/MR-J5D-G4

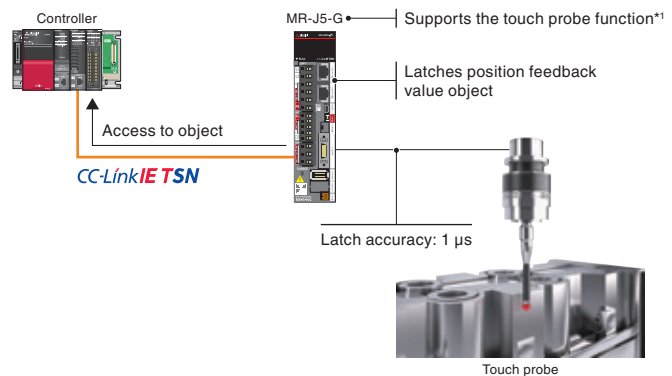

\*1. Use MR-J5-G manufactured in June 2021 or later. Note that, depending on the stock status, the servo amplifiers with both the former and the new specifications may be distributed in the market around the same time. Contact the local sales office when the touch probe function is needed.


## Supporting Flexible Driving System

### Positioning by Using a CC-Link IE TSN-Compatible RJ71GN11-T2

An RJ71GN11-T2 master/local module that supports CANopen can control the servo amplifiers.\*1 The servo amplifiers support both the profile mode (position/velocity \*2/torque \*2) and the positioning mode (point table).\*3 In the profile position mode, for example, the target positions and speeds can be set from the master station. The servo amplifier generates commands to the target positions with a start signal and starts positioning operations.


- \*1. RD78G/FX5-SSC-G Motion modules also support CANopen.
- \*2. The profile modes (velocity/torque) are not supported by MR-J5W2-G/ MR-J5W3-G/MR-J5D2-G4/MR-J5D3-G4.
- \*3. For the modes supported by the master station, refer to the master station specifications.

#### [Profile position mode continuous operation]

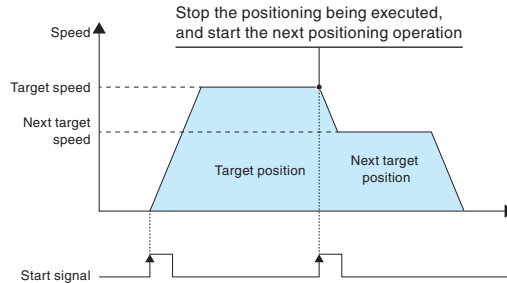


#### [Profile position mode continuous operation (point table)]

| Point table No. | Position data | Servo motor speed | Acceleration time constant | Deceleration time constant | Dwell | Auxiliary function | M code |
|-----------------|---------------|-------------------|----------------------------|----------------------------|-------|--------------------|--------|
| 1               | 1000          | 2000              | 200                        | 200                        | 0     | 1                  | 1      |
| 2               | 2000          | 1600              | 100                        | 100                        | 0     | 0                  | 2      |
| ⋮               | ⋮             | ⋮                 | ⋮                          | ⋮                          | ⋮     | ⋮                  | ⋮      |
| 255             | 3000          | 3000              | 100                        | 100                        | 0     | 2                  | 99     |

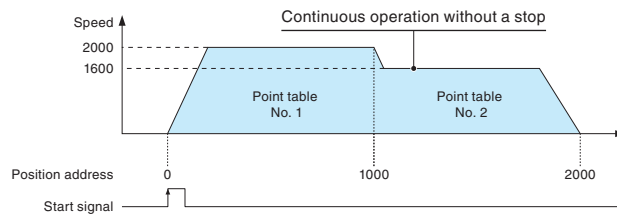

### Driver Communication Function

The controller controls the master axis by using the driver communication function of the servo amplifiers (MR-J5-G/MR-J5D1-G4/MR-J5-B). The servo amplifier of the master axis transmits the torque data to the servo amplifiers of the following axes on the same network, and the servo amplifiers also drive the servo motors on the basis of the torque data transmitted from the master axis. The data is transmitted via network, and thus no special wiring is necessary.

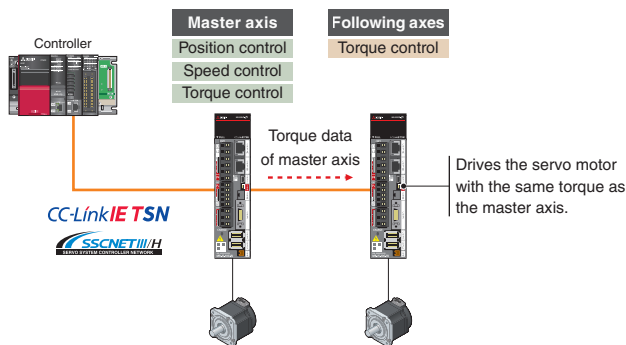

\* This function is not supported by MR-J5-G-N1/MR-J5D1-G4-N1.

### Compliance with SEMI-F47

MELSERVO-J5 series servo amplifiers comply with SEMI-F47 standard\*1 for semiconductors and FPD manufacturing systems. (SEMI-F47 is not applicable to 1-phase 200 V AC input, DC input, and MR-J5D-G4.)

\*1. The backup capacitor may be required depending on the power impedance and operating situation for the instantaneous power failure of the main circuit power supply. Be sure to perform a test on your machine to meet the SEMI-F47 (Specification for Semiconductor Processing Equipment Voltage Sag Immunity) standard. Please use the 3-phase power supply for the servo amplifier input.

## Command Interface

### CC-Link IE TSN


The servo amplifiers receive commands (position/velocity/torque) from a CC-Link TSN-compatible controller at regular intervals through synchronous communication and drive the servo motors. When combined with a Motion module or Motion Control Software, the servo amplifiers perform exact synchronous operation of axes and machines through high-speed, high-precision time synchronization.

The servo amplifiers support CiA 402 drive profile and enable the profile mode (position/velocity<sup>\*2</sup>/torque<sup>\*2</sup>) and the positioning mode (point table). When combined with the controllers supporting the profile mode, the servo amplifiers generate a positioning command to a target position, reducing loads of the controllers.

**[CC-Link IE TSN-compatible]**


MR-J5-G/MR-J5W2-G/MR-J5W3-G/MR-J5D1-G4/MR-J5D2-G4/MR-J5D3-G4

\*1. The communication cycle of  $\geq 31.25 \mu s$  is applicable when MR-J5-G/MR-J5D1-G4 are combined with RD78GH.  
 \*2. The profile modes (velocity/torque) are not supported by MR-J5W2-G/MR-J5W3-G/MR-J5D2-G4/MR-J5D3-G4.

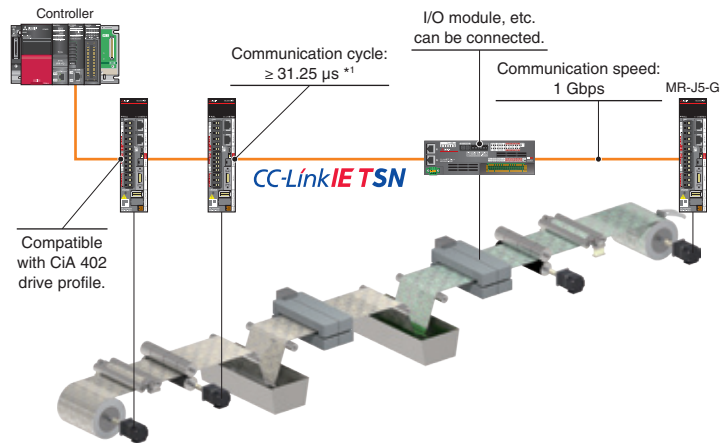

### SSCNET III/H

Replacement of the servo amplifiers in the existing system with MR-J5-B/MR-J5W2-B/MR-J5W3-B is possible, which enables the MELSERVO-J5 series servo system to be configured with the use of the existing programs of the servo system controller. The parameter conversion function of the engineering software and "Transition from MELSERVO-J4 Series to J5 Series Handbook" are available to support the replacement.

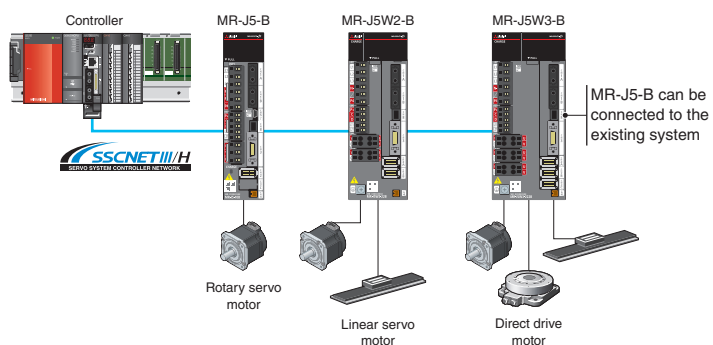


### CC-Link IE Field Network Basic

CC-Link IE Field Network Basic-compatible master stations such as an FX5U CPU module can control MR-J5-G/MR-J5D1-G4 servo amplifiers. The servo amplifier can be operated as a CANopen device via a link device.


The profile mode (position/velocity/torque) and the positioning mode (point table) are supported. MR-J5-G/MR-J5D1-G4 servo amplifiers can be connected to existing systems using MR-J4-GF. In addition, MR-J5-G newly supports the line topology.\*1

\*1. When a device which does not support the line topology is used, the line/star mixed topology is applicable.

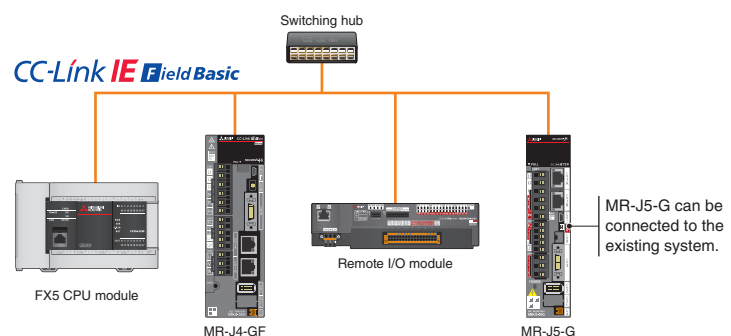

### General-Purpose Interface

General-purpose interface-compatible MR-J5-A servo amplifiers support pulse trains and analog input. The control mode can be switched between position/speed/torque control modes. When an open collector is used, both sink and source inputs are enabled.

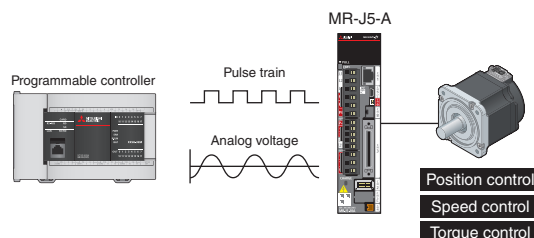

## Command Interface

### EtherCAT®

Enhanced functions

EtherCAT®-compatible servo amplifiers are available, enabling higher-performance MR-J5 servo amplifiers with enhanced functions on the EtherCAT® system.

The servo amplifiers\*<sup>3</sup> support the touch probe. (Latch accuracy: 1 μs)

#### [EtherCAT®-compatible]

MR-J5-G-N1/MR-J5W2-G-N1/MR-J5W3-G-N1/

MR-J5D1-G4-N1/MR-J5D2-G4-N1/MR-J5D3-G4-N1

|                                    |   |
|------------------------------------|---|
| Communication specification        | CANopen over EtherCAT® (CoE)<br>Ethernet over EtherCAT® (EoE)<br>Safety over EtherCAT® (FSoE) |
| Drive profile                      | CiA 402   |
| Communication cycle * <sup>1</sup> | 125 μs, 250 μs, 500 μs, 1 ms, 2 ms, 4 ms, 8 ms  |
| Control mode                       | Cyclic synchronous position mode (csp)  |
|                                    | Cyclic synchronous velocity mode (csv)  |
|                                    | Cyclic synchronous torque mode (cst)  |
|                                    | Profile position mode (pp)  |
|                                    | Profile velocity mode (pv)* <sup>2</sup>  |
|                                    | Profile torque mode (tq)* <sup>2</sup>  |
|                                    | Homing mode (hm)  |

\*1. The minimum communication cycle varies by the model type.

\*2. The control modes (pv/tq) are not supported by MR-J5W2-G-N1/MR-J5W3-G-N1/MR-J5D2-G4-N1/MR-J5D3-G4-N1.

\*3. Use MR-J5-G-N1 manufactured in June 2021 or later. Note that, depending on the stock status, the servo amplifiers with both the former and the new specifications may be distributed in the market around the same time. Contact the local sales office when the touch probe function is needed.



Servo System

Servo System  
Controllers

Embedded Type  
Servo System Controller

Servo Amplifiers

Servo Motors

Utilization of SSCNET III/H  
Device Assets

## Servo Engineering Software MELSOFT MR Configurator2

Tuning, monitor display, diagnosis, reading/writing parameters, and test operations are easily performed on a personal computer. This powerful software tool supports a stable machine system and optimum control, and moreover, shortens setup time.


### Parameter setting and docking help

Set parameters using the function display in the list without worries about the parameter No. and digits. Information related to the parameter being set is displayed in the docking help window. The latest e-Manual is also displayed in the docking help.



### Supporting multi-axis project

Set parameters and monitor operation for multiple servo amplifiers through connecting to one of the servo amplifiers. Connecting via the Ethernet switching hub and the controller is also possible.

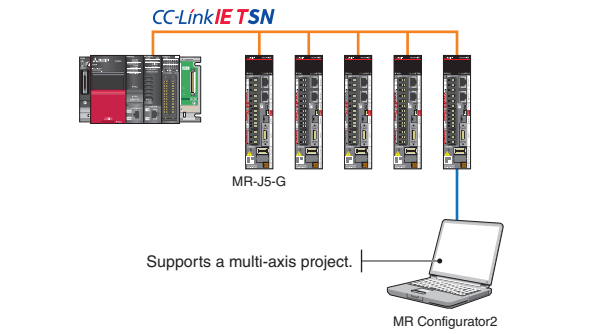

### Tuning function

Adjust control gains finely on the [Tuning] window manually for further performance after the quick tuning and the one-touch tuning.




### Graph function

Obtain graphs of 7 channels for analog and 8 channels for digital. Various servo statuses are displayed in the waveform at one measurement, supporting setting and adjustment. Convenient functions such as [Overwrite] for overwriting multiple data and [Select history] for displaying graph history are available. Two types of signals can be used as a trigger signal with an OR/AND condition.



### Machine analyzer function

Input random torque to the servo motor automatically and analyze frequency characteristics (0.1 Hz to 8 kHz) of a machine system just by clicking the [Start] button. This function supports setting of machine resonance suppression filter, etc.

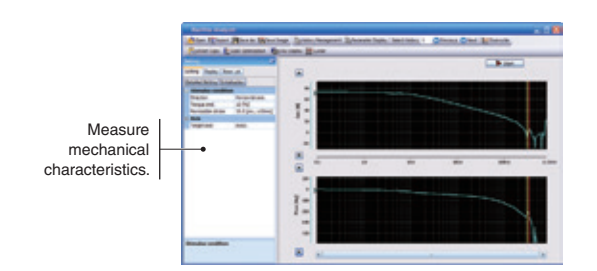

### Software reset

Reset the software for the servo amplifier with this new function. Setting switches and parameters is enabled without turning off the main circuit power supply of the servo amplifier.



# Drive System Sizing Software MELSOFT Motorizer

Select the most suitable servo motors, servo amplifiers, and regenerative options for your machine just by setting machine specifications and operation patterns. You can select a suitable combination from various results. This software also supports multi-axis systems, enabling you to set operation patterns and select options for multiple axes.

Specification input


The screenshot shows the Motorizer software interface. On the left, a navigation pane includes 'Step 1 Load mechanism', 'Step 2 Transmission mechanism', 'Step 3 Operation pattern', 'Filter Setting', 'Motor selection', and 'Drive selection'. The main area is titled 'Specification settings' and includes a 'Base' section with input fields for: Mass of load (W<sub>L</sub>: 2.500 kg), Mass of table (W<sub>H</sub>: 20.000 kg), Counter weight mass (W<sub>W</sub>: 0.000 kg), Lead of ball screw (P<sub>b</sub>: 10.000 mm), Ball screw inertia moment (J<sub>b</sub>: 0.500 kg-cm<sup>2</sup>), Friction coefficient (μ: 0.100), Overall machine efficiency (η: 0.900), and Thrust load (F<sub>c</sub>: 0.000 N). A diagram on the right illustrates a load mechanism with forces and moments labeled: V, W<sub>L</sub>, F<sub>c</sub>, W<sub>cw</sub>, J<sub>OL</sub>, J<sub>OM</sub>, and θ. Below the specification settings is a 'Selection candidate list' table with columns for Motor, Motor capacity (kW), Drive, Drive capacity (kW), Torque effective load rate (%), Peak load rate (%), and Effective load rate (%). The table lists several motor and drive combinations with their respective performance metrics.

- 13 common load mechanisms
- Able to add mechanical transmissions

The selection result can be read by FA Integrated Selection Tool.


## Flexible support for load mechanisms

- Select a load mechanism from 13 common types.
- Add transmission mechanisms such as a coupling.
- Set an inclination angle of the load mechanisms as desired.

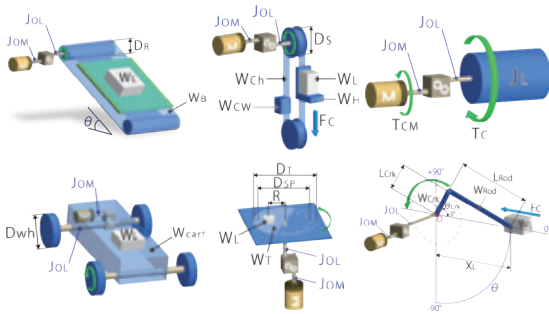

## Compatible with multi-axis systems

- Supports the multi-axis servo amplifiers and the converters.
- Set operation patterns for multiple axes.
- Select regenerative options for a multi-axis system.

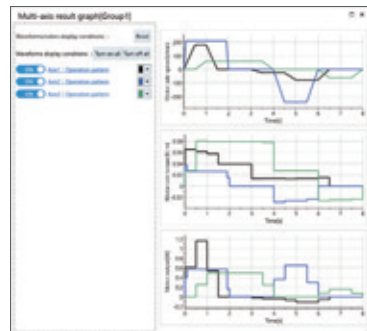

## Selection of several patterns

- Displays a list of load to motor inertia ratio, peak torque, etc., of each selection.
- Compatible with the expanded combinations of the servo amplifiers and the servo motors.
- Set threshold values for judgment.
- Displays energy-saving effect by multi-axis system

| Motor      | Motor capacity (kW) | Drive          | Drive capacity (kW) | Torque effective load rate (%) | Peak load rate (%) | Effective load rate (%) | Motor output (kW) |
|------------|---------------------|----------------|---------------------|--------------------------------|--------------------|-------------------------|-------------------|
| HR-KT1M300 | 0.150               | MR-J5-200-B/IA | 0.200               | 116.7                          | 116.7              | 116.7                   | 0.150             |
| HR-KT1M300 | 0.150               | MR-J5-200-B/IA | 0.200               | 116.7                          | 116.7              | 116.7                   | 0.150             |
| HR-KT1M300 | 0.150               | MR-J5-200-B/IA | 0.200               | 116.7                          | 116.7              | 116.7                   | 0.150             |
| HR-KT1M300 | 0.150               | MR-J5-200-B/IA | 0.200               | 116.7                          | 116.7              | 116.7                   | 0.150             |
| HR-KT1M300 | 0.150               | MR-J5-200-B/IA | 0.200               | 116.7                          | 116.7              | 116.7                   | 0.150             |

## Tutorial video

- Illustrates how to use the software and select drive systems in the video.



## FA Integrated Selection Tool

FA Integrated Selection Tool is available on the global website, so you can select multiple devices/entire system with one tool. Using "Select by device" or "Select by network" helps you to select devices such as programmable controllers and AC servos. Select necessary options such as encoder cables. Easily create system configuration diagrams and lists of necessary purchases to prevent mistakes when ordering.


### Selection Tool

#### FA Integrated Selection Tool



#### Selection of controllers/servo motors/servo amplifiers

- Read selection results from Motorizer.

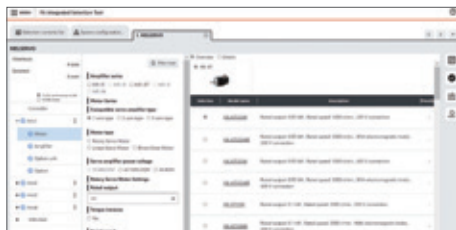


#### Selection of options

- Prevent selection mistakes.



#### Configuration

- Check a configuration of each axis.

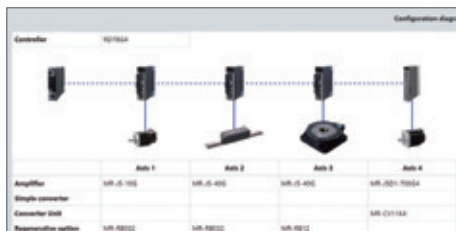

#### Purchase list

- Export to a file in Excel format.



## e-Manual

Instruction manuals for the MELSERVO-J5 series are available in e-Manual format. These manuals are linked with manuals for other products such as servo motors and controllers. The e-Manual lets you obtain necessary information quickly and also allows you to keep an enormous number of manuals as one database. Currently supported languages: English, Japanese, Chinese

#### Features

- Use all necessary manuals as one database
- Download and use manuals in your local environment
- Use the e-Manual application on tablets
- Download and update manuals quickly and easily
- Search for desired information across multiple manuals



Check manuals across the controllers, the servo amplifiers and the servo motors



**MEMO**

Servo System

Servo System  
Controllers

Embedded Type  
Servo System Controller

**Servo Amplifiers**

Servo Motors

Utilization of SSCNET III/H  
Device Assets

A broader selection of capacities to match various applications for smart equipment

Rotary Servo Motors

# HK Series




Designed for an ambient temperature of up to 60 °C with derating.

Flat type

**Small capacity, low inertia**

## HK-KT Series

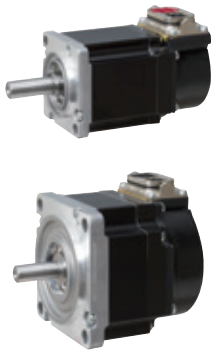

Servo motors with a 26-bit batteryless absolute position encoder  
 Rated speed: 3000 r/min \*1  
 Maximum speed: 6700 r/min \*1  
 Our product line includes 400 V and flat type models.  
 The servo motors have an all-in-one connector, making the connection simple.

\*1. The speed varies by the model type.

**Small capacity, ultra-low inertia**

## HK-MT Series



Servo motors with a 26-bit batteryless absolute position encoder  
 Rated speed: 3000 r/min  
 Maximum speed: 10000 r/min (available with the high-speed type models\*2)  
 The servo motors have an all-in-one connector, making the connection simple.

\*2. The high-speed type models are equipped with an incremental encoder.

**Medium capacity, medium inertia**

## HK-ST Series



Servo motors with a 26-bit batteryless absolute position encoder  
 Rated speed: 2000 r/min, 3000 r/min  
 Two types of rated speed are available.  
 Our product line includes 400 V and flat type models.  
 The cables for the encoder, the electromagnetic brakes, and the power are equipped with one-touch lock.

**Medium capacity, ultra-low inertia**

## HK-RT Series



Servo motors with a 26-bit batteryless absolute position encoder  
 Rated speed: 3000 r/min  
 Maximum speed: 6700 r/min \*1  
 Our product line includes 400 V and flat type models.  
 The servo motors (1 to 2 kW) have an all-in-one connector, making the connection simple.

\*1. The speed varies by the model type.

## Product Lines

The HK series boasts a product line that offers servo motors of four different capacities and inertia: HK-KT series (small capacity, low inertia), HK-MT series (small capacity, ultra-low inertia), HK-ST series (medium capacity, medium inertia), and HK-RT series (medium capacity, ultra-low inertia). The servo motors are equipped with a batteryless absolute position encoder as standard.

: Future release planned


| Series | Inertia           | Motor type | Servo amplifier power supply | Capacity                       |
|--------|-------------------|------------|------------------------------|--------------------------------|
| HK-KT  | Low inertia       | HK-KT_W    | 200 V AC                     | 0.05 kW to 2.0 kW              |
|        |                   |            | 400 V AC                     | 0.05 kW to 0.15 kW             |
|        |                   | HK-KT_4_W  | 200 V AC                     | 0.2 kW to 1.0 kW               |
|        |                   |            | 400 V AC                     | 0.4 kW to 2.0 kW               |
| HK-MT  | Ultra-low inertia | HK-MT_W    | 200 V AC                     | 0.05 kW to 1.0 kW              |
| HK-ST  | Medium inertia    | HK-ST_W    | 200 V AC                     | 0.5 kW to 7.0 kW  Up to 11 kW  |
|        |                   |            | 200 V AC                     | 0.3 kW to 4.2 kW  Up to 5.5 kW |
|        |                   | HK-ST_4_W  | 200 V AC                     | 0.5 kW to 7.0 kW  Up to 11 kW  |
|        |                   |            | 400 V AC                     | 0.5 kW to 7.0 kW  Up to 11 kW  |
| HK-RT  | Ultra-low inertia | HK-RT_W    | 200 V AC                     | 1.0 kW to 7.0 kW               |
|        |                   | HK-RT_4_W  | 400 V AC                     | 1.0 kW to 7.0 kW               |

Notes: The motor types are classified by the power class (200 V or 400 V) of the servo motors. The servo motors can be driven regardless of the servo amplifier power supply. For details of the rotary servo motors, refer to "4 Rotary Servo Motors".

## Batteryless Absolute Position Encoder as Standard


### Eliminate the Need for Purchase/Replacement/Stock Control

Servo motors come equipped with a batteryless absolute position encoder as standard, making it possible to configure absolute position systems without the use of batteries or any other options. Moreover, maintenance costs are reduced as a result of eliminating the battery replacement and stock control.

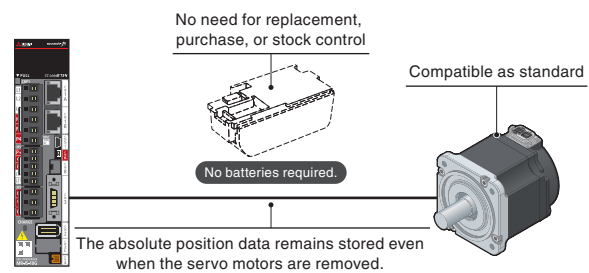


### Reduce Wiring for Multi-Axis Systems

In a conventional multi-axis system, battery cables are necessary between the servo amplifiers. Now that the batteries are not required with the use of the batteryless absolute position encoders, wiring battery cables for multi-axis systems is not required.

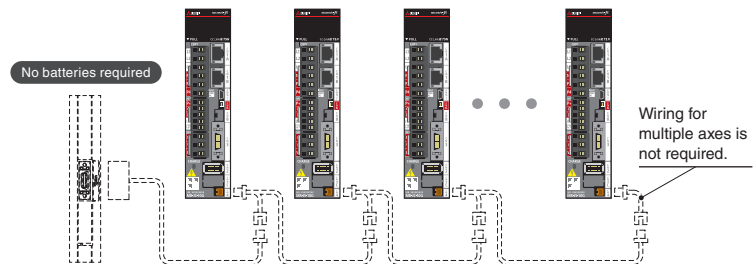

### Save Time in Transporting

Position data remains stored even when the rotary servo motors are disconnected from the servo amplifiers. Thus, control cabinets can be separated from the machines without losing the position data, making it easy to transport machines for use at a new location. The encoder does not require lithium metal batteries, allowing machines to be transported by air or sea without special handling.

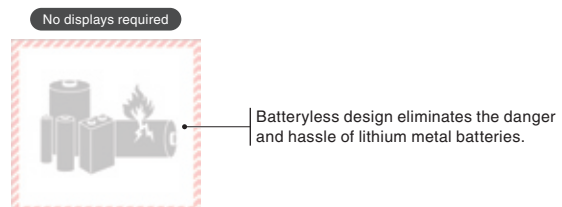


## Single Connector/One-Touch Lock/Single Cable Type

### Single Connector/Single Cable Type/One-Touch Lock

The single connector for the HK-KT/HK-MT/HK-RT \*1 series combines the motor power supply, encoder, and electromagnetic brake into a single cable. The one-touch lock eliminates the need for tightening screws, making wiring easy. The servo motors are also compatible with the dual cable type. The cables can be mounted either horizontally or vertically according to your selection. Refer to "Options/Peripheral Equipment" for details of servo motor cables.

\*1. The single connector is available for 1 to 2 kW of HK-RT series.


#### Horizontally mounted single cable type with one-touch lock

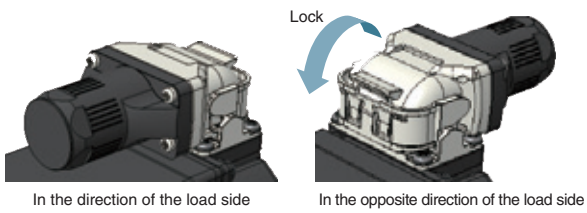


#### Vertically mounted single cable type with one-touch lock




#### Horizontally mounted dual cable type with one-touch lock

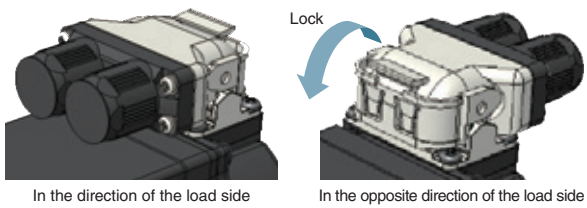

#### Vertically mounted dual cable type with one-touch lock




#### Connection example of one-touch lock with single cable type

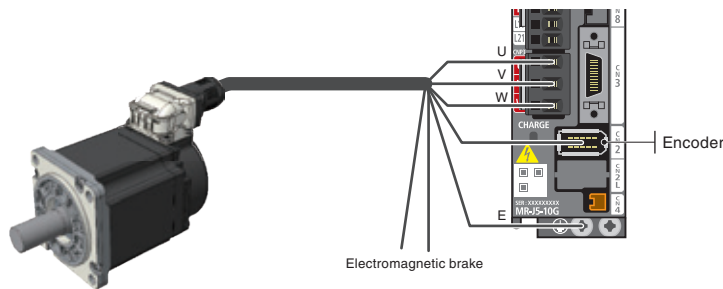

### One-Touch Lock

HK-ST/HK-RT \*1 series servo motors boast a greatly simplified installation process through use of the one-touch lock system. The one-touch lock can be used to mount connectors for the motor power supply, encoder, and electromagnetic brake, which eliminates the need for tightening screws. The servo motors are compatible with both straight and angle type connectors and also supports traditional screw-tightened connectors.

#### One-touch lock

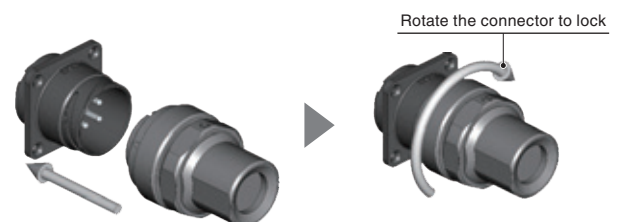


\*1. The one-touch lock is available for 3.5 to 7 kW of HK-RT series.

## Expanding Combinations of Servo Amplifiers and Servo Motors

The combinations of servo amplifiers and servo motors have been expanded to offer more flexible options for driving servo motors, such as combining a large-capacity servo amplifier for increased torque or combining a servo motor in a different power class. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" for details of the combinations.

### Increases Maximum Torque by Combining with Larger-Capacity Servo Amplifiers


Combining the servo motor with a larger-capacity servo amplifier increases the maximum torque, leading a shorter cycle time.

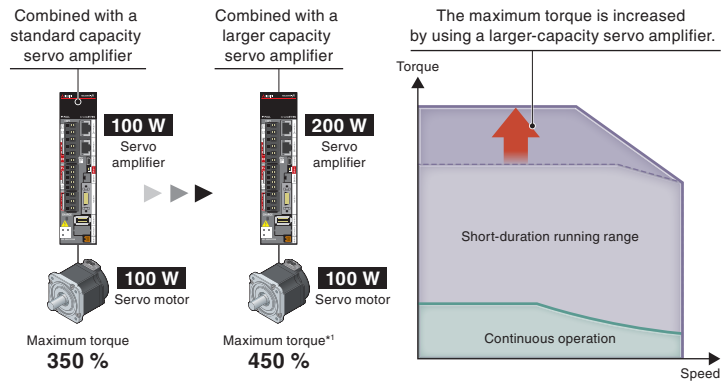

### Drives Smaller Capacity Servo Motors


Servo amplifiers are able to drive servo motors with a smaller capacity than the servo amplifier being used, reducing the kinds of spare parts that are needed.

For example, 400 W servo amplifiers are compatible with the following servo motors: 50 W, 100 W, 150 W, 200 W, and 400 W models.

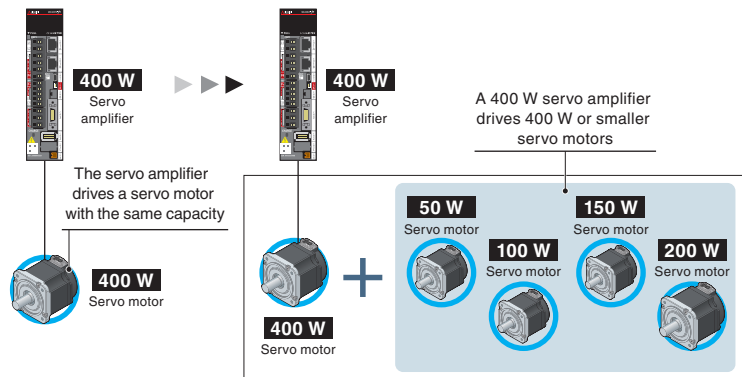


### Drives 200 V/400 V Class Servo Motors

The 200 V servo amplifiers can drive both 200 V and 400 V servo motors, and the 400 V servo motors may produce torque that is sufficient for operation when combined with smaller-capacity 200 V servo amplifiers. Lowering of the capacity of the servo amplifier contributes to lower costs and reduced installation space.

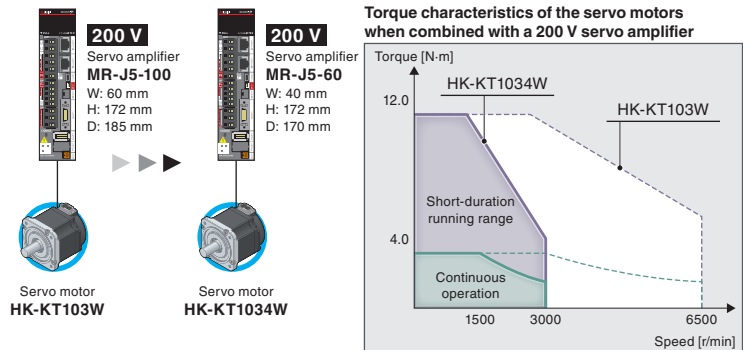

## Compact Servo Motors with a Batteryless Absolute Position Encoder

HK-KT series servo motors come equipped with a batteryless absolute position encoder and are more compact than the previous generation HG-KR series. Flat types are also available in the HK-KT product line, contributing to a compact machine design.

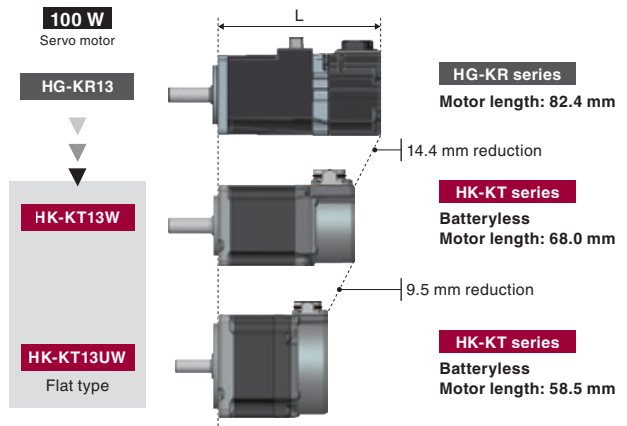


## Improved Environmental Resistance

Servo motors feature enhanced environmental resistance.

Ingress protection (IP) rating of the servo motors: IP67 <sup>\*1</sup>  
Designed for an ambient temperature of up to 60 °C. <sup>\*2</sup>

<sup>\*1</sup>. If the IP rating of the servo motor differs from those of option cables and connectors, overall IP rating depends on the lowest of all.  
<sup>\*2</sup>. Derate the speed/torque when using the servo motors at high ambient temperatures.

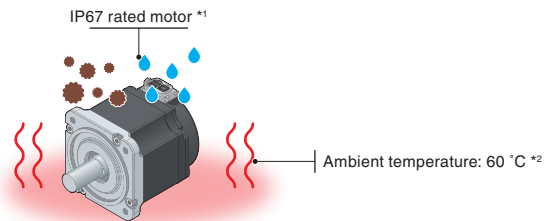

## Application Examples

|   |  |                                |                       |
|---|--|--------------------------------|-----------------------|
| <p>Semiconductor/FPD/photovoltaic manufacturing systems</p> | <p>Mounters/bonders</p>  | <p>X-Y tables</p>              | <p>Robots</p>         |
| <p>Loaders/unloaders, feeders, and sliders</p>              | <p>Food processing machines (filling machines, mixers, measuring machines, etc.)</p> | <p>Food packaging machines</p> | <p>Press machines</p> |

## High-Response Operation by Ultra-Low Inertia Servo Motors

The product lines includes HK-MT series (small capacity, ultra-low inertia) and HK-RT series (medium capacity, ultra-low inertia). The ultra-low inertia servo motors enable a high-response operation that reduces the cycle time of an ultra-high-throughput material handling system.

### Compact, High-Power Rate Servo Motors for High-Speed Operation Medium-capacity HK-RT series 1 to 7 kW

#### Comparison of HG-RR (previous series) and HK-RT in 1 kW

( ): Increased torque

| Servo motor model  | HG-RR103 | HK-RT103W        |                                     |
|--|----------|------------------|-------------------------------------|
| Rated output of a combined servo amplifier [kW]            | 2.0      | <b>1.0 (2.0)</b> | • Smaller capacity servo amplifier  |
| Flange size [mm]   | 100      | <b>90</b>        | • Reduced flange size (by 10 %)     |
| Rated torque [N·m]   |          | 3.2              |                                     |
| Maximum torque [N·m]                                       | 8.0      | <b>8.0 (9.5)</b> | • Increased torque (to 118 %)       |
| Maximum speed [r/min]                                      | 4500     | <b>6700</b>      | • Increased speed (to 148 %)        |
| Moment of inertia J [ $\times 10^{-4}$ kg·m <sup>2</sup> ] | 1.50     | <b>0.721</b>     | • Lower inertia (by 52 %)           |
| Power rate at rated torque [kW/s]                          | 67.4     | <b>141</b>       | • Increased responsivity (to 209 %) |
| Motor length [mm]  | 145.5    | <b>118.9</b>     | • Reduced motor length (by 26.6 mm) |

#### Comparison of HK-KT (low inertia) and HK-RT in 2 kW


( ): Increased torque

| Servo motor model  | HK-KT203W   | HK-RT203W   |                                     |
|--|-------------|-------------|-------------------------------------|
| Flange size [mm]   |             | 90          |                                     |
| Rated torque [N·m]   |             | 6.4         |                                     |
| Maximum torque [N·m]                                       | 19.1 (25.5) | 15.9 (19.1) |                                     |
| Maximum speed [r/min]                                      | 6000        | <b>6700</b> | • Increased speed (to 111 %)        |
| Moment of inertia J [ $\times 10^{-4}$ kg·m <sup>2</sup> ] | 5.65        | <b>1.28</b> | • Lower inertia (by 77 %)           |
| Power rate at rated torque [kW/s]                          | 71.7        | <b>317</b>  | • Increased responsivity (to 442 %) |
| Motor length [mm]  | 136.9       | 172.9       |                                     |

### Maximum Speed of 10000 r/min

#### Small-capacity HK-MT series 0.05 to 1 kW

The high-power rate servo motors are optimal for packaging machines and material handling systems. Servo motors with maximum speed of 10000 r/min \*1 are added to the product lines, contributing to a shorter cycle time.



Maximum speed  
Standard servo motor: 6700 r/min  
High-speed servo motor: 10000 r/min \*1

\*1. The high-speed type models have "V" in the model name and are equipped with an incremental encoder.

## Servo motors for high-speed, high-accuracy, linear drive systems

Linear Servo Motors

# LM Series




### Product Lines

Six series are available depending on applications.

▲  
Thrust


**Core type (natural/liquid cooling)**  
**LM-F series**  
Maximum speed: 2 m/s  
Rated thrust: 300 to 1200 N (natural cooling)  
600 to 2400 N (liquid cooling)  
Max. thrust: 1800 to 7200 N (natural/liquid cooling)  
Compact core type linear servo motors.  
The integrated liquid-cooling system doubles the continuous thrust.



Press feeders


NC machine tools

**Coreless type**  
**LM-U2 series**  
Maximum speed: 2 m/s  
Rated thrust: 50 N to 800 N  
Max. thrust: 150 N to 3200 N  
No cogging, small speed fluctuation.  
No magnetic attraction force, longer service life of the linear guides.



Material handlings


**Core type**  
**LM-H3 series**  
Maximum speed: 3 m/s  
Rated thrust: 70 N to 960 N  
Max. thrust: 175 N to 2400 N  
Core type suitable for space-saving, high speed and high acceleration/deceleration.




FPD assembly systems

Semiconductor mounting systems

**Core type with magnetic attraction counter-force**  
**LM-K2 series**  
Maximum speed: 2 m/s  
Rated thrust: 120 N to 2400 N  
Max. thrust: 300 N to 6000 N  
Longer service life of the linear guides due to the magnetic attraction counter-force structure. Low audible noise.




**Coreless type**  
**LM-AU series**  
Maximum speed: 2 to 4.5 m/s  
Rated thrust: 28 N to 350 N  
Max. thrust: 122 N to 1764 N  
No cogging, small speed fluctuation.  
No magnetic attraction force, longer service life of the linear guides.



Screen printing systems  
Scanning exposure systems

**Core type**  
**LM-AJ series**  
Maximum speed: 2 to 6.5 m/s  
Rated thrust: 68.1 N to 446.8 N  
Max. thrust: 214.7 N to 1409.1 N  
Low installation height, and suitable for compact X-Y tables.



◀ Feed speed-oriented
Positioning-oriented ▶



# Linear Servo Motors

## Basic Performance

- Maximum speed: 3 m/s (LM-H3 series), 6.5 m/s (LM-AJ series)
- Maximum thrust range: 122 N to 7200 N. Small size and high thrust are achieved by the increased winding density and the optimized core and magnet geometries as a result of electromagnetic field analysis.
- Six series are available: core (two series), liquid-cooling core, magnetic attraction counter-force core, and coreless (two series) types.

- The linear servo motors are compatible with a variety of serial interface linear encoders. The linear encoder resolution ranges from 1 nm and up.
- High-performance systems such as high-accuracy tandem synchronous control are achieved with CC-Link IE TSN.
- The linear servo motors feature environmental resistance, designed for an altitude of 2000 m and an ambient temperature of up to 60 °C. \*1,2

\*1. Derate the speed/thrust when using the linear servo motors at an altitude exceeding 1000 m and at high ambient temperatures.

\*2. LM-AJ series/LM-AU series are designed for an altitude of 1000 m and an ambient temperature of up to 40 °C.

## Higher Machine Performance

### For higher machine performance

- Improved productivity due to high-speed driving part.


### For easier use

- The linear servo motors enable a simple and compact machine with high rigidity.
- Smooth operation and clean systems are achieved.

### For flexible machine configurations

- Multi-head and tandem systems are easily configured.
- The linear servo motors are suitable for long-stroke applications.


[Offers more advantage than conventional ball screw driving systems]

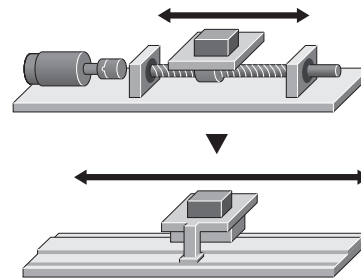


## Application Examples

Optimum for a linear drive system which requires a high speed and high accuracy. Easily achieve a tandem configuration or multi-head configuration.

### Tandem configuration





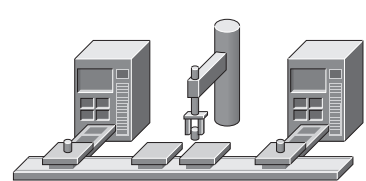


The linear servo motors configured in tandem are suitable for large systems that require highly accurate synchronous operation between two axes.



### Multi-head configuration

Multi-head systems enable control of two motor coils independently, thereby simplifying machine mechanisms. This system is suitable for machines that require a short cycle time.
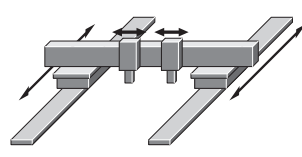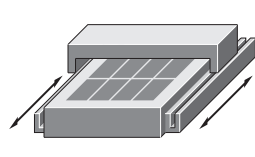
|  |  |  |
|--|--|--|
| <p>Machine tools XYZ stage</p>    | <p>Semiconductor/FPD manufacturing systems<br/>Electrical parts assembling/manufacturing systems</p>  | <p>Screen printing systems and large FPD coaters</p>  |
| <p>Material handling systems</p>  | <p>Multi-head material handling between machines</p>   |  |

## Compact and robust direct drive motors for high-accuracy applications

Direct Drive Motors

# TM Series



Low-profile flange type

**TM-RG2M Series**

Low-profile table type

**TM-RU2M Series**

Low-profile for space and weight saving

High-rigidity

**TM-RFM Series**

High torque for high-weight capacity

### Product Lines

18 models with 4 different diameters are available.

| Series                            | Motor outer diameter | Torque output range |                    |
|-----------------------------------|----------------------|---------------------|--------------------|
| TM-RG2M<br>TM-RU2M<br>Low-profile | ø130 mm              | 2.2 N·m             | 8.8 N·m            |
|                                   | ø180 mm              | 4.5 N·m             | 13.5 N·m           |
|                                   | ø230 mm              | 9 N·m               | 27 N·m             |
| TM-RFM<br>High-rigidity           | ø130 mm              | 2 N·m to 6 N·m      | 6 N·m to 18 N·m    |
|                                   | ø180 mm              | 6 N·m to 18 N·m     | 18 N·m to 54 N·m   |
|                                   | ø230 mm              | 12 N·m to 72 N·m    | 36 N·m to 216 N·m  |
|                                   | ø330 mm              | 40 N·m to 240 N·m   | 120 N·m to 720 N·m |

Legend: ■ : Rated torque, ■ : Maximum torque

Scale: 1 N·m, 10 N·m, 100 N·m, 1000 N·m

Notes: Use the direct drive motors manufactured in June 2019 or later.

## Direct Drive Motors

### Basic Performance

#### High performance with the latest technologies

Our latest magnetic design and winding technologies enable high torque density. In addition, extremely smooth rotation is achieved by the minimized torque ripple.

#### High-resolution absolute position encoder

The direct drive motors are equipped with a high-resolution absolute position encoder (1,000,000 to 4,000,000 pulses/rev) as standard. High-accuracy machines are achieved.

#### Enhanced environmental resistance

The direct drive motors feature environmental resistance, designed for an altitude of 2000 m and an ambient temperature of 60 °C. \*1

\*1. Derate the speed/torque when using the direct drive motors at an altitude exceeding 1000 m or at high ambient temperatures.

#### Compact and low-profile design

Due to high level of structural design technology, compact and low-profile design is achieved. This design enables a small mounting space and a low center of gravity.

#### Hollow shaft diameter range: ø20 mm to 104 mm

The motors are equipped with a large hollow shaft resulting from using bearing and encoder with large diameter. It allows cables and air tubing to pass through.

### Higher Machine Performance

#### For higher machine performance

- Suitable for low-speed and high-torque operations.
- High-accuracy positioning is achieved because the motors are directly coupled to a load.


#### For easier use

- Since mechanical transmission is no longer required, no backlash and no abrasion occurs, enabling smooth operation with less audible noise, a clean system, and easy maintenance.
- Less components are required for the system.

#### For flexible machine configurations

- A simple, compact, and high-rigid machine is achieved.
- Machine stability is enhanced due to the low-profile design and a low center of gravity.
- The motors have an inner rotor with hollow shaft that allows cables and pipes to pass through.

[No mechanical transmission contributing to no warp or distortion]



## Application Examples

Suitable for low speed and high torque applications.

|   |   |   |
|---|---|---|
| <p>Coating and vapor deposition systems</p> | <p>Spin-type cleaning systems for FPD/semiconductor</p> | <p>FPD/semiconductor testing systems (XYθ tables)</p> |
| <p>Index table for machine tools</p>        | <p>Rotary axis for polishing systems</p>                | <p>Rotary axis for material handling robots</p>       |

Heritage



Taking evolution to the next step by supporting SSCNET III/H

MELSEC iQ-R series

MELSEC Q series

MITSUBISHI ELECTRIC SERVO SYSTEM  
MELSERVO-J5



SSCNET III/H  
SERVO SYSTEM CONTROLLER NETWORK




Incorporate existing manufacturing devices into your new system and benefit from reduced costs and faster construction speed.

### SSCNET III/H-Compatible Servo System

- The servo amplifiers allow the user to build a system that utilizes the existing assets of the servo system controllers. Servo parameters are converted when the servo amplifier is changed on the engineering software.
- MELSEC iQ-R series Motion controllers are equipped with servo system recorder, helping to locate the cause when trouble arises.

### Utilizing MELSERVO-J5 Series Functions

- The servo amplifiers support functions of MELSERVO-J5 series such as quick tuning, machine diagnosis, and flexible combinations of the servo amplifiers and the servo motors.
- Servo motors with a batteryless absolute position encoder can be operated.

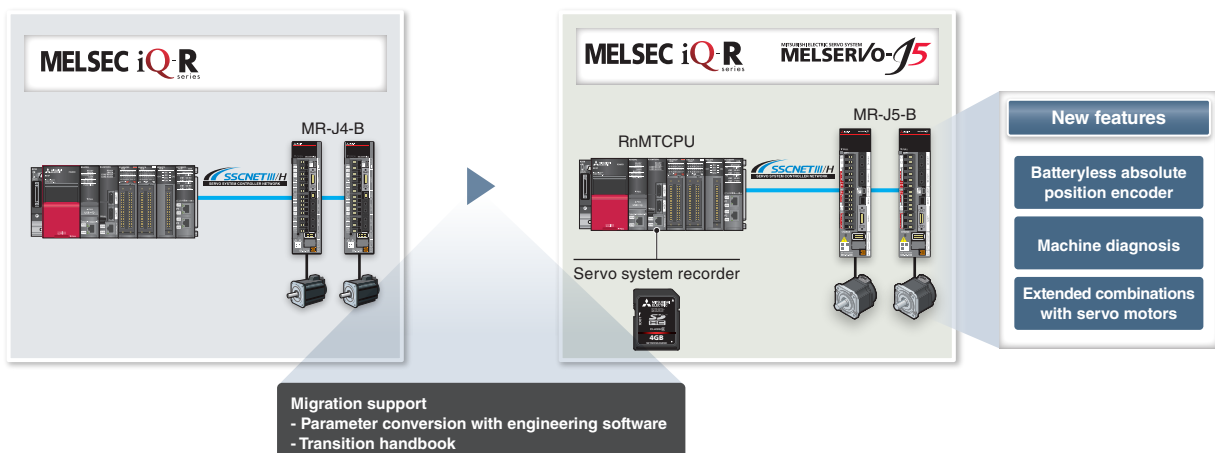

## Corrective Maintenance


### Servo System Recorder

RnMTCPU

The Motion controller automatically collects data of all servo amplifiers when an error occurs. The collected data, such as the command and the feedback values, greatly helps you analyze the error cause.

- Automatic collection of servo system data, such as the command and feedback values, without programming
- Data collection of all axes, which helps you locate the error cause even when the error is caused by the other axes without an error
- The co-recording function collects data even when an error occurs in other recording devices.

#### [Data collection]

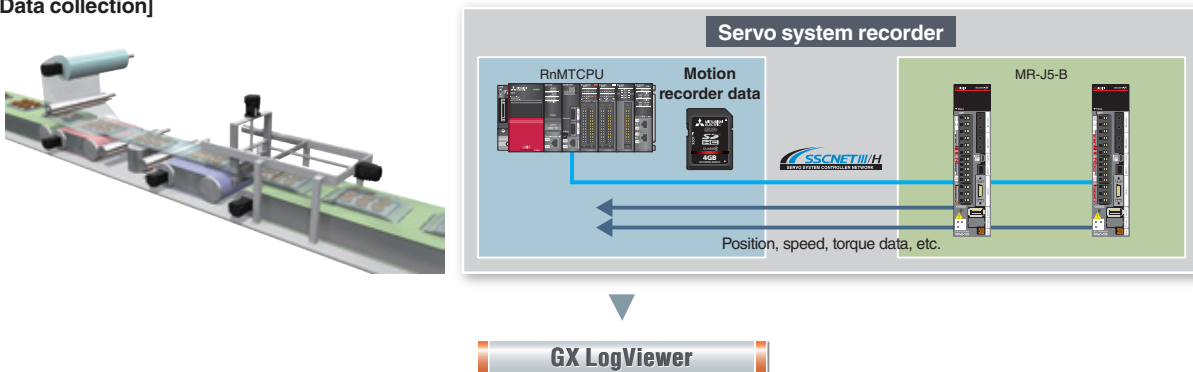


### GX LogViewer

The collected data can be checked on GX LogViewer. The operation status before and after an error is displayed in waveforms, which allows more detailed analysis and identification of the error cause.

#### [Features]

- Displays the collected data and events graphically.
- Enables users to adjust a graph easily by automatic adjustment function and drag operation.

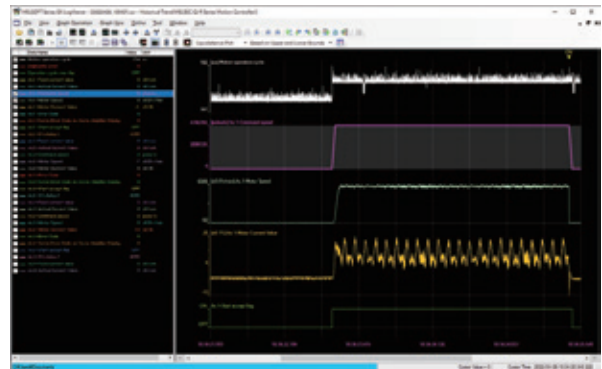


### Analyzing Data

Analyzing operation transition of the Motion controllers and the servo amplifiers before and after an error helps you locate the error cause.

#### [Example]


1. An error has occurred.
2. The speed and torque decreased even though the command position was increasing.

By analyzing the data in the recorder (1 and 2 above), users can find out a possible cause of the error, such as a disconnection of a power cable during operation.

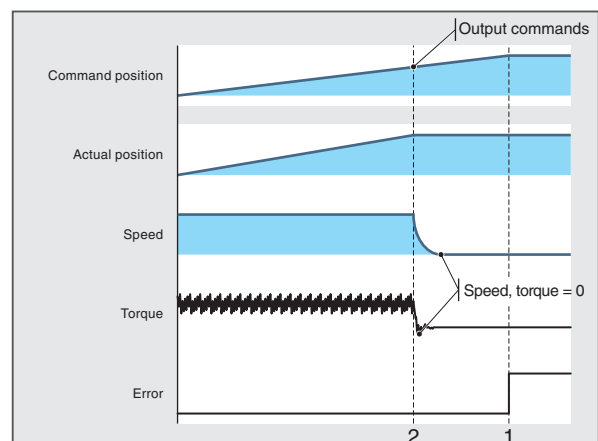



# SSCNET III/H-Compatible Servo System Controller

## MELSEC-Q Series Simple Motion Module QD77MS

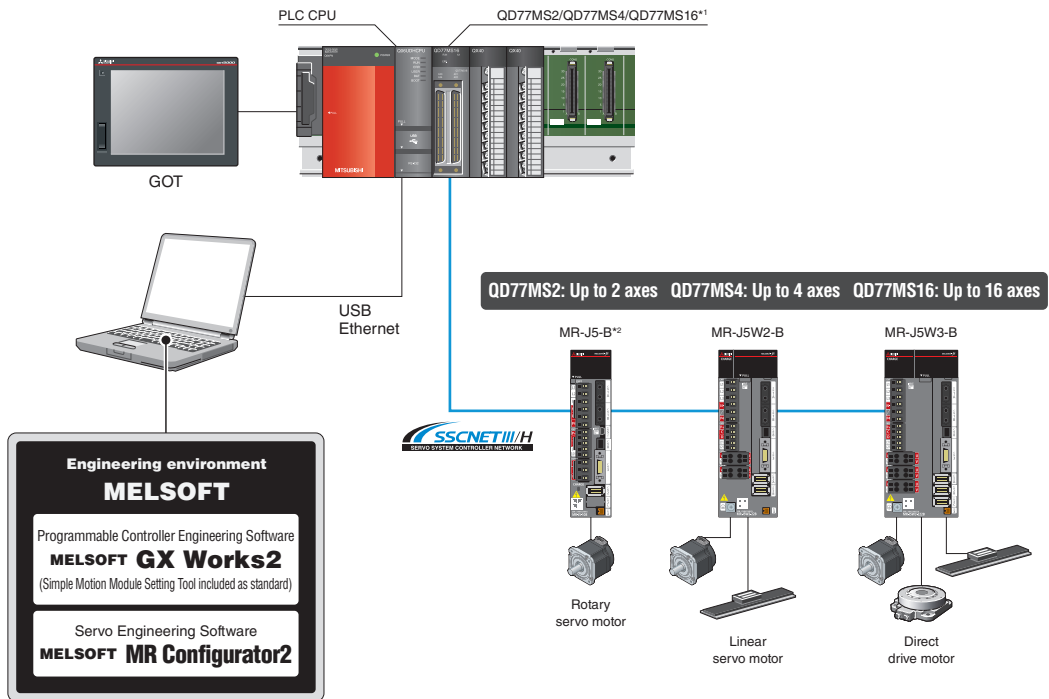

\*1. For control that requires high-accuracy synchronization of multiple axes at load side, such as interpolation and synchronous control, configure a system using the same series servo amplifiers.  
 \*2. When an MR-J5-B is used for the driver communication function, use MR-J5-B for all of the master and following axes to be combined.

### [Reusing existing programs]

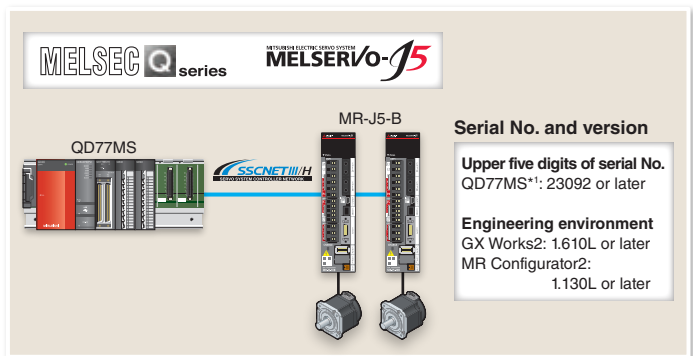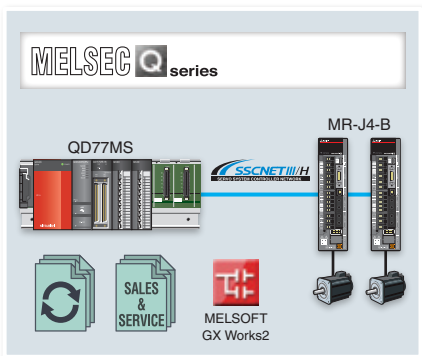

\*1. The firmware cannot be updated. Use a module with the above serial No.



#### Transition from MELSERVO-J4 Series to J5 Series Handbook

- The handbook explains the procedures for migrating an SSCNET III/H system with MR-J4-B to MR-J5-B.
- The handbook describes items necessary to be changed at migration and restrictions for when different series are mixed.



#### Addition of Combinations of HG Series Servo Motors and MR-J5 Series AC Servo Amplifiers


New functions of the MR-J5 servo amplifier can be used without replacing the existing servo motors used with the MR-J4 servo amplifier, improving the performance and functions of the system. Contact your local sales office for details.



#### Model Change from MELSERVO-J4 Series to MELSERVO-J5 Series



- Servo parameters are converted when the servo amplifier is changed.
- The parameters that are read and changed by the program will not be changed. Review those parameters.

## MELSEC-Q Series Motion Controller Q172DSCPU/Q173DSCPU/Q170MSCPU

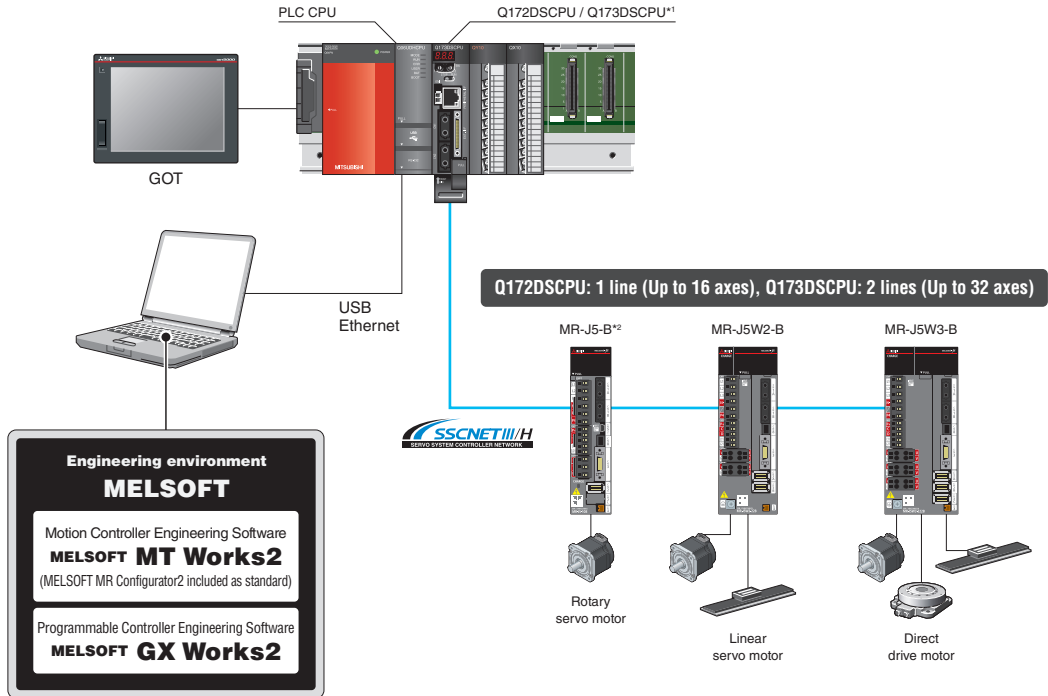

\*1. For control that requires high-accuracy synchronization of multiple axes at load side, such as interpolation and synchronous control, configure a system using the same series servo amplifiers.  
 \*2. When an MR-J5-B is used for the driver communication function, use MR-J5-B for all of the master and following axes to be combined.

### [Reusing existing programs]

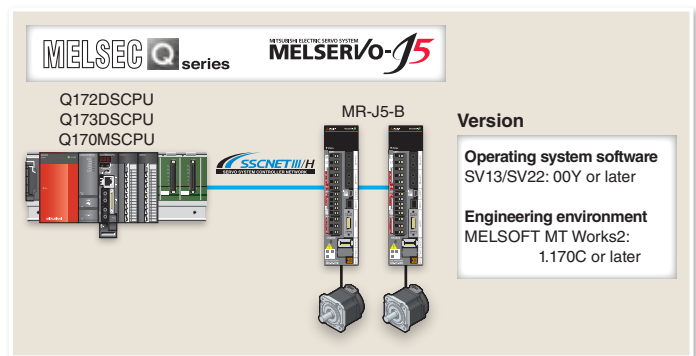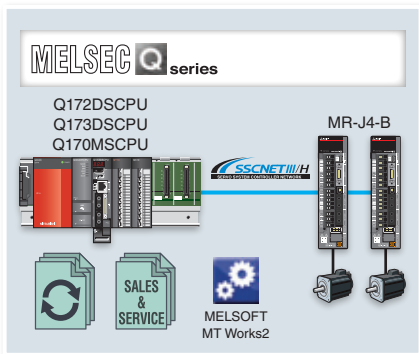

#### Transition from MELSERVO-J4 Series to J5 Series Handbook

- The handbook explains the procedures for migrating an SSCNET III/H system with MR-J4-B to MR-J5-B.
- The handbook describes items necessary to be changed at migration and restrictions for when different series are mixed.



#### Addition of Combinations of HG Series Servo Motors and MR-J5 Series AC Servo Amplifiers


New functions of the MR-J5 servo amplifier can be used without replacing the existing servo motors used with the MR-J4 servo amplifier, improving the performance and functions of the system. Contact your local sales office for details.



#### Model Change from MELSERVO-J4 Series to MELSERVO-J5 Series


- Servo parameters are converted when the servo amplifier is changed.
- The parameters that are read and changed by the program will not be changed. Review those parameters.

MELSEC iQ-R Series Simple Motion Module RD77MS

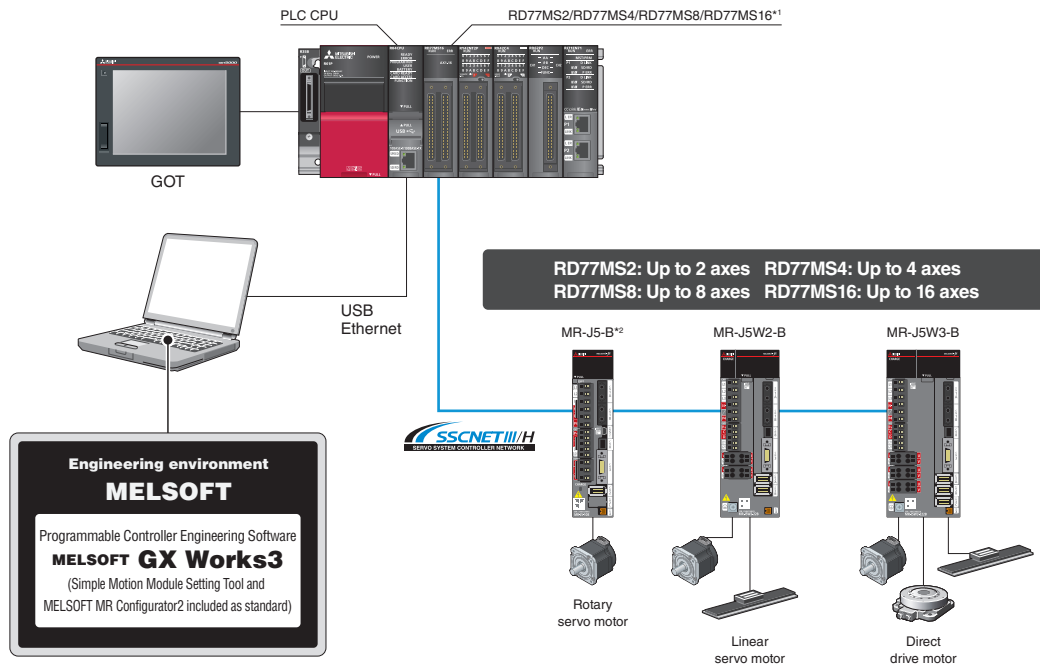

\*1. For control that requires high-accuracy synchronization of multiple axes at load side, such as interpolation and synchronous control, configure a system using the same series servo amplifiers.  
\*2. When an MR-J5-B is used for the driver communication function, use MR-J5-B for all of the master and following axes to be combined.

[Reusing existing programs]

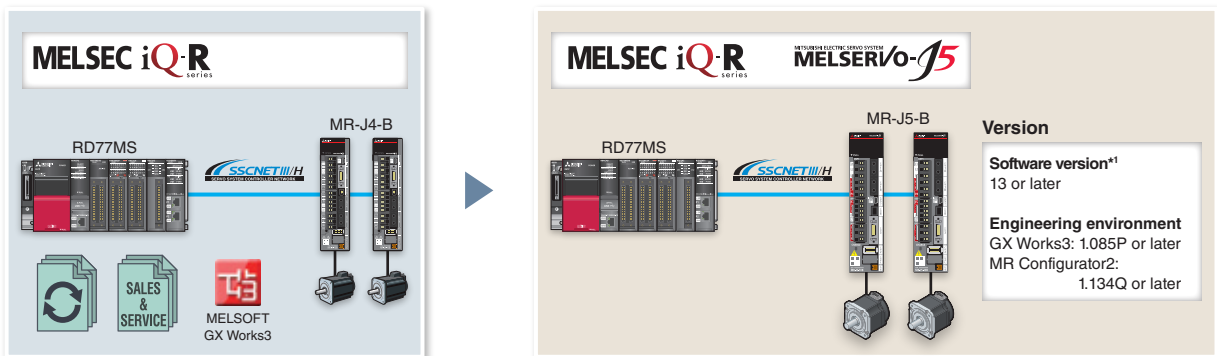

\*1. The firmware cannot be updated. Use a module with the above software version.



Transition from MELSERVO-J4 Series to J5 Series Handbook

- The handbook explains the procedures for migrating an SSCNET III/H system with MR-J4-B to MR-J5-B.
- The handbook describes items necessary to be changed at migration and restrictions for when different series are mixed.



Addition of Combinations of HG Series Servo Motors and MR-J5 Series AC Servo Amplifiers

New functions of the MR-J5 servo amplifier can be used without replacing the existing servo motors used with the MR-J4 servo amplifier, improving the performance and functions of the system. Contact your local sales office for details.




Model Change from MELSERVO-J4 Series to MELSERVO-J5 Series

- Servo parameters are converted when the servo amplifier is changed.
- The parameters that are read and changed by the program will not be changed. Review those parameters.



## MELSEC iQ-R Series Motion Controller R16MTCPU/R32MTCPU/R64MTCPU


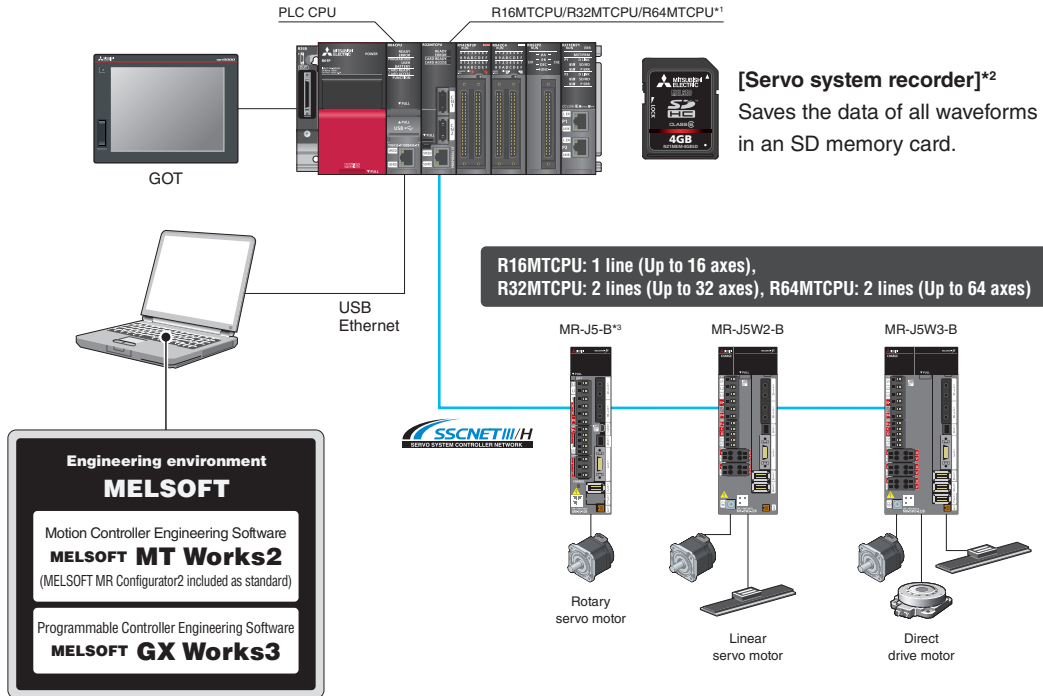


\*1. For control that requires high-accuracy synchronization of multiple axes at load side, such as interpolation and synchronous control, configure a system using the same series servo amplifiers.

\*2. To use the servo system recorder and digital oscilloscope function simultaneously, use a Motion controller shipped in July 2022 or later.

\*3. When an MR-J5-B is used for the driver communication function, use MR-J5-B for all of the master and following axes to be combined.

### [Reusing existing programs]

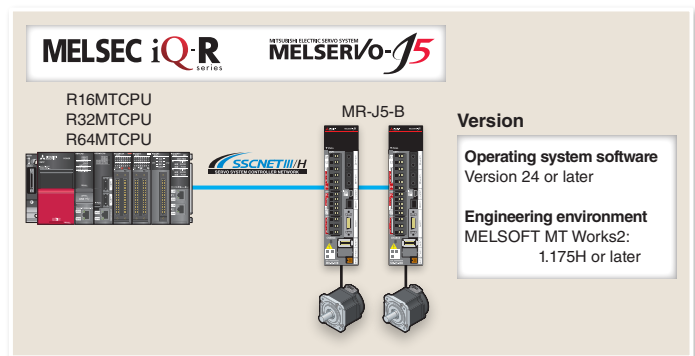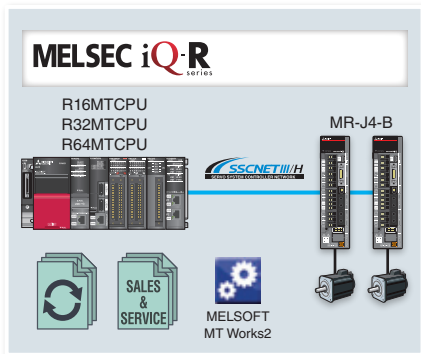

#### Transition from MELSERVO-J4 Series to J5 Series Handbook

- The handbook explains the procedures for migrating an SSCNET III/H system with MR-J4-B to MR-J5-B.
- The handbook describes items necessary to be changed at migration and restrictions for when different series are mixed.



#### Addition of Combinations of HG Series Servo Motors and MR-J5 Series AC Servo Amplifiers


New functions of the MR-J5 servo amplifier can be used without replacing the existing servo motors used with the MR-J4 servo amplifier, improving the performance and functions of the system. Contact your local sales office for details.



#### Model Change from MELSERVO-J4 Series to MELSERVO-J5 Series

- Servo parameters are converted when the servo amplifier is changed.
- The parameters that are read and changed by the program will not be changed. Review those parameters.

# FUTURE MANUFACTURING

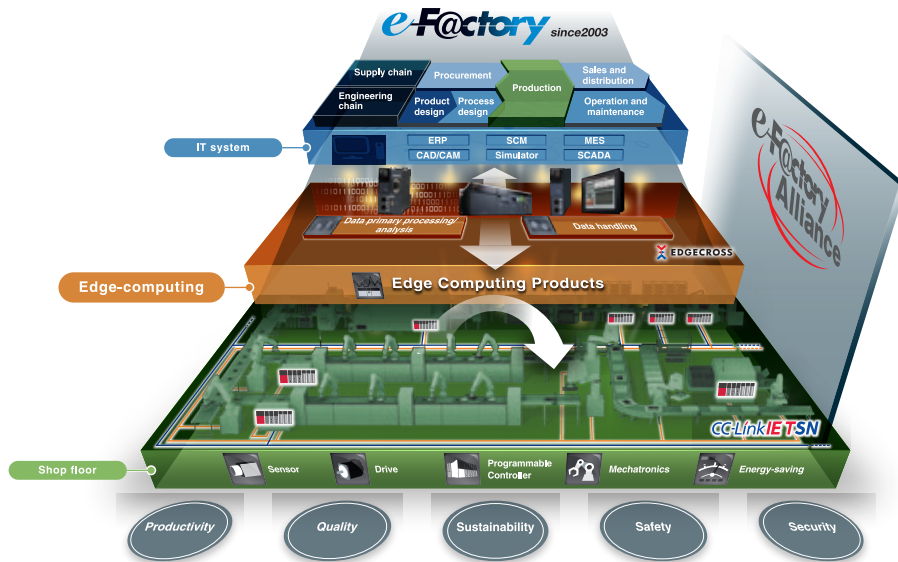

The Future of Manufacturing as envisioned by Mitsubishi Electric, e-F@ctory: “Manufacturing” that evolves in response to environmental changes in an IoT enabled world.

Established In 2003, e-F@ctory created a Kaizen<sup>#1</sup> automation methodology to help optimize and manage the increasingly complex business of “manufacturing”. Continuously evolving itself, it also utilizes the expanded reach of IT, which has brought “cyber world” benefits of analysis, simulation and virtual engineering, and yet has also placed greater demands on the “physical” world for increased data sensing, collection and communication. The continued success of e-F@ctory comes from understanding that each manufacturer has individual needs and investment plans but must still deliver; “Reduced management costs” (TCO); production flexibility to make a multitude of product in varying quantities; continuously enhanced quality. In short e-F@ctory’s goal is to deliver operational performance that is “a step ahead of the times”, while enabling manufacturing to evolve in

response to its environment. To do this it is supported by three key elements:

- The e-F@ctory Alliance Partners; who bring a wide range of software, devices, and system integration skills that enable the creation of the optimal e-F@ctory architecture.
- Advanced communication; utilizing open network technology like CC-Link IE, and communication middleware such as OPC, to open the door to device data, including legacy systems, while supporting high speed extraction.
- Platform thinking; to reduce the number of complex interfaces making it easier to bring together Robotics, Motion, Open programming languages (C language), PACs etc. strengthening the field of control,

yet operating on industrial strength hardware.




Kaizen<sup>#1</sup> = continuous improvement  
TCO = Total Cost of Ownership

Mitsubishi Electric Partners


e-F@ctory Alliance

The e-F@ctory Alliance is a FA manufacturer partnering program that strongly links the connection compatibility of Mitsubishi Electric FA equipment utilizing excellent software and machinery offered by partners, thereby enabling systems to be built by systems integration partners and the proposal of optimal solutions to customers.

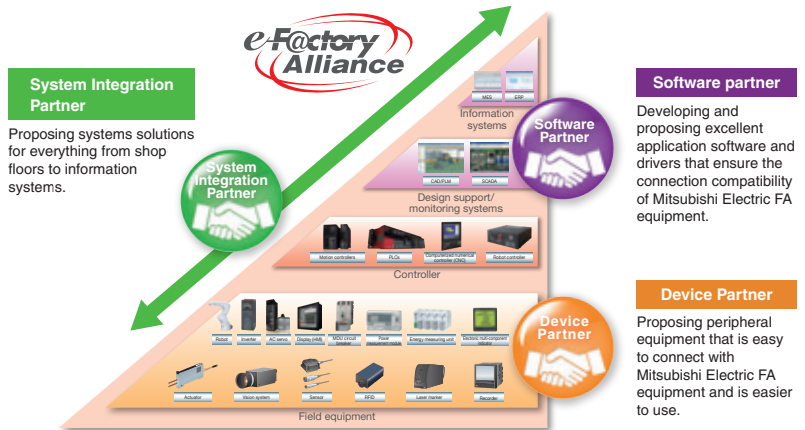

Mitsubishi Electric Servo System Partners

Servo system includes controllers, servo drivers, actuators, sensors, etc. The servo system takes a step further to accelerate the equipment revolution by collaborating with our partner companies. Now that a wide variety of partner products are available such as stepping motors, pressure-resistance, explosion-proof type motors, linear encoders, your system will be configured flexibly. The Mitsubishi Electric Servo System Partner Association is a subcommittee of e-F@ctory Alliance. Partner product lines supporting CC-Link IE TSN and MELSERVO-J5 have been and will continue to be expanded sequentially.

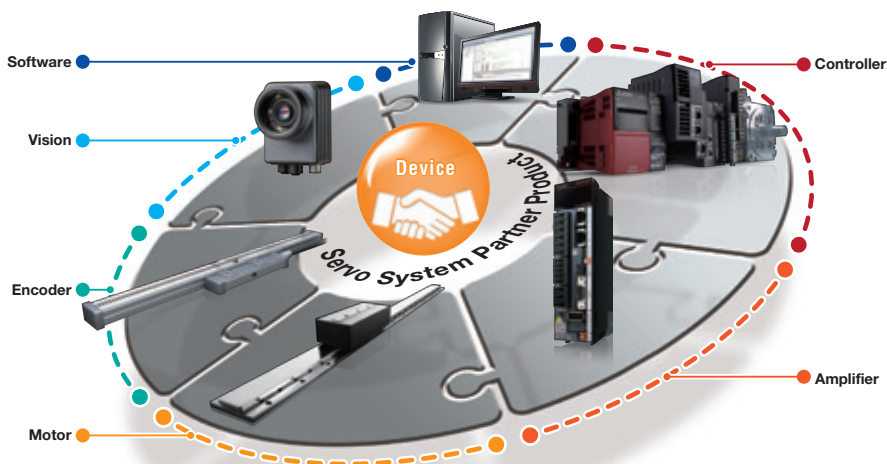


## Mitsubishi Electric FA Global Website

Mitsubishi Electric Factory Automation provides a mix of services to support its customers worldwide, through a consolidated global website. It offers a selection of support tools and a window to its local Mitsubishi Electric sales and support network.

### Global & Local Websites

Mitsubishi Electric Factory Automation  
Global website  
[www.MitsubishiElectric.com/fa](http://www.MitsubishiElectric.com/fa)

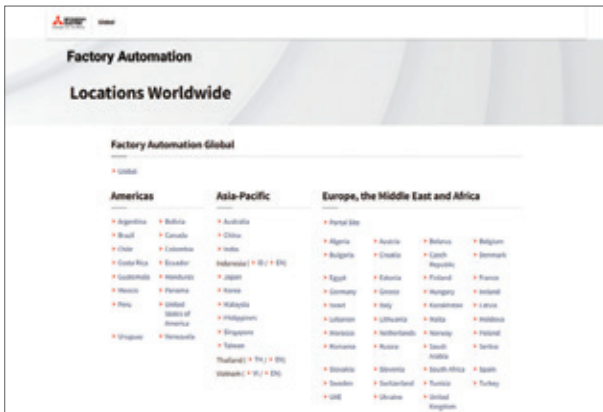

### e-Manual

Instruction manuals are available in e-Manual format.

- Use the e-Manual application on tablets
- Download and update manuals quickly and easily
- Search for desired information across multiple manuals



### FA Integrated Selection Tool

FA Integrated Selection Tool is now available, so you can select options such as encoder cables and power cables which are required to use with controllers, servo motors, servo amplifiers, and regenerative options of your choice.



FA Integrated Selection Tool

# 1

## Common Specifications

|  |      |
|--|------|
| Combinations of Rotary Servo Motors and Servo Amplifiers.....                | 1-2  |
| Combinations of Rotary Servo Motors and Drive Units.....                     | 1-6  |
| Combinations of Geared Servo Motors and Servo Amplifiers or Drive Units..... | 1-7  |
| Combinations of Linear Servo Motors and Servo Amplifiers.....                | 1-8  |
| Combinations of Direct Drive Motors and Servo Amplifiers.....                | 1-10 |
| Safety Sub-Functions.....  | 1-11 |
| Environment.....   | 1-13 |

\* Refer to p. 7-78 in this catalog for conversion of units.

# Common Specifications

## Combinations of Rotary Servo Motors and Servo Amplifiers (Note 1, 2)

The torque can be increased by combining a large-capacity servo amplifier.

The torque characteristics vary by the combinations. Refer to the list of the specifications of each rotary servo motor.

1-axis servo amplifier (200 V)

○: Standard torque ◎: Torque increased

| Rotary servo motor (Note 2) |            |            | Servo amplifier MR-J5- (200 V) |         |         |         |         |          |          |          |
|-----------------------------|------------|------------|--------------------------------|---------|---------|---------|---------|----------|----------|----------|
|                             |            |            | 10G/B/A                        | 20G/B/A | 40G/B/A | 60G/B/A | 70G/B/A | 100G/B/A | 200G/B/A | 350G/B/A |
| HK-KT_W                     | 40 × 40    | HK-KT053W  | ○                              | ◎       | ◎       | -       | -       | -        | -        | -        |
|                             |            | HK-KT13W   | ○                              | ◎       | ◎       | -       | -       | -        | -        | -        |
|                             |            | HK-KT1M3W  | -                              | ○       | ◎       | ◎       | -       | -        | -        | -        |
|                             | 60 × 60    | HK-KT13UW  | ○                              | ◎       | ◎       | -       | -       | -        | -        | -        |
|                             |            | HK-KT23W   | -                              | ○       | ◎       | ◎       | -       | -        | -        | -        |
|                             |            | HK-KT43W   | -                              | -       | ○       | ○       | ◎       | -        | -        | -        |
|                             | 80 × 80    | HK-KT63W   | -                              | -       | -       | -       | ○       | ○        | ◎        | -        |
|                             |            | HK-KT23UW  | -                              | ○       | ◎       | ◎       | -       | -        | -        | -        |
|                             |            | HK-KT43UW  | -                              | -       | ○       | ○       | ◎       | -        | -        | -        |
|                             | 90 × 90    | HK-KT7M3W  | -                              | -       | -       | -       | ○       | ○        | ◎        | -        |
|                             |            | HK-KT103W  | -                              | -       | -       | -       | -       | ○        | ◎        | ◎        |
|                             |            | HK-KT63UW  | -                              | -       | -       | ○       | ◎       | ◎        | -        | -        |
|                             |            | HK-KT7M3UW | -                              | -       | -       | -       | ○       | ○        | ◎        | -        |
|                             |            | HK-KT103UW | -                              | -       | -       | -       | -       | ○        | ◎        | ◎        |
|                             | HK-KT_4_W  | 60 × 60    | HK-KT153W                      | -       | -       | -       | -       | -        | ○        | ◎        |
| HK-KT203W                   |            |            | -                              | -       | -       | -       | -       | ○        | ◎        |          |
| 80 × 80                     |            | HK-KT202W  | -                              | -       | -       | -       | -       | ○        | ◎        |          |
|                             |            | HK-KT434W  | -                              | ○       | ◎       | ◎       | -       | -        | -        |          |
| 90 × 90                     |            | HK-KT634W  | -                              | -       | ○       | ○       | ◎       | -        | -        |          |
|                             |            | HK-KT7M34W | -                              | -       | ○       | ○       | ◎       | -        | -        |          |
|                             | HK-KT1034W | -          | -                              | -       | ○       | ◎       | ◎       | -        |          |          |
| HK-MT_W (Note 3)            | 40 × 40    | HK-KT1534W | -                              | -       | -       | -       | ○       | ◎        | -        |          |
|                             |            | HK-KT2034W | -                              | -       | -       | -       | -       | ○        | ◎        |          |
|                             |            | HK-KT2024W | -                              | -       | -       | -       | -       | ○        | ○        |          |
|                             | 60 × 60    | HK-KT053W  | ○                              | ◎       | ◎       | -       | -       | -        | -        |          |
|                             |            | HK-KT13W   | ○                              | ◎       | ◎       | -       | -       | -        | -        |          |
|                             |            | HK-KT1M3W  | -                              | ○       | ◎       | -       | -       | -        | -        |          |
|                             | 80 × 80    | HK-KT23W   | -                              | ○       | ◎       | -       | -       | -        | -        |          |
| HK-KT43W                    |            | -          | -                              | ○       | -       | ◎       | -       | -        |          |          |
| HK-KT63W                    |            | -          | -                              | -       | -       | ○       | -       | ◎        |          |          |
| HK-KT7M3W                   |            | -          | -                              | -       | -       | ○       | -       | ◎        |          |          |
| HK-MT_VW (Note 3)           | 40 × 40    | HK-KT103W  | -                              | -       | -       | -       | ○       | ◎        | -        |          |
|                             |            | HK-MT053VW | ○                              | ◎       | ◎       | -       | -       | -        | -        |          |
|                             |            | HK-MT13VW  | ○                              | ◎       | ◎       | -       | -       | -        | -        |          |
|                             | 60 × 60    | HK-MT1M3VW | -                              | ○       | ◎       | -       | -       | -        | -        |          |
|                             |            | HK-MT23VW  | -                              | ○       | ◎       | -       | -       | -        | -        |          |
|                             |            | HK-MT43VW  | -                              | -       | -       | ○       | ◎       | -        | -        |          |
|                             | 80 × 80    | HK-MT63VW  | -                              | -       | -       | -       | ○       | -        | ◎        |          |
|                             |            | HK-MT7M3VW | -                              | -       | -       | -       | ○       | -        | ◎        |          |
|                             |            | HK-MT103VW | -                              | -       | -       | -       | ○       | ◎        |          |          |

Notes: 1. The combinations of servo motors and servo amplifiers with special specifications are the same as those of standard servo amplifiers.

Refer to the servo amplifiers with the same rated output.

2. The combinations of servo amplifiers and servo motors with an electromagnetic brake or servo motors with functional safety are the same as those described in this table. Refer to "Combinations of Geared Servo Motors and Servo Amplifiers or Drive Units" for the combinations of geared servo motors and servo amplifiers.

3. Use the servo amplifiers with firmware version C2 or later. If the servo amplifiers with the previous firmware version are connected, an alarm occurs.

**Combinations of Rotary Servo Motors and Servo Amplifiers** (Note 1, 2)

The torque can be increased by combining a large-capacity servo amplifier.

The torque characteristics vary by the combinations. Refer to the list of the specifications of each rotary servo motor.

1-axis servo amplifier (200 V)

○: Standard torque ◎: Torque increased

| Rotary servo motor (Note 2) |           |            | Servo amplifier MR-J5_ (200 V) |         |         |            |          |          |            |          |
|-----------------------------|-----------|------------|--------------------------------|---------|---------|------------|----------|----------|------------|----------|
|                             |           |            | 40G/B/A                        | 60G/B/A | 70G/B/A | 100G/B/A   | 200G/B/A | 350G/B/A | 500G/B/A   | 700G/B/A |
| HK-ST_W                     | 130 × 130 | HK-ST52W   | -                              | ○       | ◎       | ◎          | -        | -        | -          | -        |
|                             |           | HK-ST102W  | -                              | -       | -       | ○          | ◎        | ◎        | -          | -        |
|                             |           | HK-ST172W  | -                              | -       | -       | -          | ○        | ○        | -          | -        |
|                             |           | HK-ST202AW | -                              | -       | -       | -          | ○        | ◎        | -          | -        |
|                             |           | HK-ST302W  | -                              | -       | -       | -          | -        | ○        | ◎ (Note 4) | -        |
|                             |           | HK-ST353W  | -                              | -       | -       | -          | -        | ○        | ◎          | -        |
|                             |           | HK-ST503W  | -                              | -       | -       | -          | -        | -        | ○          | ◎        |
|                             | 176 × 176 | HK-ST7M2UW | -                              | -       | ○       | ○          | ◎        | -        | -          | -        |
|                             |           | HK-ST172UW | -                              | -       | -       | -          | ○        | ◎        | -          | -        |
|                             |           | HK-ST202W  | -                              | -       | -       | -          | ○        | ◎        | -          | -        |
|                             |           | HK-ST352W  | -                              | -       | -       | -          | -        | ○        | ◎ (Note 4) | -        |
|                             |           | HK-ST502W  | -                              | -       | -       | -          | -        | -        | ○          | ◎        |
|                             |           | HK-ST702W  | -                              | -       | -       | -          | -        | -        | -          | ○        |
|                             | HK-ST_4_W | 130 × 130  | HK-ST524W                      | ○       | ○       | ○          | -        | -        | -          | -        |
| HK-ST1024W                  |           |            | -                              | ○       | ◎       | ◎          | -        | -        | -          |          |
| HK-ST1724W                  |           |            | -                              | -       | -       | ○          | ○        | ○        | -          |          |
| HK-ST2024AW                 |           |            | -                              | -       | -       | ○          | ○        | ○        | -          |          |
| HK-ST3024W                  |           |            | -                              | -       | -       | -          | ○        | ○        | -          |          |
| 176 × 176                   |           | HK-ST2024W | -                              | -       | -       | -          | ○        | ○        | -          |          |
|                             |           | HK-ST3524W | -                              | -       | -       | -          | ○        | ◎        | -          |          |
|                             |           | HK-ST5024W | -                              | -       | -       | -          | -        | ○        | ◎ (Note 4) |          |
| HK-ST7024W                  | -         | -          | -                              | -       | -       | -          | ○        | ○        |            |          |
| HK-RT_W                     | 90 × 90   | HK-RT103W  | -                              | -       | -       | ○ (Note 3) | ◎        | -        | -          |          |
|                             |           | HK-RT153W  | -                              | -       | -       | -          | ○        | -        | ◎          |          |
|                             |           | HK-RT203W  | -                              | -       | -       | -          | ○        | ◎        | -          |          |
|                             |           | HK-RT353W  | -                              | -       | -       | -          | -        | ○        | ◎          |          |
|                             | 130 × 130 | HK-RT503W  | -                              | -       | -       | -          | -        | -        | ○          | ◎        |
|                             |           | HK-RT703W  | -                              | -       | -       | -          | -        | -        | -          | ○        |

- Notes: 1. The combinations of servo motors and servo amplifiers with special specifications are the same as those of standard servo amplifiers. Refer to the servo amplifiers with the same rated output.
2. The combinations of servo amplifiers and servo motors with an electromagnetic brake or servo motors with functional safety are the same as those described in this table. Refer to "Combinations of Geared Servo Motors and Servo Amplifiers or Drive Units" for the combinations of geared servo motors and servo amplifiers.
3. The dynamic brake time constant is longer than that of when the previous HG-RR103 and MR-J4-200\_ are combined. When the time constant equivalent to that of the previous series is required, combine HK-RT103W and MR-J5-200\_. Refer to "MR-J5 User's Manual" for how to calculate the coasting distance.
4. Use the rotary servo motors manufactured in December 2020 or later. If the rotary servo motors manufactured before that date are connected, an alarm occurs. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for how to check the date of manufacture.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LVSWires

Product List

Precautions

Support

# Common Specifications

## Combinations of Rotary Servo Motors and Servo Amplifiers (Note 1, 2)

The torque can be increased by combining a large-capacity servo amplifier.

The torque characteristics vary by the combinations. Refer to the list of the specifications of each rotary servo motor.

1-axis servo amplifier (400 V)

○: Standard torque ◎: Torque increased

| Rotary servo motor (Note 2) |           |             | Servo amplifier MR-J5- (400 V) |             |             |             |             |             |
|-----------------------------|-----------|-------------|--------------------------------|-------------|-------------|-------------|-------------|-------------|
|                             |           |             | 60G4/B4/A4                     | 100G4/B4/A4 | 200G4/B4/A4 | 350G4/B4/A4 | 500G4/B4/A4 | 700G4/B4/A4 |
| HK-KT_W                     | 40 × 40   | HK-KT053W   | ○ (Note 3)                     | ◎ (Note 3)  | -           | -           | -           | -           |
|                             |           | HK-KT13W    | ○ (Note 3)                     | ◎ (Note 3)  | -           | -           | -           | -           |
|                             |           | HK-KT1M3W   | ○ (Note 3)                     | ◎ (Note 3)  | -           | -           | -           | -           |
| HK-KT_4_W                   | 60 × 60   | HK-KT434W   | ○ (Note 3)                     | ◎ (Note 3)  | ◎ (Note 3)  | -           | -           | -           |
|                             |           | HK-KT634W   | -                              | ○ (Note 3)  | ◎ (Note 3)  | ◎ (Note 3)  | -           | -           |
|                             | 80 × 80   | HK-KT7M34W  | -                              | ○ (Note 3)  | ◎ (Note 3)  | ◎ (Note 3)  | -           | -           |
|                             |           | HK-KT1034W  | -                              | ○ (Note 3)  | ◎ (Note 3)  | ◎ (Note 3)  | -           | -           |
|                             | 90 × 90   | HK-KT634UW  | ○                              | ◎           | ◎           | -           | -           | -           |
|                             |           | HK-KT1034UW | -                              | ○           | ◎           | ◎           | -           | -           |
|                             |           | HK-KT1534W  | -                              | -           | ○ (Note 3)  | ◎ (Note 3)  | -           | -           |
|                             |           | HK-KT2034W  | -                              | -           | ○ (Note 3)  | ◎ (Note 3)  | -           | -           |
|                             |           | HK-KT2024W  | -                              | -           | ○ (Note 3)  | ◎ (Note 3)  | -           | -           |
| HK-ST_4_W                   | 130 × 130 | HK-ST524W   | ○ (Note 4)                     | ◎ (Note 4)  | ◎ (Note 4)  | -           | -           | -           |
|                             |           | HK-ST1024W  | -                              | ○ (Note 4)  | ◎ (Note 4)  | ◎ (Note 4)  | -           | -           |
|                             |           | HK-ST1724W  | -                              | -           | ○ (Note 4)  | ○ (Note 4)  | ○ (Note 5)  | -           |
|                             |           | HK-ST2024AW | -                              | -           | ○ (Note 4)  | ◎ (Note 4)  | ◎ (Note 5)  | -           |
|                             |           | HK-ST3024W  | -                              | -           | -           | ○ (Note 4)  | ◎ (Note 5)  | ◎ (Note 5)  |
|                             |           | HK-ST3534W  | -                              | -           | -           | ○           | ◎           | -           |
|                             | 176 × 176 | HK-ST5034W  | -                              | -           | -           | -           | ○           | ◎           |
|                             |           | HK-ST2024W  | -                              | -           | ○ (Note 4)  | ◎ (Note 4)  | ◎ (Note 5)  | -           |
|                             |           | HK-ST3524W  | -                              | -           | -           | ○ (Note 4)  | ◎ (Note 5)  | ◎ (Note 5)  |
|                             |           | HK-ST5024W  | -                              | -           | -           | -           | ○ (Note 5)  | ◎ (Note 5)  |
|                             |           | HK-ST7024W  | -                              | -           | -           | -           | -           | ○ (Note 5)  |
| HK-RT_4W                    | 90 × 90   | HK-RT1034W  | -                              | ○           | ◎           | -           | -           | -           |
|                             |           | HK-RT1534W  | -                              | -           | ○           | -           | ◎           | -           |
|                             |           | HK-RT2034W  | -                              | -           | ○           | ◎           | -           | -           |
|                             | 130 × 130 | HK-RT3534W  | -                              | -           | -           | ○           | ◎           | -           |
|                             |           | HK-RT5034W  | -                              | -           | -           | -           | ○           | ◎           |
|                             |           | HK-RT7034W  | -                              | -           | -           | -           | -           | ○           |

- Notes:
- The combinations of servo motors and servo amplifiers with special specifications are the same as those of standard servo amplifiers. Refer to the servo amplifiers with the same rated output.
  - The combinations of servo amplifiers and servo motors with an electromagnetic brake or servo motors with functional safety are the same as those described in this table. Refer to "Combinations of Geared Servo Motors and Servo Amplifiers or Drive Units" for the combinations of geared servo motors and servo amplifiers.
  - Use the rotary servo motors manufactured in September 2020 or later. If the rotary servo motors manufactured before that date are connected, an alarm occurs. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for how to check the date of manufacture.
  - Use the rotary servo motors manufactured in December 2020 or later. If the rotary servo motors manufactured before that date are connected, an alarm occurs. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for how to check the date of manufacture.
  - Use the rotary servo motors manufactured in April 2021 or later. If the rotary servo motors manufactured before that date are connected, an alarm occurs. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for how to check the date of manufacture.



**Combinations of Rotary Servo Motors and Servo Amplifiers** (Note 1, 2)

The torque can be increased by combining a large-capacity servo amplifier.

The torque characteristics vary by the combinations. Refer to the list of the specifications of each rotary servo motor.

Any combination of the rotary servo motors, the linear servo motors, and the direct drive motors with different series and capacities is possible as long as the servo motors are compatible with the servo amplifier.

Multi-axis servo amplifier (200 V)

○: Standard torque ◎: Torque increased

| Rotary servo motor (Note 2) |           |             | Servo amplifier MR-J5W2_ |       |       |         | Servo amplifier MR-J5W3_ |        |
|-----------------------------|-----------|-------------|--------------------------|-------|-------|---------|--------------------------|--------|
|                             |           |             | 22G/B                    | 44G/B | 77G/B | 1010G/B | 222G/B                   | 444G/B |
| HK-KT_W                     | 40 × 40   | HK-KT053W   | ◎                        | ◎     | -     | -       | ◎                        | ◎      |
|                             |           | HK-KT13W    | ◎                        | ◎     | -     | -       | ◎                        | ◎      |
|                             |           | HK-KT1M3W   | ○                        | ◎     | -     | -       | ○                        | ◎      |
|                             | 60 × 60   | HK-KT13UW   | ◎                        | ◎     | -     | -       | ◎                        | ◎      |
|                             |           | HK-KT23W    | ○                        | ◎     | -     | -       | ○                        | ◎      |
|                             |           | HK-KT43W    | -                        | ○     | ◎     | ◎       | -                        | ○      |
|                             |           | HK-KT63W    | -                        | -     | ○     | ○       | -                        | -      |
|                             | 80 × 80   | HK-KT23UW   | ○                        | ◎     | -     | -       | ○                        | ◎      |
|                             |           | HK-KT43UW   | -                        | ○     | ◎     | ◎       | -                        | ○      |
|                             |           | HK-KT7M3W   | -                        | -     | ○     | ○       | -                        | -      |
|                             | 90 × 90   | HK-KT103W   | -                        | -     | -     | ○       | -                        | -      |
|                             |           | HK-KT63UW   | -                        | -     | ◎     | ◎       | -                        | -      |
| HK-KT7M3UW                  |           | -           | -                        | ○     | ○     | -       | -                        |        |
| HK-KT_4_W                   | 60 × 60   | HK-KT103UW  | -                        | -     | -     | ○       | -                        |        |
|                             |           | HK-KT434W   | ○                        | ◎     | -     | -       | ○                        | ◎      |
|                             | 80 × 80   | HK-KT634W   | -                        | ○     | ◎     | ◎       | -                        | ○      |
|                             |           | HK-KT7M34W  | -                        | ○     | ◎     | ◎       | -                        | ○      |
|                             | 90 × 90   | HK-KT1034W  | -                        | -     | ◎     | ◎       | -                        | -      |
|                             |           | HK-KT1534W  | -                        | -     | ○     | ○       | -                        | -      |
| HK-MT_W (Note 3)            | 40 × 40   | HK-KT2024W  | -                        | -     | -     | ○       | -                        |        |
|                             |           | HK-MT053W   | ◎                        | ◎     | -     | -       | ◎                        | ◎      |
|                             |           | HK-MT13W    | ◎                        | ◎     | -     | -       | ◎                        | ◎      |
|                             | 60 × 60   | HK-MT1M3W   | ○                        | ◎     | -     | -       | ○                        | ◎      |
|                             |           | HK-MT23W    | ○                        | ◎     | -     | -       | ○                        | ◎      |
|                             |           | HK-MT43W    | -                        | ○     | ◎     | ◎       | -                        | ○      |
|                             | 80 × 80   | HK-MT63W    | -                        | -     | ○     | ○       | -                        | -      |
|                             |           | HK-MT7M3W   | -                        | -     | ○     | ○       | -                        | -      |
|                             |           | HK-MT103W   | -                        | -     | -     | ○       | -                        | -      |
| HK-MT_VW (Note 3)           | 40 × 40   | HK-MT053VW  | ◎                        | ◎     | -     | -       | ◎                        | ◎      |
|                             |           | HK-MT13VW   | ◎                        | ◎     | -     | -       | ◎                        | ◎      |
|                             |           | HK-MT1M3VW  | ○                        | ◎     | -     | -       | ○                        | ◎      |
|                             | 60 × 60   | HK-MT23VW   | ○                        | ◎     | -     | -       | ○                        | ◎      |
|                             |           | HK-MT43VW   | -                        | -     | ◎     | ◎       | -                        | -      |
|                             | 80 × 80   | HK-MT63VW   | -                        | -     | ○     | ○       | -                        | -      |
| HK-ST_W                     | 130 × 130 | HK-MT7M3VW  | -                        | -     | ○     | ○       | -                        | -      |
|                             |           | HK-MT103VW  | -                        | -     | ○     | ○       | -                        | -      |
|                             | 176 × 176 | HK-ST52W    | -                        | -     | ◎     | ◎       | -                        | -      |
| HK-ST_4_W                   | 130 × 130 | HK-ST102W   | -                        | -     | -     | ○       | -                        | -      |
|                             |           | HK-ST7M2UW  | -                        | -     | ○     | ○       | -                        | -      |
|                             |           | HK-ST524W   | -                        | ○     | ○     | -       | -                        | ○      |
|                             |           | HK-ST1024W  | -                        | -     | ◎     | ◎       | -                        | -      |
| HK-RT_W                     | 90 × 90   | HK-ST1724W  | -                        | -     | -     | ○       | -                        | -      |
|                             |           | HK-ST2024AW | -                        | -     | -     | ○       | -                        | -      |
| HK-RT_4_W                   | 90 × 90   | HK-RT103W   | -                        | -     | -     | ○       | -                        |        |

Notes: 1. The combinations of servo motors and servo amplifiers with special specifications are the same as those of standard servo amplifiers. Refer to the servo amplifiers with the same rated output.

2. The combinations of servo amplifiers and servo motors with an electromagnetic brake or servo motors with functional safety are the same as those described in this table. Refer to "Combinations of Geared Servo Motors and Servo Amplifiers or Drive Units" for the combinations of geared servo motors and servo amplifiers.

3. Use the servo amplifiers with firmware version C2 or later. If the servo amplifiers with the previous firmware version are connected, an alarm occurs.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LVSWires

Product List

Precautions

Support

# Common Specifications

## Combinations of Rotary Servo Motors and Drive Units (Note 1, 2)

The torque can be increased by combining a large-capacity drive unit.

The torque characteristics vary by the combinations. Refer to the list of the specifications of each rotary servo motor.

Any combination of the servo motors with different series and capacities is possible as long as the servo motors are compatible with the multi-axis drive unit.

Drive unit (400 V)

○: Standard torque ◎: Torque increased

| Rotary servo motor (Note 2) |            |             | Drive unit MR-J5D1-__ |            |            |            |            | Drive unit MR-J5D2-__ |            |            |            |            | Drive unit MR-J5D3-__ |            |
|-----------------------------|------------|-------------|-----------------------|------------|------------|------------|------------|-----------------------|------------|------------|------------|------------|-----------------------|------------|
|                             |            |             | 100G4                 | 200G4      | 350G4      | 500G4      | 700G4      | 100G4                 | 200G4      | 350G4      | 500G4      | 700G4      | 100G4                 | 200G4      |
| HK-KT_W                     | 40 × 40    | HK-KT053W   | ◎ (Note 3)            | -          | -          | -          | -          | ◎ (Note 3)            | -          | -          | -          | -          | ◎ (Note 3)            | -          |
|                             |            | HK-KT13W    | ◎ (Note 3)            | -          | -          | -          | -          | ◎ (Note 3)            | -          | -          | -          | -          | ◎ (Note 3)            | -          |
|                             |            | HK-KT1M3W   | ◎ (Note 3)            | -          | -          | -          | -          | ◎ (Note 3)            | -          | -          | -          | -          | ◎ (Note 3)            | -          |
| HK-KT_4_W                   | 60 × 60    | HK-KT434W   | ◎ (Note 3)            | ◎ (Note 3) | -          | -          | -          | ◎ (Note 3)            | ◎ (Note 3) | -          | -          | -          | ◎ (Note 3)            | ◎ (Note 3) |
|                             |            | HK-KT634W   | ◎ (Note 3)            | ◎ (Note 3) | ◎ (Note 3) | -          | -          | ◎ (Note 3)            | ◎ (Note 3) | ◎ (Note 3) | -          | -          | ◎ (Note 3)            | ◎ (Note 3) |
|                             | 80 × 80    | HK-KT7M34W  | ◎ (Note 3)            | ◎ (Note 3) | ◎ (Note 3) | -          | -          | ◎ (Note 3)            | ◎ (Note 3) | ◎ (Note 3) | -          | -          | ◎ (Note 3)            | ◎ (Note 3) |
|                             |            | HK-KT1034W  | ◎ (Note 3)            | ◎ (Note 3) | ◎ (Note 3) | -          | -          | ◎ (Note 3)            | ◎ (Note 3) | ◎ (Note 3) | -          | -          | ◎ (Note 3)            | ◎ (Note 3) |
|                             | 90 × 90    | HK-KT634UW  | ◎                     | ◎          | -          | -          | -          | ◎                     | ◎          | -          | -          | -          | ◎                     | ◎          |
|                             |            | HK-KT1034UW | ○                     | ◎          | ◎          | -          | -          | ○                     | ◎          | ◎          | -          | -          | ○                     | ◎          |
|                             |            | HK-KT1534W  | -                     | ○ (Note 3) | ◎ (Note 3) | -          | -          | -                     | ○ (Note 3) | ◎ (Note 3) | -          | -          | -                     | ○ (Note 3) |
|                             |            | HK-KT2034W  | -                     | ○ (Note 3) | ◎ (Note 3) | -          | -          | -                     | ○ (Note 3) | ◎ (Note 3) | -          | -          | -                     | ○ (Note 3) |
|                             |            | HK-KT2024W  | -                     | ○ (Note 3) | ◎ (Note 3) | -          | -          | -                     | ○ (Note 3) | ◎ (Note 3) | -          | -          | -                     | ○ (Note 3) |
| HK-ST_4_W                   | 130 × 130  | HK-ST524W   | ◎ (Note 4)            | ◎ (Note 4) | -          | -          | -          | ◎ (Note 4)            | ◎ (Note 4) | -          | -          | -          | ◎ (Note 4)            | ◎ (Note 4) |
|                             |            | HK-ST1024W  | ○ (Note 4)            | ◎ (Note 4) | ◎ (Note 4) | -          | -          | ○ (Note 4)            | ◎ (Note 4) | ◎ (Note 4) | -          | -          | ○ (Note 4)            | ◎ (Note 4) |
|                             |            | HK-ST1724W  | -                     | ○ (Note 4) | ○ (Note 4) | ○ (Note 5) | -          | -                     | ○ (Note 4) | ○ (Note 4) | ○ (Note 5) | -          | -                     | ○ (Note 4) |
|                             |            | HK-ST2024AW | -                     | ○ (Note 4) | ◎ (Note 4) | ◎ (Note 5) | -          | -                     | ○ (Note 4) | ◎ (Note 4) | ◎ (Note 5) | -          | -                     | ○ (Note 4) |
|                             |            | HK-ST3024W  | -                     | -          | ○ (Note 4) | ◎ (Note 5) | ◎ (Note 5) | -                     | -          | ○ (Note 4) | ◎ (Note 5) | ◎ (Note 5) | -                     | -          |
|                             |            | HK-ST3534W  | -                     | -          | ○          | ◎          | -          | -                     | -          | ○          | ◎          | -          | -                     | -          |
|                             | 176 × 176  | HK-ST5034W  | -                     | -          | -          | ○          | ◎          | -                     | -          | -          | ○          | ◎          | -                     | -          |
|                             |            | HK-ST2024W  | -                     | ○ (Note 4) | ◎ (Note 4) | ◎ (Note 5) | -          | -                     | ○ (Note 4) | ◎ (Note 4) | ◎ (Note 5) | -          | -                     | ○ (Note 4) |
|                             |            | HK-ST3524W  | -                     | -          | ○ (Note 4) | ◎ (Note 5) | ◎ (Note 5) | -                     | -          | ○ (Note 4) | ◎ (Note 5) | ◎ (Note 5) | -                     | -          |
|                             |            | HK-ST5024W  | -                     | -          | -          | ○ (Note 5) | ◎ (Note 5) | -                     | -          | -          | ○ (Note 5) | ◎ (Note 5) | -                     | -          |
|                             |            | HK-ST7024W  | -                     | -          | -          | -          | ○ (Note 5) | -                     | -          | -          | -          | ○ (Note 5) | -                     | -          |
|                             |            | HK-RT_4W    | 90 × 90               | HK-RT1034W | ○          | ◎          | -          | -                     | -          | ○          | ◎          | -          | -                     | -          |
| HK-RT1534W                  | -          |             |                       | ○          | -          | ◎          | -          | -                     | ○          | -          | ◎          | -          | -                     | ○          |
| HK-RT2034W                  | -          |             |                       | ○          | ◎          | -          | -          | -                     | ○          | ◎          | -          | -          | -                     | ○          |
| 130 × 130                   | HK-RT3534W |             | -                     | -          | ○          | ◎          | -          | -                     | -          | ○          | ◎          | -          | -                     | -          |
|                             | HK-RT5034W |             | -                     | -          | -          | ○          | ◎          | -                     | -          | -          | ○          | ◎          | -                     | -          |
|                             | HK-RT7034W |             | -                     | -          | -          | -          | ○          | -                     | -          | -          | -          | ○          | -                     | -          |

- Notes:
- The combinations of servo motors and drive units with special specifications are the same as those of standard drive units. Refer to the drive units with the same rated output.
  - The combinations of drive units and servo motors with an electromagnetic brake or servo motors with functional safety are the same as those described in this table. Refer to "Combinations of Geared Servo Motors and Servo Amplifiers or Drive Units" for the combinations of geared servo motors and drive units.
  - Use the rotary servo motors manufactured in September 2020 or later. If the rotary servo motors manufactured before that date are connected, an alarm occurs. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for how to check the date of manufacture.
  - Use the rotary servo motors manufactured in December 2020 or later. If the rotary servo motors manufactured before that date are connected, an alarm occurs. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for how to check the date of manufacture.
  - Use the rotary servo motors manufactured in April 2021 or later. If the rotary servo motors manufactured before that date are connected, an alarm occurs. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for how to check the date of manufacture.

**Combinations of Geared Servo Motors and Servo Amplifiers or Drive Units** (Note 1, 2)

The torques of the geared servo motors do not increase even when these servo motors are combined with larger capacity servo amplifiers or drive units.

Any combination of the servo motors with different series and capacities is possible as long as the servo motors are compatible with the multi-axis servo amplifier or the multi-axis drive unit. The multi-axis servo amplifier can be used in a mixed combination of the rotary servo motors, the linear servo motors, and the direct drive motors.

1-axis servo amplifier (200 V)

○: Standard torque

| Geared servo motor (Note 2) |           |            | Servo amplifier MR-J5- (200 V) |         |         |         |         |          |          |          |            |          |
|-----------------------------|-----------|------------|--------------------------------|---------|---------|---------|---------|----------|----------|----------|------------|----------|
|                             |           |            | 10G/B/A                        | 20G/B/A | 40G/B/A | 60G/B/A | 70G/B/A | 100G/B/A | 200G/B/A | 350G/B/A | 500G/B/A   | 700G/B/A |
| HK-KT_G_                    | 40 × 40   | HK-KT053G_ | ○                              | ○       | ○       | -       | -       | -        | -        | -        | -          | -        |
|                             |           | HK-KT13G_  | ○                              | ○       | ○       | -       | -       | -        | -        | -        | -          | -        |
|                             | 60 × 60   | HK-KT23G_  | -                              | ○       | ○       | ○       | -       | -        | -        | -        | -          | -        |
|                             |           | HK-KT43G_  | -                              | -       | ○       | ○       | ○       | -        | -        | -        | -          | -        |
| HK-ST_G_                    | 130 × 130 | HK-ST52G_  | -                              | -       | -       | ○       | ○       | ○        | -        | -        | -          | -        |
|                             |           | HK-ST102G_ | -                              | -       | -       | -       | -       | ○        | ○        | ○        | -          | -        |
|                             |           | HK-ST152G_ | -                              | -       | -       | -       | -       | -        | ○        | ○        | -          | -        |
|                             | 176 × 176 | HK-ST202G_ | -                              | -       | -       | -       | -       | -        | ○        | ○        | -          | -        |
|                             |           | HK-ST352G_ | -                              | -       | -       | -       | -       | -        | -        | ○        | ○ (Note 3) | -        |
|                             |           | HK-ST502G_ | -                              | -       | -       | -       | -       | -        | -        | -        | ○          | ○        |
| HK-ST702G_                  | -         | -          | -                              | -       | -       | -       | -       | -        | -        | -        | ○          |          |

1-axis servo amplifier (400 V)

○: Standard torque

| Geared servo motor (Note 2) |           |             | Servo amplifier MR-J5- (400 V) |             |             |             |             |             |
|-----------------------------|-----------|-------------|--------------------------------|-------------|-------------|-------------|-------------|-------------|
|                             |           |             | 60G4/B4/A4                     | 100G4/B4/A4 | 200G4/B4/A4 | 350G4/B4/A4 | 500G4/B4/A4 | 700G4/B4/A4 |
| HK-ST_4G_                   | 130 × 130 | HK-ST524G_  | ○ (Note 3)                     | ○ (Note 3)  | ○ (Note 3)  | -           | -           | -           |
|                             |           | HK-ST1024G_ | -                              | ○ (Note 3)  | ○ (Note 3)  | ○ (Note 3)  | -           | -           |
|                             |           | HK-ST1524G_ | -                              | -           | ○ (Note 3)  | ○ (Note 3)  | ○ (Note 4)  | -           |
|                             | 176 × 176 | HK-ST2024G_ | -                              | -           | ○ (Note 3)  | ○ (Note 3)  | ○ (Note 4)  | -           |
|                             |           | HK-ST3524G_ | -                              | -           | -           | ○ (Note 3)  | ○ (Note 4)  | ○ (Note 4)  |
|                             |           | HK-ST5024G_ | -                              | -           | -           | -           | ○ (Note 4)  | ○ (Note 4)  |
| HK-ST7024G_                 | -         | -           | -                              | -           | -           | ○ (Note 4)  |             |             |

Multi-axis servo amplifier (200 V)

○: Standard torque

| Geared servo motor (Note 2) |            |            | Servo amplifier MR-J5W2- |       |       |         | Servo amplifier MR-J5W3- |        |
|-----------------------------|------------|------------|--------------------------|-------|-------|---------|--------------------------|--------|
|                             |            |            | 22G/B                    | 44G/B | 77G/B | 1010G/B | 222G/B                   | 444G/B |
| HK-KT_G_                    | 40 × 40    | HK-KT053G_ | ○                        | ○     | -     | -       | ○                        | ○      |
|                             |            | HK-KT13G_  | ○                        | ○     | -     | -       | ○                        | ○      |
|                             | 60 × 60    | HK-KT23G_  | ○                        | ○     | -     | -       | ○                        | ○      |
|                             |            | HK-KT43G_  | -                        | ○     | ○     | ○       | -                        | ○      |
| 80 × 80                     | HK-KT7M3G_ | -          | -                        | ○     | ○     | -       | -                        |        |
|                             | 130 × 130  | HK-ST52G_  | -                        | -     | ○     | ○       | -                        | -      |
| HK-ST102G_                  |            | -          | -                        | -     | ○     | -       | -                        |        |

Drive unit (400 V)

○: Standard torque

| Geared servo motor (Note 2) |           |             | Drive unit MR-J5D1- |            |            |            |            | Drive unit MR-J5D2- |            |            |            |            | Drive unit MR-J5D3- |            |
|-----------------------------|-----------|-------------|---------------------|------------|------------|------------|------------|---------------------|------------|------------|------------|------------|---------------------|------------|
|                             |           |             | 100G4               | 200G4      | 350G4      | 500G4      | 700G4      | 100G4               | 200G4      | 350G4      | 500G4      | 700G4      | 100G4               | 200G4      |
| HK-ST_4G_                   | 130 × 130 | HK-ST524G_  | ○ (Note 3)          | ○ (Note 3) | -          | -          | -          | ○ (Note 3)          | ○ (Note 3) | -          | -          | -          | ○ (Note 3)          | ○ (Note 3) |
|                             |           | HK-ST1024G_ | ○ (Note 3)          | ○ (Note 3) | ○ (Note 3) | -          | -          | ○ (Note 3)          | ○ (Note 3) | ○ (Note 3) | -          | -          | ○ (Note 3)          | ○ (Note 3) |
|                             |           | HK-ST1524G_ | -                   | ○ (Note 3) | ○ (Note 3) | ○ (Note 4) | -          | -                   | ○ (Note 3) | ○ (Note 3) | ○ (Note 4) | -          | -                   | ○ (Note 3) |
|                             | 176 × 176 | HK-ST2024G_ | -                   | ○ (Note 3) | ○ (Note 3) | ○ (Note 4) | -          | -                   | ○ (Note 3) | ○ (Note 3) | ○ (Note 4) | -          | -                   | ○ (Note 3) |
|                             |           | HK-ST3524G_ | -                   | -          | ○ (Note 3) | ○ (Note 4) | ○ (Note 4) | -                   | -          | ○ (Note 3) | ○ (Note 4) | ○ (Note 4) | -                   | -          |
|                             |           | HK-ST5024G_ | -                   | -          | -          | ○ (Note 4) | ○ (Note 4) | -                   | -          | -          | ○ (Note 4) | ○ (Note 4) | -                   | -          |
| HK-ST7024G_                 | -         | -           | -                   | -          | ○ (Note 4) | -          | -          | -                   | -          | ○ (Note 4) | -          | -          |                     |            |

- Notes: 1. The combinations of servo motors and servo amplifiers or drive units with special specifications are the same as those of standard servo amplifiers or drive units. Refer to the servo amplifiers or drive units with the same rated output.  
 2. The combinations of servo motors with an electromagnetic brake and servo amplifiers or drive units are the same as those described in this table.  
 3. Use the rotary servo motors manufactured in December 2020 or later. If the rotary servo motors manufactured before that date are connected, an alarm occurs. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for how to check the date of manufacture.  
 4. Use the rotary servo motors manufactured in April 2021 or later. If the rotary servo motors manufactured before that date are connected, an alarm occurs. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for how to check the date of manufacture.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Common Specifications

## Combinations of Linear Servo Motors and Servo Amplifiers (Note 1)

1-axis servo amplifier

○: Standard thrust

| Linear servo motor       |                     |                         | Servo amplifier MR-J5- _ |         |         |         |          |          |          |          |          |   |
|--------------------------|---------------------|-------------------------|--------------------------|---------|---------|---------|----------|----------|----------|----------|----------|---|
|                          | Primary side (coil) | Secondary side (magnet) | 20G/B/A                  | 40G/B/A | 60G/B/A | 70G/B/A | 100G/B/A | 200G/B/A | 350G/B/A | 500G/B/A | 700G/B/A |   |
| LM-H3 series             | LM-H3P2A-07P-BSS0   | LM-H3S20-288-BSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-H3S20-384-BSS0       | -                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-H3S20-480-BSS0       | -                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-H3S20-768-BSS0       | -                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-H3P3A-12P-CSS0   | LM-H3S30-288-CSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        | - |
|                          |                     | LM-H3S30-384-CSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        | - |
|                          |                     | LM-H3S30-480-CSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        | - |
|                          |                     | LM-H3S30-768-CSS0       | -                        | -       | -       | -       | -        | ○        | -        | -        | -        | - |
| LM-H3P7A-24P-ASS0        | LM-H3S70-288-ASS0   | -                       | -                        | -       | ○       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-H3S70-384-ASS0   | -                       | -                        | -       | -       | -       | ○        | -        | -        | -        | -        |   |
|                          | LM-H3S70-480-ASS0   | -                       | -                        | -       | -       | -       | ○        | -        | -        | -        | -        |   |
|                          | LM-H3S70-768-ASS0   | -                       | -                        | -       | -       | -       | -        | ○        | -        | -        | -        |   |
| LM-AJ series (Note 2)    | LM-AJP1B-07K-JSS0   | LM-AJS10-080-JSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-AJS10-200-JSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
|                          | LM-AJP1D-14K-JSS0   | LM-AJS20-080-JSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-AJS20-200-JSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
|                          | LM-AJP2B-12S-JSS0   | LM-AJS30-080-JSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-AJS30-200-JSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
|                          | LM-AJP2D-23T-JSS0   | LM-AJS40-080-JSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-AJS40-200-JSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
| LM-AJP3B-17N-JSS0        | LM-AJS10-080-JSS0   | -                       | ○                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AJS10-200-JSS0   | -                       | -                        | -       | ○       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AJS20-080-JSS0   | -                       | ○                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AJS20-200-JSS0   | -                       | -                        | -       | ○       | -       | -        | -        | -        | -        | -        |   |
| LM-AJP3D-35R-JSS0        | LM-AJS30-080-JSS0   | -                       | ○                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AJS30-200-JSS0   | -                       | -                        | -       | ○       | -       | -        | -        | -        | -        | -        |   |
| LM-AJP4B-22M-JSS0        | LM-AJS40-080-JSS0   | -                       | ○                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AJS40-200-JSS0   | -                       | -                        | -       | ○       | -       | -        | -        | -        | -        | -        |   |
| LM-AJP4D-45N-JSS0        | LM-AJS10-080-JSS0   | -                       | ○                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AJS10-200-JSS0   | -                       | -                        | -       | ○       | -       | -        | -        | -        | -        | -        |   |
| LM-F series              | LM-FP2B-06M-1SS0    | LM-FS20-480-1SS0        | -                        | -       | -       | -       | -        | ○        | -        | -        | -        |   |
|                          | LM-FP2D-12M-1SS0    | LM-FS20-576-1SS0        | -                        | -       | -       | -       | -        | -        | -        | ○        | -        |   |
|                          | LM-FP2F-18M-1SS0    | LM-FS20-576-1SS0        | -                        | -       | -       | -       | -        | -        | -        | -        | ○        |   |
|                          | LM-FP4B-12M-1SS0    | LM-FS40-480-1SS0        | -                        | -       | -       | -       | -        | -        | -        | ○        | -        |   |
|                          | LM-FP4D-24M-1SS0    | LM-FS40-576-1SS0        | -                        | -       | -       | -       | -        | -        | -        | -        | ○        |   |
| LM-K2 series             | LM-K2P1A-01M-2SS1   | LM-K2S10-288-2SS1       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-K2S10-384-2SS1       | -                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-K2P1C-03M-2SS1   | LM-K2S10-480-2SS1       | -                        | -       | -       | -       | -        | ○        | -        | -        | -        |   |
|                          |                     | LM-K2S10-768-2SS1       | -                        | -       | -       | -       | -        | -        | ○        | -        | -        |   |
|                          | LM-K2P2A-02M-1SS1   | LM-K2S20-288-1SS1       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-K2S20-384-1SS1       | -                        | -       | -       | -       | -        | -        | ○        | -        | -        |   |
|                          | LM-K2P2C-07M-1SS1   | LM-K2S20-480-1SS1       | -                        | -       | -       | -       | -        | -        | -        | ○        | -        |   |
| LM-K2S20-768-1SS1        |                     | -                       | -                        | -       | -       | -       | -        | -        | ○        | -        |          |   |
| LM-K2P3C-14M-1SS1        | LM-K2S30-288-1SS1   | -                       | -                        | -       | -       | -       | -        | -        | ○        | -        |          |   |
|                          | LM-K2S30-384-1SS1   | -                       | -                        | -       | -       | -       | -        | -        | ○        | -        |          |   |
| LM-K2P3E-24M-1SS1        | LM-K2S30-480-1SS1   | -                       | -                        | -       | -       | -       | -        | -        | -        | ○        |          |   |
|                          | LM-K2S30-768-1SS1   | -                       | -                        | -       | -       | -       | -        | -        | -        | ○        |          |   |
| LM-U2 series             | LM-U2PAB-05M-0SS0   | LM-U2SA0-240-0SS0       | ○                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-U2PAD-10M-0SS0   | LM-U2SA0-300-0SS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-U2PAF-15M-0SS0   | LM-U2SA0-420-0SS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-U2PBB-07M-1SS0   | LM-U2SB0-240-1SS1       | ○                        | -       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-U2PBD-15M-1SS0   | LM-U2SB0-300-1SS1       | -                        | -       | ○       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-U2PBF-22M-1SS0   | LM-U2SB0-420-1SS1       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
|                          | LM-U2P2B-40M-2SS0   | LM-U2S20-300-2SS1       | -                        | -       | -       | -       | -        | ○        | -        | -        | -        |   |
|                          | LM-U2P2C-60M-2SS0   | LM-U2S20-480-2SS1       | -                        | -       | -       | -       | -        | -        | ○        | -        | -        |   |
| LM-U2P2D-80M-2SS0        | LM-U2S20-480-2SS1   | -                       | -                        | -       | -       | -       | -        | -        | ○        | -        |          |   |
| LM-AU series (Note 2, 3) | LM-AUP3A-03V-JSS0   | LM-AUS30-120-JSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AUP3B-06V-JSS0   | LM-AUS30-180-JSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AUP3C-09V-JSS0   | LM-AUS30-240-JSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          |                     | LM-AUS30-300-JSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AUP3D-11R-JSS0   | LM-AUS30-600-JSS0       | -                        | ○       | -       | -       | -        | -        | -        | -        | -        |   |
|                          | LM-AUP4A-04R-JSS0   | LM-AUS40-120-JSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
|                          | LM-AUP4B-09R-JSS0   | LM-AUS40-180-JSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
|                          | LM-AUP4C-13P-JSS0   | LM-AUS40-240-JSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
|                          | LM-AUP4D-18M-JSS0   | LM-AUS40-300-JSS0       | -                        | -       | -       | ○       | -        | -        | -        | -        | -        |   |
| LM-AUP4F-26P-JSS0        | LM-AUS40-600-JSS0   | -                       | -                        | -       | -       | -       | ○        | -        | -        | -        |          |   |
| LM-AUP4H-35M-JSS0        | LM-AUS40-600-JSS0   | -                       | -                        | -       | -       | -       | ○        | -        | -        | -        |          |   |

- Notes: 1. The combinations of servo motors and servo amplifiers with special specifications are the same as those of standard servo amplifiers. Refer to the servo amplifiers with the same rated output.  
 2. LM-AJ series and LM-AU series do not support MR-J5-B\_.  
 3. Use the servo amplifiers with firmware version D0 or later. If the servo amplifiers with the previous firmware version are connected, an alarm occurs.

**Combinations of Linear Servo Motors and Servo Amplifiers** (Note 1)

Any combination of the rotary servo motors, the linear servo motors, and the direct drive motors with different series and capacities is possible as long as the servo motors are compatible with the servo amplifier.

**Multi-axis servo amplifier**

○: Standard thrust

| Linear servo motor       |                     |  | Servo amplifier MR-J5W2-__ |       |       |         | Servo amplifier MR-J5W3-__ |        |
|--------------------------|---------------------|--|----------------------------|-------|-------|---------|----------------------------|--------|
|                          | Primary side (coil) | Secondary side (magnet)  | 22G/B                      | 44G/B | 77G/B | 1010G/B | 222G/B                     | 444G/B |
| LM-H3 series             | LM-H3P2A-07P-BSS0   | LM-H3S20-288-BSS0<br>LM-H3S20-384-BSS0<br>LM-H3S20-480-BSS0<br>LM-H3S20-768-BSS0 | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-H3P3A-12P-CSS0   | LM-H3S30-288-CSS0<br>LM-H3S30-384-CSS0   | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-H3P3B-24P-CSS0   | LM-H3S30-480-CSS0  | -                          | -     | ○     | ○       | -                          | -      |
|                          | LM-H3P3C-36P-CSS0   | LM-H3S30-768-CSS0  | -                          | -     | ○     | ○       | -                          | -      |
|                          | LM-H3P7A-24P-ASS0   | LM-H3S70-288-ASS0<br>LM-H3S70-384-ASS0<br>LM-H3S70-480-ASS0<br>LM-H3S70-768-ASS0 | -                          | -     | ○     | ○       | -                          | -      |
| LM-AJ series (Note 2)    | LM-AJP1B-07K-JSS0   | LM-AJS10-080-JSS0<br>LM-AJS10-200-JSS0   | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-AJP1D-14K-JSS0   | LM-AJS10-400-JSS0  | -                          | -     | ○     | ○       | -                          | -      |
|                          | LM-AJP2B-12S-JSS0   | LM-AJS20-080-JSS0<br>LM-AJS20-200-JSS0   | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-AJP2D-23T-JSS0   | LM-AJS20-400-JSS0  | -                          | -     | ○     | ○       | -                          | -      |
|                          | LM-AJP3B-17N-JSS0   | LM-AJS30-080-JSS0<br>LM-AJS30-200-JSS0   | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-AJP3D-35R-JSS0   | LM-AJS30-400-JSS0  | -                          | -     | ○     | ○       | -                          | -      |
|                          | LM-AJP4B-22M-JSS0   | LM-AJS40-080-JSS0<br>LM-AJS40-200-JSS0   | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-AJP4D-45N-JSS0   | LM-AJS40-400-JSS0  | -                          | -     | ○     | ○       | -                          | -      |
| LM-K2 series             | LM-K2P1A-01M-2SS1   | LM-K2S10-288-2SS1<br>LM-K2S10-384-2SS1<br>LM-K2S10-480-2SS1<br>LM-K2S10-768-2SS1 | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-K2P2A-02M-1SS1   | LM-K2S20-288-1SS1<br>LM-K2S20-384-1SS1<br>LM-K2S20-480-1SS1<br>LM-K2S20-768-1SS1 | -                          | -     | ○     | ○       | -                          | -      |
| LM-U2 series             | LM-U2PAB-05M-0SS0   | LM-U2SA0-240-0SS0  | ○                          | ○     | -     | -       | ○                          | ○      |
|                          | LM-U2PAD-10M-0SS0   | LM-U2SA0-300-0SS0  | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-U2PAF-15M-0SS0   | LM-U2SA0-420-0SS0  | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-U2PBB-07M-1SS1   | LM-U2SB0-240-1SS1  | ○                          | ○     | -     | -       | ○                          | ○      |
|                          | LM-U2PBD-15M-1SS0   | LM-U2SB0-300-1SS1  | -                          | -     | ○     | ○       | -                          | -      |
|                          | LM-U2PBF-22M-1SS0   | LM-U2SB0-420-1SS1  | -                          | -     | ○     | ○       | -                          | -      |
| LM-AU series (Note 2, 3) | LM-AUP3A-03V-JSS0   | LM-AUS30-120-JSS0  | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-AUP3B-06V-JSS0   | LM-AUS30-180-JSS0  | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-AUP3C-09V-JSS0   | LM-AUS30-240-JSS0  | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-AUP3D-11R-JSS0   | LM-AUS30-300-JSS0  | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-AUP4A-04R-JSS0   | LM-AUS30-600-JSS0  | -                          | ○     | ○     | ○       | -                          | ○      |
|                          | LM-AUP4B-09R-JSS0   | LM-AUS40-120-JSS0  | -                          | -     | ○     | ○       | -                          | -      |
|                          | LM-AUP4C-13P-JSS0   | LM-AUS40-180-JSS0  | -                          | -     | ○     | ○       | -                          | -      |
|                          | LM-AUP4D-18M-JSS0   | LM-AUS40-240-JSS0<br>LM-AUS40-300-JSS0   | -                          | -     | ○     | ○       | -                          | -      |

- Notes: 1. The combinations of servo motors and servo amplifiers with special specifications are the same as those of standard servo amplifiers. Refer to the servo amplifiers with the same rated output.  
 2. LM-AJ series and LM-AU series do not support MR-J5W\_-B.  
 3. Use the servo amplifiers with firmware version D0 or later. If the servo amplifiers with the previous firmware version are connected, an alarm occurs.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Common Specifications

## Combinations of Direct Drive Motors and Servo Amplifiers (Note 1)

The torque can be increased by combining a large-capacity servo amplifier.

The torque characteristics vary by the combinations. Refer to the list of the specifications of each direct drive motor.

Any combination of the rotary servo motors, the linear servo motors, and the direct drive motors with different series and capacities is possible as long as the servo motors are compatible with the servo amplifier.

### 1-axis servo amplifier

○: Standard torque ◎: Torque increased

| Direct drive motor (Note 2)       |               | Servo amplifier MR-J5-__ |         |         |         |          |          |          |
|-----------------------------------|---------------|--------------------------|---------|---------|---------|----------|----------|----------|
|                                   |               | 20G/B/A                  | 40G/B/A | 60G/B/A | 70G/B/A | 100G/B/A | 350G/B/A | 500G/B/A |
| TM-RG2M series/<br>TM-RU2M series | TM-RG2M002C30 | ○                        | -       | -       | -       | -        | -        | -        |
|                                   | TM-RU2M002C30 |                          |         |         |         |          |          |          |
|                                   | TM-RG2M004E30 | ○                        | ◎       | -       | -       | -        | -        | -        |
|                                   | TM-RU2M004E30 |                          |         |         |         |          |          |          |
| TM-RFM series                     | TM-RG2M009G30 | -                        | ○       | -       | -       | -        | -        | -        |
|                                   | TM-RU2M009G30 |                          |         |         |         |          |          |          |
|                                   | TM-RFM002C20  | ○                        | -       | -       | -       | -        | -        | -        |
|                                   | TM-RFM004C20  | -                        | ○       | -       | -       | -        | -        | -        |
|                                   | TM-RFM006C20  | -                        | -       | ○       | -       | -        | -        | -        |
|                                   | TM-RFM006E20  | -                        | -       | ○       | -       | -        | -        | -        |
|                                   | TM-RFM012E20  | -                        | -       | -       | ○       | -        | -        | -        |
|                                   | TM-RFM018E20  | -                        | -       | -       | -       | ○        | -        | -        |
|                                   | TM-RFM012G20  | -                        | -       | -       | ○       | -        | -        | -        |
|                                   | TM-RFM048G20  | -                        | -       | -       | -       | -        | ○        | -        |
|                                   | TM-RFM072G20  | -                        | -       | -       | -       | -        | ○        | -        |
|                                   | TM-RFM040J10  | -                        | -       | -       | ○       | -        | -        | -        |
| TM-RFM120J10                      | -             | -                        | -       | -       | -       | ○        | -        |          |
| TM-RFM240J10                      | -             | -                        | -       | -       | -       | -        | ○        |          |

### Multi-axis servo amplifier

○: Standard torque ◎: Torque increased

| Direct drive motor (Note 2)       |               | Servo amplifier MR-J5W2-__ |       |       |         | Servo amplifier MR-J5W3-__ |        |
|-----------------------------------|---------------|----------------------------|-------|-------|---------|----------------------------|--------|
|                                   |               | 22G/B                      | 44G/B | 77G/B | 1010G/B | 222G/B                     | 444G/B |
| TM-RG2M series/<br>TM-RU2M series | TM-RG2M002C30 | ○                          | ○     | -     | -       | ○                          | ○      |
|                                   | TM-RU2M002C30 |                            |       |       |         |                            |        |
|                                   | TM-RG2M004E30 | ○                          | ◎     | -     | -       | ○                          | ◎      |
|                                   | TM-RU2M004E30 |                            |       |       |         |                            |        |
| TM-RFM series                     | TM-RG2M009G30 | -                          | ○     | ○     | ○       | -                          | ○      |
|                                   | TM-RU2M009G30 |                            |       |       |         |                            |        |
|                                   | TM-RFM002C20  | ○                          | ○     | -     | -       | ○                          | ○      |
|                                   | TM-RFM004C20  | -                          | ○     | ○     | ○       | -                          | ○      |
|                                   | TM-RFM006C20  | -                          | -     | ○     | ○       | -                          | -      |
|                                   | TM-RFM006E20  | -                          | -     | ○     | ○       | -                          | -      |
|                                   | TM-RFM012E20  | -                          | -     | ○     | ○       | -                          | -      |
|                                   | TM-RFM018E20  | -                          | -     | -     | ○       | -                          | -      |
|                                   | TM-RFM012G20  | -                          | -     | ○     | ○       | -                          | -      |
|                                   | TM-RFM040J10  | -                          | -     | ○     | ○       | -                          | -      |

Notes: 1. The combinations of servo motors and servo amplifiers with special specifications are the same as those of standard servo amplifiers. Refer to the servo amplifiers with the same rated output.

2. Use the direct drive motors manufactured in June 2019 or later when connecting to MR-J5 servo amplifiers. If the direct drive motors manufactured before that date are connected, an alarm occurs. Refer to "Direct Drive Motor User's Manual" for how to check the date of manufacture.

Safety Sub-Functions (Note 1)

Specifications of servo amplifiers

| Item               |   | Specifications   |  |                                    |
|--------------------|---|--|--|------------------------------------|
|                    |   | MR-J5-G(4)(-N1)<br>MR-J5-B(4)(-RJ)<br>MR-J5W_-B<br>MR-J5-A(4)(-RJ)                             | MR-J5-G(4)-RJ(N1)<br>MR-J5W_-G(-N1)<br>MR-J5D_-G4(-N1)   | MR-J5-G4-HS(N1)                    |
| Safety performance | Standards                                       | EN ISO 13849-1:2015 Category 3 PL e, IEC 61508 SIL 3, EN IEC 62061 maximum SIL 3, EN 61800-5-2 | EN ISO 13849-1:2015 Category 4 PL e, IEC 61508 SIL 3, EN IEC 62061 maximum SIL 3, EN 61800-5-2 |                                    |
|                    | Mean time to dangerous failure (MTTFd)          | MTTFd ≥ 100 [years] (314a)   | MTTFd ≥ 100 [years] (750a)   | MTTFd ≥ 100 [years] (300a)         |
|                    | Diagnostic coverage (DC)                        | DC = Medium, 97.6 %  | DC = Medium, 96.5 %  |                                    |
|                    | Probability of dangerous Failure per Hour (PFH) | PFH = 6.4 × 10 <sup>-9</sup> [1/h]   | PFH = 3 × 10 <sup>-9</sup> [1/h]   | PFH = 7.7 × 10 <sup>-9</sup> [1/h] |
|                    | Mission time (T <sub>M</sub> ) (Note 3)         | T <sub>M</sub> = 20 [years]  |  |                                    |

Function specifications

| Item                          |   | Specifications  |  |  |
|-------------------------------|---|---|--|--|
|                               |   | MR-J5-G(4)(-RJ(N1))<br>MR-J5D_-G4(-N1)<br>MR-J5W_-B                               | MR-J5W_-G(-N1)<br>MR-J5-B(4)(-RJ)<br>MR-J5-A(4)(-RJ)   | MR-J5-G4-HS(N1)  |
| Safety sub-functions          | STO   | Shut-off response time (STO input off → energy shut off)                          | 8 ms or less (using input device)<br>60 ms or less (using CC-Link IE TSN/EtherCAT®) (Note 4, 5, 8) |  |
|                               | SS1   | Deceleration delay time   | 0 ms to 60000 ms (functional safety parameter setting)   |  |
|                               | SS2   | Deceleration delay time   | 0 ms to 60000 ms (functional safety parameter setting)   |  |
|                               | SOS   | Observation position  | 0 rev to 1000 rev (functional safety parameter setting)  |  |
|                               | SBC   | Shut-off response time  | 8 ms or less (using input device)<br>60 ms or less (using CC-Link IE TSN/EtherCAT®) (Note 4, 5, 8) |  |
|                               | SLS1/2/3/4                                  | Observation speed   | 0 r/min (mm/s) to 10000 r/min (mm/s) (functional safety parameter setting) (Note 6)                |  |
|                               | SSM   | Observation speed   | 0 r/min (mm/s) to 10000 r/min (mm/s) (functional safety parameter setting)                         |  |
|                               | SDI   | Direction monitor delay time  | 0 ms to 60000 ms (functional safety parameter setting)   |  |
|                               | SLI   | Observation position  | 0 rev to 1000 rev (functional safety parameter setting)  |  |
|                               | SLT   | Observation torque  | -1000.0 % to 1000.0 % (functional safety parameter setting)  |  |
| Input/output function         | Input device                                | Number of inputs (double wiring)  | 1 point  | 3 points   |
|                               |   | Permissible time for mismatched double inputs                                     | 0 ms to 60000 ms (functional safety parameter setting)   |  |
|                               |   | Noise elimination filter  | 1.000 ms to 32.000 ms (functional safety parameter setting)  |  |
|                               |   | Test pulse off time (Note 7)  | 1 ms or less   |  |
|                               |   | Test pulse interval (Note 7)  | 250 ms to 1000 ms  |  |
|                               | Output device                               | Number of outputs (double wiring)   | 1 point  | 3 points   |
|                               |   | Test pulse off time   | 0.500 ms to 2.000 ms (functional safety parameter setting)   |  |
|                               |   | Test pulse interval   | 1 s or less  |  |
|                               | External wiring diagnostic output           | Number of outputs (double wiring)   | -  | 1 point  |
|                               |   | Test pulse off time   | -  | 1.000 ms to 2.000 ms (functional safety parameter setting) |
| Test pulse interval           |   | -   | 1 s or less  |  |
| Safety communication function | Response time                               | 250 ms (Note 2)   |  |  |
|                               | Transmission interval monitor time (Note 8) | 16.0 ms to 1000.0 ms (functional safety parameter setting) (using CC-Link IE TSN) |  |  |
|                               | FSoE Watchdog Time                          | 16.0 ms to 65534.0 ms (object setting) (using EtherCAT®) (Note 8)                 |  |  |
|                               | Safety communication delay time             | 60 ms or less (using CC-Link IE TSN/EtherCAT®) (Note 4, 8)                        |  |  |

- Notes:
- Supported safety sub-functions and their safety levels vary by the combinations of the servo amplifier or the drive unit and the servo motor, and the firmware version of the servo amplifier. Refer to "List of supported safety sub-functions".
  - This value is applicable when the transmission interval monitor time is 64.0 ms or less, or FSoE Watchdog Time is 60 ms or less.
  - The performance of special proof tests within the mission time of the product is regarded as not necessary, however, the diagnostic interval is suggested as at least one test per three months for Category 3 PL e, SIL 3 on IEC 61800-5-2:2016.
  - This value is applicable when the transmission interval monitor time is 32.0 ms or less, or FSoE Watchdog Time is 30 ms or less.
  - Set the communication cycle as follows:
    - MR-J5-G(4)-RJ, MR-J5-G4-HS, MR-J5D1-G4: 125 μs or more
    - MR-J5-G(4)-RJN1, MR-J5-G4-HSN1, MR-J5D1-G4-N1: 250 μs or more
    - MR-J5W\_-G(-N1), MR-J5D2-G4(-N1), MR-J5D3-G4(-N1): 500 μs or more
  - The observation speed can be set separately.
  - The test pulse is a signal for the external circuit to perform self-diagnosis by turning off the signals to the servo amplifier or the drive unit instantaneously at regular intervals.
  - The listed value is applicable when the safety sub-functions through the network connection are executed.

# Common Specifications

## Safety Sub-Functions (Note 10)

### List of supported safety sub-functions

Supported safety sub-functions and their safety levels vary by the combinations of the servo amplifier or the drive unit and the servo motor. Refer to the table below.

| Servo amplifier model (Note 11)                                    | Connection method (connector)                                  | Servo motor type   | Safety sub-function (IEC/EN 61800-5-2) |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |
|--|--|--|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|  |  |  | STO                                    | SS1                      |                          | SS2 (Note 3, 6)          | SOS (Note 3, 6)          | SBC                      | SLS (Note 3, 6)          | SSM (Note 3, 6)          | SDI (Note 3, 6)          | SLI (Note 3, 6)          | SLT (Note 6)             |
|  |  |  |  | SS1-t (Note 3, 6)        | SS1-r (Note 3, 6)        | SS2-t, SS2-r             |                          |                          |                          |                          |                          |                          |                          |
| MR-J5-G(4)(-N1)<br>MR-J5-B(4)(-RJ)<br>MR-J5W_-B<br>MR-J5-A(4)(-RJ) | DI/O connection (CN8)  | Servo motor with functional safety<br>Rotary servo motor<br>Linear servo motor<br>Direct drive motor | Cat. 3<br>PL e,<br>SIL 3               | -<br>(Note 8)            | -                        | -                        | -                        | -                        | -                        | -                        | -                        | -                        | -                        |
| MR-J5-G(4)-RJ(N1) (Note 14)  | DI/O connection (CN8/CN3) (Note 2)                             | Servo motor with functional safety   | Cat. 4<br>PL e,<br>SIL 3               | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 3<br>PL d,<br>SIL 2 |
| MR-J5-G4-HS(N1)<br>MR-J5W_-G(-N1) (Note 4, 9, 14)                  |  | Rotary servo motor<br>Linear servo motor<br>Direct drive motor                                       | Cat. 4<br>PL e,<br>SIL 3               | Cat. 4<br>PL e,<br>SIL 3 | Cat. 3<br>PL d,<br>SIL 2 | -                        | -                        | Cat. 4<br>PL e,<br>SIL 3 | Cat. 3<br>PL d,<br>SIL 2 | Cat. 3<br>PL d,<br>SIL 2 | Cat. 3<br>PL d,<br>SIL 2 | -                        | Cat. 3<br>PL d,<br>SIL 2 |
| MR-J5D1-G4(-N1) (Note 14)  |  | Network connection (Note 1, 5, 7, 12, 13, 15)  | Servo motor with functional safety     | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 | Cat. 4<br>PL e,<br>SIL 3 |
| MR-J5D2-G4(-N1) (Note 9, 14)                                       | Rotary servo motor<br>Linear servo motor<br>Direct drive motor |  | Cat. 4<br>PL e,<br>SIL 3               | Cat. 4<br>PL e,<br>SIL 3 | Cat. 3<br>PL d,<br>SIL 2 | -                        | -                        | Cat. 4<br>PL e,<br>SIL 3 | Cat. 3<br>PL d,<br>SIL 2 | Cat. 3<br>PL d,<br>SIL 2 | Cat. 3<br>PL d,<br>SIL 2 | -                        | Cat. 3<br>PL d,<br>SIL 2 |
| MR-J5D3-G4(-N1) (Note 9, 14)                                       |  |  |  |                          |                          |                          |                          |                          |                          |                          |                          |                          |                          |

- Notes:
- Combine the servo amplifier with an R\_SFCPU safety CPU with firmware version of 20 or later.
  - The listed safety levels are applicable when one of the following executes safety sub-function control with a diagnosis using test pulses.
    - MR-J5-G4-HS(N1)
    - Safety CPU or safety controller that meets Category 4 PL e, SIL 3
When a forced stop switch, a safety switch, or an enable switch is directly connected to the servo amplifier and a diagnosis using test pulses is not executed, the safety level is Category 3 PL d, SIL 2.
  - A fully closed loop system does not support SS1-r, SS2, SOS, SLS, SSM, SDI, and SLI.
  - The safety sub-functions are supported by MR-J5W\_-G manufactured in November 2019 or later.
  - Set the communication cycle as follows:
    - MR-J5-G(4)-RJ, MR-J5-G4-HS, MR-J5D1-G4: 125 μs or more
    - MR-J5-G(4)-RJN1, MR-J5-G4-HSN1, MR-J5D1-G4-N1: 250 μs or more
    - MR-J5W\_-G(-N1), MR-J5D2-G4(-N1), MR-J5D3-G4(-N1): 500 μs or more
  - When used with CC-Link IE Field Network Basic, SS1-r, SS2, SOS, SLS, SSM, SDI, SLI, and SLT are available on servo amplifiers or drive units with firmware version D8 or later.
  - The safety sub-functions through the network connection are not available when the servo amplifiers or drive units use CC-Link IE Field Network Basic.
  - The servo amplifiers support SS1-t when combined with MR-J3-D05. Refer to p. 7-48 in this catalog for details.
  - The STO function can be set for each axis.
  - For 200 V class servo amplifiers, the firmware version B2 or later is required.
  - The functional safety unit (MR-D30) cannot be connected.
  - When used with CC-Link IE TSN Class A, the safety sub-functions through the network connection are available on servo amplifiers or drive units with firmware version D4 or later.
  - The safety sub-functions through the network connection are not available when the servo amplifier uses driver communication function.
  - For MR-J5-G(4)-RJN1, MR-J5W\_-G(-N1), and MR-J5D\_-G4-N1, SS1-r, SS2, SOS, SLS, SSM, SDI, SLI, and SLT are available on servo amplifiers or drive units with firmware version D8 or later.
  - For MR-J5-G(4)-RJN1, MR-J5W\_-G(-N1), and MR-J5D\_-G4-N1, the safety sub-functions through the network connection are available on servo amplifiers or drive units with firmware version D8 or later.



Environment

Motion module

| Item                 | Operation  | Storage                        |
|----------------------|--|--------------------------------|
| Ambient temperature  | 0 °C to 55 °C<br>0 °C to 60 °C (when using the extended temperature range base unit) <sup>(Note 2)</sup>   | -25 °C to 75 °C (non-freezing) |
| Ambient humidity     | 5 %RH to 95 %RH (non-condensing)   |                                |
| Ambience             | Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust  |                                |
| Altitude             | 2000 m or less   |                                |
| Vibration resistance | Under intermittent vibration (directions of X, Y, and Z axes):<br>5 Hz to 8.4 Hz, displacement amplitude 3.5 mm<br>8.4 Hz to 150 Hz, acceleration amplitude 9.8 m/s <sup>2</sup><br>Under continuous vibration:<br>5 Hz to 8.4 Hz, displacement amplitude 1.75 mm<br>8.4 Hz to 150 Hz, acceleration amplitude 4.9 m/s <sup>2</sup> |                                |

Servo amplifier/drive unit/simple converter

| Item                          | Operation  | Transportation  | Storage  |
|-------------------------------|--|---|--|
| Ambient temperature           | 0 °C to 60 °C (non-freezing)<br>Class 3K3 (IEC 60721-3-3)  | -25 °C to 70 °C (non-freezing)<br>Class 2K12 (IEC 60721-3-2)  | -25 °C to 70 °C (non-freezing)<br>Class 1K4 (IEC 60721-3-1)  |
| Ambient humidity              | 5 %RH to 95 %RH (non-condensing)   |   |  |
| Ambience                      | Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust  |   |  |
| Altitude/atmospheric pressure | Altitude: 2000 m or less <sup>(Note 1)</sup>   | Overland/sea transportation, or transporting on an airplane whose cargo compartment is pressurized at 700 hPa or higher                                   | Atmospheric pressure: 700 hPa to 1060 hPa<br>(Equivalent to altitudes from -400 m to 3000 m)   |
| Vibration resistance          | Under intermittent vibration:<br>10 Hz to 57 Hz, displacement amplitude 0.075 mm<br>57 Hz to 150 Hz, acceleration amplitude 9.8 m/s <sup>2</sup><br>Class 3M1 (IEC 60721-3-3)<br>Under continuous vibration (directions of X, Y, and Z axes):<br>10 Hz to 55 Hz, acceleration amplitude 5.9 m/s <sup>2</sup> | 2 Hz to 9 Hz, displacement amplitude (single amplitude) 7.5 mm<br>9 Hz to 200 Hz, acceleration amplitude 20 m/s <sup>2</sup><br>Class 2M3 (IEC 60721-3-2) | 2 Hz to 9 Hz, displacement amplitude (single amplitude) 1.5 mm<br>9 Hz to 200 Hz, acceleration amplitude 5 m/s <sup>2</sup><br>Class 1M2 (IEC 60721-3-1) |

Power regeneration converter unit

| Item                 | Operation  | Transportation  | Storage  |
|----------------------|--|---|--|
| Ambient temperature  | 0 °C to 55 °C (non-freezing)<br>Class 3K3 (IEC 60721-3-3)  | -20 °C to 65 °C (non-freezing)<br>Class 2K12 (IEC 60721-3-2)  | -20 °C to 65 °C (non-freezing)<br>Class 1K4 (IEC 60721-3-1)  |
| Ambient humidity     | 5 %RH to 90 %RH (non-condensing)   |   |  |
| Ambience             | Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust  |   |  |
| Altitude             | 2000 m or less <sup>(Note 1)</sup>   |   | 1000 m or less   |
| Vibration resistance | Under intermittent vibration:<br>10 Hz to 57 Hz, amplitude 0.075 mm<br>57 Hz to 150 Hz, acceleration amplitude 9.8 m/s <sup>2</sup><br>(IEC 60068-2-6 Test Fc)<br>Under continuous vibration (directions of X, Y, and Z axes): 10 Hz to 55 Hz, acceleration amplitude 5.9 m/s <sup>2</sup> | 2 Hz to 9 Hz, displacement amplitude (single amplitude) 7.5 mm<br>9 Hz to 200 Hz, acceleration amplitude 20 m/s <sup>2</sup><br>Class 2M3 (IEC 60721-3-2) | 2 Hz to 9 Hz, displacement amplitude (single amplitude) 1.5 mm<br>9 Hz to 200 Hz, acceleration amplitude 5 m/s <sup>2</sup><br>Class 1M2 (IEC 60721-3-1) |

Notes: 1. Refer to User's Manuals of each servo amplifier, drive unit, and power regeneration converter unit for the restrictions on using the servo amplifiers, the drive units, and the power regeneration converter units at an altitude exceeding 1000 m and up to 2000 m.  
2. The extended temperature range base unit is compatible with RD78G only.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LVSWires  
Product List  
Precautions  
Support

# Common Specifications

## Environment

### Rotary servo motor

| Item                         | Operation   | Storage                        |
|------------------------------|---|--------------------------------|
| Ambient temperature          | 0 °C to 60 °C (non-freezing) <sup>(Note 2)</sup>  | -15 °C to 70 °C (non-freezing) |
| Ambient humidity             | 10 %RH to 90 %RH (non-condensing)   |                                |
| Ambience <sup>(Note 1)</sup> | Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust, no object generating a strong magnetic field |                                |
| Altitude                     | 2000 m or less <sup>(Note 3)</sup>  |                                |
| External magnetic field      | 10 mT or less   |                                |
| Vibration resistance         | Refer to the specifications of each rotary servo motor.   |                                |

### Linear servo motor (LM-H3/LM-F/LM-K2/LM-U2 series)

| Item                         | Operation   | Storage                           |
|------------------------------|---|-----------------------------------|
| Ambient temperature          | 0 °C to 60 °C (non-freezing) <sup>(Note 2)</sup>                                  | -15 °C to 70 °C (non-freezing)    |
| Ambient humidity             | 10 %RH to 80 %RH (non-condensing)   | 10 %RH to 90 %RH (non-condensing) |
| Ambience <sup>(Note 1)</sup> | Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust |                                   |
| Altitude                     | 2000 m or less <sup>(Note 5)</sup>  |                                   |
| Vibration resistance         | Refer to the specifications of each linear servo motor.                           |                                   |

### Linear servo motor (LM-AJ series/LM-AU series)

| Item                         | Operation   | Storage                           |
|------------------------------|---|-----------------------------------|
| Ambient temperature          | 0 °C to 40 °C (non-freezing)  | -15 °C to 70 °C (non-freezing)    |
| Ambient humidity             | 10 %RH to 80 %RH (non-condensing)   | 10 %RH to 90 %RH (non-condensing) |
| Ambience <sup>(Note 1)</sup> | Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust |                                   |
| Altitude                     | 1000 m or less  |                                   |
| Vibration resistance         | Refer to the specifications of each linear servo motor.                           |                                   |

### Direct drive motor

| Item                            | Operation   | Storage                           |
|---------------------------------|---|-----------------------------------|
| Ambient temperature             | 0 °C to 60 °C (non-freezing) <sup>(Note 2)</sup>                                  | -15 °C to 70 °C (non-freezing)    |
| Ambient humidity                | 10 %RH to 80 %RH (non-condensing)   | 10 %RH to 90 %RH (non-condensing) |
| Ambience <sup>(Note 1, 4)</sup> | Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust |                                   |
| Altitude                        | 2000 m or less <sup>(Note 3)</sup>  |                                   |
| Vibration resistance            | Refer to the specifications of each direct drive motor.                           |                                   |

- Notes:
1. Do not use the servo motors in the environment where the servo motors are exposed to oil mist, oil and/or water.
  2. Refer to User's Manuals of each servo motor for the restrictions on the ambient temperature.
  3. Refer to User's Manuals of each servo motor for the derating condition when using the servo motors at an altitude exceeding 1000 m and up to 2000 m.
  4. Do not place any object (such as a magnet) which generates a magnetic force near the direct drive motor. If it is unavoidable, take a measure such as mounting a shielding plate and so on to cut off the magnetic force.
  5. Refer to "Linear Servo Motor User's Manual (LM-H3/LM-U2/LM-F/LM-K2)" for the restrictions on using the linear servo motor at an altitude exceeding 1000 m and up to 2000 m.

# 2 Servo System Controllers

|                              |      |
|------------------------------|------|
| Motion Module.....           | 2-2  |
| Engineering Software.....    | 2-14 |
| Motion Control Software..... | 2-15 |

\* Refer to p. 7-78 in this catalog for conversion of units.

# Servo System Controllers

## Motion Module RD78G (Simple Motion Mode)

### Control specifications

Items in bold: differences

| Item   | Specifications  |  |         | Comparison with the previous models (Simple Motion modules)   |  |
|--|---|--|---------|---|--|
|  | RD78G4  | RD78G8   | RD78G16 | RD77MS  | QD77MS   |
| Maximum number of control axes [axis]                | 4   | 8  | 16      | 2, 4, 8, 16   | 2, 4, 16<br>(QD77MS2 and QD77MS4 use the buffer memory assignment for 4 axes)  |
| Command interface                                    | <b>CC-Link IE TSN</b>   |  |         | SSCNET III/H  |  |
| Servo amplifier                                      | <b>MR-J5-G, MR-J5W2-G, MR-J5W3-G, MR-J5D1-G4, MR-J5D2-G4, MR-J5D3-G4</b>  |  |         | MR-J5-B, MR-J5W2-B, MR-J5W3-B, MR-J4-B, MR-J4W2-B, MR-J4W3-B  |  |
| Operation cycle (operation cycle setting) [ $\mu$ s] | <b>250, 500, 1000, 2000, 4000</b>   |  |         | 444, 888, 1777, 3555  | 888, 1777  |
| Interpolation function                               | Linear interpolation (up to 4 axes), 2-axis circular interpolation, helical interpolation   |  |         |   | Linear interpolation (up to 4 axes),<br>2-axis circular interpolation  |
| Control method                                       | Positioning control, path control (linear, arc, and helical <sup>(Note 1)</sup> ), speed control, speed-torque control, synchronous control, continuous operation to torque control   |  |         |   |  |
| Acceleration/deceleration processing                 | Trapezoidal acceleration/deceleration, S-curve acceleration/deceleration  |  |         |   |  |
| Compensation function                                | Backlash compensation, electronic gear, near pass function  |  |         |   |  |
| Synchronous control                                  | Synchronous encoder input, command generation axis, cam, phase compensation   |  |         | Synchronous encoder input, cam, phase compensation  | Synchronous encoder input, command generation axis, cam, phase compensation  |
| Cam control  | Maximum number of cam registrations <sup>(Note 2)</sup>   | 256  |         |   |  |
|  | Cam data  | Stroke ratio data format, coordinate data format   |         |   |  |
|  | Cam auto-generation function  | Cam for a rotary knife   |         |   |  |
| Positioning control method                           | Motion profile table  |  |         |   |  |
| Control unit   | mm, inch, degree, pulse   |  |         |   |  |
| Number of positioning data                           | 600 data (positioning data No. 1 to 600)/axis<br><b>(Set with MELSOFT GX Works3 or a sequence program (No. 1 to 600).)</b>  |  |         | 600 data (positioning data No. 1 to 600)/axis<br>(Set with MELSOFT GX Works3 or a sequence program (No. 1 to 100).)   | 600 data (positioning data No. 1 to 600)/axis<br>(Set with MELSOFT GX Works2 or a sequence program (QD77MS16 (No. 1 to 100), QD77MS2/QD77MS4 (No. 1 to 600).)) |
| Backup   | Parameters, positioning data, and block start data can be saved on flash ROM (batteryless backup)   |  |         |   |  |
| Home position return                                 | <b>Driver home position return</b> <sup>(Note 3)</sup>  |  |         | Proximity dog method, count method 1, count method 2, data set method, scale home position signal detection method, driver home position return <sup>(Note 3)</sup> | Proximity dog method, count method 1, count method 2, data set method, scale home position signal detection method   |
| Positioning control                                  | Linear interpolation control (up to 4 axes <sup>(Note 4)</sup> (vector speed, reference axis speed)), fixed-pitch feed control (up to 4 axes), 2-axis circular interpolation (auxiliary point-specified, central point-specified), helical interpolation control, speed control (up to 4 axes), speed-position switching control (INC mode, ABS mode), position-speed switching control, current value change (positioning data, start No. for a current value changing) NOP instruction, JUMP instruction (conditional, unconditional), LOOP, LEND, block start, condition start, wait start, simultaneous start, repeated start |  |         |   |  |
| Manual control                                       | JOG operation   | Provided   |         |   |  |
|  | Inching operation   | Provided   |         |   |  |
|  | Manual pulse generator operation  | Up to 1 module (incremental), unit magnification (1 to 10000 times),<br><b>via a CPU</b> <sup>(Note 6)</sup> |         |   | Up to 1 module (incremental), unit magnification (1 to 10000 times),<br><b>an external input connection connector</b>  |
| Speed-torque control                                 | Speed control not including position loop, torque control, continuous operation to torque control   |  |         |   |  |
| Absolute position system                             | Provided  |  |         |   |  |
| Synchronous encoder axis                             | Up to the number of axes of the connected servo amplifiers<br>(via a servo amplifier or a CPU <sup>(Note 6)</sup> )   |  |         | Up to 4 channels<br><b>(An external input connection connector, via a servo amplifier, or via a CPU</b> <sup>(Note 6)</sup> )                                       |  |
| Speed limit function                                 | Speed limit value, JOG speed limit value  |  |         |   |  |
| Torque limit function                                | Torque limit value same setting, torque limit value individual setting  |  |         |   |  |
| Forced stop function                                 | Via a buffer memory, valid/invalid setting  |  |         | <b>An external input connection connector</b> or via a buffer memory, valid/invalid setting   |  |
| Software stroke limit function                       | Movable range check with feed current value or with machine feed value  |  |         |   |  |
| Hardware stroke limit function                       | Provided  |  |         |   |  |
| Speed change function                                | Provided  |  |         |   |  |

**Motion Module RD78G (Simple Motion Mode)**

Control specifications

Items in bold: differences

| Item  | Specifications   |   |         | Comparison with the previous models (Simple Motion modules)                         |  |
|---|--|---|---------|---|--|
|   | RD78G4   | RD78G8  | RD78G16 | RD77MS  | QD77MS   |
| Override function                           | <b>0 to 300 %</b>  |   |         |   | 1 to 300 %   |
| Acceleration/deceleration processing change | Acceleration/deceleration time   |   |         |   |  |
| Torque limit change                         | Provided   |   |         |   |  |
| Target position change function             | The target position address and the speed to the target position can be changed.           |   |         |   |  |
| M-code output function                      | WITH mode/AFTER mode   |   |         |   |  |
| Step function                               | Deceleration unit step, data No. unit step   |   |         |   |  |
| Skip function                               | Via a CPU or an external command signal  |   |         |   |  |
| Parameter initialization function           | Provided   |   |         |   |  |
| External input signal select function       | Via a CPU or a servo amplifier   |   |         | <b>An external input connection connector</b> , via a CPU, or via a servo amplifier |  |
| Mark detection function                     | Continuous detection mode, specified number of detections mode, ring buffer mode           |   |         |   |  |
|   | Mark detection signal  | <b>Up to the number of axes of the connected servo amplifiers</b> |         | 20  | 4 (QD77MS2: 2 points)  |
|   | Number of mark detection settings  | Up to 16  |         |   | QD77MS16: up to 16<br>QD77MS4/QD77MS2: up to 4   |
| Optional data monitor function              | Up to 4 points/axis  |   |         |   |  |
| Functional safety                           | <b>Safety communication (network connection)</b> , DI/DO connection of the servo amplifier |   |         | DI/DO connection of the servo amplifier   |  |
| Driver communication function               | Provided   |   |         |   |  |
| Inter-module synchronization function       | Provided   |   |         |   |  |
| Automatic return                            | <b>Provided</b>  |   |         | Connect/disconnect function of SSCNET communication                                 |  |
| Digital oscilloscope function               | Bit data: 16 channels <sup>(Note 5)</sup> , word data: 16 channels <sup>(Note 5)</sup>     |   |         |   | For QD77MS16,<br>Bit data: 16 channels <sup>(Note 5)</sup> ,<br>Word data: 16 channels <sup>(Note 5)</sup><br>For QD77MS4/QD77MS2,<br>Bit data: 8 channels,<br>Word data: 4 channels |

- Notes: 1. The helical interpolation is available with RD78G and RD77MS.  
 2. The number of cam registrations depends on the memory capacity, cam resolution, and number of coordinates.  
 3. The home position return method set in a driver (servo amplifier) is used.  
 4. 4-axis linear interpolation control is enabled only at the reference axis speed.  
 5. Eight channels of each word data and bit data can be displayed in real time.  
 6. Use a high-speed counter module.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Servo System Controllers

## Motion Module FX5-SSC-G (Simple Motion Mode)

### Control specifications

Items in bold: differences

| Item  |   | Specifications  |   | Comparison with the previous models (Simple Motion modules)   |             |
|---|---|---|---|---|-------------|
|   |   | FX5-40SSC-G   | FX5-80SSC-G   | FX5-40SSC-S   | FX5-80SSC-S |
| Maximum number of control axes              | [axis]  | 4   | 8   | 4   | 8           |
| Command interface                           |   | <b>CC-Link IE TSN</b>   |   | SSCNET III/H  |             |
| Servo amplifier                             |   | <b>MR-J5-G, MR-J5W2-G, MR-J5W3-G, MR-J5D1-G4, MR-J5D2-G4, MR-J5D3-G4</b>  |   | MR-J4-B, MR-J4W2-B, MR-J4W3-B   |             |
| Operation cycle (operation cycle setting)   | [μs]  | <b>500, 1000, 2000, 4000</b>  |   | 888, 1777   |             |
| Interpolation function                      |   | Linear interpolation (up to 4 axes), 2-axis circular interpolation  |   |   |             |
| Control method                              |   | Positioning control, path control (linear and arc), speed control, speed-torque control, synchronous control, continuous operation to torque control  |   |   |             |
| Acceleration/deceleration processing        |   | Trapezoidal acceleration/deceleration, S-curve acceleration/deceleration  |   |   |             |
| Compensation function                       |   | Backlash compensation, electronic gear, near pass function  |   |   |             |
| Synchronous control                         |   | Synchronous encoder input, command generation axis, cam, phase compensation   |   |   |             |
| Cam control                                 | Maximum number of cam registrations <sup>(Note 1)</sup>   | <b>128</b>  |   | 64  | 128         |
|   | Cam data  | Stroke ratio data format, coordinate data format  |   |   |             |
|   | Cam auto-generation function  | Cam for a rotary knife  |   |   |             |
| Positioning control method                  |   | Motion profile table  |   |   |             |
| Control unit                                |   | mm, inch, degree, pulse   |   |   |             |
| Number of positioning data                  |   | 600 data (positioning data No. 1 to 600)/axis   |   |   |             |
| Backup                                      |   | Parameters, positioning data, and block start data can be saved on flash ROM (batteryless backup)   |   |   |             |
| Home position return                        |   | <b>Driver home position return</b> <sup>(Note 2)</sup>  |   | Proximity dog method, count method 1, count method 2, data set method, scale home position signal detection method, driver home position return <sup>(Note 2)</sup> |             |
| Positioning control                         |   | Linear interpolation control (up to 4 axes <sup>(Note 3)</sup> (vector speed, reference axis speed)), fixed-pitch feed control (up to 4 axes), 2-axis circular interpolation (auxiliary point-specified, central point-specified), speed control (up to 4 axes), speed-position switching control (INC mode, ABS mode), position-speed switching control (INC mode), current value change (positioning data, start No. for a current value changing) NOP instruction, JUMP instruction (conditional, unconditional), LOOP, LEND, block start, condition start, wait start, simultaneous start, repeated start |   |   |             |
| Manual control                              | JOG operation   | Provided  |   |   |             |
|   | Inching operation   | Provided  |   |   |             |
|   | Manual pulse generator operation  | Up to 1 module (incremental), unit magnification (1 to 10000 times), <b>via a CPU</b> <sup>(Note 5)</sup>   |   | Up to 1 module (incremental), unit magnification (1 to 10000 times), <b>an external input connection connector</b>  |             |
| Speed-torque control                        | Speed control not including position loop, torque control, continuous operation to torque control |   |   |   |             |
| Absolute position system                    | Provided  |   |   |   |             |
| Synchronous encoder axis                    |   | Up to 4 modules (via a servo amplifier or a CPU <sup>(Note 5)</sup> )   | Up to 4 modules ( <b>An external input connection connector</b> , via a servo amplifier, or via a CPU <sup>(Note 5)</sup> ) |   |             |
| Speed limit function                        |   | Speed limit value, JOG speed limit value  |   |   |             |
| Torque change function                      |   | Forward/reverse torque limit value same setting, forward/reverse torque limit value individual setting  |   |   |             |
| Forced stop function                        |   | Via a buffer memory, valid/invalid setting  |   |   |             |
| Software stroke limit function              |   | Movable range check with feed current value or with machine feed value  |   |   |             |
| Hardware stroke limit function              |   | Provided  |   |   |             |
| Speed change function                       |   | Provided  |   |   |             |
| Override function                           |   | <b>0 to 300 %</b>   |   | 1 to 300 %  |             |
| Acceleration/deceleration processing change |   | Acceleration/deceleration time  |   |   |             |
| Torque limit change                         |   | Provided  |   |   |             |
| Target position change function             |   | The target position address and the speed to the target position can be changed.  |   |   |             |
| M-code output function                      |   | WITH mode/AFTER mode  |   |   |             |
| Step function                               |   | Deceleration unit step, data No. unit step  |   |   |             |
| Skip function                               |   | Via a CPU or an external command signal   |   |   |             |
| Parameter initialization function           |   | Provided  |   |   |             |
| External input signal select function       |   | Via a CPU or a servo amplifier  |   |   |             |
| Mark detection function                     |   | Continuous detection mode, specified number of detections mode, ring buffer mode  |   |   |             |
|   | Mark detection signal   | <b>Up to the number of axes of the connected servo amplifiers</b>   |   | Up to 4 points  |             |
|   | Number of mark detection settings   | Up to 16  |   |   |             |

**Motion Module FX5-SSC-G (Simple Motion Mode)**

Control specifications

Items in bold: differences

| Item                           | Specifications  |             | Comparison with the previous models (Simple Motion modules) |             |
|--------------------------------|---|-------------|---|-------------|
|                                | FX5-40SSC-G   | FX5-80SSC-G | FX5-40SSC-S   | FX5-80SSC-S |
| Optional data monitor function | Up to 4 points/axis   |             |   |             |
| Functional safety              | DI/DO connection of the servo amplifier                           |             |   |             |
| Driver communication function  | -   |             | Provided  |             |
| Automatic return               | <b>Provided</b>   |             | Connect/disconnect function of SSCNET communication         |             |
| Digital oscilloscope function  | Bit data: 16 channels, word data: 16 channels <sup>(Note 4)</sup> |             |   |             |

- Notes:
1. The number of cam registrations depends on the memory capacity, cam resolution, and number of coordinates.
  2. The home position return method set in a driver (servo amplifier) is used.
  3. 4-axis linear interpolation control is enabled only at the reference axis speed.
  4. Eight channels of each word data and bit data can be displayed in real time.
  5. Use the built-in high-speed counter of a CPU module or a high-speed pulse input/output module.

- Common Specifications
- Servo System Controllers**
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LVSWires
- Product List
- Precautions
- Support

# Servo System Controllers

## Motion Module (RD78G/FX5-SSC-G) (Simple Motion Mode)

### Synchronous control

| Item  | Number of settable axes |        |         |             |             |
|---|-------------------------|--------|---------|-------------|-------------|
|   | RD78G4                  | RD78G8 | RD78G16 | FX5-40SSC-G | FX5-80SSC-G |
| Servo input axis [axes/module]                      | 4                       | 8      | 16      | 4           | 8           |
| Command generation axis [axes/module]               | 4                       | 8      | 8       | 4           | 8           |
| Synchronous encoder axis [axes/module]              | 4                       | 8      | 16      | 4           | 4           |
| Composite main shaft gear [module/output axis]      | 1                       |        |         |             |             |
| Main shaft main input axis [module/output axis]     | 1                       |        |         |             |             |
| Main shaft sub input axis [module/output axis]      | 1                       |        |         |             |             |
| Main shaft gear [module/output axis]                | 1                       |        |         |             |             |
| Main shaft clutch [module/output axis]              | 1                       |        |         |             |             |
| Auxiliary shaft [module/output axis]                | 1                       |        |         |             |             |
| Auxiliary shaft gear [module/output axis]           | 1                       |        |         |             |             |
| Auxiliary shaft clutch [module/output axis]         | 1                       |        |         |             |             |
| Composite auxiliary shaft gear [module/output axis] | 1                       |        |         |             |             |
| Speed change gear [module/output axis]              | 1                       |        |         |             |             |
| Output axis (cam axis) [axes/module]                | 4                       | 8      | 16      | 4           | 8           |

### Cam control

| Item                            |   | RD78G4   | RD78G8   | RD78G16 | FX5-40SSC-G   | FX5-80SSC-G |      |      |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
|---------------------------------|---|--|--|---------|---|-------------|------|------|------|----------------|----------------|-----|-----|------|------|------|------|-------|-------|-------|-----|-----|----|----|----|---|---|-----------|-----------|-----|----|----|----|---|---|---|---|
| Memory capacity                 | Cam storage area  | 256 k bytes  |  |         | 128 k bytes   |             |      |      |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
|                                 | Cam working area  | 1024 k bytes   |  |         |   |             |      |      |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
| Maximum number of registrations | Cam storage area  | 256 <sup>(Note 1)</sup>  |  |         | 4-axis module: 64 <sup>(Note 1)</sup><br>8-axis module: 128 <sup>(Note 1)</sup> |             |      |      |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
|                                 | Cam working area  | 256 <sup>(Note 1)</sup>  |  |         |   |             |      |      |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
| Comment                         |   | Up to 32 characters for each cam data  |  |         |   |             |      |      |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
| Cam data                        | Stroke ratio data type                                  | Maximum number of cam registrations <sup>(Note 2)</sup>  | <table border="1"> <thead> <tr> <th>Cam resolution</th> <th>256</th> <th>512</th> <th>1024</th> <th>2048</th> <th>4096</th> <th>8192</th> <th>16384</th> <th>32768</th> </tr> </thead> <tbody> <tr> <td>RD78G</td> <td>256</td> <td>128</td> <td>64</td> <td>32</td> <td>16</td> <td>8</td> <td>4</td> <td>2</td> </tr> <tr> <td>FX5-SSC-G</td> <td>128</td> <td>64</td> <td>32</td> <td>16</td> <td>8</td> <td>4</td> <td>2</td> <td>-</td> </tr> </tbody> </table> |         |   |             |      |      |      |                | Cam resolution | 256 | 512 | 1024 | 2048 | 4096 | 8192 | 16384 | 32768 | RD78G | 256 | 128 | 64 | 32 | 16 | 8 | 4 | 2         | FX5-SSC-G | 128 | 64 | 32 | 16 | 8 | 4 | 2 | - |
|                                 |   |  | Cam resolution   | 256     | 512   | 1024        | 2048 | 4096 | 8192 | 16384          | 32768          |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
|                                 |   |  | RD78G  | 256     | 128   | 64          | 32   | 16   | 8    | 4              | 2              |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
|                                 | FX5-SSC-G   | 128  | 64   | 32      | 16  | 8           | 4    | 2    | -    |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
| Stroke ratio                    |   | -214.7483648 to 214.7483647 %  |  |         |   |             |      |      |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
| Coordinate data type            | Maximum number of cam registrations <sup>(Note 2)</sup> | <table border="1"> <thead> <tr> <th>Cam resolution</th> <th>128</th> <th>256</th> <th>512</th> <th>1024</th> <th>2048</th> <th>4096</th> <th>8192</th> <th>16384</th> </tr> </thead> <tbody> <tr> <td>RD78G</td> <td>256</td> <td>128</td> <td>64</td> <td>32</td> <td>16</td> <td>8</td> <td>4</td> <td>2</td> </tr> <tr> <td>FX5-SSC-G</td> <td>128</td> <td>64</td> <td>32</td> <td>16</td> <td>8</td> <td>4</td> <td>2</td> <td>-</td> </tr> </tbody> </table> |  |         |   |             |      |      |      | Cam resolution | 128            | 256 | 512 | 1024 | 2048 | 4096 | 8192 | 16384 | RD78G | 256   | 128 | 64  | 32 | 16 | 8  | 4 | 2 | FX5-SSC-G | 128       | 64  | 32 | 16 | 8  | 4 | 2 | - |   |
|                                 |   | Cam resolution   | 128  | 256     | 512   | 1024        | 2048 | 4096 | 8192 | 16384          |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
|                                 |   | RD78G  | 256  | 128     | 64  | 32          | 16   | 8    | 4    | 2              |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
| FX5-SSC-G                       | 128   | 64   | 32   | 16      | 8   | 4           | 2    | -    |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
| Coordinate data                 |   | Input value: 0 to 2147483647 Output value: -2147483648 to 2147483647   |  |         |   |             |      |      |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |
| Cam auto-generation function    |   | Cam for a rotary knife   |  |         |   |             |      |      |      |                |                |     |     |      |      |      |      |       |       |       |     |     |    |    |    |   |   |           |           |     |    |    |    |   |   |   |   |

Notes: 1. The maximum number of registrations depends on the memory capacity, cam resolution, and number of coordinates.

2. This is the maximum number of cam registrations for the cam storage area.



MEMO

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LVSWires

Product List

Precautions

Support

# Servo System Controllers

## Motion Module RD78GH/RD78G (PLCopen® Motion Control FB Mode)

### Control specifications

| Item  |  | Specifications  |  |
|---|--|---|--|
|   |  | Motion module   |  |
|   |  | RD78GH  | RD78G  |
| Maximum number of control axes                                    |  | RD78GHV: 128 axes<br>RD78GHW: 256 axes  | RD78G4: 4 axes<br>RD78G8: 8 axes<br>RD78G16: 16 axes<br>RD78G32: 32 axes<br>RD78G64: 64 axes |
| Maximum number of connectable stations                            |  | 120 stations  |  |
| Command interface   |  | CC-Link IE TSN  |  |
| Servo amplifier   |  | MR-J5-G, MR-J5W2-G, MR-J5W3-G, MR-J5D1-G4, MR-J5D2-G4, MR-J5D3-G4   |  |
| Operation cycle<br>(operation cycle settings) <sup>(Note 1)</sup> |  | [μs] 31.25, 62.5, 125, 250, 500, 1000, 2000, 4000, 8000   | 62.5, 125, 250, 500, 1000, 2000, 4000, 8000  |
| Axis  |  | Real drive axis, virtual drive axis, real encoder axis, virtual encoder axis, virtual linked axis                                   |  |
|   | Axes group                                 | 0: Unset<br>1 or later: the axes group No. for the setting axis   |  |
|   | Real drive axis                            | Servo amplifier   |  |
|   | Real encoder axis                          | Via a servo amplifier   |  |
| Interpolation function  |  | Linear interpolation (2 to 4 axes), 2-axis circular interpolation   |  |
| Control method  |  | Positioning control, direct control   |  |
| Acceleration/deceleration processing                              |  | Acceleration/deceleration specification method (acceleration, deceleration, jerk), time-fixed acceleration/deceleration method      |  |
| Compensation function   |  | Driver unit conversion  |  |
| Synchronous control   | Module                                     | Master axis, cam, gear  |  |
|   | Master axis                                | Real drive axis, virtual drive axis, real encoder axis, virtual encoder axis, virtual linked axis                                   |  |
| Operation profile<br>(cam data)                                   | Cam data                                   | Cam data, cam for a rotary knife  |  |
|   | Motion control FB<br>(Cam auto-generation) | Cam for a rotary knife  |  |
| Control unit  |  | pulse, m, degree, Revolution, inch, arbitrary unit character string   |  |
| Programming language  |  | PLC CPU: ladder diagram, function block diagram/ladder diagram, structured text language<br>Motion module: structured text language |  |
| Backup  |  | Parameters and programs can be saved on a flash ROM (batteryless backup)  |  |
| Start/stop operation  |  | Start, stop, restart, buffer mode, forced stop  |  |
| Home position return control                                      |  | Driver homing method, data set type homing  |  |
| Positioning control   | Linear control                             | Linear interpolation (2 to 4 axes)  |  |
|   | 2-axis circular interpolation              | Border point-specified, central point-specified, radius-specified circular interpolation  |  |
| Manual control  |  | JOG operation   |  |
| Direct control  | Speed control                              | Speed control not including position loop, speed control including position loop  |  |
|   | Torque control                             | Torque control, continuous operation to torque control  |  |
| Absolute position system  |  | Provided  |  |
| Speed limit function  |  | Speed command range   |  |
| Torque limit function   |  | Torque limit value (positive/negative direction)  |  |
| Forced stop function  |  | Valid/Invalid setting   |  |
| Software stroke limit   |  | Movable range check with an address of the set position or the feed machine position.   |  |
| Hardware stroke limit   |  | Provided  |  |
| Command speed change  |  | Provided  |  |
| Current position change function                                  |  | Provided  |  |
| Acceleration/deceleration processing change                       |  | Acceleration/deceleration, acceleration/deceleration time   |  |
| Torque limit value change   |  | Provided  |  |
| Override function   |  | Provided  |  |
| History data  |  | Event history, position data history  |  |
| Logging   |  | Data logging, real-time monitor   |  |
| Axis emulate  |  | Provided  |  |
| Touch probe (mark detection)                                      |  | Provided  |  |
| Monitoring of servo data  |  | Cyclic transmission, transient transmission   |  |
| Servo system recorder   |  | Provided  |  |
| Safety communication  |  | Provided  |  |
| Driver communication function                                     |  | Provided  |  |
| Inter-module synchronization function                             |  | Provided  |  |

Notes: 1. The number of controllable axes varies depending on the operation cycle.

**Motion Module RD78GH/RD78G (PLCopen® Motion Control FB Mode)**

Synchronous control specifications

Perform synchronous control with a combination of function blocks.  
 For the function blocks to be used, refer to "Function blocks (FB) list" of this catalog.

Program capacity and operation profile (cam) specifications

| Item                                      | RD78GH   | RD78G   |
|---|--|---|
| Program/data capacity <sup>(Note 1)</sup> | Built-in ROM max. 64 [MB] + SD memory card               | Built-in ROM max. 16 [MB] + SD memory card                        |
| Maximum number of cam registration        | 60000 (1024 out of 60000 can be set on engineering tool) |   |
| Cam data                                  | Cam type   | Cam data, cam for a rotary knife                                  |
|   | Interpolation method                                     | Section interpolation, linear interpolation, spline interpolation |
|   | Profile ID   | 1 to 60000  |
|   | Resolution   | 8 to 65535 (any resolution within the range)                      |
|   | Units for cam length per cycle                           | mm, inch, pulse, degree   |
|   | Units for stroke   | %, mm, inch, pulse, degree  |
| Cam auto-generation                       | Cam for a rotary knife                                   |   |

Notes: 1. Total capacity including system management area. The available capacity is smaller.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/SWires

Product List

Precautions

Support

## Servo System Controllers

### Motion Module RD78GH/RD78G (PLCopen® Motion Control FB Mode)

Function blocks (FB) list

| Type                    | Motion control FB                        | Name  |
|-------------------------|--|---|
| Management FBs          | MC_GroupEnable                           | Axes Group Enabled  |
|                         | MC_GroupDisable                          | Axes Group Disabled   |
|                         | MC_Power                                 | Operation Available   |
|                         | MC_SetPosition                           | Current Position Change                                     |
|                         | MCv_SetTorqueLimit                       | Torque Limit Value  |
|                         | MC_SetOverride                           | Override Value Setting                                      |
|                         | MC_ReadParameter                         | Parameter Read  |
|                         | MC_WriteParameter                        | Parameter Write   |
|                         | MC_Reset                                 | Axis Error Reset  |
|                         | MC_GroupReset                            | Axes Group Error Reset                                      |
|                         | MC_TouchProbe                            | Touch Probe Enabled   |
|                         | MC_AbortTrigger                          | Touch Probe Disabled  |
|                         | MC_CamTableSelect                        | Cam Table Selection   |
|                         | MCv_ChangeCycle                          | Current Value Change per Cycle                              |
|                         | MCv_AllPower                             | All Axes Operation Available                                |
|                         | MC_GroupSetOverride                      | Axes Group Override Value Setting                           |
|                         | MCv_MotionErrorReset                     | Motion Error Reset  |
|                         | MCv_AdvPositionPerCycleCalc              | Advanced Synchronous Control Position per Cycle Calculation |
|                         | MCv_AdvCamSetPositionCalc                | Advanced Synchronous Control Cam Set Position Calculation   |
| Operation FBs           | MC_Home                                  | OPR   |
|                         | MC_Stop                                  | Forced Stop   |
|                         | MC_GroupStop                             | Group Forced Stop   |
|                         | MC_MoveAbsolute                          | Absolute Value Positioning                                  |
|                         | MC_MoveRelative                          | Relative Value Positioning                                  |
|                         | MCv_Jog                                  | JOG   |
|                         | MC_MoveVelocity                          | Speed Control   |
|                         | MC_TorqueControl                         | Torque Control  |
|                         | MCv_SpeedControl                         | Speed Control (Including Position Loop)                     |
|                         | MCv_MoveLinearInterpolateAbsolute        | Absolute Value Linear Interpolation Control                 |
|                         | MCv_MoveLinearInterpolateRelative        | Relative Value Linear Interpolation Control                 |
|                         | MCv_MoveCircularInterpolateAbsolute      | Absolute Value Circular Interpolation Control               |
|                         | MCv_MoveCircularInterpolateRelative      | Relative Value Circular Interpolation Control               |
|                         | MC_CamIn                                 | Cam Operation Start   |
|                         | MC_GearIn                                | Gear Operation Start  |
|                         | MC_CombineAxes                           | Addition/Subtraction Positioning                            |
|                         | MCv_BacklashCompensationFilter           | Backlash Compensation Filter                                |
|                         | MCv_SmoothingFilter                      | Smoothing Filter  |
|                         | MCv_DirectionFilter                      | Moving Direction Restriction Filter                         |
|                         | MCv_SpeedLimitFilter                     | Speed Limit Filter  |
| MCv_AdvancedSync        | Advanced Synchronous Control             |   |
| MCv_MovePositioningData | Multiple Axes Positioning Data Operation |   |
| Standard FBs            | MCv_ReadProfileData                      | Profile Read  |
|                         | MCv_WriteProfileData                     | Profile Write   |

\* The number of usable function blocks depends on the program capacity.

Motion Module

CC-Link IE TSN

| Item   | RD78GH  | RD78G                                     | FX5-40SSC-G   | FX5-80SSC-G  |
|--|---|---|---|--|
| Communications speed                               | 1 Gbps/100 Mbps   |   |   |  |
| Maximum number of connectable stations per network | 121 stations (including the master station)   |   | 21 stations (including the master and four motion control stations)   | 25 stations (including the master and eight motion control stations) |
| Connection cable                                   | Ethernet cable (category 5e or higher, double shielded/STP), straight cable                                 |   |   |  |
| Maximum distance between stations                  | 100 m   |   |   |  |
| Maximum number of networks                         | 239   |   |   |  |
| Topology   | Line topology, star topology, coexistence of line and star topologies, ring topology <sup>(Note 1, 2)</sup> |   | Line topology, star topology, coexistence of line and star topologies |  |
| Communications method                              | Time-sharing method   |   |   |  |
| Maximum transient transmission capacity            | 1920 bytes  |   |   |  |
| Maximum link points per network                    | RX/R  | 16K points                                |   | 8K points  |
|  | Y/RWw   | 8K points                                 |   | 1K points  |
| Maximum link points per station                    | RX/R  | 16K points                                |   | 8K points  |
|  | Y/RWw   | 8K points                                 |   | 1K points  |
| Safety communications                              | Maximum number of safety connections per station  | 120 connections                           |   | -  |
|  | Maximum number of link points per safety connection   | 8 words (input: 8 words, output: 8 words) |   | -  |

Notes: 1. When using ring topology to configure a system that includes the MR-J5 servo amplifier, up to 60 stations can be connected.  
 2. Ring topology is available in a system that is configured with CC-Link IE TSN Class B only. Ring topology is not available in a system that mixes CC-Link IE TSN Class B/A or that is configured with CC-Link IE TSN Class A only. For other restrictions, refer to "MELSEC iQ-R Motion Module User's Manual".


[Note when connecting devices]

Connect class A remote stations after class B remote stations.

CC-Link IE TSN Class

CC-Link IE TSN certifies nodes and switches to a specific class level according to its functionality and performance classification. Products can be classified as either class A or B. For the CC-Link IE TSN Class of each product, please check the CC-Link Partner Association website or the relevant product catalog or manual. Supported functions and system configuration may differ according to the CC-Link IE TSN Class of products used. For example, products compatible with class B are necessary to configure a high-speed motion control system. For details of configuring systems with both class A and class B devices, please refer to relevant master product manual.

System configuration

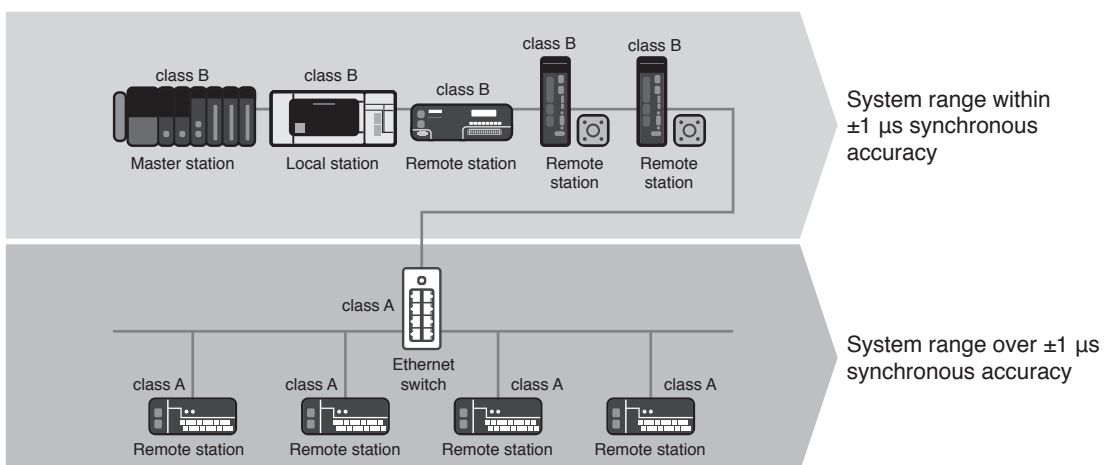

- Synchronous accuracy of a system varies relative to the combination of connected devices and switches CC-Link IE TSN Class
- Use class B Ethernet switch when configuring a star topology with class B devices
- Use class B devices when configuring a system within  $\pm 1 \mu\text{s}$  high-accuracy synchronization, connect class A devices to a separate branch line from class B devices (for details of system configuration, please refer to relevant master product manual)
- Mitsubishi Electric's block type remote modules comply both class B and A

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Servo System Controllers

## Motion Module

### Module specifications RD78GH/RD78G

| Item                                      | RD78GH   | RD78G  |
|---|--|--|
| Maximum number of control axes            | RD78GHV: 128 axes<br>RD78GHW: 256 axes                         | RD78G4: 4 axes<br>RD78G8: 8 axes<br>RD78G16: 16 axes<br>RD78G32: 32 axes<br>RD78G64: 64 axes |
| Maximum number of connectable stations    | 121 stations (including the master station)                    |  |
| Servo amplifier connection method         | CC-Link IE TSN   |  |
| CC-Link IE TSN Class                      | B  |  |
| Maximum distance between stations [m]     | 100  |  |
| PERIPHERAL I/F                            | Via a CPU module (USB, Ethernet)                               |  |
| Extended memory                           | SD memory card   |  |
| Number of ports for CC-Link IE TSN        | 2 ports  | 1 port   |
| Number of I/O points occupied             | 48 points (I/O assignment: 16 points (empty slot) + 32 points) | 32 points  |
| Number of slots occupied                  | 2 slots  | 1 slot   |
| Internal current consumption (5 V DC) [A] | 2.33   | 1.93   |
| Mass [kg]                                 | 0.44   | 0.26   |
| Dimensions [mm]                           | 106.0 (H) × 56.0 (W) × 110.0 (D)                               | 106.0 (H) × 27.8 (W) × 110.0 (D)   |

### Module specifications FX5-40SSC-G/FX5-80SSC-G

| Item  | FX5-40SSC-G   | FX5-80SSC-G  |
|---|---|--|
| Maximum number of control axes                      | 4 axes  | 8 axes   |
| Maximum number of connectable stations              | 21 stations (including the master and four motion control stations) | 25 stations (including the master and eight motion control stations) |
| Servo amplifier connection method                   | CC-Link IE TSN  |  |
| CC-Link IE TSN Class                                | B   |  |
| Maximum distance between stations [m]               | 100   |  |
| Maximum input current of external 24 V DC power [A] | 0.24  |  |
| Mass [kg]   | 0.3   |  |
| Dimensions [mm]                                     | 90 (H) × 50 (W) × 83 (D)  |  |
| Applicable CPU <sup>(Note 1)</sup>                  | FX5U, FX5UC <sup>(Note 2)</sup>                                     |  |

- Notes: 1. Use a CPU module with firmware version 1.230 or later.  
The following CPU modules can be updated to that firmware version.
- CPU module with serial No. 17X\*\*\*\* or later
  - FX5UC-32MT/DS-TS and FX5UC-32MT/DSS-TS with serial No. 178\*\*\*\* or later.
2. FX5-CNV-IFC is required to connect the Motion module to an FX5UC CPU module.

## ■Products on the Market

### Manual Pulse Generator


Mitsubishi Electric has confirmed the operation of the following manual pulse generator. Contact the manufacturer for details.

| Product name           | Model      | Description  | Manufacturer                |
|------------------------|------------|--|-----------------------------|
| Manual pulse generator | RE46A2CO2B | Number of pulses per revolution: 25 pulses/rev (100 pulses/rev after magnification by 4) | Tokyo Sokuteikizai Co.,Ltd. |


**Motion Module**

Dimensions

- RD78G4/RD78G8/RD78G16/RD78G32/RD78G64

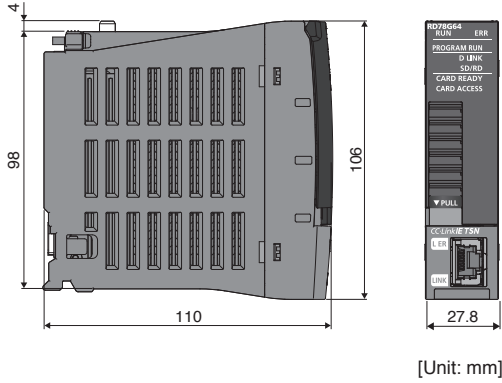


- RD78GHV/RD78GHW

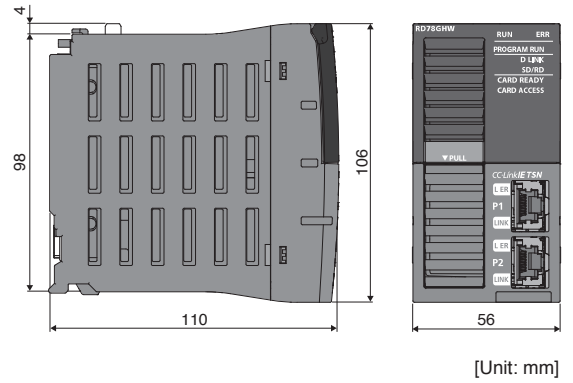


Dimensions

- FX5-40SSC-G


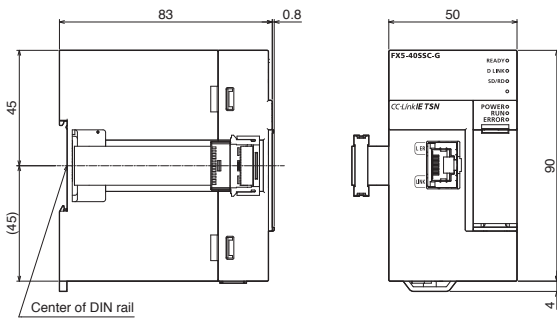


- FX5-80SSC-G

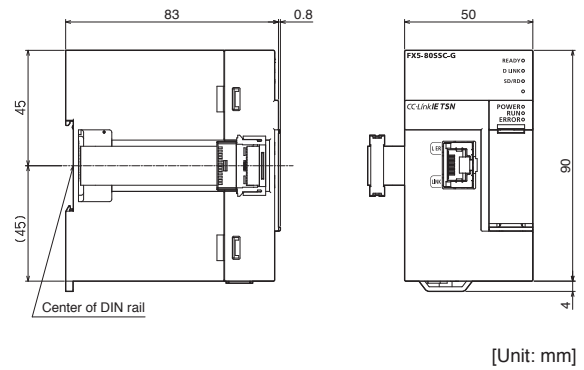

**Mounting**

- RD78G4/RD78G8/RD78G16/RD78G32/RD78G64  
RD78GHV/RD78GHW

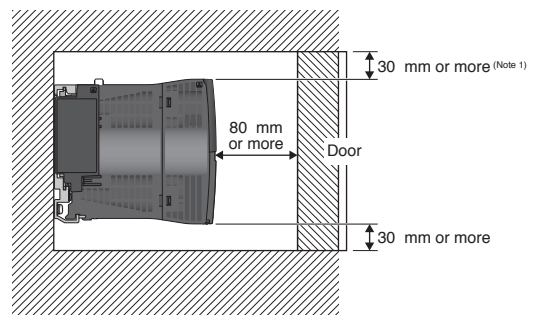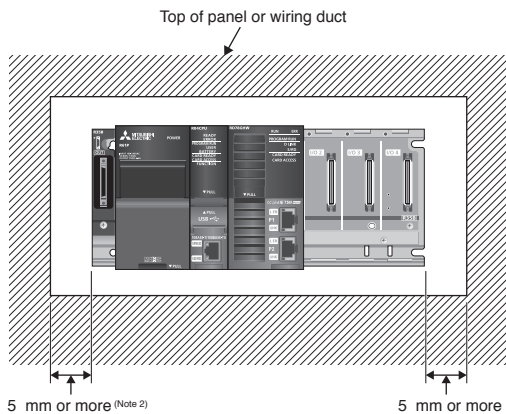

Notes: 1. Provide clearance of 30 mm or more when the height of a wiring duct is 50 mm or less. In other cases, provide clearance of 40 mm or more.  
 2. Provide clearance of 20 mm or more when an extension cable is connected/removed without removing a power supply module.

# Servo System Controllers

## Engineering Software

### MELSOFT GX Works3 operating environment <sup>(Note 1)</sup>

| Item                     | Description   |  |
|--------------------------|---|--|
| OS                       | Microsoft® Windows® 11 (Home, Pro, Enterprise, Education)   |  |
|                          | Microsoft® Windows® 10 (Home, Pro, Enterprise, Education, IoT Enterprise 2016 LTSC <sup>*1</sup> , IoT Enterprise 2019 LTSC <sup>*1</sup> )<br><sup>*1: 64-bit version only</sup> |  |
| CPU                      | Windows® 11   | 2 or more cores on a compatible 64-bit processor or System on a Chip (SoC) |
|                          | Windows® 10   | Intel® Core™ 2 Duo Processor 2 GHz or more recommended                     |
| Required memory          | Windows® 11   | 4 GB or more recommended   |
|                          | Windows® 10   | 64-bit OS: 2 GB or more recommended<br>32-bit OS: 1 GB or more recommended |
| Required hard disk space | For installation: 22 GB or more free hard disk space<br>For operation: 512 MB or more free virtual memory space   |  |
| Monitor                  | Resolution 1024 × 768 or more   |  |

Notes: 1. Refer to Installation Instructions for precautions and restrictions regarding the operating environment.

### Engineering software list

| Item              | Model         | Description  |     |
|-------------------|---------------|--|-----|
| MELSOFT GX Works3 | SW1DND-GXW3-E | <ul style="list-style-type: none"> <li>Programmable Controller Engineering Software [MELSOFT GX Works3, GX Works2, GX Developer, PX Developer]</li> <li>MITSUBISHI ELECTRIC FA Library</li> </ul>  | DVD |
| MELSOFT iQ Works  | SW2DND-IQWK-E | FA engineering software <sup>(Note 1)</sup> <ul style="list-style-type: none"> <li>System Management Software [MELSOFT Navigator]</li> <li>Programmable Controller Engineering Software [MELSOFT GX Works3, GX Works2, GX Developer, PX Developer]</li> <li>Motion Controller Engineering Software [MELSOFT MT Works2]</li> <li>Screen Design Software [MELSOFT GT Works3]</li> <li>Robot Programming Software [MELSOFT RT ToolBox3 <sup>(Note 2)</sup>]</li> <li>Inverter Setup Software [MELSOFT FR Configurator2]</li> <li>Servo Engineering Software [MELSOFT MR Configurator2]</li> <li>C Controller setting and monitoring tool [MELSOFT CW Configurator]</li> <li>MITSUBISHI ELECTRIC FA Library</li> </ul> | DVD |

Notes: 1. Refer to each product manual for the software supported by the model.

2. RT ToolBox3 mini (simplified version) will be installed if iQ Works product ID is used. When RT ToolBox3 (with simulation function) is required, please purchase RT ToolBox3 product ID.



## Motion Control Software SWM-G(-N1)

### Control specifications

| Item  | Specifications   |  |
|---|--|--|
| Maximum number of control axes <sup>(Note 1)</sup>  | 16, 32, 64, 128 axes   |  |
| Command interface                                   | CC-Link IE TSN<br>EtherCAT <sup>®</sup> <sup>(Note 3)</sup>  |  |
| CC-Link IE TSN Class                                | B  |  |
| Communication cycle (operation cycle settings) [μs] | 125, 250, 500, 1000, 2000, 4000, 8000  |  |
| Communication specifications                        | Mixture of hot connect, SDO communication, and TCP/IP communication  |  |
| Development environment                             | • Microsoft <sup>®</sup> Visual Studio <sup>®</sup> 2017, 2019<br>• Programming languages supported by API library: C/C++, .NET (C#, VB.NET, etc.) |  |
| Functions   | Control method   | Position, speed, torque  |
|   | Positioning  | Up to 128 axes simultaneously (absolute value command, relative value command), override   |
|   | Acceleration/deceleration processing   | Trapezoidal, S-curve, jerk ratio, parabolic, sine, time acceleration trapezoidal, etc. (24 types)  |
|   | Interpolation function   | 2- to 4-axis linear interpolation, 2-axis/3-axis circular interpolation, 3-axis helical interpolation, PVT   |
|   | Continuous path  | Combination of linear and circular interpolation, spline interpolation, pre-read speed automatic control, linear/circular continuous path with rotation stage  |
|   | JOG operation  | Provided   |
|   | Real-time control  | Event, triggered motion, position synchronous output   |
|   | Synchronous control  | Simple synchronization, synchronous gear ratio, synchronous phase offset, synchronous compensation, dynamic establishment/cancellation of synchronization, multiple pairs (up to 64 pairs) of synchronization between 1 axis and multiple axes (synchronous group) |
|   | Electronic cam   | Cam curves of eight systems can be defined, cam curve per communication cycle, phase operation, clutch   |
|   | Home position return <sup>(Note 2)</sup>   | Home position return using the Z-phase, home position sensor, limit sensor, limit proximity sensor, external input signal, mechanical end, and gantry axis can be performed.   |
|   | I/O size   | Input: 8000 bytes, output: 8000 bytes  |
|   | Compensation function  | Backlash/pitch error compensation, plane strain (straightness) compensation  |
| Auxiliary function                                  | Touch probe, logging   |  |

- Notes: 1. The maximum number of control axes differs among the USB keys for Motion Control Software.  
 2. SWM-G does not support the home position return mode of the servo amplifier.  
 3. SWM-G-N1 is also compatible with EtherCAT<sup>®</sup>.

### CC-Link IE TSN

| Item                                    | Specifications  |
|---|---|
| Communications speed [bps]              | 1 G/100 M <sup>(Note 1, 2)</sup>  |
| Connectable stations per network        | Up to 128 stations  |
| Connection cable                        | Ethernet cable (category 5e or higher, double shielded/STP), straight cable |
| Maximum distance between stations [m]   | 100   |
| Topology <sup>(Note 3)</sup>            | Line topology, star topology, coexistence of line and star topologies       |
| Communications method                   | Time-sharing method   |
| Maximum transient transmission capacity | 1920 bytes  |

- Notes: 1. When two ports are available, a 1 Gbps device and a 100 Mbps device can be assigned to each port.  
 2. When devices of different CC-Link IE TSN Class are mixed, the functions and performance equivalent to those of the lower CC-Link IE TSN Class are applied to part of or the entire network.  
 3. Use class B Ethernet switch when configuring a star topology with class B devices.

### Operating environment

| Item  | Specifications  |  |
|---|---|--|
| Personal computer                           | Microsoft <sup>®</sup> Windows <sup>®</sup> supported personal computer   |  |
| OS  | Microsoft <sup>®</sup> Windows <sup>®</sup> 10 (Pro, Enterprise, IoT Enterprise LTSC <sup>(Note 1)</sup> ) (64-bit) |  |
| CPU   | Intel <sup>®</sup> Atom™ 2 GHz, 2Core or higher is recommended  |  |
| Memory                                      | 4 GB or more  |  |
| Required hard disk space                    | For installation: 5 GB or more  |  |
| Network interface (network interface cards) | SWM-G   | Intel <sup>®</sup> I210, I350, I211-AT   |
|   | SWM-G-N1  | Intel <sup>®</sup> I210, I350, I211-AT, I217LM, I218V, I219<br>Realtek 8168/8111, etc. |

- Notes: 1. Windows<sup>®</sup> 10 IoT Enterprise LTSC is recommended.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

## Servo System Controllers

### Motion Control Software SWM-G(-N1)

#### Motion Control Software list

| Product name                                    |          | Model           | Description  |
|---|----------|-----------------|--|
| Motion Control Software <small>(Note 1)</small> | SWM-G    | SW1DNN-SWVG-M   | CC-Link IE TSN compatible<br>• SWM-G Engine • SWM-G Operating Station • Network API<br>• SWM-G API • Real Time OS (RTX64)                            |
|   | SWM-G-N1 | SW1DNN-SWVGN1-M | CC-Link IE TSN/EtherCAT®-compatible<br>• SWM-G Engine • SWM-G Operating Station • Network API<br>• SWM-G API • EcConfigurator • Real Time OS (RTX64) |
| USB key for Motion Control Software             | SWM-G    | MR-SWVG16-U     | Maximum number of control axes: 16 axes, USB key (license)   |
|   |          | MR-SWVG32-U     | Maximum number of control axes: 32 axes, USB key (license)   |
|   |          | MR-SWVG64-U     | Maximum number of control axes: 64 axes, USB key (license)   |
|   |          | MR-SWVG128-U    | Maximum number of control axes: 128 axes, USB key (license)  |
|   | SWM-G-N1 | MR-SWVG16N1-U   | Maximum number of control axes: 16 axes, USB key (license)   |
|   |          | MR-SWVG32N1-U   | Maximum number of control axes: 32 axes, USB key (license)   |
|   |          | MR-SWVG64N1-U   | Maximum number of control axes: 64 axes, USB key (license)   |
|   |          | MR-SWVG128N1-U  | Maximum number of control axes: 128 axes, USB key (license)  |

Notes: 1. Download and install Motion Control Software from Mitsubishi Electric FA global website.

## API Library

Simpler programming by using a dedicated library suite for access to Motion Control Software.

### ■ Main functions of API library

| Class       | Function              | Description  |
|-------------|-----------------------|--|
| SSCApi      | StartEngine           | Starts SWM-G engine.   |
|             | StopEngine            | Stops SWM-G engine.  |
|             | CreateDevice          | Creates a device to interface with the SWM-G engine.                                 |
|             | CloseDevice           | Closes a device.   |
|             | StartCommunication    | Starts communication with the servo network.   |
|             | StopCommunication     | Stops communication with the servo network.  |
| CoreMotion  | GetStatus             | Reads the current system status from SWM-G engine.                                   |
| AxisControl | SetServoOn            | Executes servo on or servo off.  |
|             | SetAxisCommandMode    | Sets the command mode of the axis.   |
|             | GetAxisCommandMode    | Obtains the command mode of the axis.  |
|             | GetPosCommand         | Obtains the commanded position of the axis.  |
|             | GetPosFeedback        | Obtains the feedback position of the axis.   |
|             | GetVelCommand         | Obtains the commanded velocity of the axis.  |
|             | GetVelFeedback        | Obtains the feedback velocity of the axis.   |
| Config      | SetParam              | Sets the system parameters.  |
|             | GetParam              | Obtains the system parameters.   |
|             | SetAxisParam          | Sets the axis parameters.  |
|             | GetAxisParam          | Obtains the axis parameters.   |
|             | Export                | Exports the system and axis parameters to xml file.                                  |
| Home        | Import                | Imports the system and axis parameters from xml file.                                |
|             | StartHome             | Starts home position return.   |
| Motion      | SetCommandPos         | Sets the commanded position to a specified value.                                    |
|             | StartPos              | Executes positioning (absolute position).  |
|             | StartMov              | Executes positioning (relative position).  |
|             | StartLinearIntplPos   | Starts linear interpolation (absolute position).                                     |
|             | StartLinearIntplMov   | Starts linear interpolation (relative position).                                     |
|             | StartCircularIntplPos | Starts circular interpolation (absolute position).                                   |
|             | StartCircularIntplMov | Starts circular interpolation (relative position).                                   |
|             | StartHelicalIntplPos  | Starts helical interpolation (absolute position).                                    |
|             | StartHelicalIntplMov  | Starts helical interpolation (relative position).                                    |
|             | StartJog              | Starts JOG operation.  |
|             | Stop                  | Decelerates the axis to stop.  |
|             | ExecQuickStop         | Decelerates the axis to stop with Quick Stop Dec parameter.                          |
|             | ExecTimedStop         | Decelerates the axis to stop with the specified time.                                |
|             | Wait                  | Executes the blocking wait command.  |
|             | Pause                 | Pauses the positioning operation.  |
|             | Resume                | Restarts the paused positioning operation.   |
|             | OverridePos           | Overrides the target position (absolute position) during positioning operation.      |
|             | OverrideMov           | Overrides the target position (relative position) during positioning operation.      |
|             | OverrideProfile       | Overrides the velocity pattern during positioning, JOG operation, and speed control. |
|             | StopJogAtPos          | Decelerates the axis in JOG operation to stop at the specified position.             |

|                              |
|------------------------------|
| Common Specifications        |
| Servo System Controllers     |
| Servo Amplifiers             |
| Rotary Servo Motors          |
| Linear Servo Motors          |
| Direct Drive Motors          |
| Options/Peripheral Equipment |
| LVSWires                     |
| Product List                 |
| Precautions                  |
| Support                      |

# Servo System Controllers

## API Library

Simpler programming by using a dedicated library suite for access to Motion Control Software.

### ■ Main functions of API library

| Class      | Function                    | Description  |
|------------|-----------------------------|--|
| Sync       | SetSyncMasterSlave          | Establishes synchronization between the master and following axes.     |
|            | ResolveSync                 | Cancels synchronization of the specified following axes.               |
| Velocity   | StartVel                    | Starts speed control.  |
|            | Stop                        | Stops speed control.   |
| Torque     | StartTrq                    | Starts torque control.   |
|            | StopTrq                     | Stops torque control.  |
| AdvMotion  | CreatePathIntplBuffer       | Assigns the buffer memory for path interpolation to an axis.           |
|            | FreePathIntplBuffer         | Frees up the buffer memory for path interpolation.                     |
|            | StartPathIntplPos           | Starts path control (absolute position).                               |
|            | StartPathIntplMov           | Starts path control (relative position).                               |
|            | StartPathIntpl3DPos         | Starts 3D path interpolation (absolute position).                      |
|            | StartPathIntpl3DMov         | Starts 3D path interpolation (relative position).                      |
| AdvSync    | StartECAM                   | Starts E-CAM control.  |
|            | StopECAM                    | Stops E-CAM control.   |
| Event      | SetEvent                    | Sets an event.   |
|            | SetSoftwareTouchProbe       | Sets the parameter of the software touch probe channel.                |
|            | GetSoftwareTouchProbeStatus | Obtains the parameters and the current status of software touch probe. |
|            | SetHardwareTouchProbe       | Sets the parameters of hardware touch probe.                           |
|            | GetHardwareTouchProbeStatus | Obtains the parameters and the current status of hardware touch probe. |
|            | StartPSO                    | Starts the position synchronous output channel.                        |
| Io         | SetOutBit                   | Sets the output bit values.  |
|            | SetOutByte                  | Sets the output byte values.   |
|            | SetOutAnalogDataShort       | Sets two-byte output data.   |
|            | GetInBit                    | Obtains the input bit values.  |
|            | GetInByte                   | Obtains the input byte values.   |
|            | GetInAnalogDataShort        | Obtains two-byte input data.   |
| UserMemory | SetMBit                     | Sets the user memory bit values.                                       |
|            | SetMByte                    | Sets the user memory byte values.                                      |
|            | SetMAnalogDataShort         | Sets two-byte user memory data.  |
|            | GetMBit                     | Obtains the user memory bit value.                                     |
|            | GetMByte                    | Obtains the user memory byte value.                                    |
|            | GetMAnalogDataShort         | Obtains two-byte user memory data.                                     |
| Log        | StartLog                    | Starts logging data.   |
|            | StopLog                     | Stops logging data.  |
|            | SetLog                      | Specifies the data to be collected by logging operation.               |
| CCLink     | StartHotconnect             | Starts the hot connect.  |
|            | SdoDownload                 | Downloads the SDO data of the specified remote station.                |
|            | SdoUpload                   | Uploads the SDO data of the specified remote station.                  |
|            | SetAxisMode                 | Sets the control mode of the axis of the specified remote station.     |
|            | StartAxisHM                 | Starts HM mode control of the axis of the specified remote station.    |
|            | SImpSendBySlaveId           | Transmits SLMP to the specified remote station.                        |

# 3

## Servo Amplifiers

|   |      |
|---|------|
| Model Designation.....  | 3-3  |
| MR-J5-G_ Connections with Peripheral Equipment.....   | 3-7  |
| MR-J5-G_ Specifications.....  | 3-9  |
| MR-J5-G_ Standard Wiring Diagram Example.....   | 3-12 |
| Functional Safety I/O Signal Connector (CN8) Connection Example.....                            | 3-15 |
| Main/Control Circuit Power Supply Connection Example.....                                       | 3-16 |
| Servo Motor Connection Example (for MR-J5-G(-N1)/MR-J5-B/MR-J5-A).....                          | 3-18 |
| Linear Encoder Connection Example (for MR-J5-G(-N1)/MR-J5-B/MR-J5-A).....                       | 3-22 |
| External Encoder Connection Specifications.....   | 3-24 |
| Servo Motor Connection Example (for MR-J5-G-RJ(N1)/MR-J5-G4-HS(N1)/MR-J5-B-RJ/MR-J5-A-RJ)...    | 3-25 |
| Linear Encoder Connection Example (for MR-J5-G-RJ(N1)/MR-J5-G4-HS(N1)/MR-J5-B-RJ/MR-J5-A-RJ)... | 3-29 |
| MR-J5-G_ Dimensions.....  | 3-30 |
| MR-J5W_G(-N1) Connections with Peripheral Equipment.....  | 3-35 |
| MR-J5W_G(-N1) Specifications.....   | 3-36 |
| MR-J5W_G(-N1) Standard Wiring Diagram Example.....  | 3-38 |
| Main/Control Circuit Power Supply Connection Example.....                                       | 3-40 |
| Servo Motor Connection Example.....   | 3-41 |
| External Encoder Connection Specifications.....   | 3-42 |
| Linear Encoder Connection Example.....  | 3-46 |
| MR-J5W_G(-N1) Dimensions.....   | 3-48 |
| MR-J5D_-G4(-N1) Connections with Peripheral Equipment.....                                      | 3-50 |
| MR-J5D_-G4(-N1) Specifications.....   | 3-51 |
| MR-J5D_-G4(-N1) Standard Wiring Diagram Example.....  | 3-54 |
| Main/Control Circuit Power Supply Connection Example.....                                       | 3-57 |
| Servo Motor Connection Example.....   | 3-58 |
| External Encoder Connection Specifications.....   | 3-59 |
| Linear Encoder Connection Example.....  | 3-62 |
| MR-J5D_-G4(-N1) Dimensions.....   | 3-63 |
| Positioning Function.....   | 3-67 |
| Restrictions.....   | 3-69 |

|   |       |
|---|-------|
| MR-J5-B_ Connections with Peripheral Equipment.....               | 3-70  |
| MR-J5-B_ Specifications.....                                      | 3-71  |
| MR-J5-B_ Standard Wiring Diagram Example.....                     | 3-73  |
| MR-J5-B_ Dimensions.....  | 3-74  |
| <br>  |       |
| MR-J5W_-B Connections with Peripheral Equipment.....              | 3-79  |
| MR-J5W_-B Specifications.....                                     | 3-80  |
| MR-J5W_-B Standard Wiring Diagram Example.....                    | 3-82  |
| MR-J5W_-B Dimensions.....   | 3-84  |
| <br>  |       |
| MR-J5-A_ Connections with Peripheral Equipment.....               | 3-86  |
| MR-J5-A_ Specifications.....                                      | 3-87  |
| MR-J5-A_ Standard Wiring Diagram Example.....                     | 3-90  |
| MR-J5-A_ Dimensions.....  | 3-93  |
| <br>  |       |
| MR-CM3K Specifications.....                                       | 3-98  |
| MR-CM3K Wiring Diagram Example.....                               | 3-99  |
| MR-CM3K Dimensions.....   | 3-100 |
| MR-CV_ Specifications.....  | 3-101 |
| MR-CV_ Dimensions.....  | 3-102 |
| Selection of Converter Unit, Servo Amplifier, and Drive Unit..... | 3-104 |

**G** MR-J5-G(-N1) **G-RJ** MR-J5-G-RJ(N1) **G-HS** MR-J5-G4-HS(N1) **WG** MR-J5W2-G(-N1)/MR-J5W3-G(-N1)  
**DG** MR-J5D1-G4(-N1)/MR-J5D2-G4(-N1)/MR-J5D3-G4(-N1) **B** MR-J5-B **B-RJ** MR-J5-B-RJ **WB** MR-J5W2-B/MR-J5W3-B  
**A** MR-J5-A **A-RJ** MR-J5-A-RJ

\* Refer to p. 7-78 in this catalog for conversion of units.

\* In this section, a term of servo amplifier includes a combination of a drive unit and a converter unit.

## Model Designation for 1-Axis Servo Amplifier (Note 1)

**G** **G-RJ** **G-HS**

**M R - J 5 - 1 0 G -**

Mitsubishi Electric AC servo amplifier MELSERVO-J5 series

| Symbol | Interface          |
|--------|--------------------|
| G      | Network compatible |

| Symbol | Rated output [kW] |
|--------|-------------------|
| 10     | 0.1               |
| 20     | 0.2               |
| 40     | 0.4               |
| 60     | 0.6               |
| 70     | 0.75              |
| 100    | 1                 |
| 200    | 2                 |
| 350    | 3.5               |
| 500    | 5                 |
| 700    | 7                 |

| Symbol | Power supply                                    |
|--------|---|
| None   | 3-phase 200 V AC, 1-phase 200 V AC, or DC input |
| 4      | 3-phase 400 V AC                                |

| Symbol | Special specifications (Note 2, 4)  |
|--------|---|
| None   | CC-Link IE TSN-compatible standard  |
| RJ     | CC-Link IE TSN-compatible, Fully closed loop control four-wire type, Load-side encoder A/B/Z-phase input compatible, Safety sub-function  |
| HS     | CC-Link IE TSN-compatible, Fully closed loop control four-wire type, Load-side encoder A/B/Z-phase input compatible, Safety sub-function, 3 points of functional safety I/O signals |
| ED     | MR-J5- G_ without a dynamic brake (Note 3)  |
| RU     | MR-J5- G_ -RJ without a dynamic brake (Note 3)  |
| HU     | MR-J5- G4-HS without a dynamic brake (Note 3)   |
| N1     | EtherCAT®-compatible standard   |
| RJN1   | EtherCAT®-compatible, Fully closed loop control four-wire type, Load-side encoder A/B/Z-phase input compatible, Safety sub-function   |
| HSN1   | EtherCAT®-compatible, Fully closed loop control four-wire type, Load-side encoder A/B/Z-phase input compatible, Safety sub-function, 3 points of functional safety I/O signals      |
| EDN1   | MR-J5- G_ -N1 without a dynamic brake (Note 3)  |
| RUN1   | MR-J5- G_ -RJN1 without a dynamic brake (Note 3)  |
| HUN1   | MR-J5- G4-HSN1 without a dynamic brake (Note 3)   |

- Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.  
 2. For the servo amplifier firmware version supporting each function, refer to "MR-J5 User's Manual".  
 3. A dynamic brake which is built in the 7 kW or smaller servo amplifiers is removed. When the servo amplifiers without the dynamic brake are used, the servo motors coast to a stop and do not stop immediately at alarm occurrence or power failure. Take measures to ensure safety on the entire system. When specified servo motors are used, the electronic dynamic brake may activate at an alarm occurrence. The dynamic brake can be disabled with a servo parameter setting. Refer to "MR-J5 User's Manual" for details.  
 4. For the restrictions on the communication cycle of each function, refer to "Restrictions" in this catalog.


Common Specifications  
 Servo System Controllers  
**Servo Amplifiers**  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSwires  
 Product List  
 Precautions  
 Support

# Servo Amplifiers

## Model Designation for 1-Axis Servo Amplifier (Note 1)


**B**   **B-RJ**

**M R - J 5 - 1 0 B -**

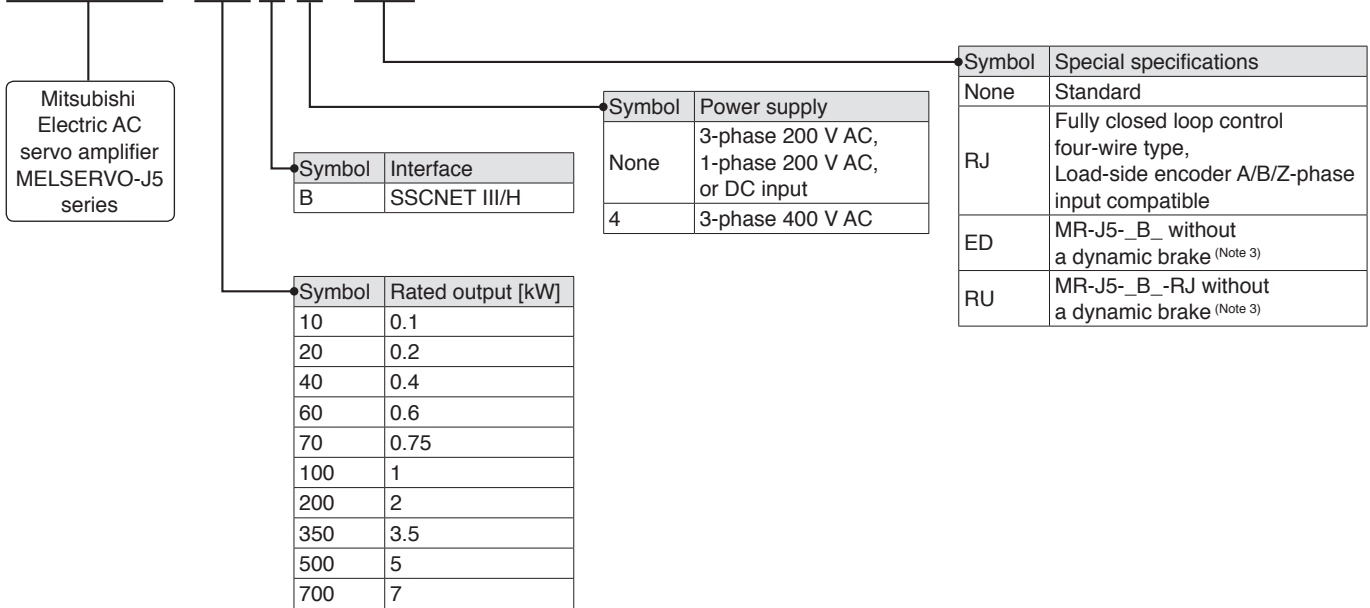

**M R - J 5 - 1 0 A -**

**A**   **A-RJ**

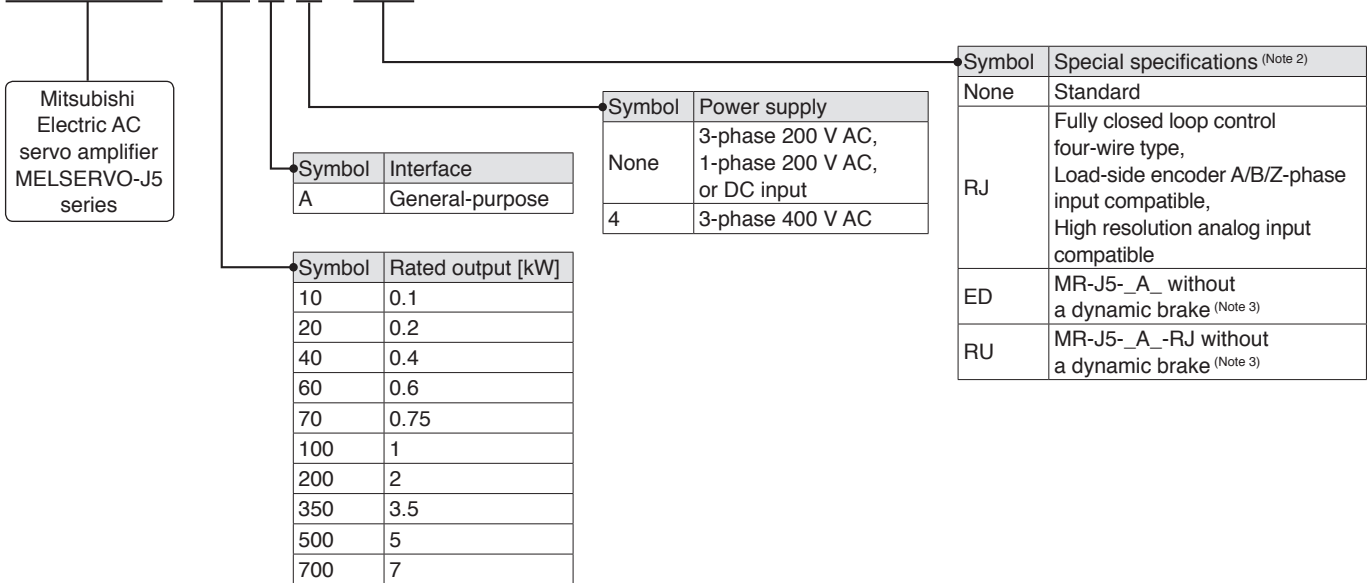


Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.  
 2. For the servo amplifier firmware version supporting each function, refer to "MR-J5 User's Manual".  
 3. A dynamic brake which is built in the 7 kW or smaller servo amplifiers is removed. When the servo amplifiers without the dynamic brake are used, the servo motors coast to a stop and do not stop immediately at alarm occurrence or power failure. Take measures to ensure safety on the entire system. When specified servo motors are used, the electronic dynamic brake may activate at an alarm occurrence. The dynamic brake can be disabled with a servo parameter setting. Refer to "MR-J5 User's Manual" for details.




Model Designation for Multi-Axis Servo Amplifier (Note 1)

MR - J5W2 - 22G -

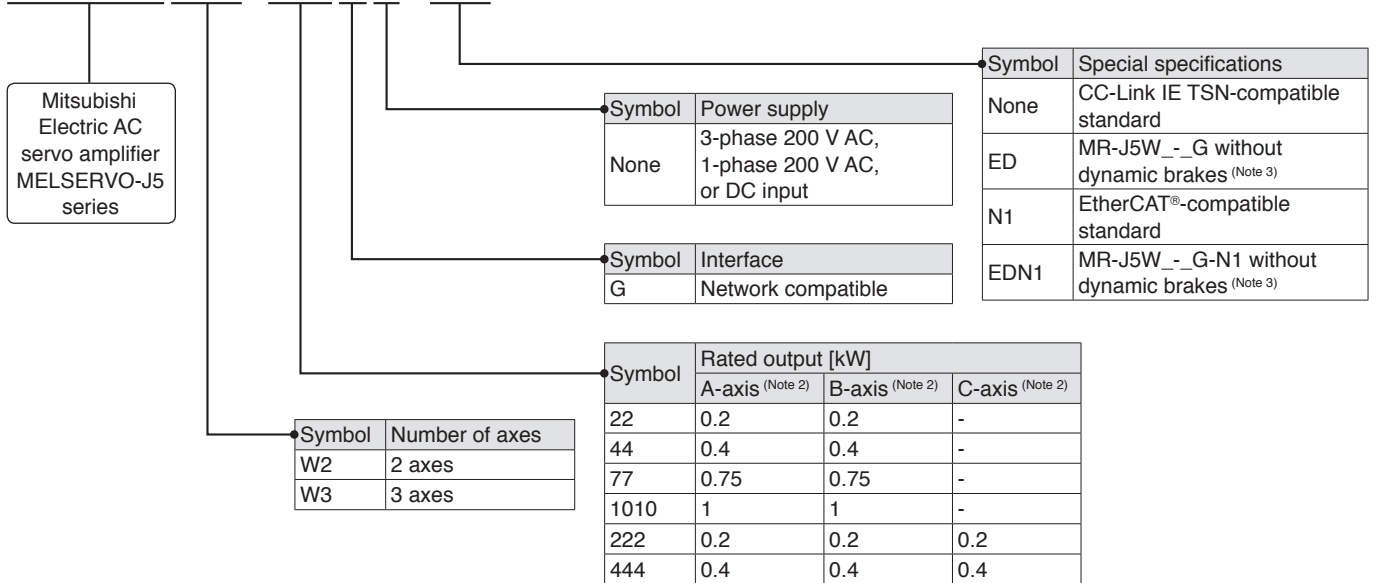

MR - J5W2 - 22B -

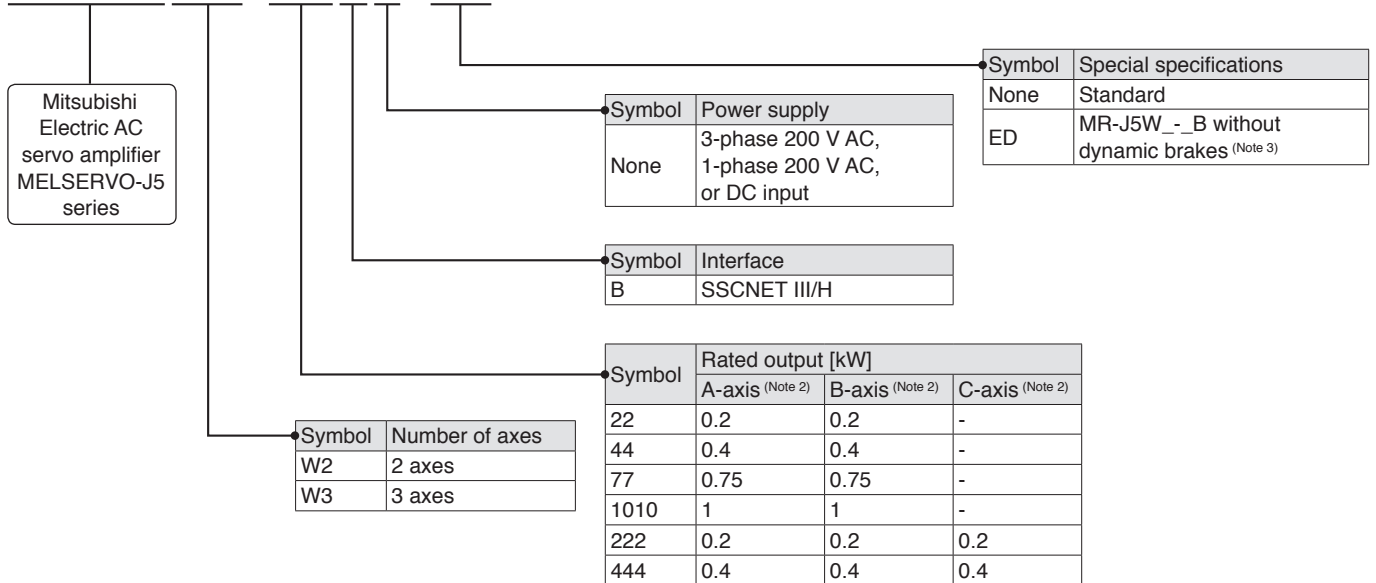


Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.  
 2. A-axis, B-axis, and C-axis indicate names of axes of the multi-axis servo amplifier. The C-axis is available for the 3-axis servo amplifier.  
 3. Dynamic brakes which are built in the servo amplifiers are removed. When the servo amplifiers without the dynamic brakes are used, the servo motors coast to a stop and do not stop immediately at alarm occurrence or power failure. Take measures to ensure safety on the entire system. When specified servo motors are used, the electronic dynamic brake may activate at an alarm occurrence. The dynamic brake can be disabled with a servo parameter setting. Refer to "MR-J5 User's Manual" for details.

# Servo Amplifiers

## Model Designation for Drive Unit <sup>(Note 1)</sup>

DG


MR - J5D1 - 100G4 -

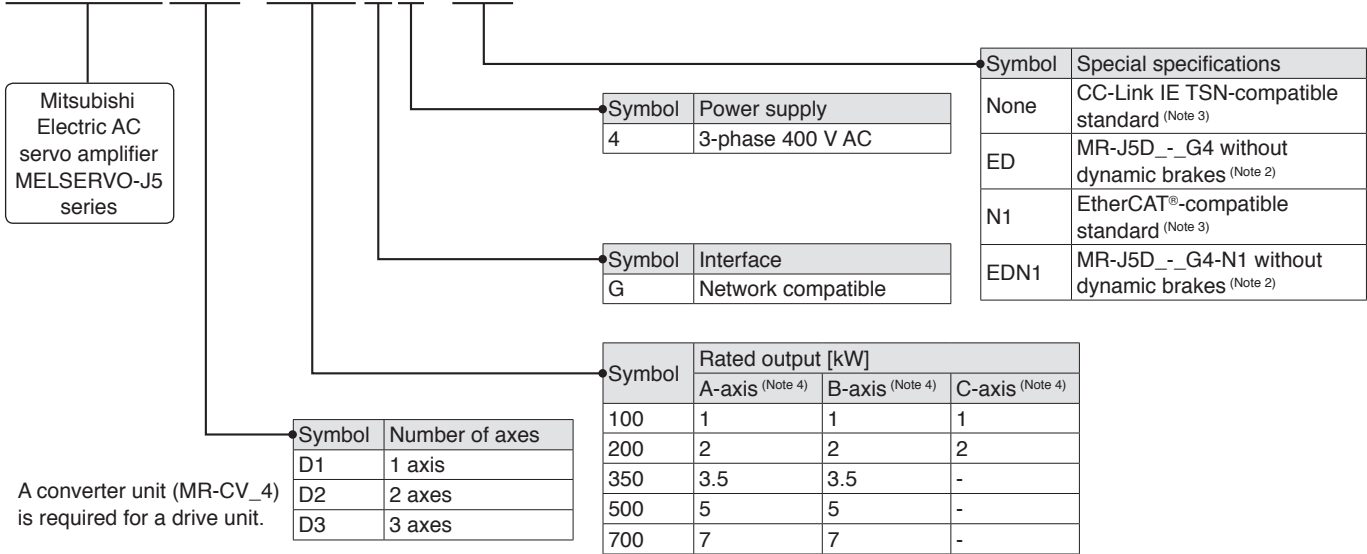

## Model Designation for Simple Converter

G G-RJ WG B B-RJ WB A A-RJ


MR - CM3K

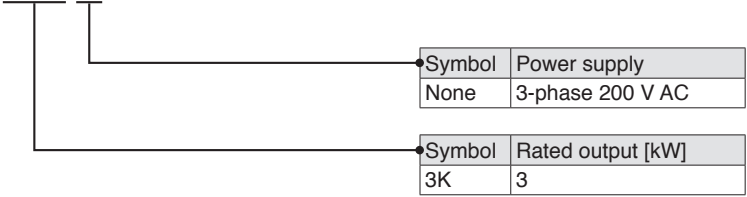

## Model Designation for Power Regeneration Converter Unit

DG

MR - CV11K4

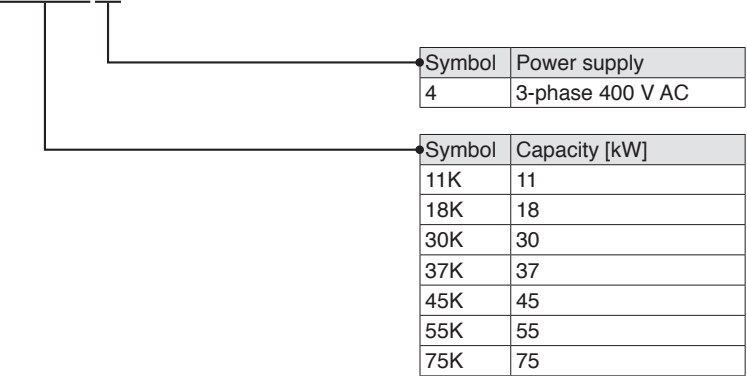


Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.  
 2. A dynamic brake which is built in the drive units is removed. When the drive units without the dynamic brake are used, the servo motors coast to a stop and do not stop immediately at alarm occurrence or power failure. Take measures to ensure safety on the entire system. When specified servo motors are used, the electronic dynamic brake may activate at an alarm occurrence. The dynamic brake can be disabled with a servo parameter setting. Refer to "MR-J5D User's Manual" for details.  
 3. MR-J5D1-G4(-N1) supports fully closed loop control four-wire type input and the load-side encoder A/B/Z-phase input as standard.  
 4. A-axis, B-axis, and C-axis indicate names of axes of the multi-axis drive unit. The B-axis is available for the 2-axis drive unit and the 3-axis drive unit. The C-axis is available for the 3-axis drive unit.

**MR-J5-G(4)-(RJ)(N1)) Connections with Peripheral Equipment (Note 1)**

**G G-RJ**

Peripheral equipment is connected to MR-J5-G(4)-(RJ)(N1)) as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

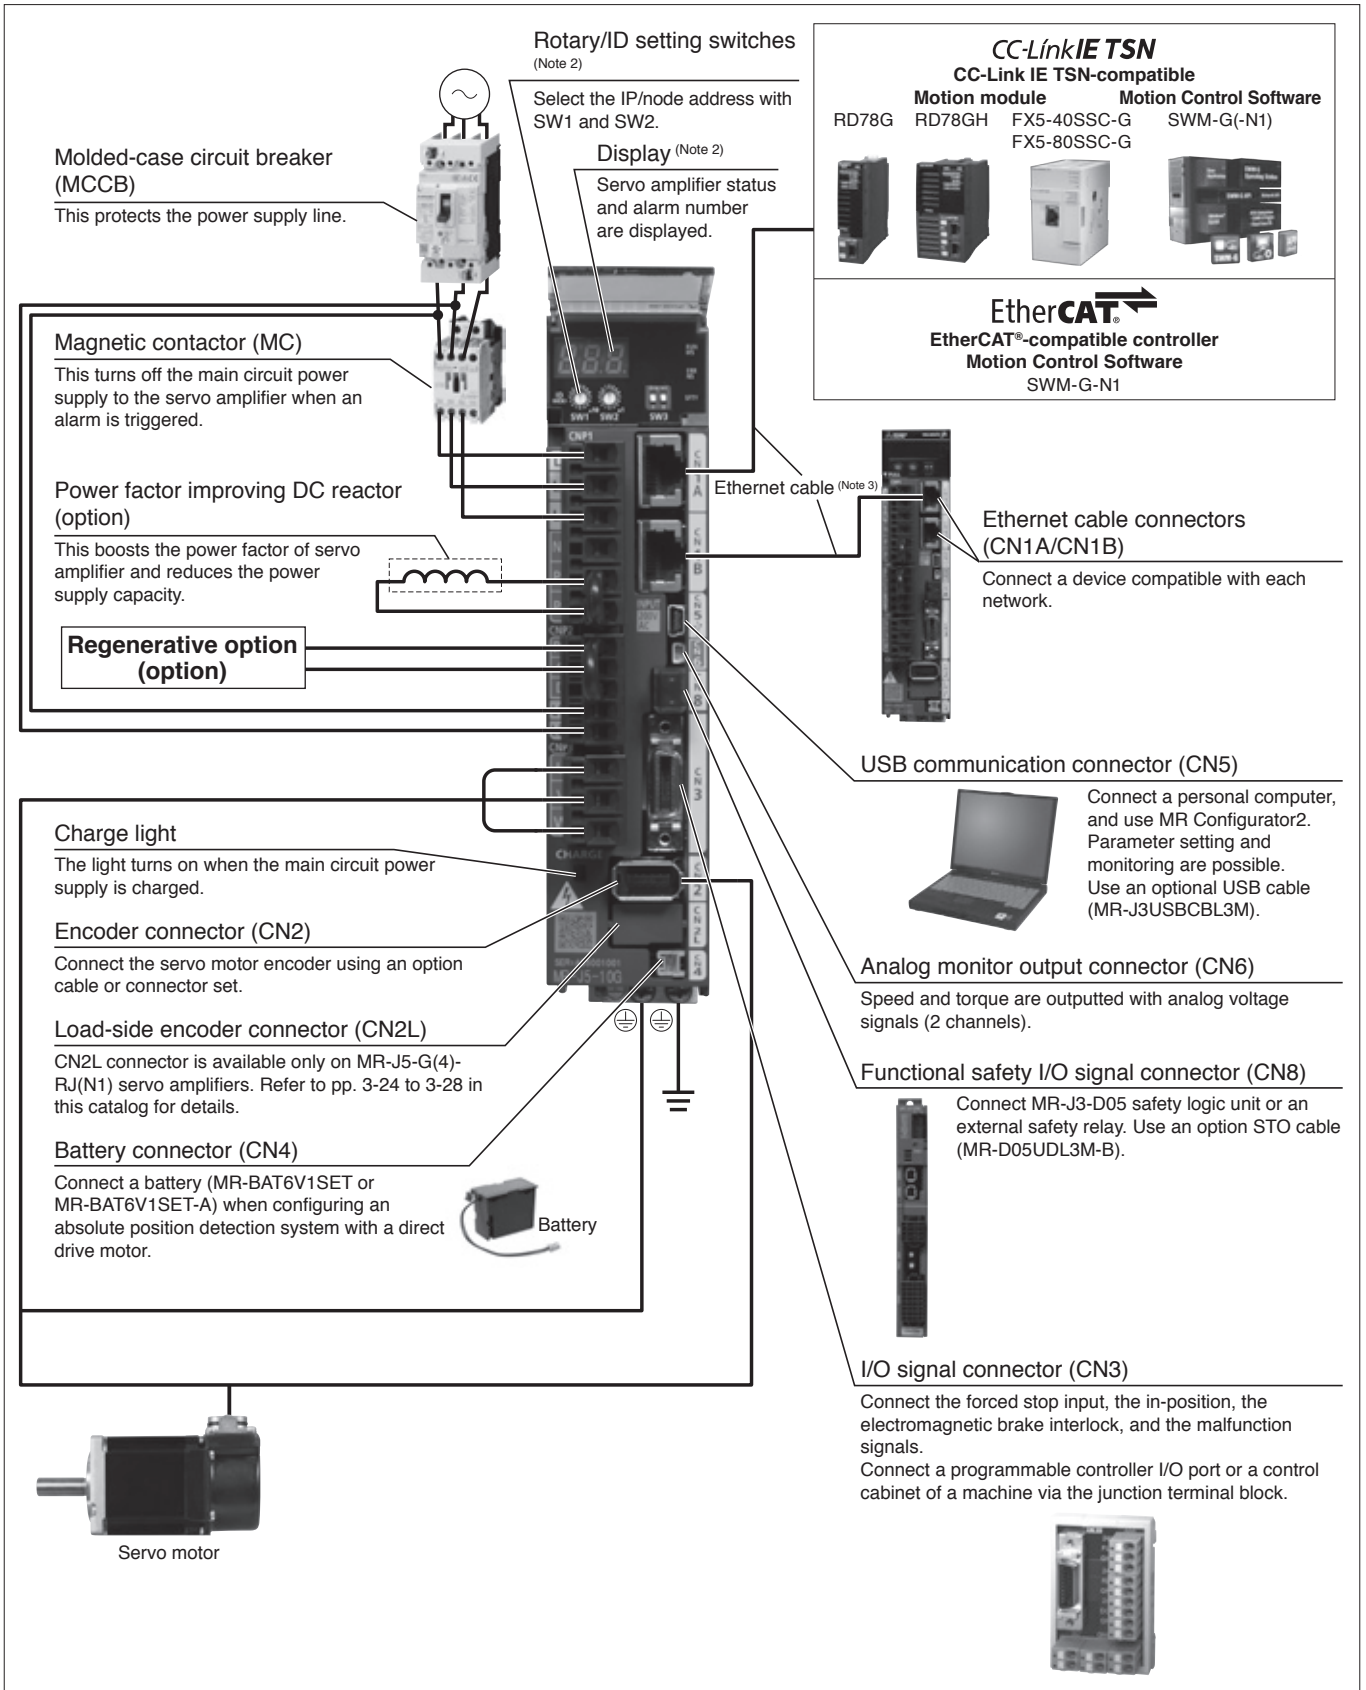


Notes: 1. The connection with the peripheral equipment is an example for MR-J5-350G(4)-(RJ)(N1)) or smaller servo amplifiers. Refer to "MR-J5 User's Manual" for the actual connections.  
2. This picture shows when the display cover is open.  
3. For specifications of the Ethernet cable, refer to "Ethernet Cable Specifications" on p. 7-30 in this catalog.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

## MR-J5-G4-HS(N1) Connections with Peripheral Equipment (Note 1)

G-HS

Peripheral equipment is connected to MR-J5-G4-HS(N1) as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

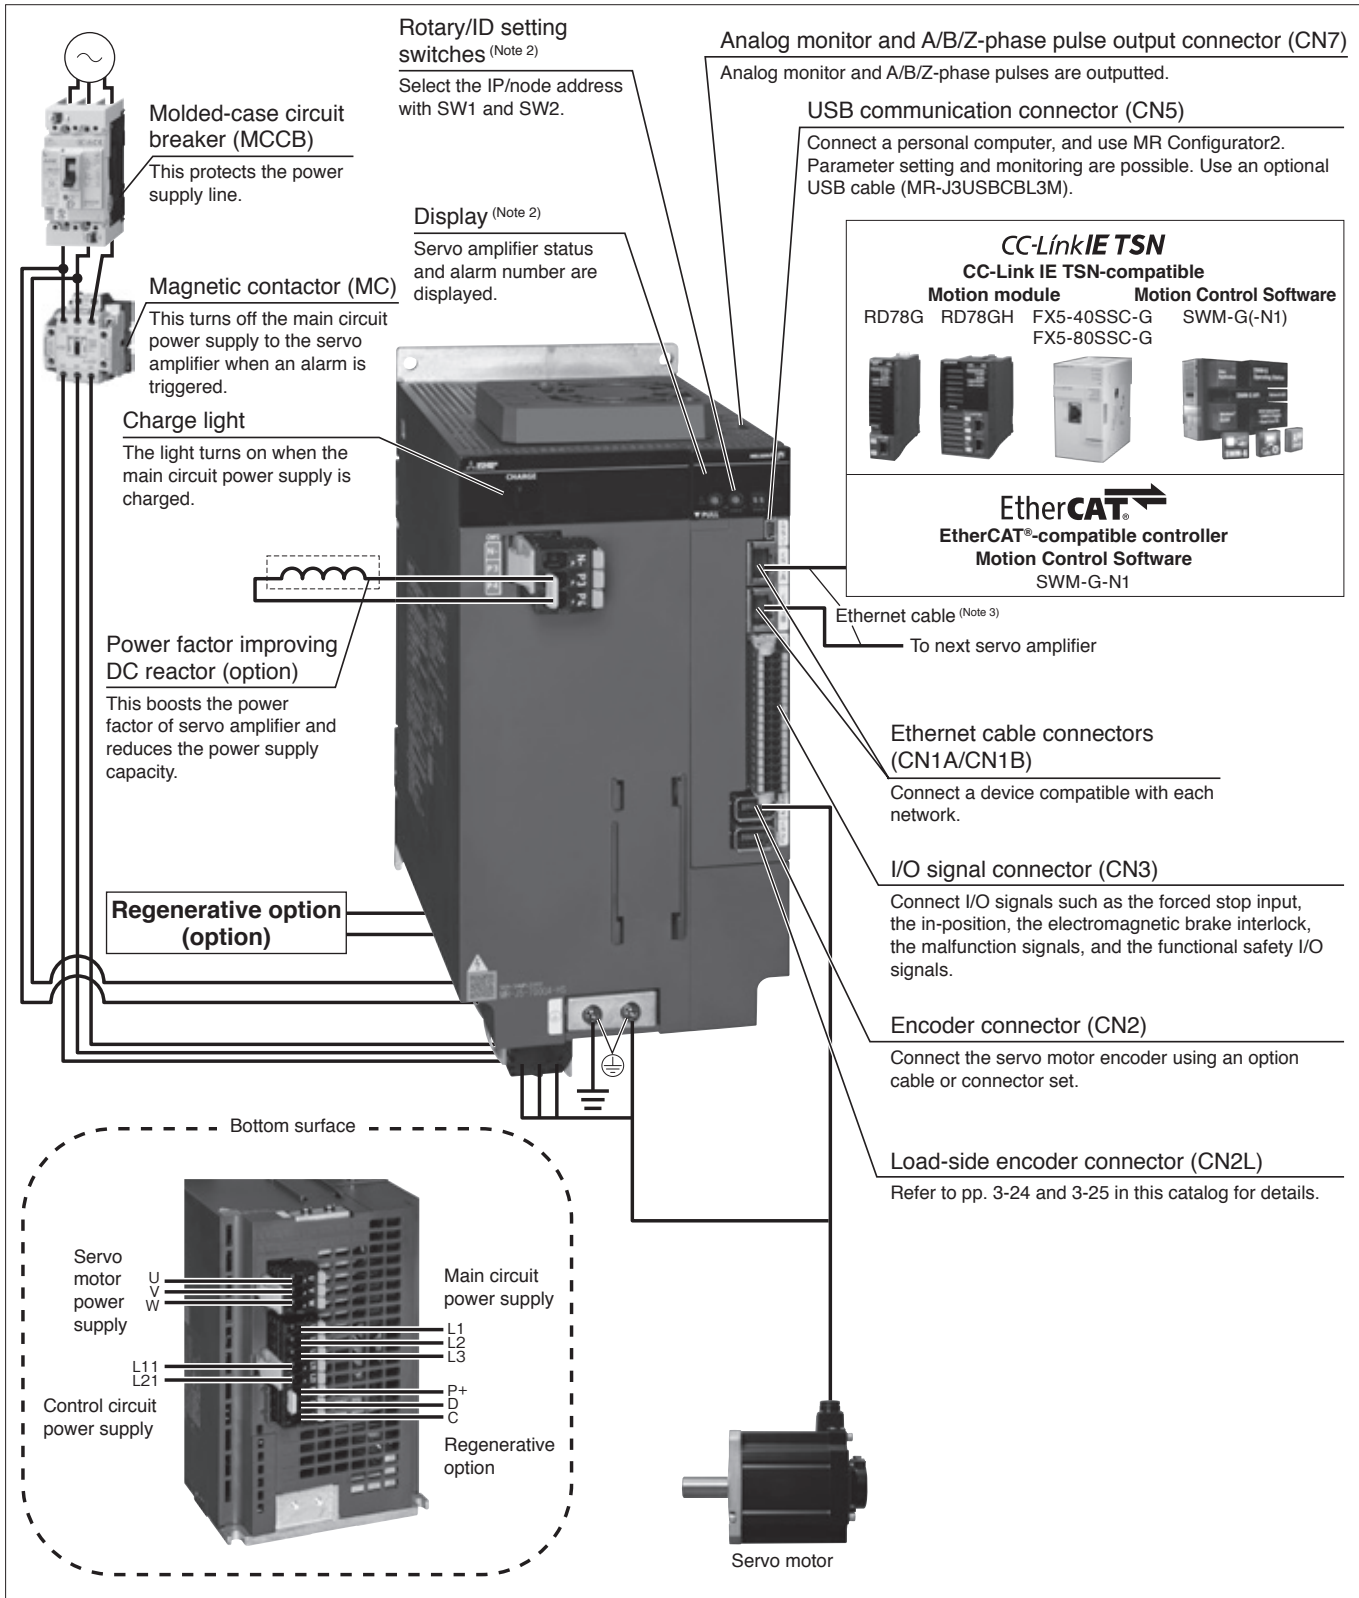

- Notes: 1. The connection with the peripheral equipment is an example for MR-J5-700G4-HS(N1) or smaller servo amplifiers. Refer to "MR-J5 User's Manual" for the actual connections.  
2. This illustration shows when the display cover is closed.  
3. For specifications of the Ethernet cable, refer to "Ethernet Cable Specifications" on p. 7-30 in this catalog.

MR-J5-G\_ (Network Compatible) Specifications (200 V)

G G-RJ

| Servo amplifier model MR-J5-_-(-RJ)(N1))   |  | 10G   | 20G  | 40G       | 60G       | 70G                        | 100G  | 200G        | 350G | 500G                                      | 700G |  |
|--|--|---|--|-----------|-----------|----------------------------|---|-------------|------|---|------|--|
| Output   | Voltage  | 3-phase 0 V AC to 240 V AC  |  |           |           |                            |   |             |      |   |      |  |
|  | Rated current [A]  | 1.3   | 1.8  | 2.8       | 3.2       | 5.8                        | 6.0   | 11.0        | 17.0 | 28.0                                      | 37.0 |  |
| Main circuit power supply input  | Voltage/frequency (Note 1)   | AC input  | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |           |           |                            | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz (Note 7) |             |      | 3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |      |  |
|  |  | DC input (Note 8)   | 283 V DC to 340 V DC                                 |           |           |                            |   |             |      |   |      |  |
|  | Rated current (Note 6) [A]   | 0.9 (1.5)   | 1.5 (2.5)  | 2.6 (4.5) | 3.2 (5.0) | 3.8 (6.5)                  | 5.0 (10.5)  | 10.5 (15.8) | 16.0 | 21.7                                      | 28.9 |  |
|  | Permissible voltage fluctuation  | AC input  | 3-phase or 1-phase 170 V AC to 264 V AC              |           |           |                            | 3-phase or 1-phase 170 V AC to 264 V AC (Note 7)              |             |      | 3-phase 170 V AC to 264 V AC              |      |  |
|  |  | DC input (Note 8)   | 241 V DC to 374 V DC                                 |           |           |                            |   |             |      |   |      |  |
| Permissible frequency fluctuation  | ±5 % maximum   |   |  |           |           |                            |   |             |      |   |      |  |
| Control circuit power supply input   | Voltage/frequency  | AC input  | 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz            |           |           |                            |   |             |      |   |      |  |
|  |  | DC input (Note 8)   | 283 V DC to 340 V DC                                 |           |           |                            |   |             |      |   |      |  |
|  | Rated current [A]  | 0.2   |  |           |           |                            |   |             |      | 0.3                                       |      |  |
|  | Permissible voltage fluctuation  | AC input  | 1-phase 170 V AC to 264 V AC                         |           |           |                            |   |             |      |   |      |  |
|  |  | DC input (Note 8)   | 241 V DC to 374 V DC                                 |           |           |                            |   |             |      |   |      |  |
| Permissible frequency fluctuation  | ±5 % maximum   |   |  |           |           |                            |   |             |      |   |      |  |
| Power consumption [W]  | 30   |   |  |           |           |                            |   |             |      |   |      |  |
| Interface power supply   | 24 V DC ± 10 % (required current capacity: 0.3 A (including CN8 connector signals))  |   |  |           |           |                            |   |             |      |   |      |  |
| Control method   | Sine-wave PWM control/current control method   |   |  |           |           |                            |   |             |      |   |      |  |
| Permissible regenerative power of the built-in regenerative resistor (Note 2, 3) [W] | -  | 10  |  |           | 30        |                            | 100   |             | 130  |   | 170  |  |
| Dynamic brake (Note 4)   | Built-in   |   |  |           |           |                            |   |             |      |   |      |  |
| CC-Link IE TSN Class B (Note 13) (MR-J5-G(-RJ))                                      | Communication cycle (Note 10, 12)  | 31.25 μs, 62.5 μs, 125 μs, 250 μs, 500 μs, 1 ms, 1.5 ms, 2 ms, 2.5 ms, 3 ms, 3.5 ms, 4 ms, 4.5 ms, 5 ms, 5.5 ms, 6 ms, 6.5 ms, 7 ms, 7.5 ms, 8 ms |  |           |           |                            |   |             |      |   |      |  |
|  | Protocol version   | 1.0/2.0 (Note 5)  |  |           |           |                            |   |             |      |   |      |  |
| CC-Link IE TSN Class A (Note 5, 13, 14) (MR-J5-G(-RJ))                               | Communication cycle (Note 10)  | 500 μs to 500 ms  |  |           |           |                            |   |             |      |   |      |  |
|  | Protocol version   | 2.0   |  |           |           |                            |   |             |      |   |      |  |
| EtherCAT® (MR-J5-G(-RJ)N1)   | Communication cycle (Note 10, 12)  | 125 μs, 250 μs, 500 μs, 1 ms, 2 ms, 4 ms, 8 ms  |  |           |           |                            |   |             |      |   |      |  |
| CC-Link IE Field Network Basic (Note 5, 14) (MR-J5-G(-RJ))                           | Supported  |   |  |           |           |                            |   |             |      |   |      |  |
| Communication function   | USB  | Connect a personal computer (MR Configurator2 compatible)   |  |           |           |                            |   |             |      |   |      |  |
| Encoder output pulse   | Compatible (A/B/Z-phase pulse)   |   |  |           |           |                            |   |             |      |   |      |  |
| Analog monitor   | 2 channels   |   |  |           |           |                            |   |             |      |   |      |  |
| Positioning mode (Note 5, 12)  | Point table method   |   |  |           |           |                            |   |             |      |   |      |  |
| Fully closed loop control (Note 5, 12)   | MR-J5-G(-N1)   | Two-wire type communication method  |  |           |           |                            |   |             |      |   |      |  |
|  | MR-J5-G-RJ(N1)   | Two-wire/four-wire type communication method  |  |           |           |                            |   |             |      |   |      |  |
| Load-side encoder interface  | MR-J5-G(-N1)   | Mitsubishi Electric high-speed serial communication   |  |           |           |                            |   |             |      |   |      |  |
|  | MR-J5-G-RJ(N1)   | Mitsubishi Electric high-speed serial communication, A/B/Z-phase differential input signal  |  |           |           |                            |   |             |      |   |      |  |
| Servo functions  | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, scale measurement function (Note 5, 12), super trace control (Note 5), continuous operation to torque control mode (Note 5, 12, 15), driver communication function (Note 5, 12, 15) |   |  |           |           |                            |   |             |      |   |      |  |
| Protective functions   | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection  |   |  |           |           |                            |   |             |      |   |      |  |
| Safety sub-function, Safety performance  | Refer to "Safety Sub-Functions" in section 1 of this catalog.  |   |  |           |           |                            |   |             |      |   |      |  |
| Structure (IP rating)  | Natural cooling, open (IP20)   |   |  |           |           | Force cooling, open (IP20) |   |             |      | Force cooling, open (IP20) (Note 9)       |      |  |
| Close mounting   | 3-phase power supply input   | Possible (Note 11)  |  |           |           |                            | Not possible  |             | -    |   |      |  |
|  | 1-phase power supply input   | Possible (Note 11)  |  |           |           |                            | Not possible  |             | -    |   |      |  |
| Mass [kg]  | 0.8  |   |  | 1.0       | 1.4       |                            | 2.2   |             | 3.7  |   | 6.2  |  |

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

## MR-J5-G\_ (Network Compatible) Specifications (200 V)

**G****G-RJ**

- Notes:
1. Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.
  2. Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.
  3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.
  4. When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
  5. For the servo amplifier firmware version supporting this function, refer to "MR-J5 User's Manual".
  6. The values in brackets are the rated current for the 1-phase power supply input.
  7. When the servo amplifier is used with a 1-phase power supply and combined with a servo motor of over 750 W, use the servo amplifiers at 75 % or less of the effective load ratio.
  8. For a connection example of power supply circuit with DC input, refer to "MR-J5 User's Manual".
  9. The connector part is excluded.
  10. The communication cycle depends on the controller specifications and the number of device stations connected.
  11. When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifiers at 75 % or less of the effective load ratio.
  12. For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
  13. A communication speed of 1 Gbps/100 Mbps can be selected. When 100 Mbps is selected, the minimum communication cycle is 500 μs.
  14. For the restrictions on the network, refer to "MR-J5 User's Manual".
  15. The function is not available with MR-J5-G-(RJ)N1.

**MR-J5-G\_ (Network Compatible) Specifications (400 V)**

**G G-RJ G-HS**


| Servo amplifier model MR-J5-__   |  | 60G4(-RJ)(N1)  | 100G4(-RJ)(N1) | 200G4(-RJ)(N1) | 350G4(-RJ)(N1)             | 500G4(-HS)(N1) | 700G4(-HS)(N1) |
|--|--|--|----------------|----------------|----------------------------|----------------|----------------|
| Output   | Voltage                                  | 3-phase 0 V AC to 480 V AC   |                |                |                            |                |                |
|  | Rated current [A]                        | 1.6  | 2.8            | 5.5            | 8.6                        | 14             | 17             |
| Main circuit power supply input  | Voltage/frequency (Note 1) AC input      | 3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz  |                |                |                            |                |                |
|  | Rated current [A]                        | 1.4  | 2.5            | 5.1            | 7.9                        | 10.8           | 14.4           |
| Control circuit power supply input   | Permissible voltage fluctuation AC input | 3-phase 323 V AC to 528 V AC   |                |                |                            |                |                |
|  | Permissible frequency fluctuation        | ±5 % maximum   |                |                |                            |                |                |
| Interface power supply   | Voltage/frequency AC input               | 1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz  |                |                |                            |                |                |
|  | Rated current [A]                        | 0.1  |                |                |                            | 0.2            |                |
|  | Permissible voltage fluctuation AC input | 1-phase 323 V AC to 528 V AC   |                |                |                            |                |                |
|  | Permissible frequency fluctuation        | ±5 % maximum   |                |                |                            |                |                |
| Power consumption [W]  |  | 30   |                |                |                            | 45             |                |
| Control method   |  | Sine-wave PWM control/current control method   |                |                |                            |                |                |
| Permissible regenerative power of the built-in regenerative resistor (Note 2, 3) [W] |  | 15   | 15             | 100            | 120                        | 130            | 170            |
| Dynamic brake (Note 4)   |  | Built-in   |                |                |                            |                |                |
| CC-Link IE TSN Class B (Note 7) MR-J5-G4(-RJ)/MR-J5-G4(-HS)                          | Communication cycle (Note 5, 6)          | 31.25 μs, 62.5 μs, 125 μs, 250 μs, 500 μs, 1 ms, 1.5 ms, 2 ms, 2.5 ms, 3 ms, 3.5 ms, 4 ms, 4.5 ms, 5 ms, 5.5 ms, 6 ms, 6.5 ms, 7 ms, 7.5 ms, 8 ms  |                |                |                            |                |                |
|  | Protocol version                         | 1.0/2.0 (Note 9)   |                |                |                            |                |                |
| CC-Link IE TSN Class A (Note 7, 8, 9) MR-J5-G4(-RJ)/MR-J5-G4(-HS)                    | Communication cycle (Note 5)             | 500 μs to 500 ms   |                |                |                            |                |                |
|  | Protocol version                         | 2.0  |                |                |                            |                |                |
| EtherCAT® MR-J5-G4-RJ(N1)/MR-J5-G4-HS(N1)  | Communication cycle (Note 5, 6)          | 125 μs, 250 μs, 500 μs, 1 ms, 2 ms, 4 ms, 8 ms   |                |                |                            |                |                |
|  | Communication function                   | USB  |                |                |                            |                |                |
| CC-Link IE Field Network Basic (Note 8, 9) MR-J5-G4(-RJ)/MR-J5-G4(-HS)               |  | Supported  |                |                |                            |                |                |
| Encoder output pulse   |  | Compatible (A/B/Z-phase pulse)   |                |                |                            |                |                |
| Analog monitor   |  | 2 channels   |                |                |                            |                |                |
| Positioning mode (Note 6, 9)   |  | Point table method   |                |                |                            |                |                |
| Fully closed loop control (Note 6)   | MR-J5-G4(-N1)                            | Two-wire type communication method   |                |                |                            |                |                |
|  | MR-J5-G4-RJ(N1)                          | Two-wire/four-wire type communication method   |                |                |                            |                |                |
|  | MR-J5-G4-HS(N1)                          |  |                |                |                            |                |                |
| Load-side encoder interface  | MR-J5-G4(-N1)                            | Mitsubishi Electric high-speed serial communication  |                |                |                            |                |                |
|  | MR-J5-G4-RJ(N1)                          | Mitsubishi Electric high-speed serial communication, A/B/Z-phase differential input signal   |                |                |                            |                |                |
|  | MR-J5-G4-HS(N1)                          |  |                |                |                            |                |                |
| Servo functions  |  | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, scale measurement function (Note 6), super trace control, continuous operation to torque control mode (Note 6, 10), driver communication function (Note 6, 9, 10) |                |                |                            |                |                |
| Protective functions   |  | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection  |                |                |                            |                |                |
| Safety sub-function, Safety performance  |  | Refer to "Safety Sub-Functions" in section 1 of this catalog.  |                |                |                            |                |                |
| Structure (IP rating)  |  | Natural cooling, open (IP20)   |                |                | Force cooling, open (IP20) |                |                |
| Close mounting   |  | Not possible   |                |                |                            |                |                |
| Mass [kg]  |  | 1.6  | 2.2            | 2.3            | 5.2                        | 5.4            |                |

- Notes: 1. Rated output and speed of a rotary servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.  
 2. Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.  
 3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.  
 4. When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio.  
 5. The communication cycle depends on the controller specifications and the number of device stations connected.  
 6. For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.  
 7. A communication speed of 1 Gbps/100 Mbps can be selected. When 100 Mbps is selected, the minimum communication cycle is 500 μs.  
 8. For the restrictions on the network, refer to "MR-J5 User's Manual".  
 9. For the servo amplifier firmware version supporting this function, refer to "MR-J5 User's Manual".  
 10. The function is not available with MR-J5-G4-N1, MR-J5-G4-RJN1, and MR-J5-G4-HSN1.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

## MR-J5-G(4)-(RJ)(N1) Standard Wiring Diagram Example


G G-RJ

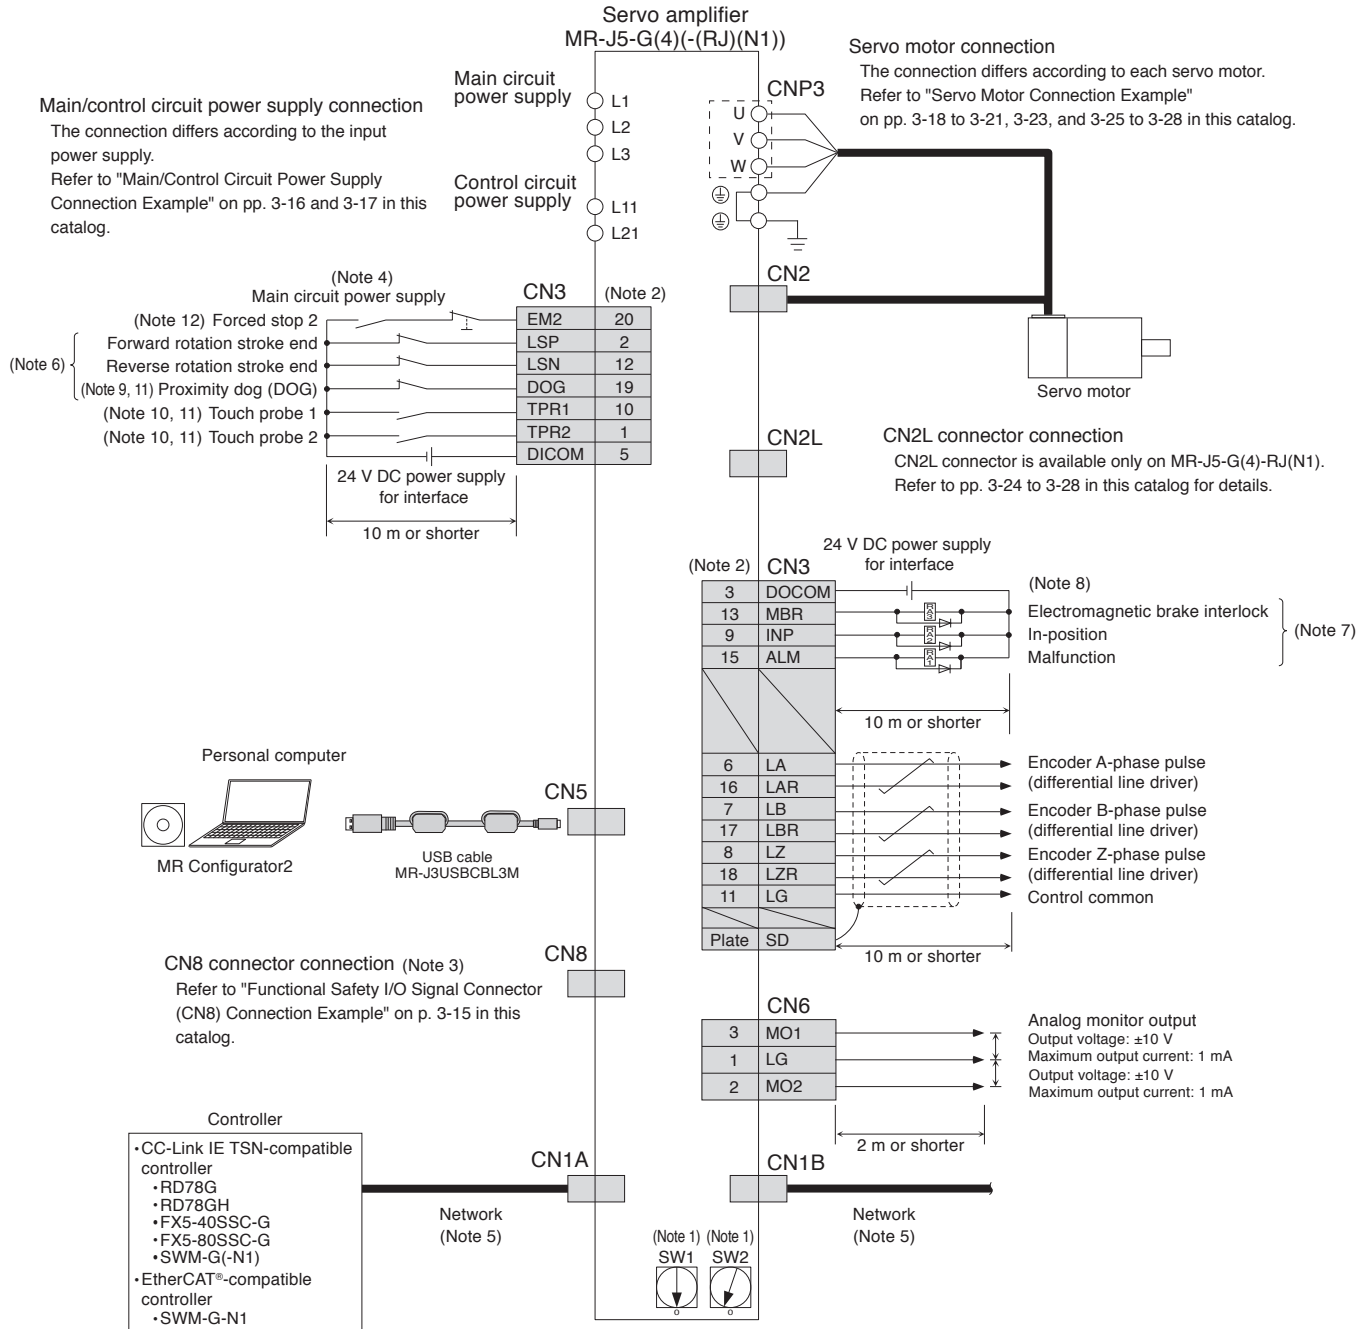

Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.



MR-J5-G4-HS(N1) Standard Wiring Diagram Example

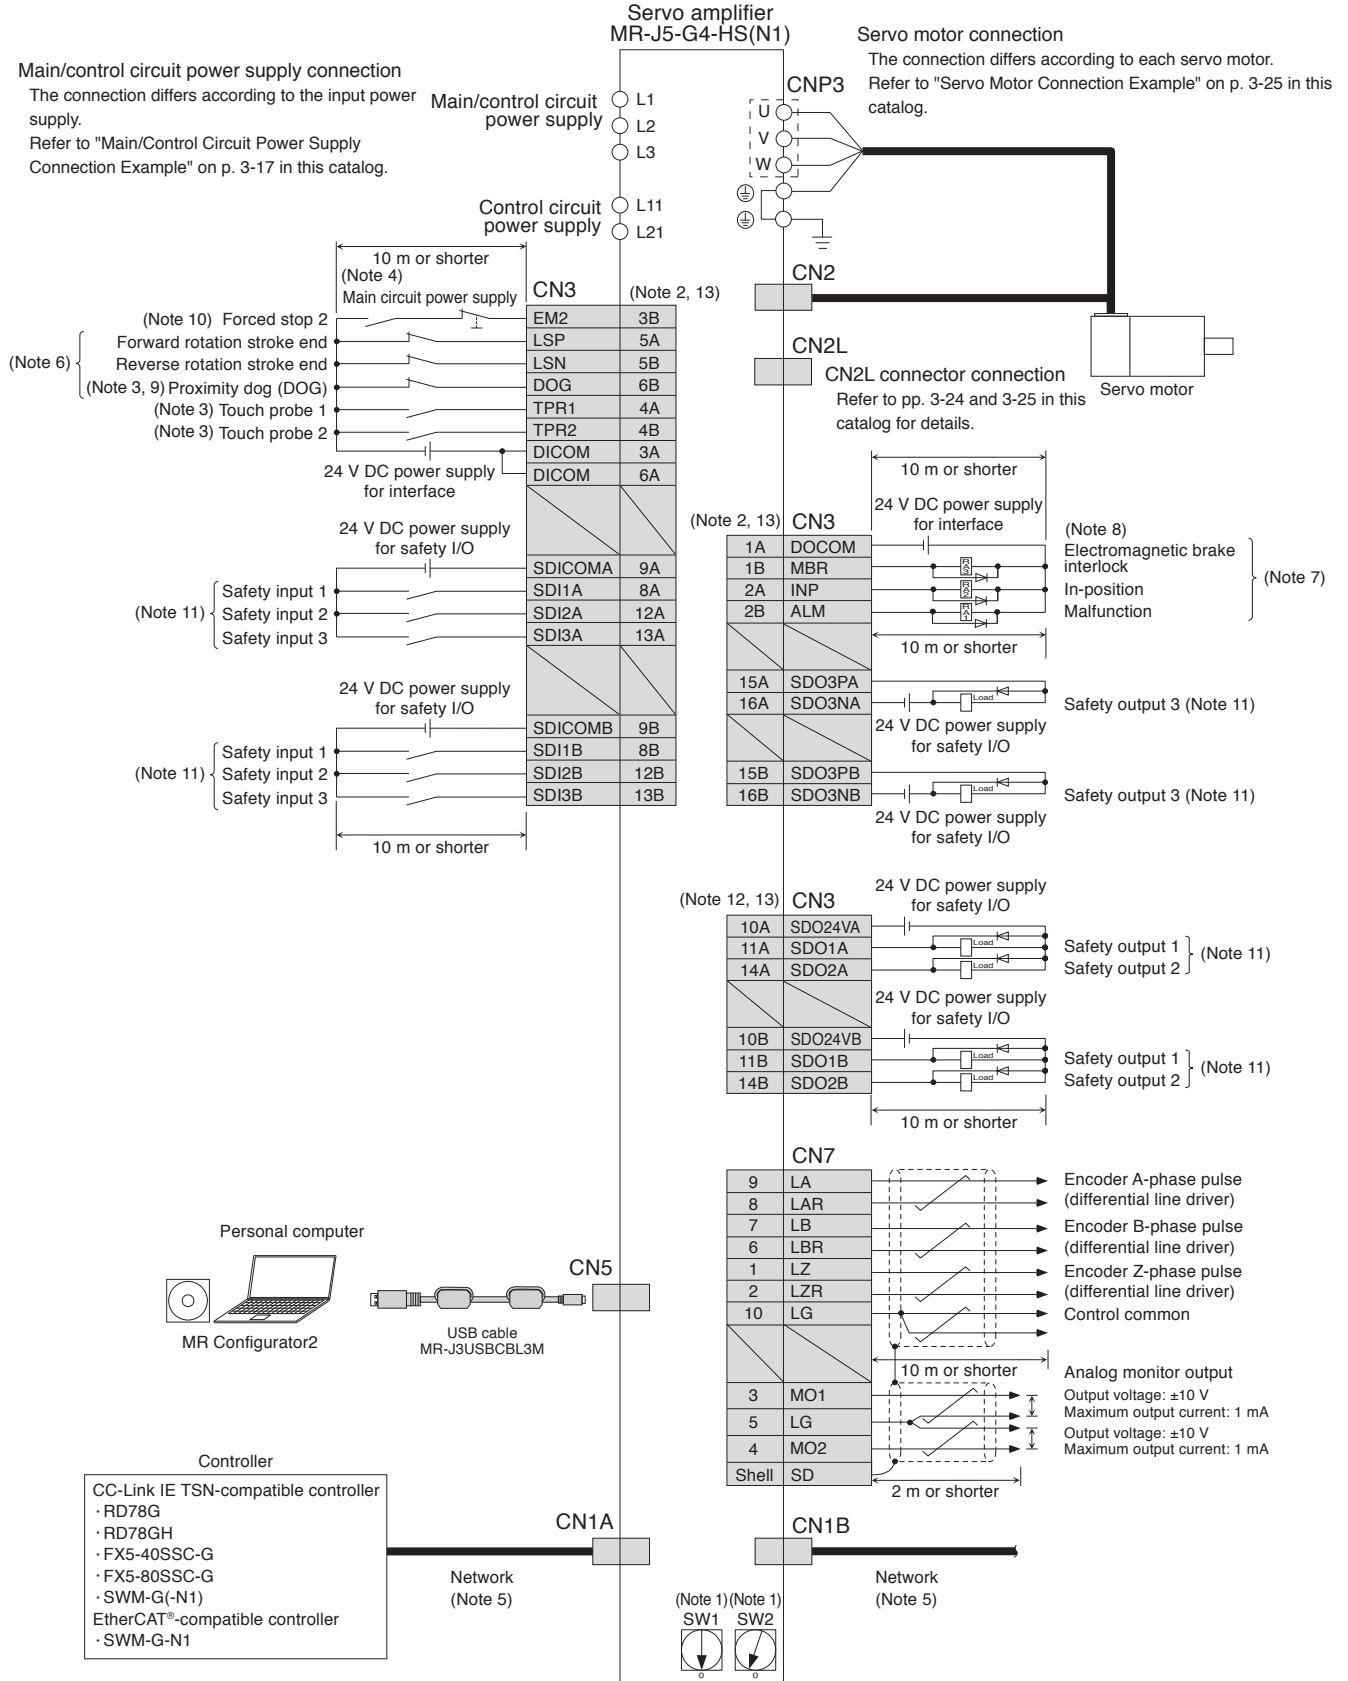

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LVSWires
- Product List
- Precautions
- Support

## MR-J5-G4-HS(N1) Standard Wiring Diagram Example

G-HS

- Notes:
1. The node address or the 4th octet of the IP address can be set to between 1 and 254 with a combination of the ID setting switches or the rotary switches (SW1 and SW2). Note that the number of the connectable device stations depends on the controller specifications.
  2. This is for sink wiring. Source wiring is also possible.
  3. For the restrictions on the communication cycle of the touch probe function, refer to "Restrictions" in this catalog.
  4. To prevent an unexpected restart of the servo amplifier, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  5. When branching off CC-Link IE TSN (synchronous communication function) with a switching hub, use a switching hub (class B) recommended by CC-Link Partner Association. When a switching hub (class A) is used, there are restrictions on the topologies to be used. Refer to the controller manual for details.
  6. Devices for these pins can be changed with [Pr. PD03], [Pr. PD04], and [Pr. PD05].
  7. Devices for these pins can be changed with [Pr. PD07], [Pr. PD08], and [Pr. PD09].
  8. When using a linear servo motor or direct drive motor, use MBR (Electromagnetic brake interlock) for an external brake mechanism.
  9. This device can be changed to TPR3 (Touch probe 3) with [Pr. PD05]. When TPR3 is set, connect by using a normally open contact switch as the same as TPR1 (Touch probe 1) and TPR2 (Touch probe 2).
  10. The forced stop signal is issued for the servo amplifier. For overall system, apply the emergency stop on the controller side.
  11. The functional safety cannot be used with the factory setting. When using the functional safety, follow the instructions in "MR-J5 User's Manual" and set the functional safety parameters.
  12. SDO1A, SDO2A, SDO1B, and SDO2B can be used only for source wiring.
  13. The frame of the CN3 connector is not connected to the protective earth (PE) terminal. Grounding with a shield connection clamp (SCC 15-F) is recommended. For details, refer to "Products on the Market for Servo Amplifiers" in this catalog.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

### Functional Safety I/O Signal Connector (CN8) Connection Example


G G-RJ WG DG B B-RJ WB A A-RJ

The following are connection examples of STO function for MR-J5-G. Be sure to read through "MR-J5 User's Manual" or "MR-J5D User's Manual" for the actual wiring and use.

●When using a safety door

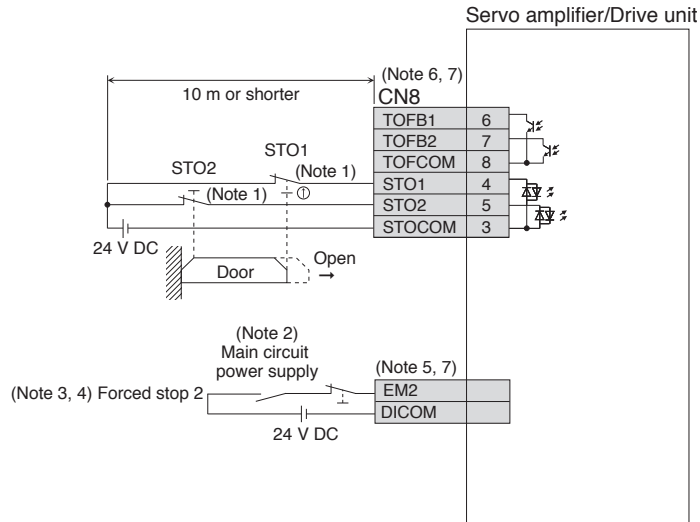

●When used with MR-J3-D05

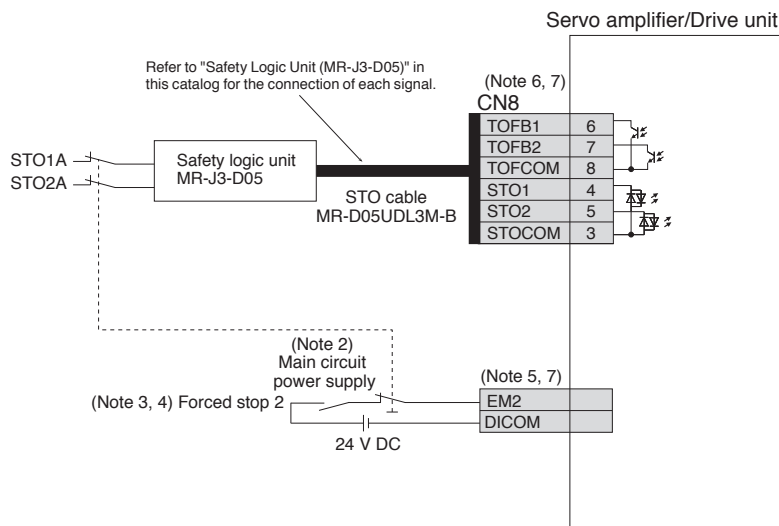

- Notes:
1. When using the STO function, turn off STO1 and STO2 at the same time. Turn off STO1 and STO2 after the servo motor stops in servo-off state or after the servo motor stops with deceleration by turning off EM2 (Forced stop 2).
  2. To prevent an unexpected restart of the servo amplifier, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  3. If the controller does not have a forced stop function, install a forced stop 2 switch (normally closed contact).
  4. Turn on EM2 (Forced stop 2) before starting the operation.
  5. The connector and the pin numbers for each signal vary depending on the servo amplifier. Refer to the standard wiring diagram example for the relevant servo amplifier in this catalog for details.
  6. For MR-J5-G(4)-RJ(N1), MR-J5W\_-G(-N1), and MR-J5D\_-G4(-N1), the input/output signal names of CN8 are different from the indicated names such as STO1 and TOFB1. Refer to "MR-J5 User's Manual" or "MR-J5D User's Manual" for details.
  7. This is for source wiring. Sink wiring is also possible.



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.


Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

# Servo Amplifiers


## Main/Control Circuit Power Supply Connection Example (Note 6)

**G G-RJ B B-RJ A A-RJ**


### ● Driving on/off of main circuit power supply with AC power supply for 3-phase 200 V AC

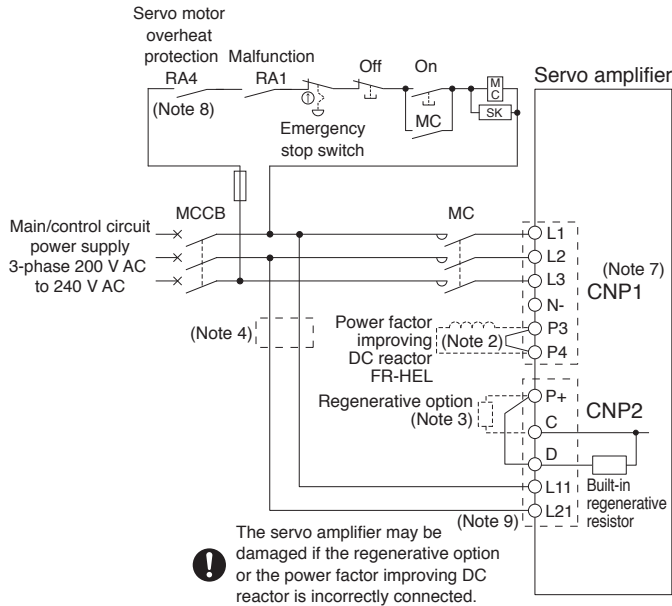


### ● Driving on/off of main circuit power supply with DC power supply for 3-phase 200 V AC

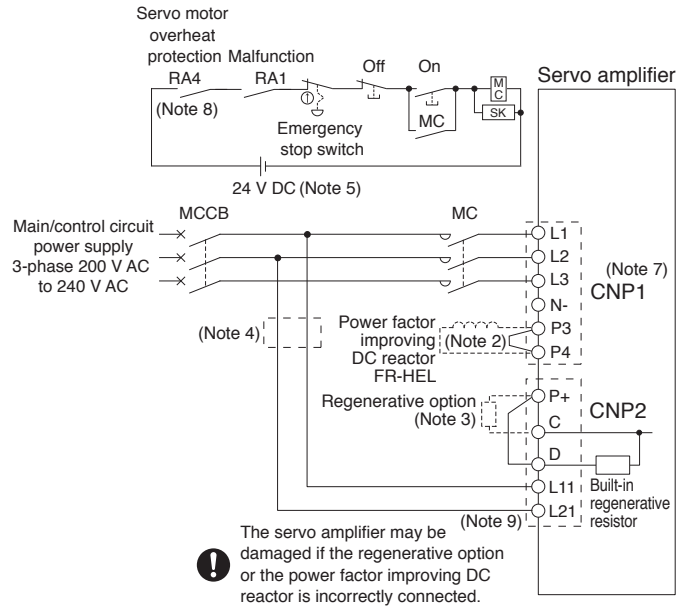

### ● Driving on/off of main circuit power supply with AC power supply for 1-phase 200 V AC

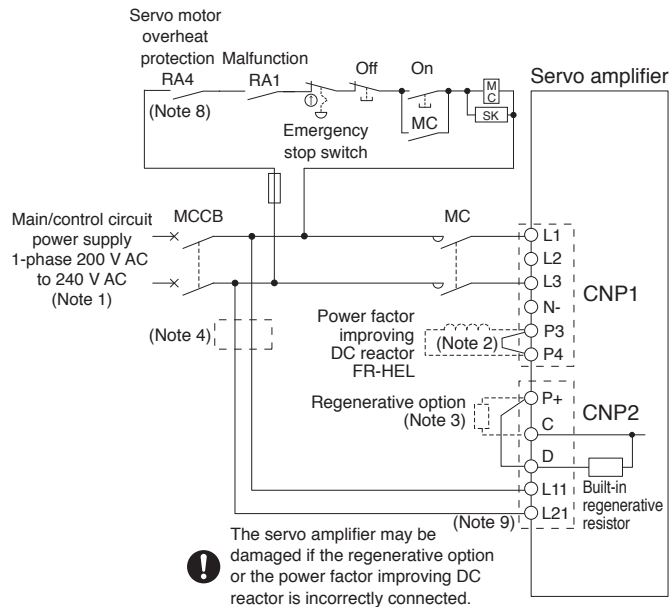

### ● Driving on/off of main circuit power supply with DC power supply for 1-phase 200 V AC

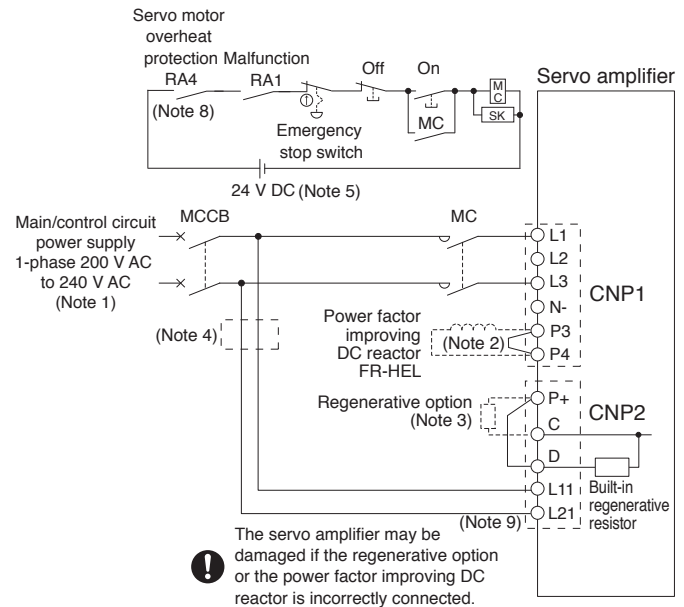

- Notes:
- For 1-phase 200 V AC to 240 V AC, connect the power supply to L1 and L3 terminals. Do not connect anything to L2.
  - Disconnect a short-circuit bar between P3 and P4 when using the power factor improving DC reactor or the simple converter unit.
  - Disconnect a short-circuit bar between P+ and D when connecting the regenerative option externally.
  - When wires used for L11 and L21 are thinner than those for L1, L2, and L3, use a molded-case circuit breaker or a fuse. Refer to "MR-J5 User's Manual" for details.
  - Do not use the 24 V DC interface power supply for the magnetic contactor. Provide a dedicated power supply to the magnetic contactor.
  - For a connection example of power supply circuit with DC input, refer to "MR-J5 User's Manual".
  - For MR-J5-500\_ and MR-J5-700\_ servo amplifiers, CNP1 connector is divided into two connectors, CNP1A (L1/L2/L3) and CNP1B (N1/P3/P4).
  - When connecting a linear servo motor with a thermal protector, add a contact to shut off by being interlocked with the thermal protector output of the linear servo motor.
  - Do not ground the servo amplifier between L11 and L21 even when the control circuit power supply is separated from the main circuit power supply using an uninterruptible power supply (UPS) or an isolation transformer.





Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

## Main/Control Circuit Power Supply Connection Example

**G G-RJ G-HS B B-RJ A A-RJ**



- Driving on/off of main circuit power supply with AC power supply for 3-phase 400 V AC and 3.5 kW or smaller

- Driving on/off of main circuit power supply with DC power supply for 3-phase 400 V AC and 3.5 kW or smaller

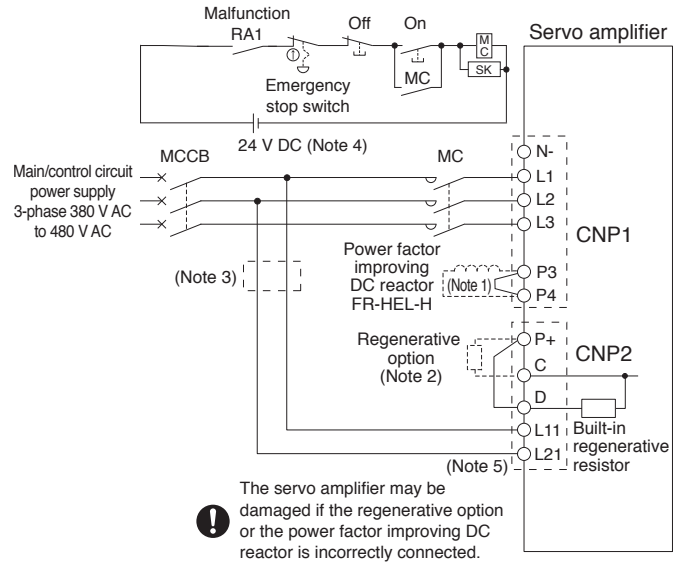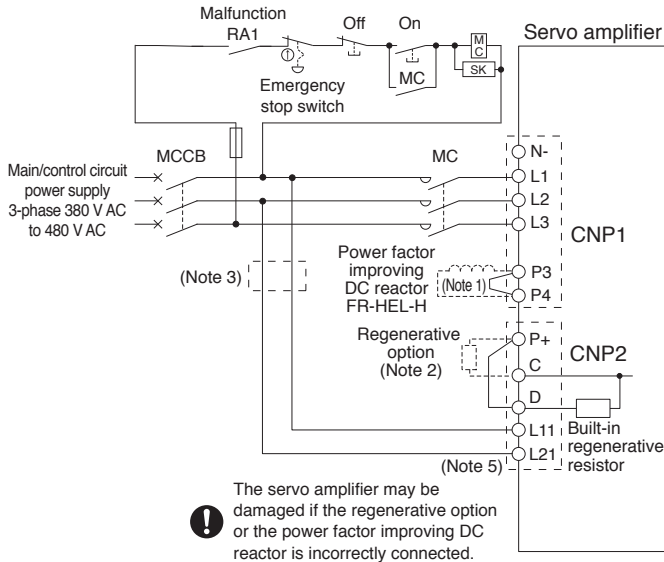

- Driving on/off of main circuit power supply with AC power supply for 3-phase 400 V AC and 5 kW or larger

- Driving on/off of main circuit power supply with DC power supply for 3-phase 400 V AC and 5 kW or larger

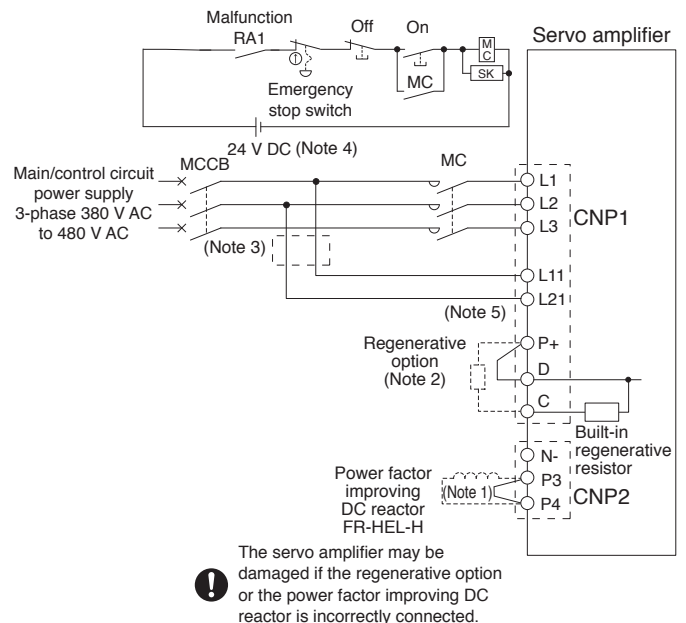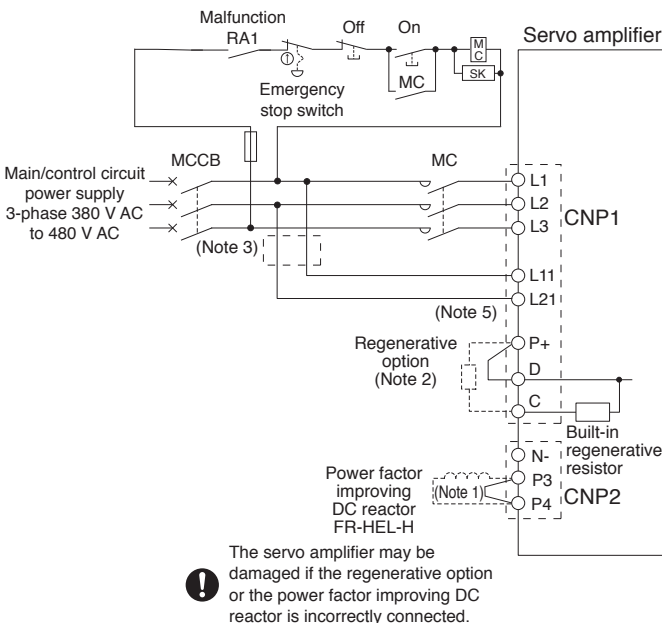

- Notes:
1. Disconnect a short-circuit bar between P3 and P4 when using the power factor improving DC reactor.
  2. Disconnect a short-circuit bar between P+ and D when connecting the regenerative option externally.
  3. When wires used for L11 and L21 are thinner than those for L1, L2, and L3, use a molded-case circuit breaker or a fuse. Refer to "MR-J5 User's Manual" for details.
  4. Do not use the 24 V DC interface power supply for the magnetic contactor. Provide a dedicated power supply to the magnetic contactor.
  5. Do not ground the servo amplifier between L11 and L21 even when the control circuit power supply is separated from the main circuit power supply using an uninterruptible power supply (UPS) or an isolation transformer.



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LVSWires

Product List


Precautions

Support


## Servo Motor Connection Example (Rotary Servo Motor)

### Semi Closed Loop Control System with MR-J5-G(4)(-N1)/MR-J5-B(4)/MR-J5-A(4)

● For HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series

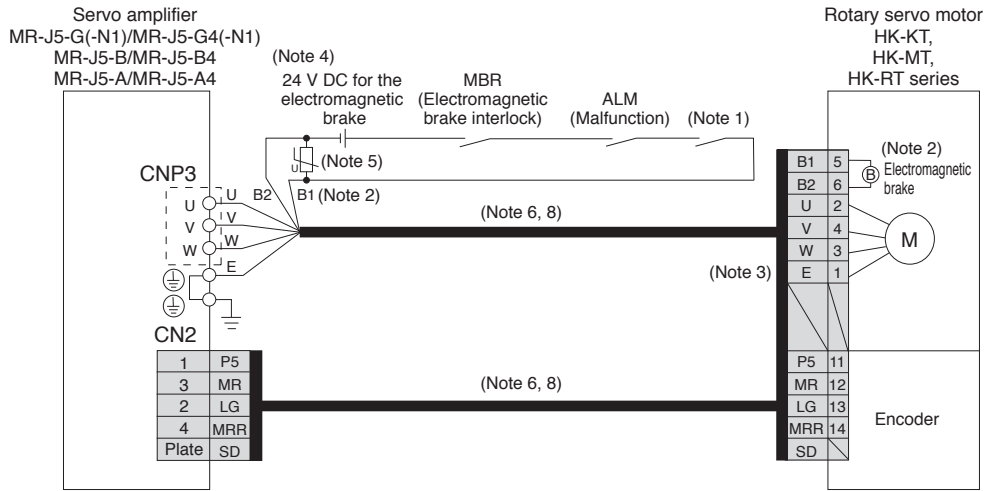

● For HK-ST series/HK-RT (3.5 kW to 7.0 kW) series

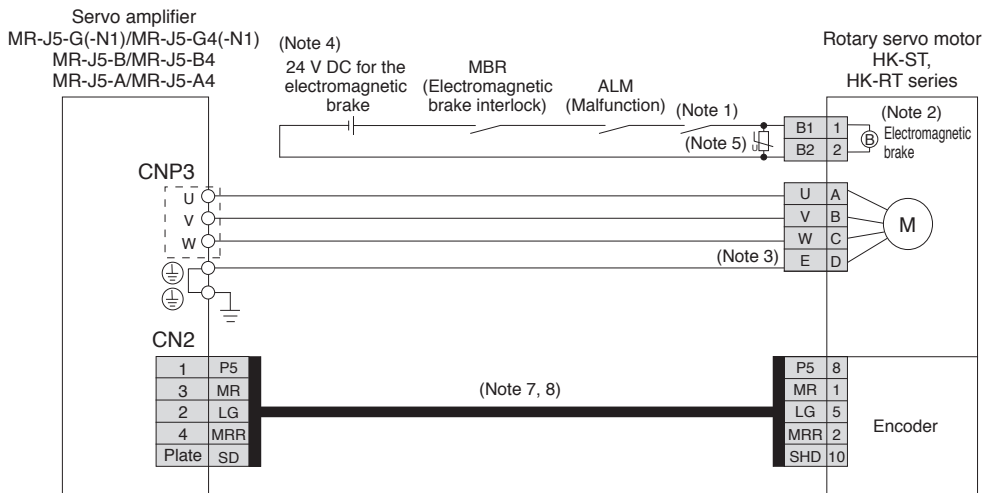

- Notes:
1. Create the circuit in order to shut off by being interlocked with the emergency stop switch.
  2. This is for the servo motors with an electromagnetic brake. The electromagnetic brake terminals do not have polarity.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  4. Do not use the 24 V DC interface power supply for the electromagnetic brake. Provide a dedicated power supply to the electromagnetic brake.
  5. Install a surge absorber between B1 and B2.
  6. This is for using an option dual cable type. Single cable types are also available.
  7. Encoder cables are available as an option.
  8. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.


Servo Motor Connection Example (Rotary Servo Motor)

Fully Closed Loop Control System with MR-J5-G(4)(-N1)/MR-J5-B(4)/MR-J5-A(4)

● For HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series

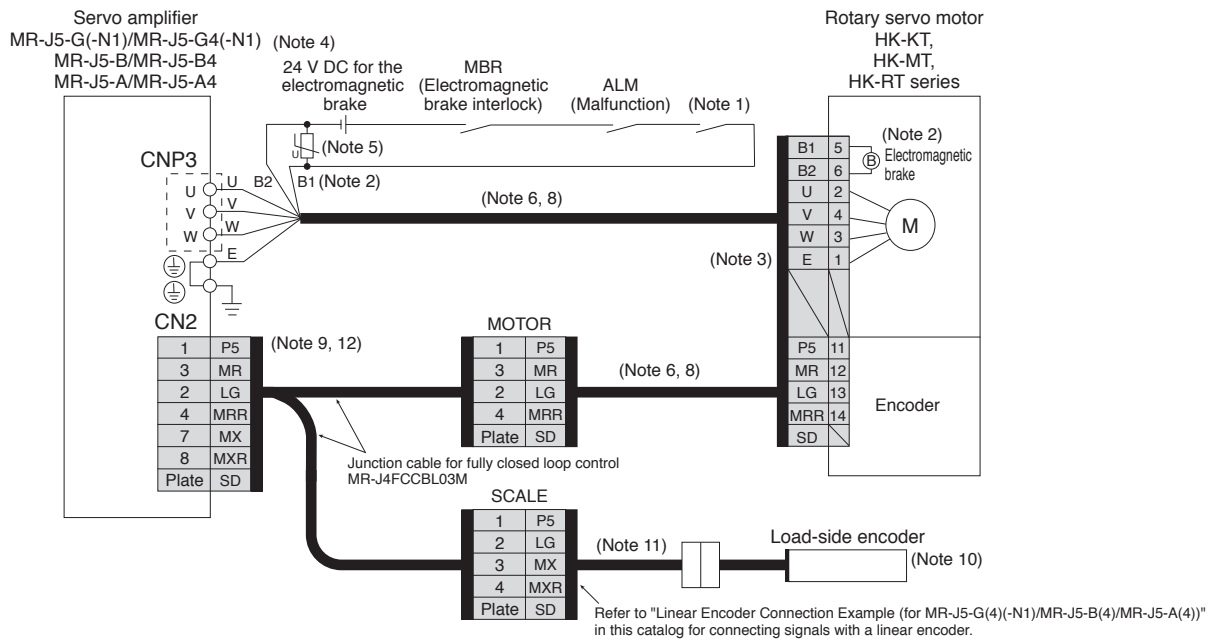

● For HK-ST series/HK-RT (3.5 kW to 7.0 kW) series

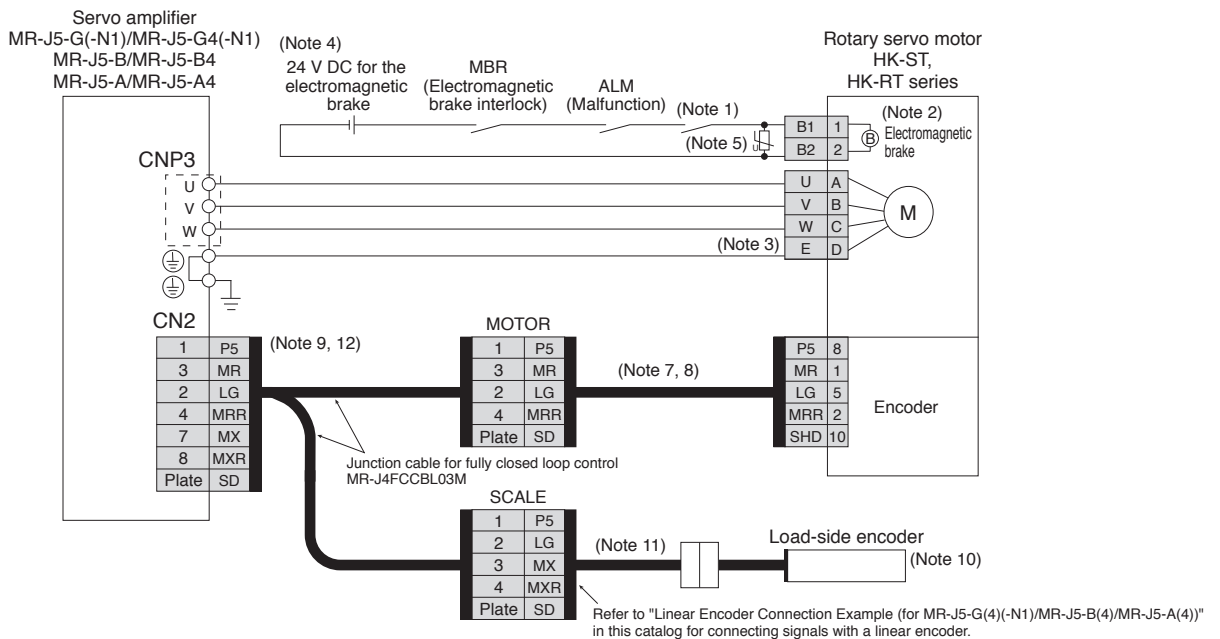

- Notes:
1. Create the circuit in order to shut off by being interlocked with the emergency stop switch.
  2. This is for the servo motors with an electromagnetic brake. The electromagnetic brake terminals do not have polarity.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  4. Do not use the 24 V DC interface power supply for the electromagnetic brake. Provide a dedicated power supply to the electromagnetic brake.
  5. Install a surge absorber between B1 and B2.
  6. This is for using an option dual cable type. Single cable types are also available.
  7. Encoder cables are available as an option.
  8. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.
  9. For fully closed loop control, the load-side encoder and the servo motor encoder are compatible only with two-wire type communication method. Four-wire type cannot be used.
  10. For linear encoders, refer to "List of Linear Encoders" in this catalog. Refer to "MR-J5 User's Manual" for the fully closed loop control with a rotary encoder.
  11. Necessary encoder cables vary depending on the load-side encoder. Refer to "MR-J5 User's Manual" and "Rotary Servo Motor User's Manual (For MR-J5)".
  12. When configuring a fully closed loop control system with MR-J5-G(4)(-N1)/MR-J5-B(4)/MR-J5-A(4), connect MR-J4FCCBL03M junction cable or a junction cable fabricated using MR-J3THMCN2 connector set to CN2 connector.



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.


Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/SWires  
Product List  
Precautions  
Support

# Servo Amplifiers

G B A

## Servo Motor Connection Example (Linear Servo Motor) Linear Servo System with MR-J5-G(-N1)/MR-J5-B/MR-J5-A

● For LM-H3 series/LM-F series/LM-K2 series/LM-U2 series

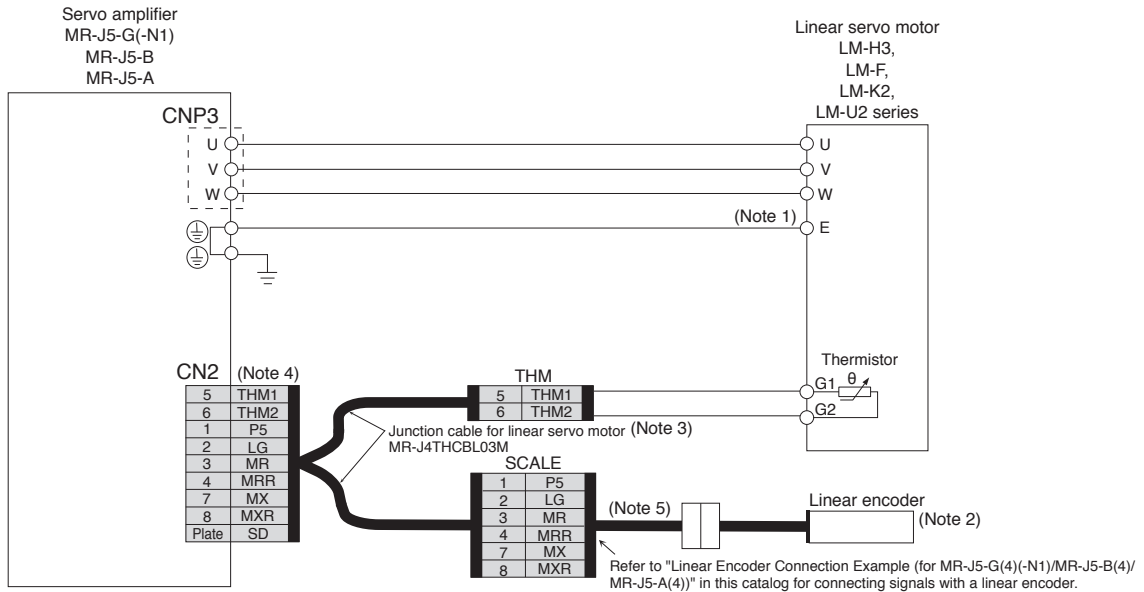

- Notes:
1. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  2. For linear encoders, refer to "List of Linear Encoders" in this catalog.
  3. MR-J4THCBL03M junction cable for linear servo motor is compatible with both two-wire and four-wire type linear encoders.
  4. When using a linear servo motor with MR-J5-G(-N1)/MR-J5-B/MR-J5-A, connect MR-J4THCBL03M junction cable or a junction cable fabricated using MR-J3THMCN2 connector set to CN2 connector.
  5. Necessary cables vary depending on the linear encoder. Refer to "MR-J5 Partner's Encoder User's Manual" for details.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.




## Servo Motor Connection Example (Linear Servo Motor) Linear Servo System with MR-J5-G(-N1)/MR-J5-A

● For LM-AJ series

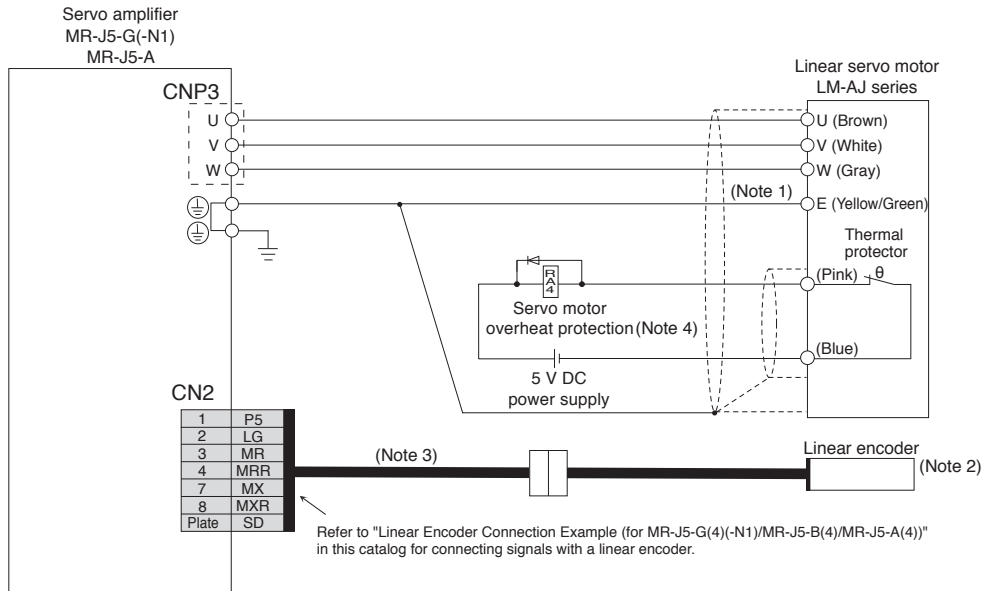

● For LM-AU series

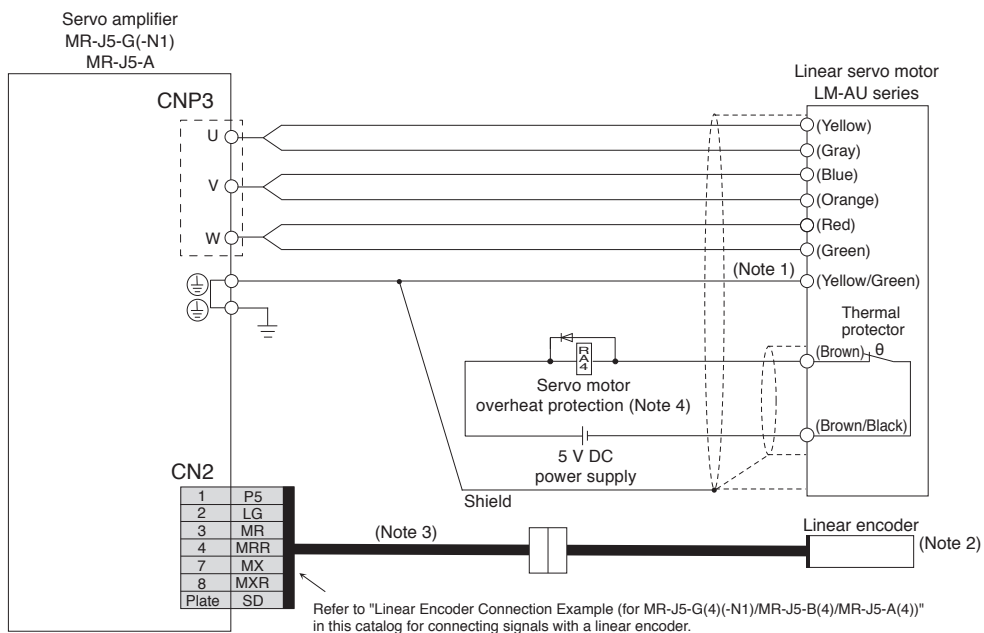

- Notes:
1. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  2. For linear encoders, refer to "List of Linear Encoders" in this catalog.
  3. Necessary cables vary depending on the linear encoder. Refer to "MR-J5 Partner's Encoder User's Manual" for details.
  4. Create a relay circuit to turn off the main circuit power supply when the thermal protector is opened by overheating. Use a relay designed for a flowing current of 1000 mA or less. If a mechanical relay is used, use a relay designed for a flowing current of 50 mA to 1000 mA.








Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

# Servo Amplifiers

## Linear Encoder Connection Example (for MR-J5-G(4)(-N1)/MR-J5-B(4)/MR-J5-A(4))

**G B A**

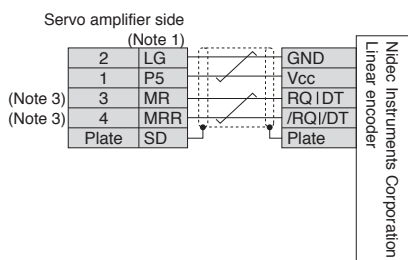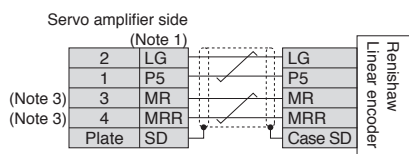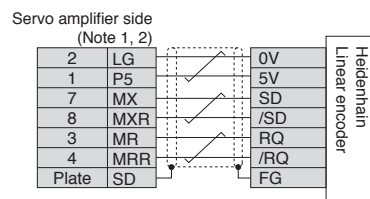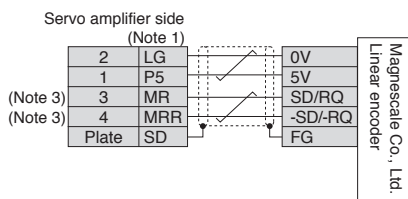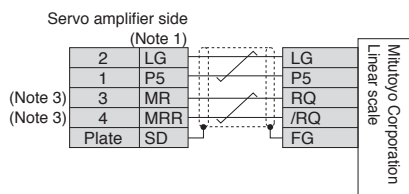

- Notes:
1. For the number of the wire pairs for LG and P5, refer to "MR-J5 Partner's Encoder User's Manual".
  2. When the fully closed loop control system is configured with a rotary servo motor, the load-side encoder and the servo motor encoder are compatible only with two-wire type communication method. Four-wire type cannot be used.
  3. For the fully closed loop control, MR and MRR of the servo amplifier-side connectors will be connected to MX and MXR of the SCALE connectors of MR-J4FCCBL03M.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.


Servo Motor Connection Example (Direct Drive Motor)

G G-RJ B B-RJ A A-RJ

● For TM-RG2M series/TM-RU2M series/TM-RFM series (incremental system)

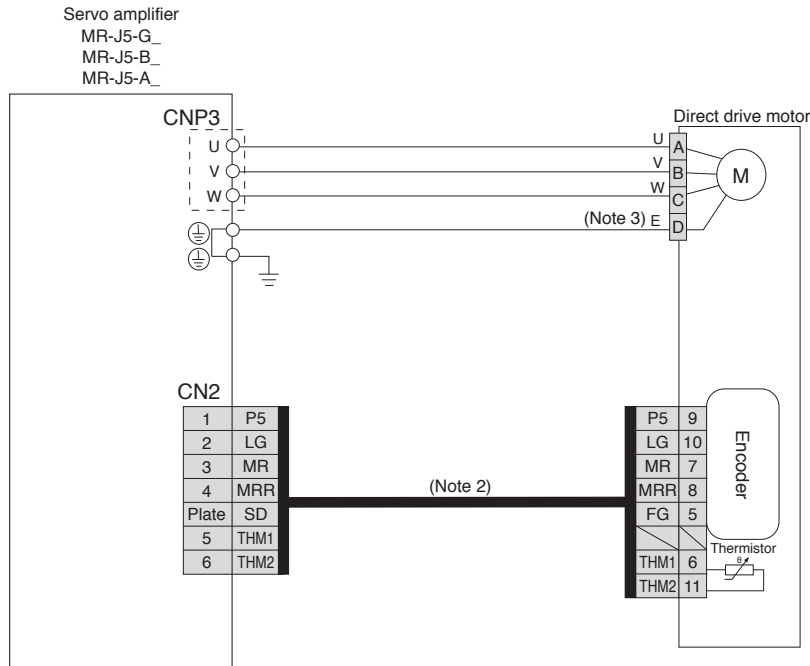

● For TM-RG2M series/TM-RU2M series/TM-RFM series (absolute position detection system)

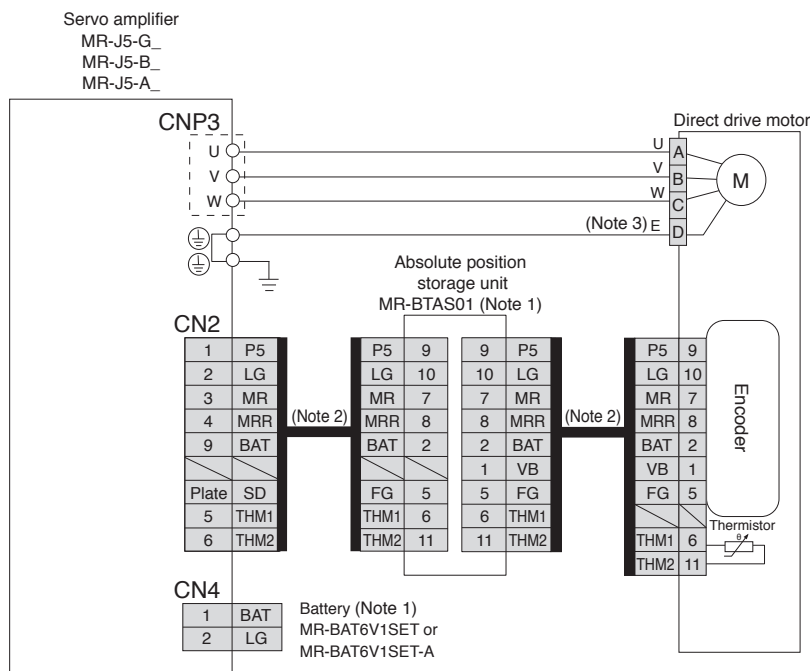

- Notes:
1. An MR-BTAS01 absolute position storage unit, and MR-BAT6V1SET or MR-BAT6V1SET-A battery (sold as options) are required for absolute position detection system. Refer to "MR-J5 User's Manual" and "Direct Drive Motor User's Manual" for details of absolute position detection system.
  2. Fabricate this encoder cable. Refer to "Direct Drive Motor User's Manual" when fabricating the encoder cable.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.

**!** Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

# Servo Amplifiers

## External Encoder Connection Specifications

**G G-RJ G-HS B B-RJ A A-RJ**

Refer to the following table for the encoder communication method compatible with each system and for the servo amplifier connector to which a load-side encoder should be connected.

| Operation mode  | External encoder communication method  | Connector to be connected with the external encoder |   |                                |                              |
|---|--|---|---|--------------------------------|------------------------------|
|   |  | MR-J5-G(4)(-N1)/MR-J5-B(4)                          | MR-J5-G(4)-RJ(N1)/MR-J5-G4-HS(N1)/MR-J5-B(4)-RJ | MR-J5-A(4)                     | MR-J5-A(4)-RJ                |
| Linear servo system <small>(Note 3)</small>                 | Two-wire type                          | CN2 <small>(Note 1)</small>                         | CN2 <small>(Note 1)</small>                     | CN2 <small>(Note 1)</small>    | CN2 <small>(Note 1)</small>  |
|   | Four-wire type                         |   |   |                                |                              |
|   | A/B/Z-phase differential output method |   | CN2L <small>(Note 2)</small>                    |                                | CN2L <small>(Note 2)</small> |
| Fully closed loop control system <small>(Note 6, 7)</small> | Two-wire type                          | CN2 <small>(Note 4, 5)</small>                      | CN2L  | CN2 <small>(Note 4, 5)</small> | CN2L                         |
|   | Four-wire type                         |   |   |                                |                              |
|   | A/B/Z-phase differential output method |   |   |                                |                              |
| Scale measurement function <small>(Note 6, 7)</small>       | Two-wire type                          | CN2 <small>(Note 4, 5)</small>                      | CN2L  |                                |                              |
|   | Four-wire type                         |   |   |                                |                              |
|   | A/B/Z-phase differential output method |   |   |                                |                              |


- Notes:
1. MR-J4THCBL03M junction cable is required.
  2. Connect a thermistor to CN2 connector.
  3. Refer to "Combinations of Linear Servo Motors and Servo Amplifiers" in this catalog for servo amplifiers that are compatible with linear servo motors.
  4. MR-J4FCCBL03M junction cable is required.
  5. MR-J5-G(4)(-N1)/MR-J5-B(4)/MR-J5-A(4) does not support a servo motor encoder with the four-wire type communication method. Use MR-J5-G(4)-RJ(N1)/MR-J5-G4-HS(N1)/MR-J5-B(4)-RJ/MR-J5-A(4)-RJ.
  6. For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
  7. For the servo amplifier firmware version supporting this function, refer to "MR-J5 User's Manual".

Servo Motor Connection Example (Rotary Servo Motor)


G-RJ G-HS B-RJ A-RJ

Fully Closed Loop Control System with MR-J5-G(4)-RJ(N1)/MR-J5-G4-HS(N1)/MR-J5-B(4)-RJ/MR-J5-A(4)-RJ

● For HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series

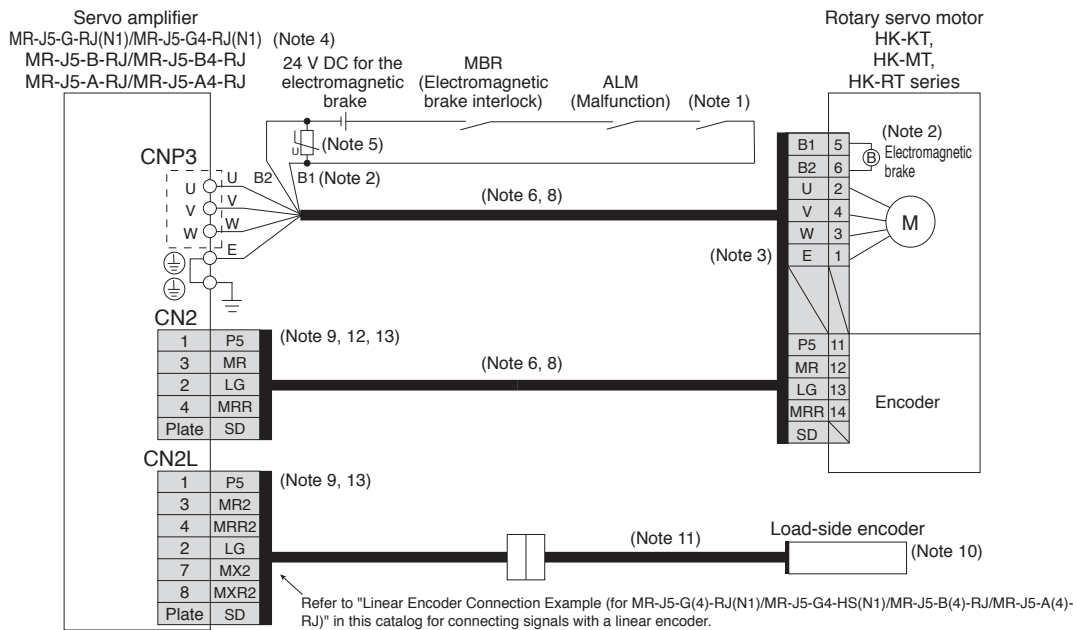

● For HK-ST series/HK-RT (3.5 kW to 7.0 kW) series

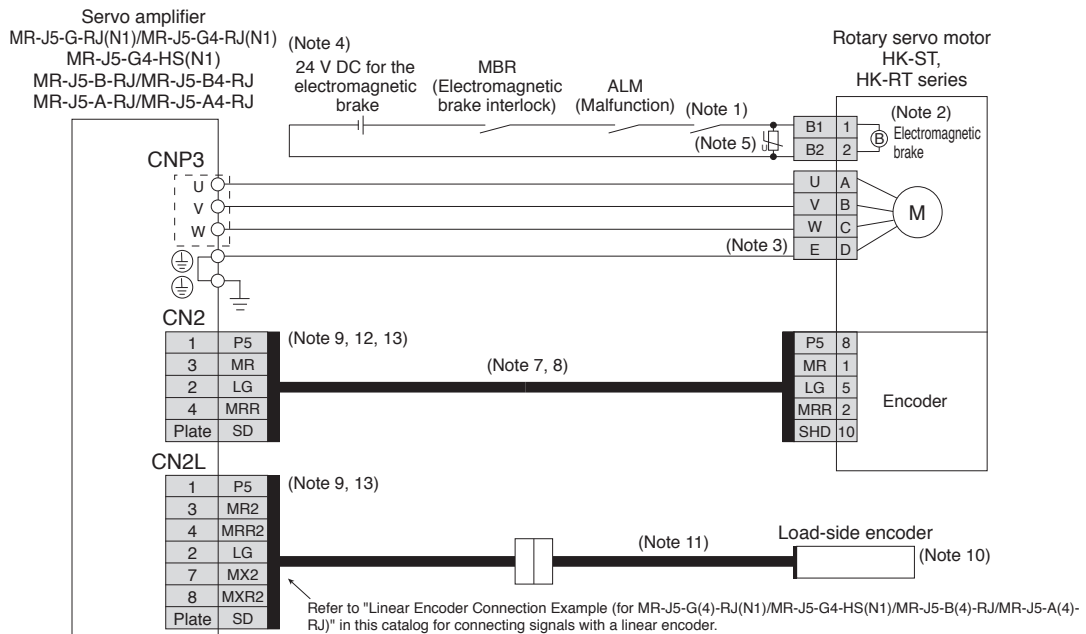

- Notes:
1. Create the circuit in order to shut off by being interlocked with the emergency stop switch.
  2. This is for the servo motors with an electromagnetic brake. The electromagnetic brake terminals do not have polarity.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  4. Do not use the 24 V DC interface power supply for the electromagnetic brake. Provide a dedicated power supply to the electromagnetic brake.
  5. Install a surge absorber between B1 and B2.
  6. This is for using an option dual cable type. Single cable types are also available.
  7. Encoder cables are available as an option.
  8. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.
  9. The load-side encoder and the servo motor encoder are compatible with both two-wire and four-wire type communication methods.
  10. For linear encoders, refer to "List of Linear Encoders" in this catalog. Refer to "MR-J5 User's Manual" for the fully closed loop control with a rotary encoder.
  11. Necessary encoder cables vary depending on the load-side encoder. Refer to "MR-J5 User's Manual" and "Rotary Servo Motor User's Manual (For MR-J5)".
  12. This wiring of the servo motor encoder is applicable for the two-wire type communication method.
  13. When configuring a fully closed loop control system with MR-J5-G(4)-RJ(N1)/MR-J5-G4-HS(N1)/MR-J5-B(4)-RJ/MR-J5-A(4)-RJ, connect a servo motor encoder to CN2 connector and a load-side encoder to CN2L connector. Do not use MR-J4FCCBL03M junction cable or a junction cable fabricated using MR-J3THMCN2 connector set.



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV5/Wires  
Product List  
Precautions  
Support


## Servo Motor Connection Example

G-RJ B-RJ A-RJ


(Linear Servo Motor: LM-H3 Series/LM-F Series/LM-K2 Series/LM-U2 Series)

Linear Servo System with MR-J5-G-RJ(N1)/MR-J5-B-RJ/MR-J5-A-RJ

### ●Connecting a serial linear encoder

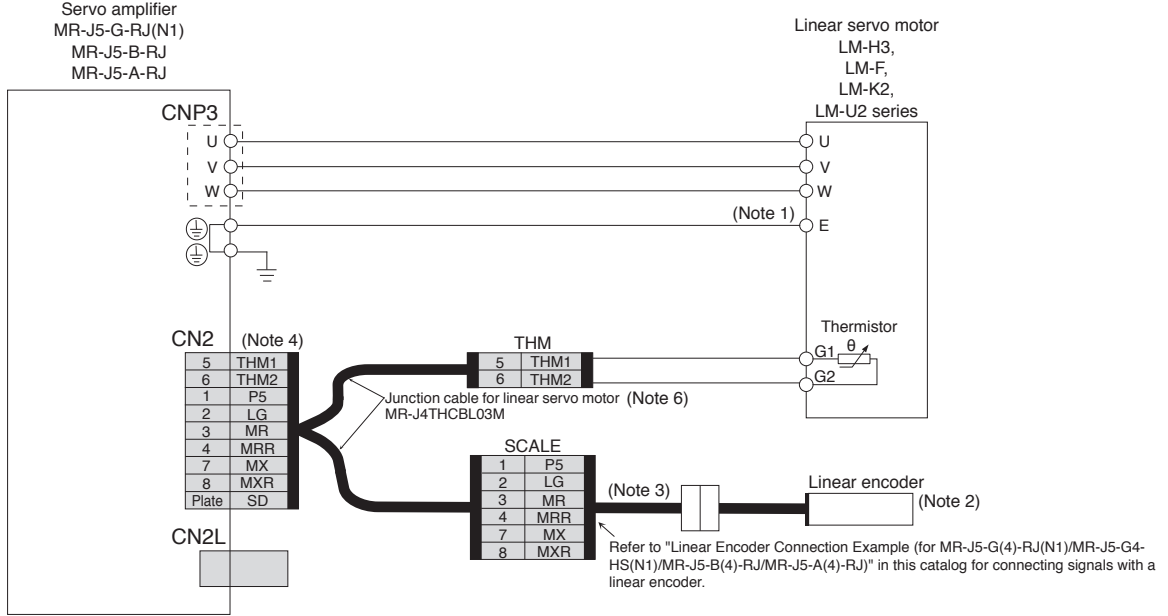

### ●Connecting an A/B/Z-phase differential output linear encoder

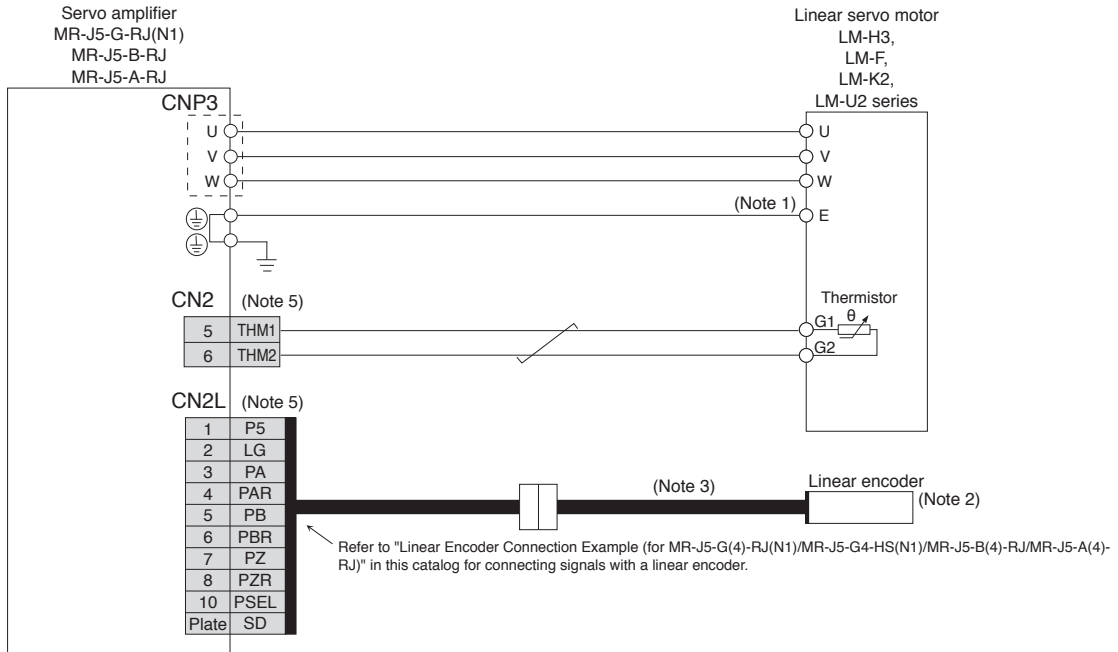

- Notes:
1. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  2. For linear encoders, refer to "List of Linear Encoders" in this catalog.
  3. Necessary cables vary depending on the linear encoder. Refer to "MR-J5 Partner's Encoder User's Manual" for details.
  4. When configuring a linear servo system with MR-J5-G-RJ(N1)/MR-J5-B-RJ/MR-J5-A-RJ and a serial linear encoder, connect MR-J4THCBL03M junction cable or a junction cable fabricated using MR-J3THMCN2 connector set to CN2 connector.
  5. When configuring a linear servo system with MR-J5-G-RJ(N1)/MR-J5-B-RJ/MR-J5-A-RJ and an A/B/Z-phase differential output type linear encoder, connect a thermistor to CN2 connector and the linear encoder to CN2L connector. Do not use MR-J4THCBL03M junction cable or a junction cable fabricated using MR-J3THMCN2 connector set.
  6. MR-J4THCBL03M junction cable for linear servo motor is compatible with both two-wire and four-wire type linear encoders.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.


### Servo Motor Connection Example (Linear Servo Motor: LM-AJ Series)

#### Linear Servo System with MR-J5-G-RJ(N1)/MR-J5-A-RJ

##### ●Connecting a serial linear encoder

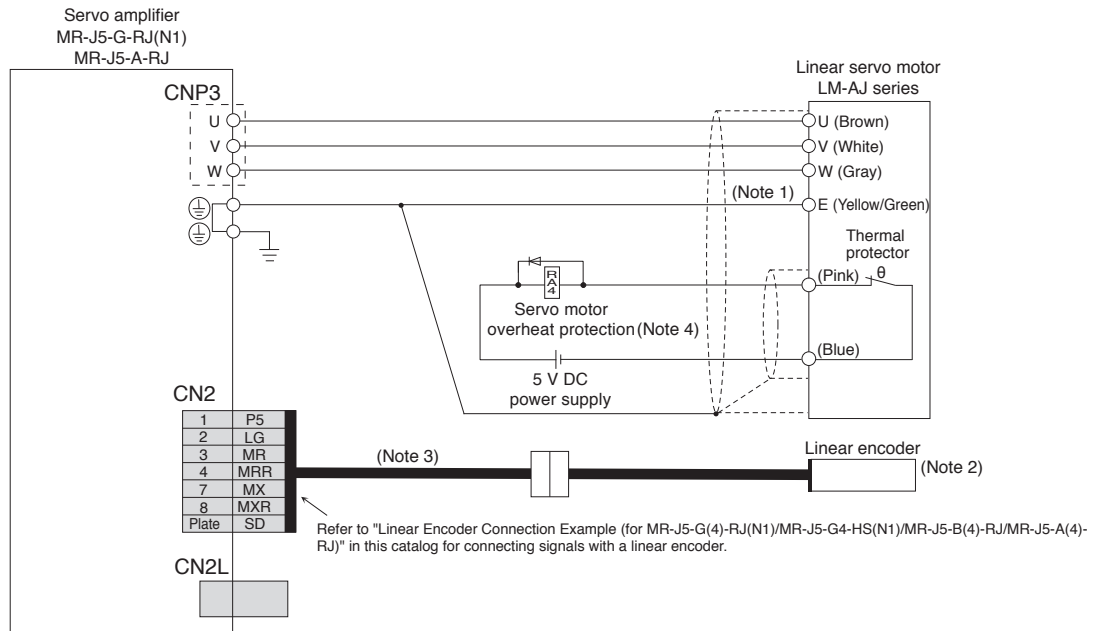

##### ●Connecting an A/B/Z-phase differential output linear encoder

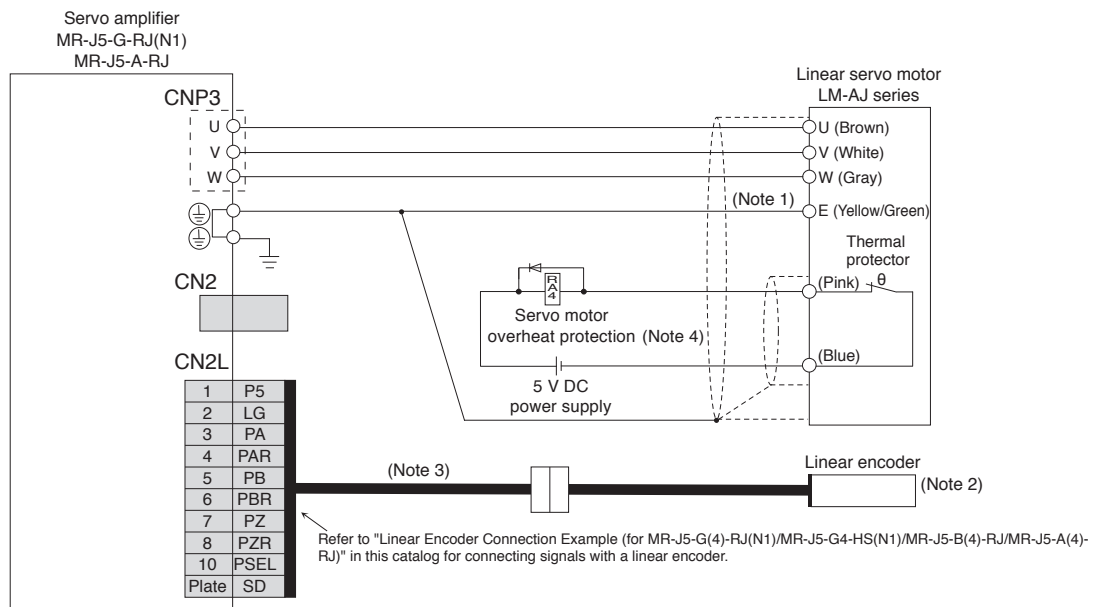

- Notes:
1. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  2. For linear encoders, refer to "List of Linear Encoders" in this catalog.
  3. Necessary cables vary depending on the linear encoder. Refer to "MR-J5 Partner's Encoder User's Manual" for details.
  4. Create a relay circuit to turn off the main circuit power supply when the thermal protector is opened by overheating. Use a relay designed for a flowing current of 1000 mA or less. If a mechanical relay is used, use a relay designed for a flowing current of 50 mA to 1000 mA.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.


## Servo Motor Connection Example (Linear Servo Motor: LM-AU Series) Linear Servo System with MR-J5-G-RJ(N1)/MR-J5-A-RJ

G-RJ A-RJ

### ●Connecting a serial linear encoder

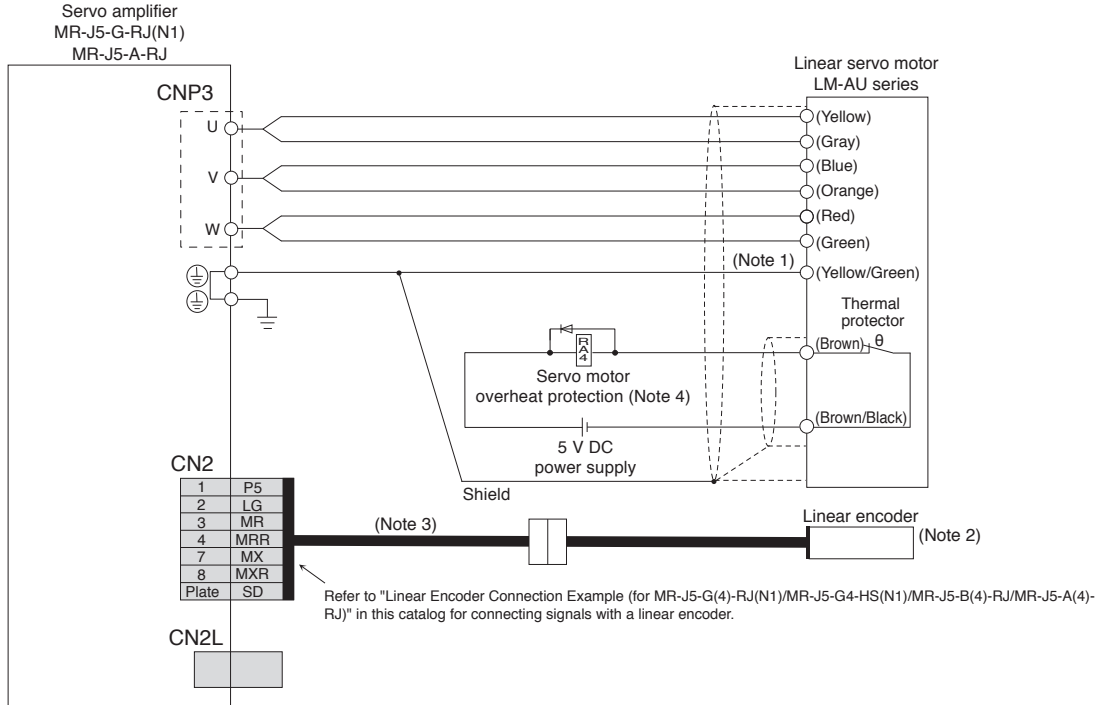

### ●Connecting an A/B/Z-phase differential output linear encoder

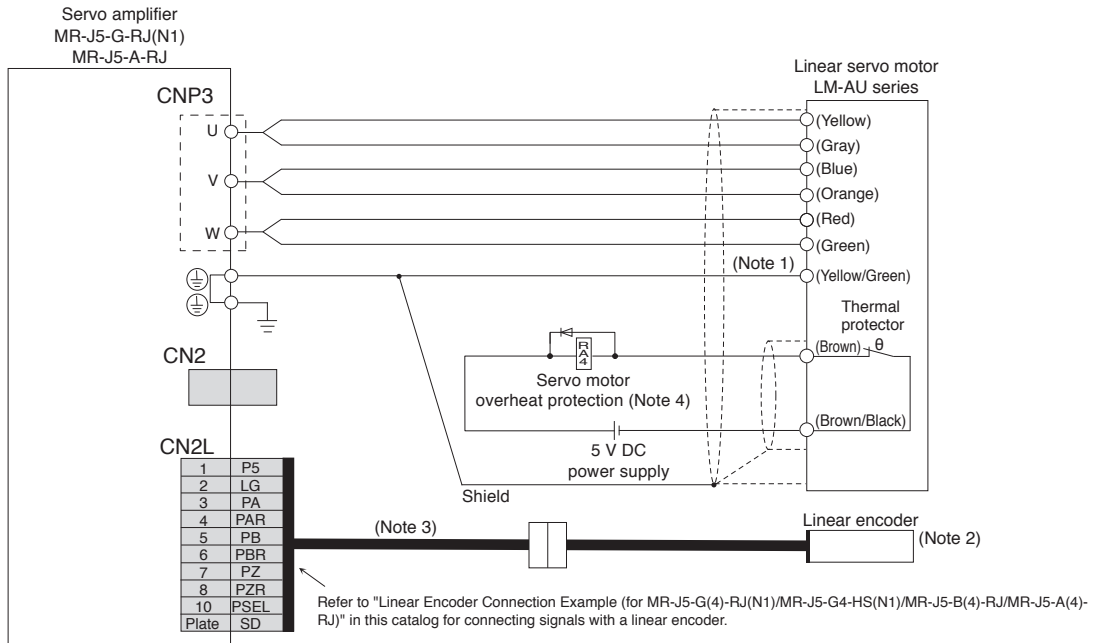

- Notes:
1. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  2. For linear encoders, refer to "List of Linear Encoders" in this catalog.
  3. Necessary cables vary depending on the linear encoder. Refer to "MR-J5 Partner's Encoder User's Manual" for details.
  4. Create a relay circuit to turn off the main circuit power supply when the thermal protector is opened by overheating. Use a relay designed for a flowing current of 1000 mA or less. If a mechanical relay is used, use a relay designed for a flowing current of 50 mA to 1000 mA.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.



## Linear Encoder Connection Example (for MR-J5-G(4)-RJ(N1)/MR-J5-G4-HS(N1)/MR-J5-B(4)-RJ/MR-J5-A(4)-RJ)

G-RJ G-HS B-RJ A-RJ

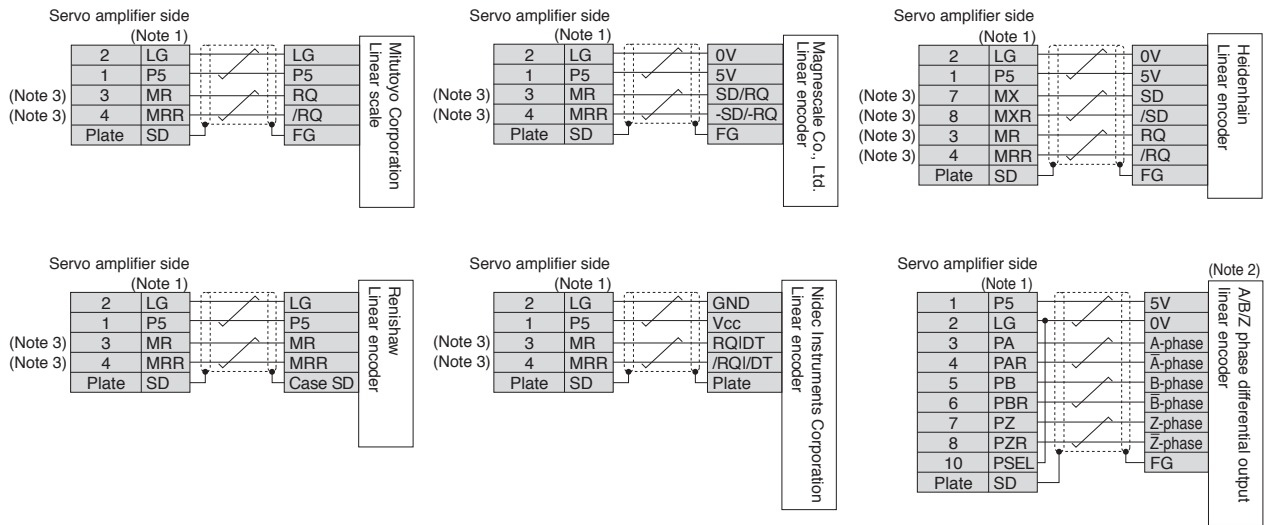

- Notes:
1. For the number of the wire pairs for LG and P5, refer to "MR-J5 Partner's Encoder User's Manual".
  2. If the encoder's current consumption exceeds 350 mA, supply power from an external source.
  3. For the fully closed loop control, the signals of 3-pin, 4-pin, 7-pin, and 8-pin of the CN2L connector are as follows:
    - 3-pin: MR2
    - 4-pin: MRR2
    - 7-pin: MX2
    - 8-pin: MXR2



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.


Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

# Servo Amplifiers

## MR-J5-G\_ Dimensions


**G** **G-RJ**

- MR-J5-10G(-N1), MR-J5-10G-RJ(N1)
- MR-J5-20G(-N1), MR-J5-20G-RJ(N1)
- MR-J5-40G(-N1), MR-J5-40G-RJ(N1)

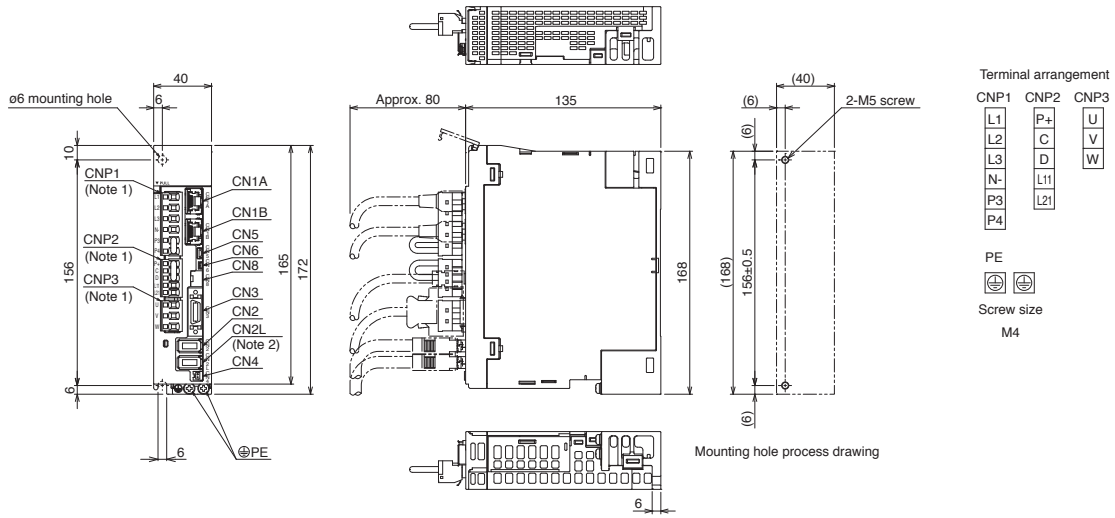

[Unit: mm]

- MR-J5-60G(-N1), MR-J5-60G-RJ(N1)

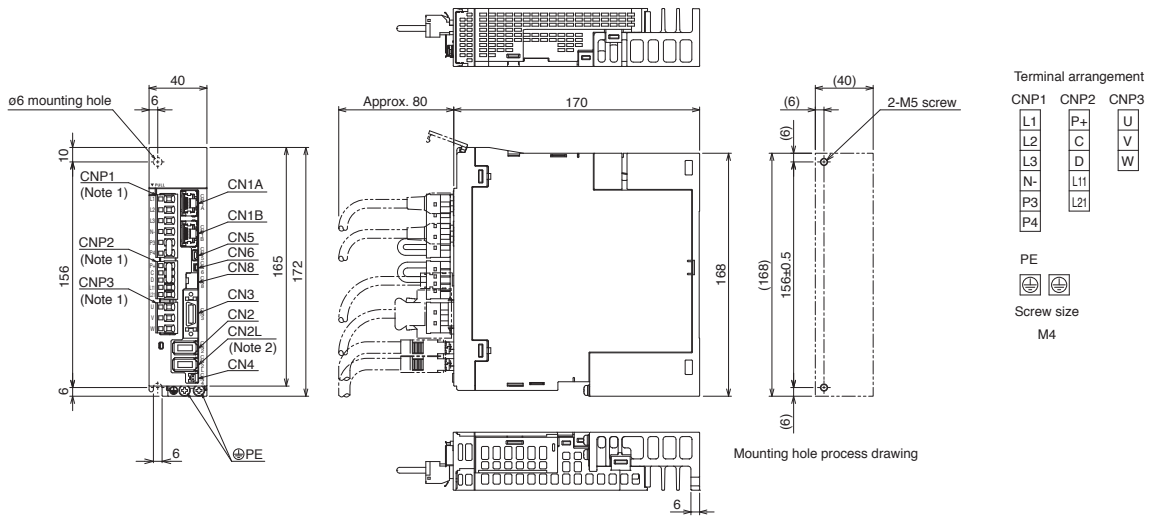


[Unit: mm]

- Notes:
1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.
  2. CN2L connector is not available for MR-J5-G(-N1) servo amplifiers.


MR-J5-G\_ Dimensions

- MR-J5-70G(-N1), MR-J5-70G-RJ(N1)
- MR-J5-100G(-N1), MR-J5-100G-RJ(N1)

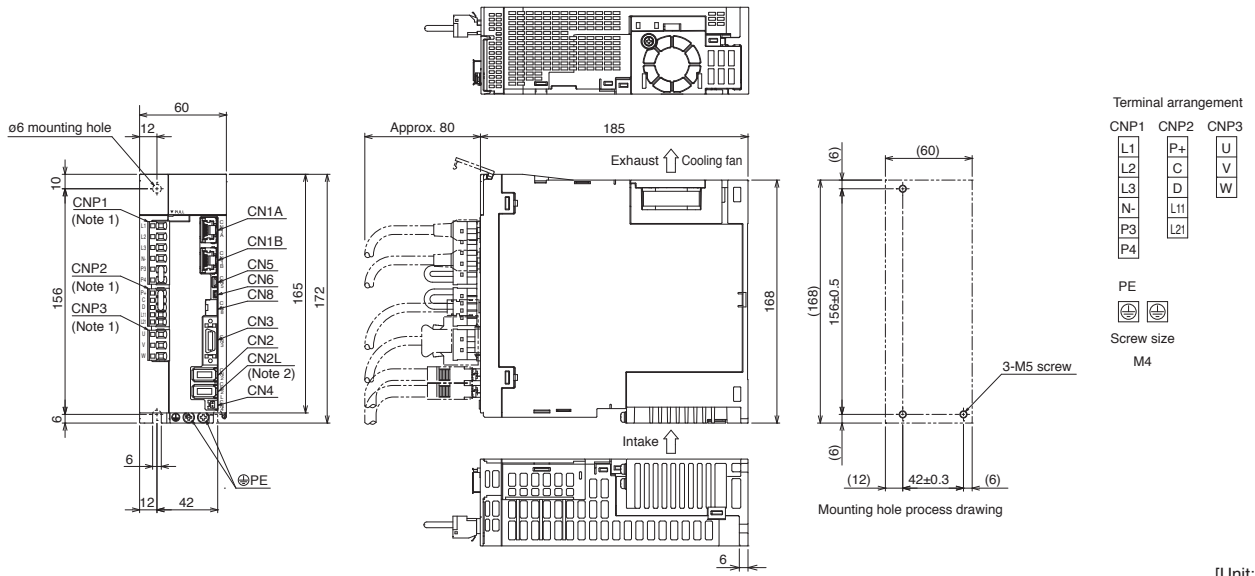

[Unit: mm]

- MR-J5-200G(-N1), MR-J5-200G-RJ(N1) (Note 3)
- MR-J5-350G(-N1), MR-J5-350G-RJ(N1) (Note 3)

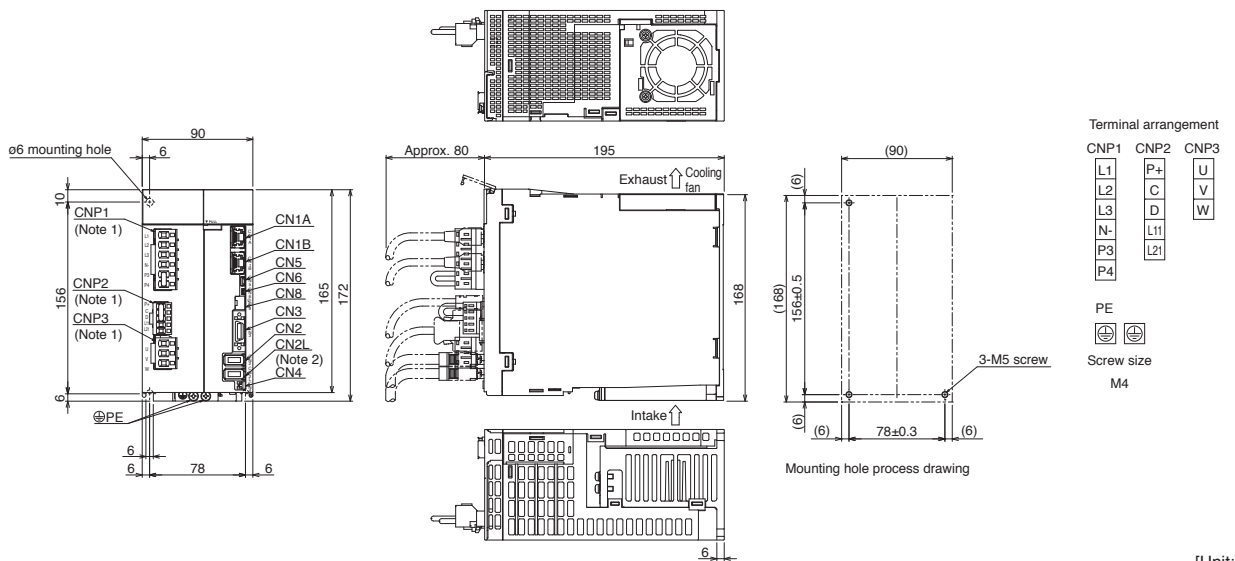

[Unit: mm]


- Notes:
1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.
  2. CN2L connector is not available for MR-J5-G(-N1) servo amplifiers.
  3. For the servo amplifiers manufactured in August 2022 or later, the fan unit is mounted with two screws. Refer to "Mitsubishi Electric AC Servo System Sales and Service No. 22-02E" for details.

# Servo Amplifiers

## MR-J5-G\_ Dimensions


**G** **G-RJ**

●MR-J5-500G(-N1), MR-J5-500G-RJ(N1)

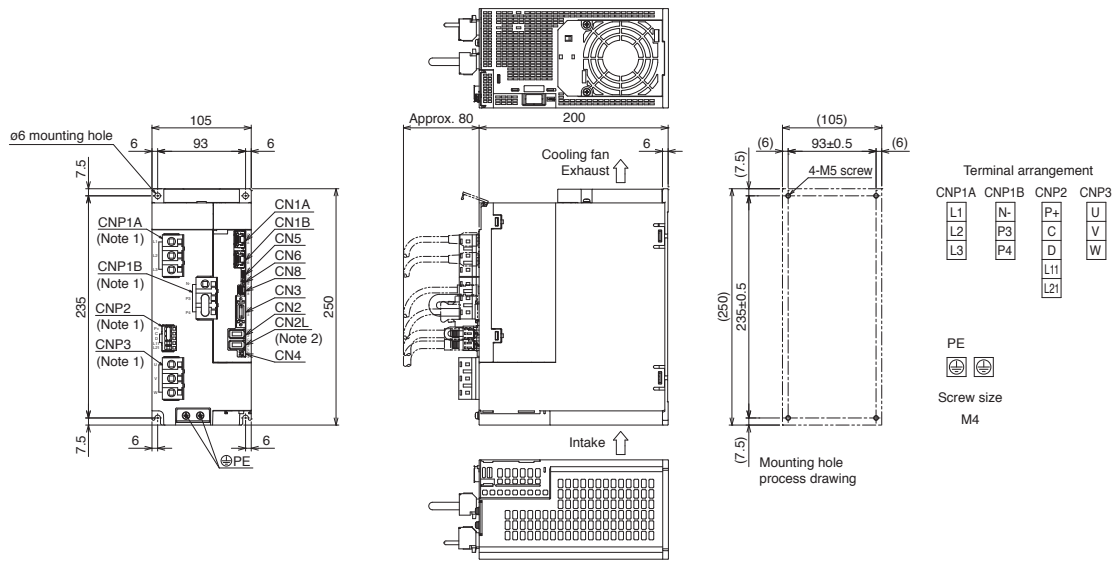

[Unit: mm]

●MR-J5-700G(-N1), MR-J5-700G-RJ(N1)

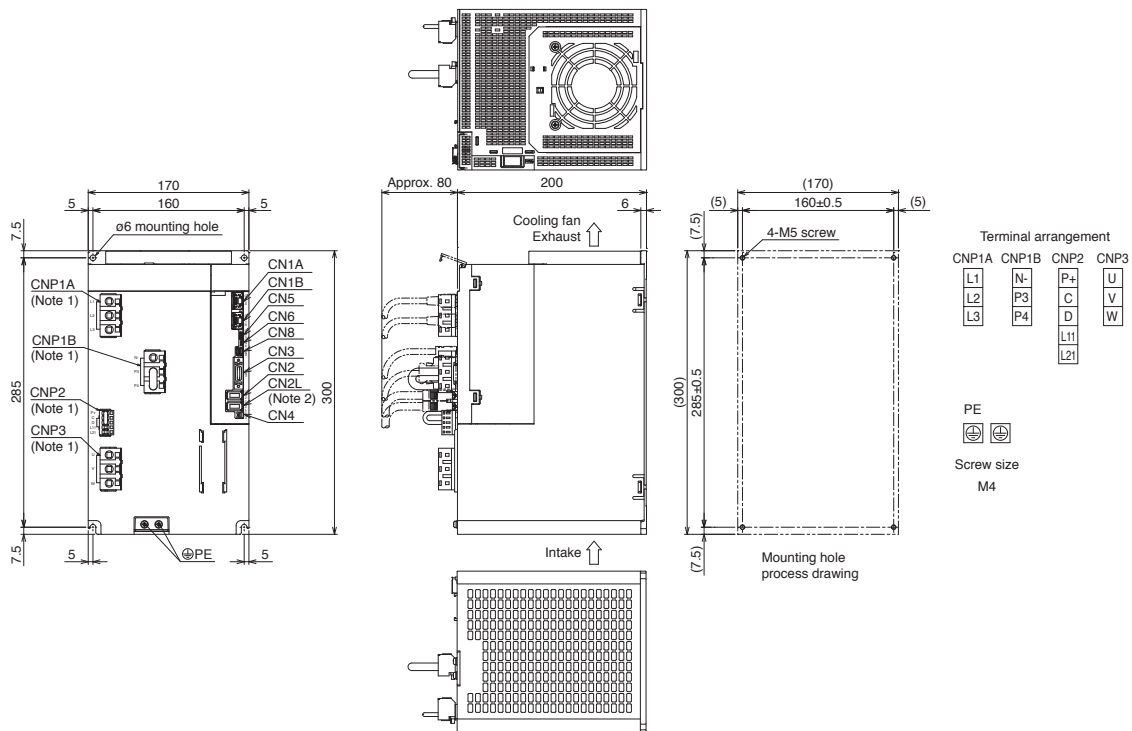


[Unit: mm]

Notes: 1. CNP1A, CNP1B, CNP2, and CNP3 connectors are supplied with the servo amplifier.  
2. CN2L connector is not available for MR-J5-G(-N1) servo amplifiers.


MR-J5-G\_ Dimensions

- MR-J5-60G4(-N1), MR-J5-60G4-RJ(N1)
- MR-J5-100G4(-N1), MR-J5-100G4-RJ(N1)

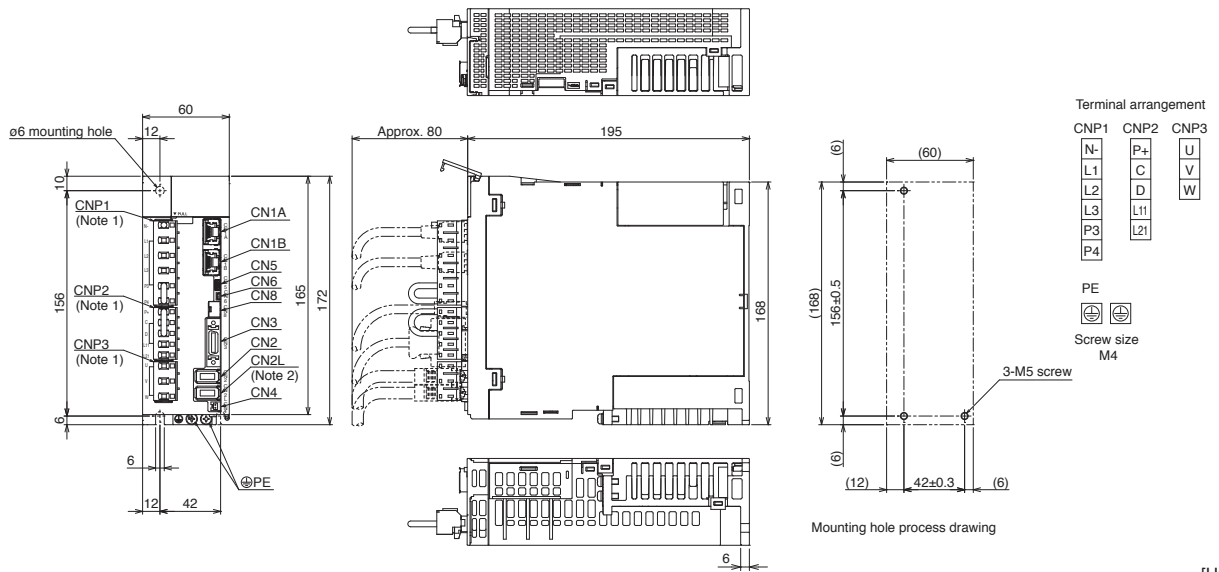

[Unit: mm]

- MR-J5-200G4(-N1), MR-J5-200G4-RJ(N1) (Note 3)
- MR-J5-350G4(-N1), MR-J5-350G4-RJ(N1) (Note 3)

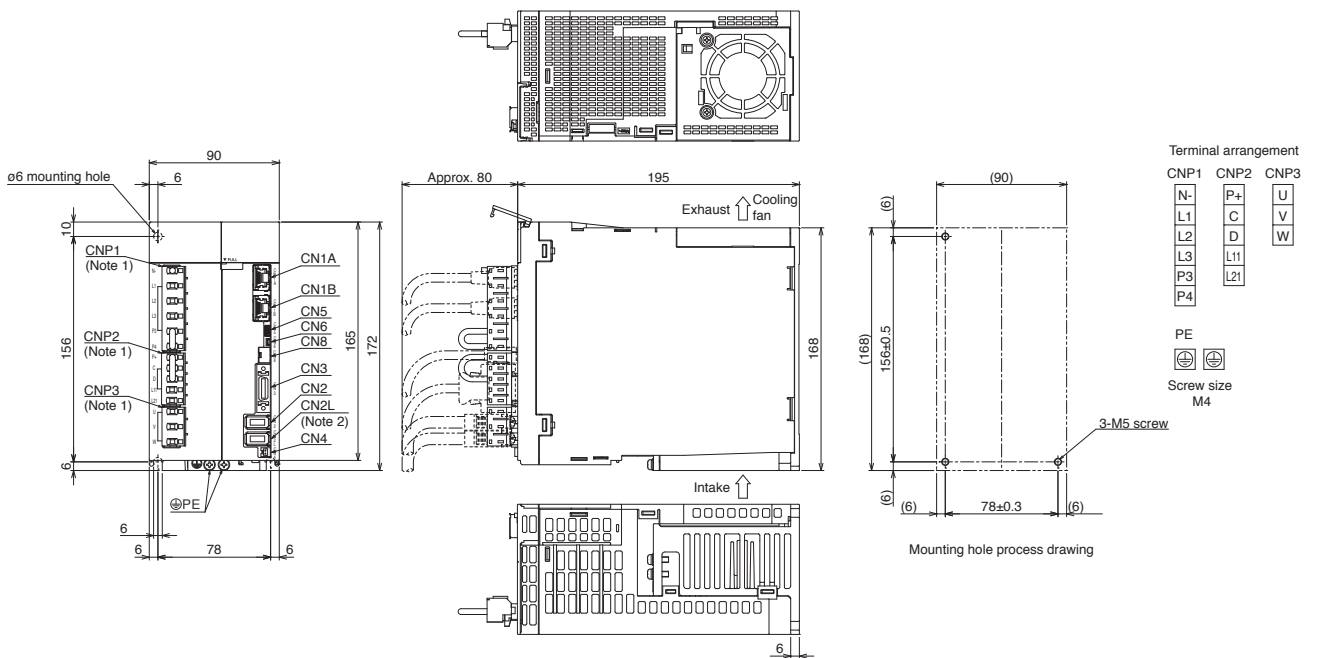

[Unit: mm]


- Notes:
1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.
  2. CN2L connector is not available for MR-J5-G4(-N1) servo amplifiers.
  3. For the servo amplifiers manufactured in August 2022 or later, the fan unit is mounted with two screws. Refer to "Mitsubishi Electric AC Servo System Sales and Service No. 22-02E" for details.

# Servo Amplifiers

## MR-J5-G\_Dimensions


**G** **G-HS**

●MR-J5-500G4(-N1), MR-J5-700G4(-N1)

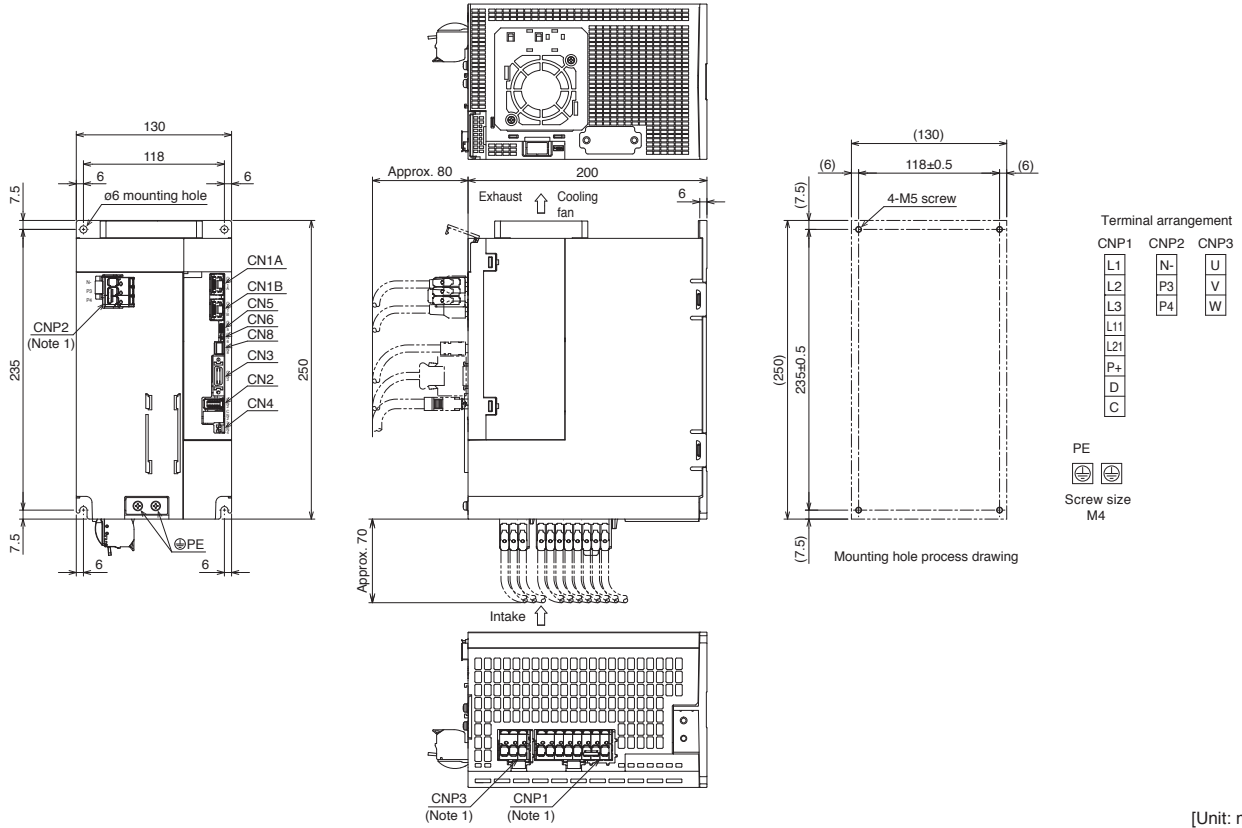

[Unit: mm]

●MR-J5-500G4-HS(N1), MR-J5-700G4-HS(N1)

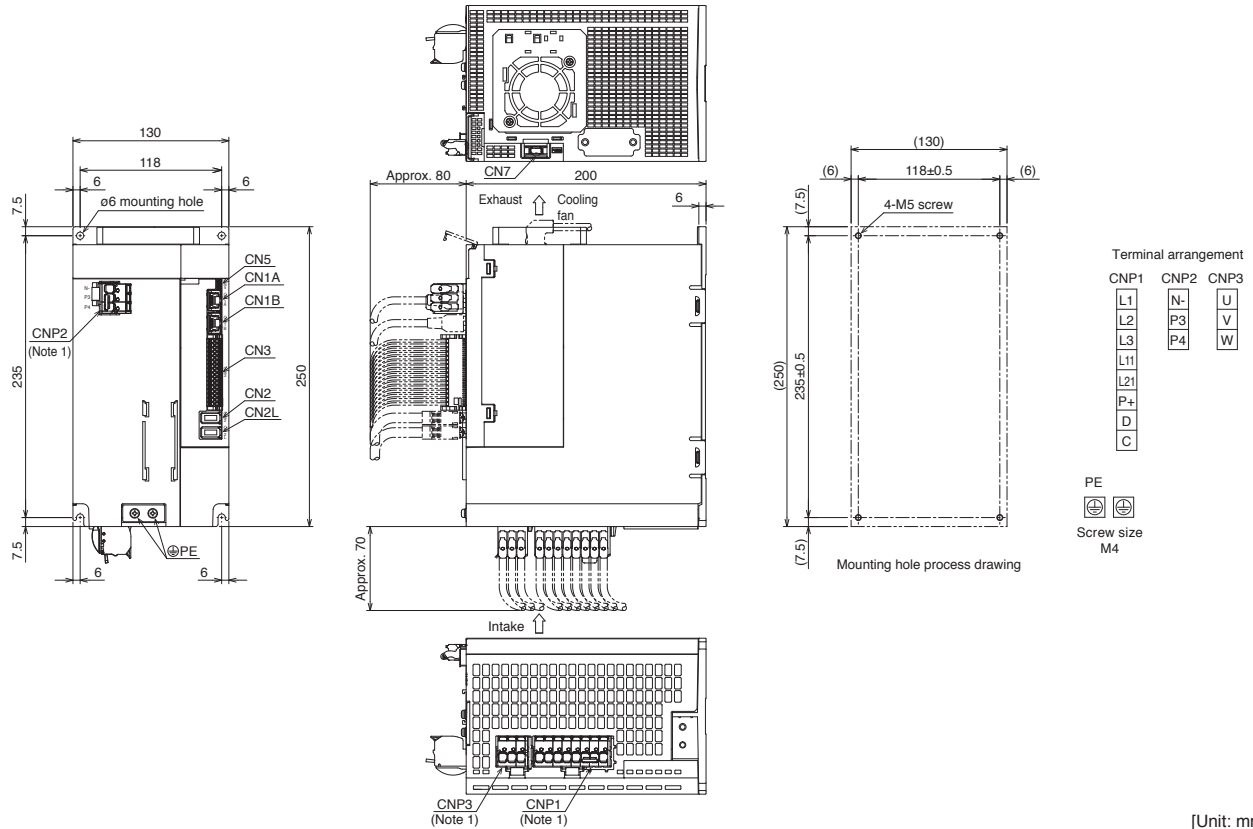


[Unit: mm]

Notes: 1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.

## MR-J5W\_G(-N1) Connections with Peripheral Equipment <sup>(Note 1)</sup>

Peripheral equipment is connected to MR-J5W\_G(-N1) as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

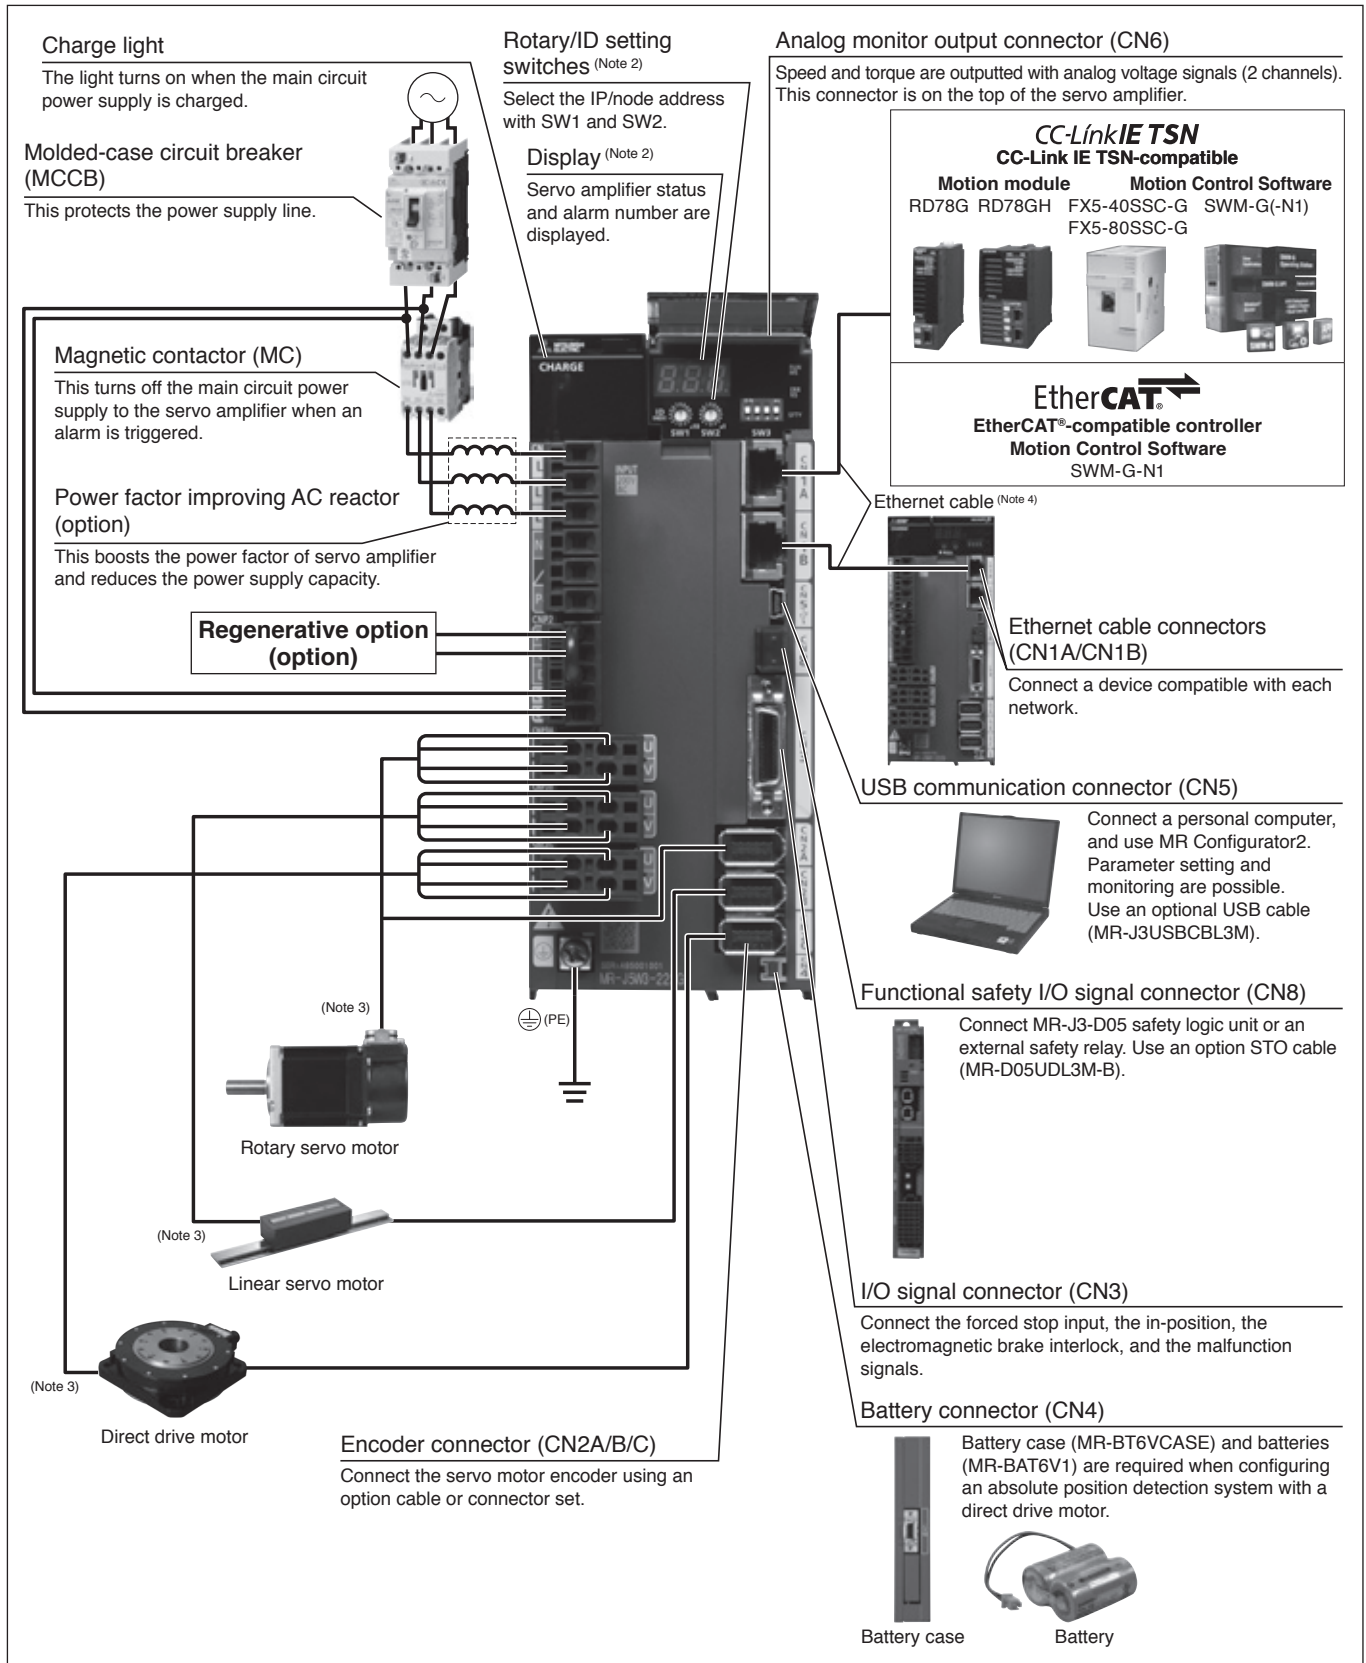

Notes: 1. The connection with the peripheral equipment is an example for MR-J5W3-222G(-N1). CNP3C and CN2C connectors are not available on MR-J5W2-G(-N1). Refer to "MR-J5 User's Manual" for the actual connections of each multi-axis servo amplifier.  
2. This picture shows when the display cover is open.  
3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.  
4. For specifications of the Ethernet cable, refer to "Ethernet Cable Specifications" on p. 7-30 in this catalog.

# Servo Amplifiers

## MR-J5W2-G(-N1) (2-Axis, Network Compatible) Specifications

WG

| Servo amplifier model MR-J5W2-(-N1)   |   | 22G  | 44G  | 77G           | 1010G                                     |
|---|---|--|--|---------------|---|
| Output  | Voltage                                     | 3-phase 0 V AC to 240 V AC   |  |               |   |
|   | Rated current (each axis) [A]               | 1.8  | 2.8  | 5.8           | 6.0                                       |
| Main circuit power supply input   | Voltage/frequency <sup>(Note 1)</sup>       | AC input   | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |               | 3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |
|   |   | DC input <sup>(Note 8)</sup>   | 283 V DC to 340 V DC                                 |               |   |
|   | Rated current <sup>(Note 6)</sup> [A]       | 2.9<br>(5.0)   | 5.2<br>(9.0)   | 7.5<br>(13.0) | 9.8                                       |
|   | Permissible voltage fluctuation             | AC input   | 3-phase or 1-phase 170 V AC to 264 V AC              |               | 3-phase 170 V AC to 264 V AC              |
|   |   | DC input <sup>(Note 8)</sup>   | 241 V DC to 374 V DC                                 |               |   |
| Permissible frequency fluctuation   |   | ±5 % maximum   |  |               |   |
| Control circuit power supply input  | Voltage/frequency                           | AC input   | 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz            |               |   |
|   |   | DC input <sup>(Note 8)</sup>   | 283 V DC to 340 V DC                                 |               |   |
|   | Rated current [A]                           | 0.4  |  |               |   |
|   | Permissible voltage fluctuation             | AC input   | 1-phase 170 V AC to 264 V AC                         |               |   |
|   |   | DC input <sup>(Note 8)</sup>   | 241 V DC to 374 V DC                                 |               |   |
| Permissible frequency fluctuation   |   | ±5 % maximum   |  |               |   |
| Power consumption [W]   |   | 55   |  |               |   |
| Interface power supply  |   | 24 V DC ± 10 % (required current capacity: 0.35 A (including CN8 connector signals))   |  |               |   |
| Control method  |   | Sine-wave PWM control/current control method   |  |               |   |
| Permissible regenerative power of the built-in regenerative resistor <sup>(Note 2, 3)</sup> [W] |   | 20   |  | 100           |   |
| Dynamic brake <sup>(Note 4)</sup>   |   | Built-in   |  |               |   |
| CC-Link IE TSN Class B <sup>(Note 9)</sup> (MR-J5W2-G)  | Communication cycle <sup>(Note 5, 12)</sup> | 62.5 μs, 125 μs, 250 μs, 500 μs, 1 ms, 1.5 ms, 2 ms, 2.5 ms, 3 ms, 3.5 ms, 4 ms, 4.5 ms, 5 ms, 5.5 ms, 6 ms, 6.5 ms, 7 ms, 7.5 ms, 8 ms  |  |               |   |
|   | Protocol version                            | 1.0/2.0 <sup>(Note 11)</sup>   |  |               |   |
| CC-Link IE TSN Class A <sup>(Note 9, 11, 13)</sup> (MR-J5W2-G)                                  | Communication cycle <sup>(Note 5)</sup>     | 500 μs to 500 ms   |  |               |   |
|   | Protocol version                            | 2.0  |  |               |   |
| EtherCAT® (MR-J5W2-G-N1)  | Communication cycle <sup>(Note 5, 12)</sup> | 250 μs, 500 μs, 1 ms, 2 ms, 4 ms, 8 ms   |  |               |   |
| CC-Link IE Field Network Basic  |   | Not supported  |  |               |   |
| Communication function  | USB   | Connect a personal computer (MR Configurator2 compatible)  |  |               |   |
| Encoder output pulse  |   | Compatible (A/B-phase pulse) <sup>(Note 12)</sup>  |  |               |   |
| Analog monitor  |   | 2 channels   |  |               |   |
| Positioning mode <sup>(Note 11, 12)</sup>   |   | Point table method   |  |               |   |
| Fully closed loop control <sup>(Note 11, 12)</sup>  |   | Two-wire type communication method   |  |               |   |
| Load-side encoder interface <sup>(Note 10)</sup>  |   | Mitsubishi Electric high-speed serial communication  |  |               |   |
| Servo functions   |   | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, scale measurement function <sup>(Note 11, 12)</sup> , super trace control <sup>(Note 11)</sup> , continuous operation to torque control mode <sup>(Note 11, 14)</sup> |  |               |   |
| Protective functions  |   | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection  |  |               |   |
| Safety sub-function, Safety performance   |   | Refer to "Safety Sub-Functions" in section 1 of this catalog.  |  |               |   |
| Structure (IP rating)   |   | Natural cooling, open (IP20)   | Force cooling, open (IP20)                           |               |   |
| Close mounting  |   | Possible <sup>(Note 7)</sup>   |  |               |   |
| Mass [kg]   |   | 1.5  |  | 1.9           |   |

- Notes:
- Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.
  - Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.
  - Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.
  - When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
  - The communication cycle depends on the controller specifications and the number of device stations connected.
  - The values in brackets are the rated current for the 1-phase power supply input.
  - When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifiers at 75 % or less of the effective load ratio.
  - For a connection example of power supply circuit with DC input, refer to "MR-J5 User's Manual".
  - A communication speed of 1 Gbps/100 Mbps can be selected. When 100 Mbps is selected, the minimum communication cycle is 500 μs.
  - Not compatible with pulse train interface (A/B/Z-phase differential output type).
  - For the servo amplifier firmware version supporting this function, refer to "MR-J5 User's Manual".
  - For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
  - For the restrictions on the network, refer to "MR-J5 User's Manual".
  - The function is not available with MR-J5W\_G-N1.



**MR-J5W3-G(-N1) (3-Axis, Network Compatible) Specifications**


WG

|  |                                   |   |  |
|--|-----------------------------------|---|--|
| Servo amplifier model MR-J5W3-_-(-N1)  |                                   | 222G  | 444G   |
| Output   | Voltage                           |   | 3-phase 0 V AC to 240 V AC                           |
|  | Rated current (each axis) [A]     |   | 1.8 2.8  |
| Main circuit power supply input  | Voltage/frequency (Note 1)        | AC input  | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |
|  |                                   | DC input (Note 8)   | 283 V DC to 340 V DC                                 |
|  | Rated current (Note 6) [A]        |   | 4.3 (7.5) 7.8 (13.5)                                 |
|  | Permissible voltage fluctuation   | AC input  | 3-phase or 1-phase 170 V AC to 264 V AC              |
|  |                                   | DC input (Note 8)   | 241 V DC to 374 V DC                                 |
| Permissible frequency fluctuation  |                                   | ±5 % maximum  |  |
| Control circuit power supply input   | Voltage/frequency                 | AC input  | 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz            |
|  |                                   | DC input (Note 8)   | 283 V DC to 340 V DC                                 |
|  | Rated current [A]                 |   | 0.4  |
|  | Permissible voltage fluctuation   | AC input  | 1-phase 170 V AC to 264 V AC                         |
|  |                                   | DC input (Note 8)   | 241 V DC to 374 V DC                                 |
|  | Permissible frequency fluctuation |   | ±5 % maximum   |
| Power consumption [W]  |                                   | 55  |  |
| Interface power supply   |                                   | 24 V DC ± 10 % (required current capacity: 0.45 A (including CN8 connector signals))  |  |
| Control method   |                                   | Sine-wave PWM control/current control method  |  |
| Permissible regenerative power of the built-in regenerative resistor (Note 2, 3) [W] |                                   | 30  |  |
| Dynamic brake (Note 4)   |                                   | Built-in  |  |
| CC-Link IE TSN Class B (Note 9) (MR-J5W3-G)  | Communication cycle (Note 5, 11)  | 125 μs, 250 μs, 500 μs, 1 ms, 1.5 ms, 2 ms, 2.5 ms, 3 ms, 3.5 ms, 4 ms, 4.5 ms, 5 ms, 5.5 ms, 6 ms, 6.5 ms, 7 ms, 7.5 ms, 8 ms  |  |
|  | Protocol version                  | 1.0/2.0 (Note 10)   |  |
| CC-Link IE TSN Class A (Note 9, 10, 13) (MR-J5W3-G)                                  | Communication cycle (Note 5)      | 500 μs to 500 ms  |  |
|  | Protocol version                  | 2.0   |  |
| EtherCAT® (MR-J5W3-G-N1)   | Communication cycle (Note 5, 11)  | 250 μs, 500 μs, 1 ms, 2 ms, 4 ms, 8 ms  |  |
| CC-Link IE Field Network Basic   |                                   | Not supported   |  |
| Communication function   | USB                               | Connect a personal computer (MR Configurator2 compatible)   |  |
| Encoder output pulse   | MR-J5W3-G                         | Compatible only with A-axis and B-axis (A/B-phase pulse) (Note 11, 12)  |  |
|  | MR-J5W3-G-N1                      | Not compatible  |  |
| Analog monitor   |                                   | 2 channels  |  |
| Positioning mode (Note 10, 11)   |                                   | Point table method  |  |
| Fully closed loop control  |                                   | Not available   |  |
| Servo functions  |                                   | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, super trace control (Note 10), continuous operation to torque control mode (Note 10, 14) |  |
| Protective functions   |                                   | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection     |  |
| Safety sub-function, Safety performance  |                                   | Refer to "Safety Sub-Functions" in section 1 of this catalog.   |  |
| Structure (IP rating)  |                                   | Force cooling, open (IP20)  |  |
| Close mounting   |                                   | Possible (Note 7)   |  |
| Mass [kg]  |                                   | 1.8   |  |

- Notes:
- Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.
  - Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.
  - Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.
  - When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
  - The communication cycle depends on the controller specifications and the number of device stations connected.
  - The values in brackets are the rated current for the 1-phase power supply input.
  - When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifiers at 75 % or less of the effective load ratio.
  - For a connection example of power supply circuit with DC input, refer to "MR-J5 User's Manual".
  - A communication speed of 1 Gbps/100 Mbps can be selected. When 100 Mbps is selected, the minimum communication cycle is 500 μs.
  - For the servo amplifier firmware version supporting this function, refer to "MR-J5 User's Manual".
  - For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
  - When the command unit selection function (command unit/s) or the touch probe function is enabled, encoder output pulses are not outputted.
  - For the restrictions on the network, refer to "MR-J5 User's Manual".
  - The function is not available with MR-J5W\_-G-N1.

## MR-J5W2-G(-N1) Standard Wiring Diagram Example


WG

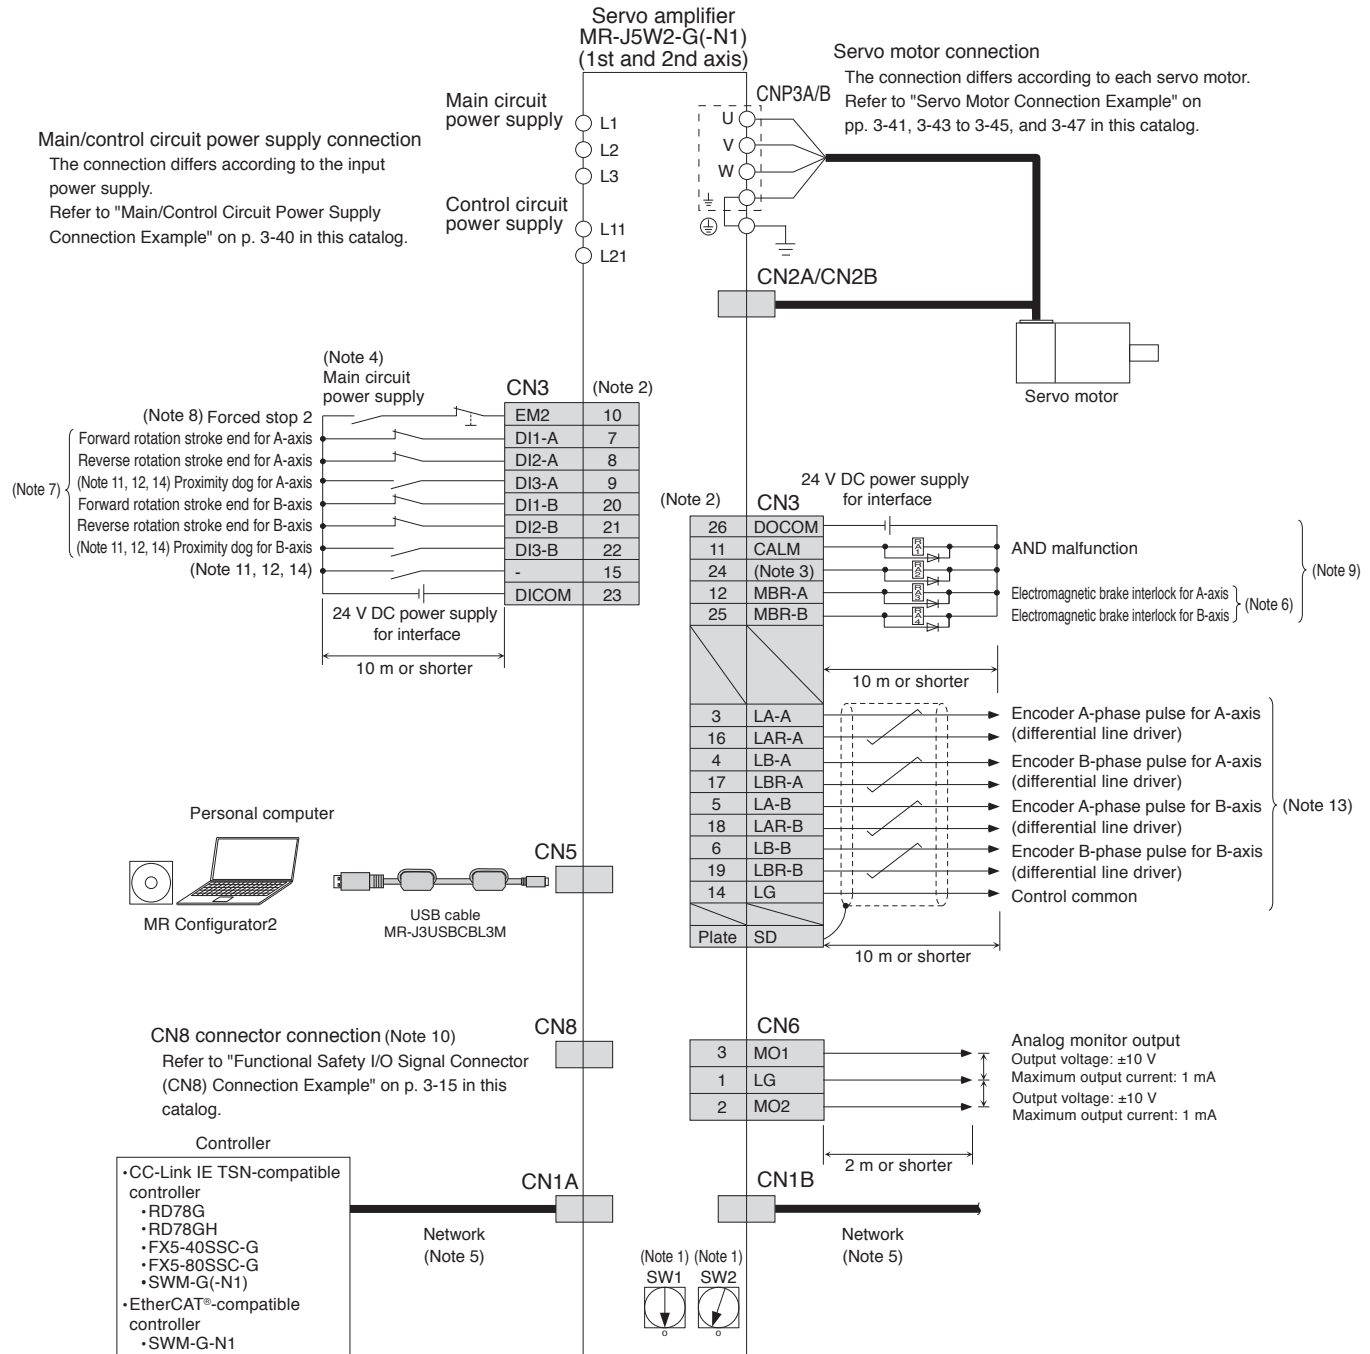

Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

MR-J5W3-G(-N1) Standard Wiring Diagram Example

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/SWires  
Product List  
Precautions  
Support

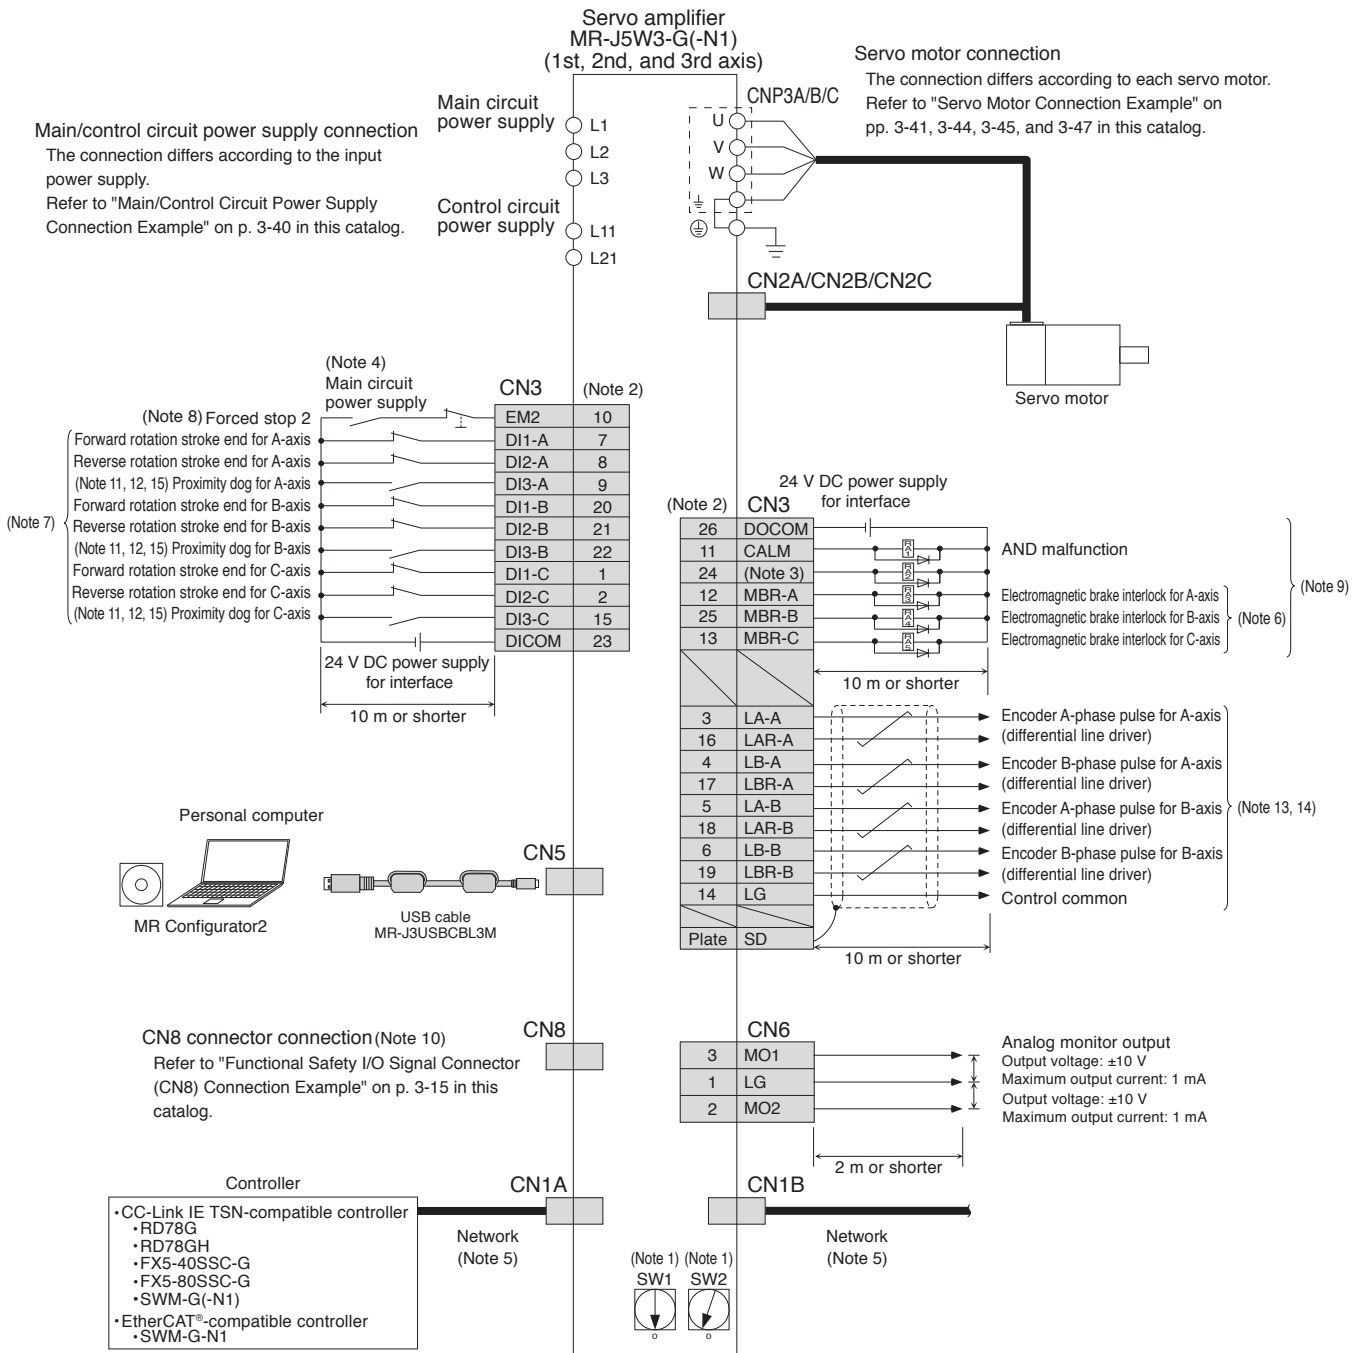

- Notes: 1. The node address or the 4th octet of the IP address can be set to between 1 and 254 with a combination of the ID setting switches or the rotary switches (SW1 and SW2). Note that the number of the connectable device stations depends on the controller specifications.
2. This is for sink wiring. Source wiring is also possible.
3. CINP (AND in-position) is assigned to this pin as default. A device for this pin can be changed with [Pr. PD08].
4. To prevent an unexpected restart of the servo amplifier, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
5. When branching off CC-Link IE TSN (synchronous communication function) with a switching hub, use a switching hub (class B) recommended by CC-Link Partner Association. When a switching hub (class A) is used, there are restrictions on the topologies to be used. Refer to the controller manual for details.
6. When using a linear servo motor or direct drive motor, use MBR (Electromagnetic brake interlock) for an external brake mechanism.
7. Devices for these pins can be changed with [Pr. PD03], [Pr. PD04], and [Pr. PD05].
8. The forced stop signal is issued for three axes of the servo amplifier. For overall system, apply the emergency stop on the controller side.
9. Devices for these pins can be changed with [Pr. PD07] and [Pr. PD09].
10. Attach a short-circuit connector supplied with the servo amplifier when the functional safety (STO function) is not used.
11. These devices can be changed to TPR1 (Touch probe 1), TPR2 (Touch probe 2), and TPR3 (Touch probe 3) with [Pr. PD05].
12. For the servo amplifier firmware version supporting the touch probe function, refer to "MR-J5 User's Manual".
13. For the availability of the encoder output pulse, refer to "MR-J5W3-G(-N1) (3-Axis, Network Compatible) Specifications" in this catalog.
14. For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
15. For the restrictions on the communication cycle of the touch probe function, refer to "Restrictions" in this catalog.


**!** Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

# Servo Amplifiers


## Main/Control Circuit Power Supply Connection Example (Note 6)

WG WB


- Driving on/off of main circuit power supply with AC power supply for 3-phase 200 V AC

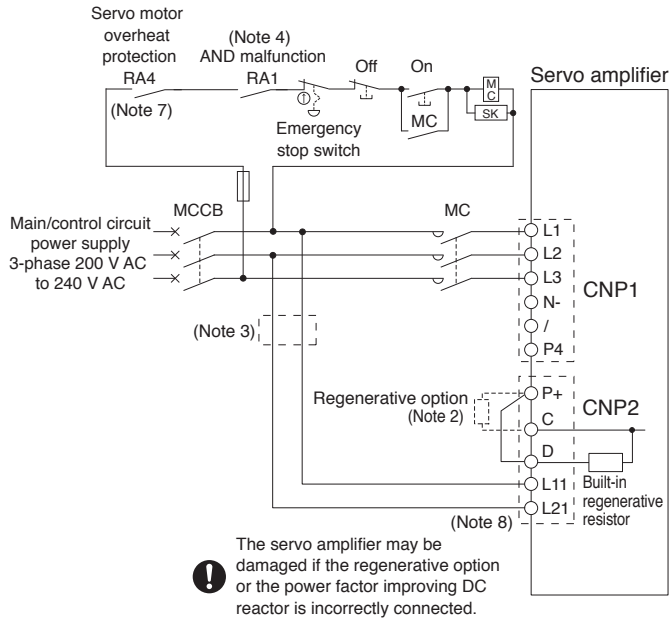


- Driving on/off of main circuit power supply with DC power supply for 3-phase 200 V AC

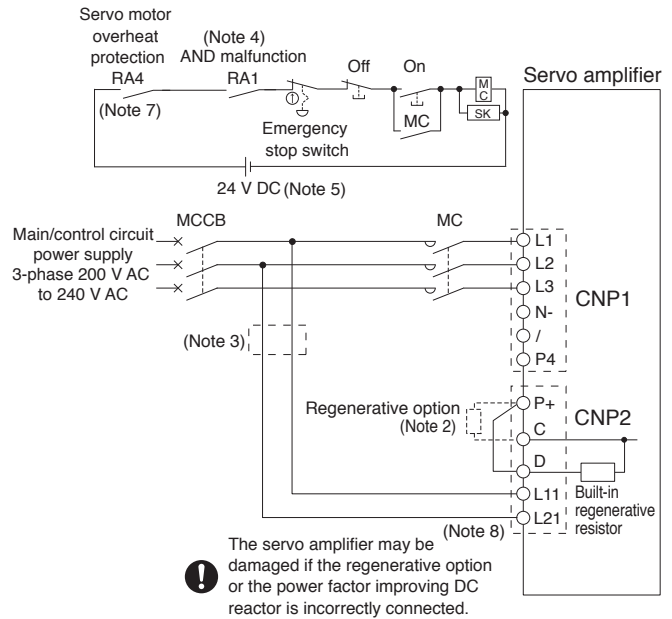

- Driving on/off of main circuit power supply with AC power supply for 1-phase 200 V AC

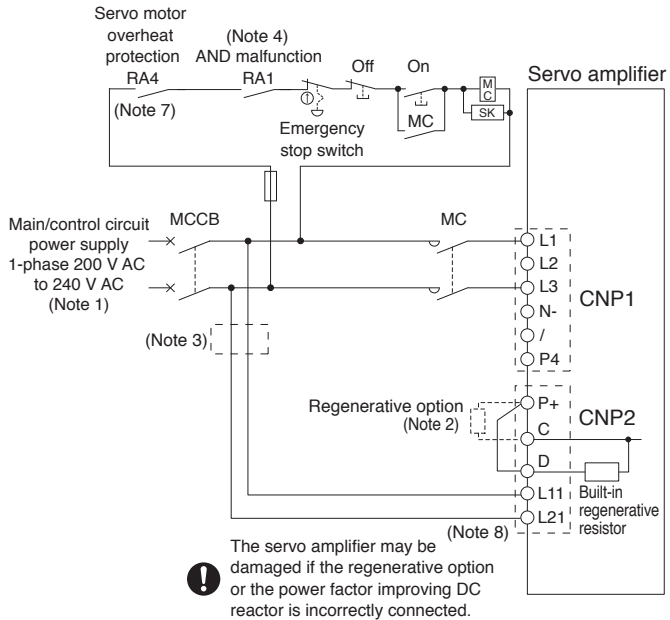

- Driving on/off of main circuit power supply with DC power supply for 1-phase 200 V AC

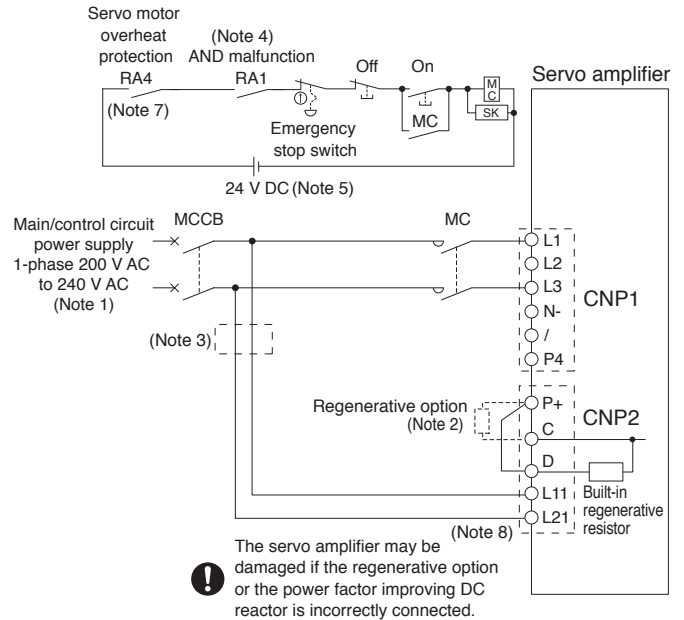

- Notes:
1. For 1-phase 200 V AC to 240 V AC, connect the power supply to L1 and L3 terminals. Do not connect anything to L2.
  2. Disconnect a short-circuit bar between P+ and D when connecting the regenerative option externally.
  3. When wires used for L11 and L21 are thinner than those for L1, L2, and L3, use a molded-case circuit breaker or a fuse. Refer to "MR-J5 User's Manual" for details.
  4. Select either of the following functions for CALM (AND malfunction) with the controller.
    - 1) The contact opens when an alarm occurs on one of the axes.
    - 2) The contact opens when an alarm occurs on all axes.
  5. Do not use the 24 V DC interface power supply for the magnetic contactor. Provide a dedicated power supply to the magnetic contactor.
  6. For a connection example of power supply circuit with DC input, refer to "MR-J5 User's Manual".
  7. When connecting a linear servo motor with a thermal protector, add a contact to shut off by being interlocked with the thermal protector output of the linear servo motor.
  8. Do not ground the servo amplifier between L11 and L21 even when the control circuit power supply is separated from the main circuit power supply using an uninterruptible power supply (UPS) or an isolation transformer.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.


**Servo Motor Connection Example (Rotary Servo Motor)**

**Semi Closed Loop Control System with MR-J5W\_-G(-N1)/MR-J5W\_-B**

● For HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series

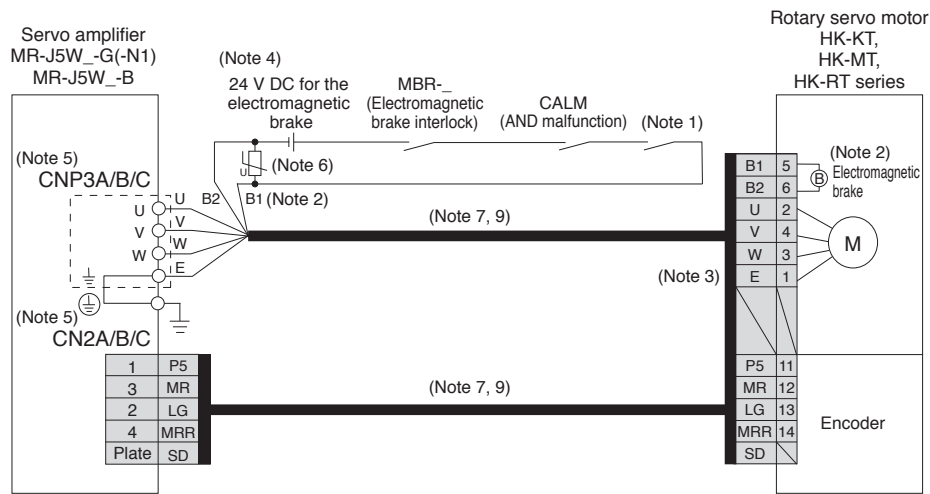

● For HK-ST series

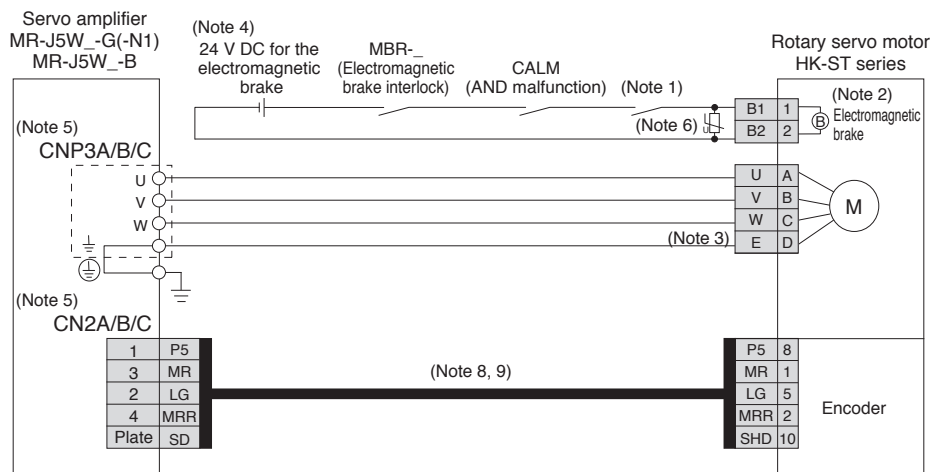

- Notes:
1. Create the circuit in order to shut off by being interlocked with the emergency stop switch.
  2. This is for the servo motors with an electromagnetic brake. The electromagnetic brake terminals do not have polarity.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  4. Do not use the 24 V DC interface power supply for the electromagnetic brake. Provide a dedicated power supply to the electromagnetic brake.
  5. CNP3C and CN2C connectors are available for MR-J5W3-G(-N1)/MR-J5W3-B servo amplifiers.
  6. Install a surge absorber between B1 and B2.
  7. This is for using an option dual cable type. Single cable types are also available.
  8. Encoder cables are available as an option.
  9. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

WG WB

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List

Precautions

Support

## External Encoder Connection Specifications

WG WB

Refer to the following table for the encoder communication method compatible with each system and for the servo amplifier connector to which a load-side encoder should be connected.


| Operation mode  | External encoder communication method | Connector to be connected with the external encoder                |  |
|---|---------------------------------------|--|--|
|   |                                       | MR-J5W2-G(-N1)/MR-J5W2-B   | MR-J5W3-G(-N1)/MR-J5W3-B                                     |
| Linear servo system <small>(Note 3)</small>                 | Two-wire type                         | CN2A <small>(Note 1)</small>                                       | CN2A <small>(Note 1)</small>                                 |
|   | Four-wire type                        | CN2B <small>(Note 1)</small>                                       | CN2B <small>(Note 1)</small><br>CN2C <small>(Note 1)</small> |
| Fully closed loop control system <small>(Note 2, 5)</small> | Two-wire type                         | CN2A <small>(Note 4, 6)</small><br>CN2B <small>(Note 4, 6)</small> |  |
| Scale measurement function <small>(Note 2, 5)</small>       | Two-wire type                         | CN2A <small>(Note 4, 6)</small><br>CN2B <small>(Note 4, 6)</small> |  |

- Notes:
1. MR-J4THCBL03M junction cable is required.
  2. For the servo amplifier firmware version supporting this function, refer to "MR-J5 User's Manual".
  3. Refer to "Combinations of Linear Servo Motors and Servo Amplifiers" in this catalog for servo amplifiers that are compatible with linear servo motors.
  4. MR-J4FCCBL03M junction cable is required.
  5. For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
  6. MR-J5W2-G(-N1)/MR-J5W2-B does not support a servo motor encoder with the four-wire type communication method. Use MR-J5-G(4)-RJ(N1)/MR-J5-G4-HS(N1)/MR-J5-B(4)-RJ.


Servo Motor Connection Example (Rotary Servo Motor)

Fully Closed Loop Control System with MR-J5W2-G(-N1)/MR-J5W2-B

● For HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series

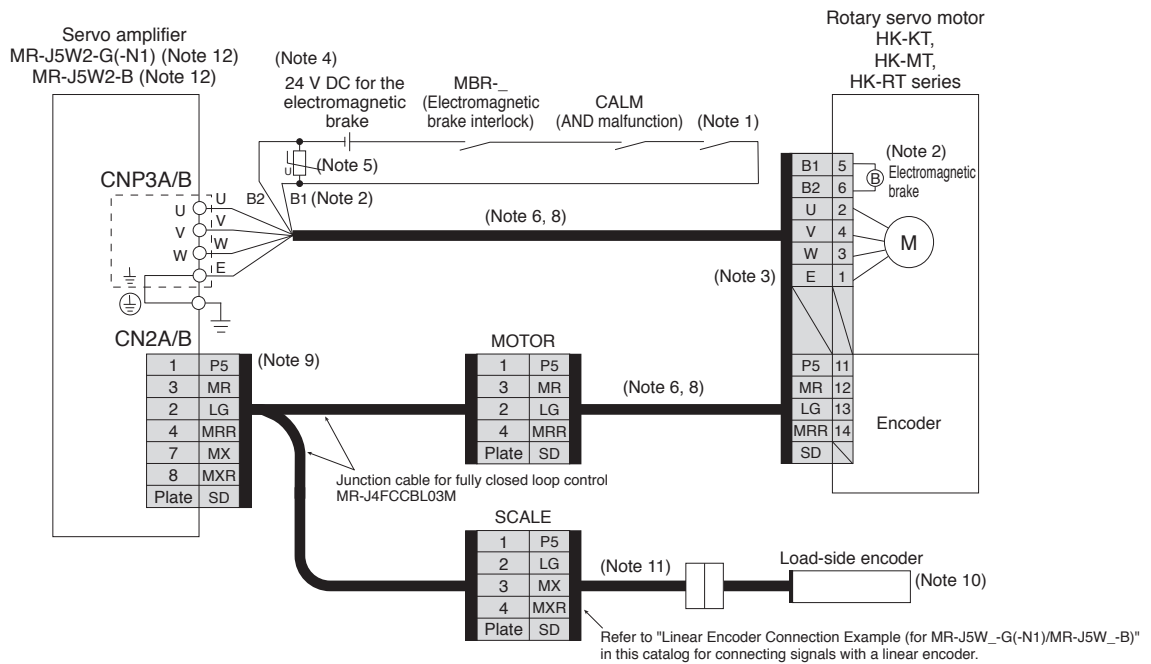

● For HK-ST series

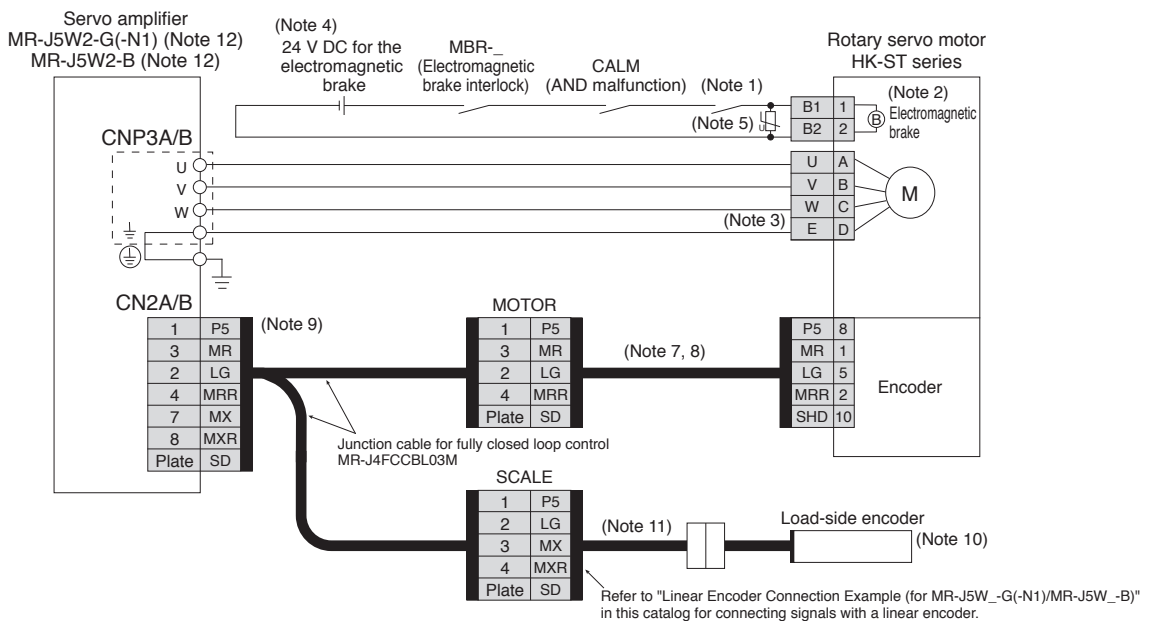

- Notes:
1. Create the circuit in order to shut off by being interlocked with the emergency stop switch.
  2. This is for the servo motors with an electromagnetic brake. The electromagnetic brake terminals do not have polarity.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  4. Do not use the 24 V DC interface power supply for the electromagnetic brake. Provide a dedicated power supply to the electromagnetic brake.
  5. Install a surge absorber between B1 and B2.
  6. This is for using an option dual cable type. Single cable types are also available.
  7. Encoder cables are available as an option.
  8. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.
  9. For fully closed loop control, the load-side encoder and the servo motor encoder are compatible only with two-wire type communication method. Four-wire type cannot be used.
  10. For linear encoders, refer to "List of Linear Encoders" in this catalog. Refer to "MR-J5 User's Manual" for the fully closed loop control with a rotary encoder.
  11. Necessary encoder cables vary depending on the load-side encoder. Refer to "MR-J5 User's Manual" and "Rotary Servo Motor User's Manual (For MR-J5)".
  12. MR-J5W3-G(-N1)/MR-J5W3-B does not support the fully closed loop control.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

## Servo Motor Connection Example (Linear Servo Motor) Linear Servo System with MR-J5W\_-G(-N1)/MR-J5W\_-B

● For LM-H3 series/LM-K2 series/LM-U2 series

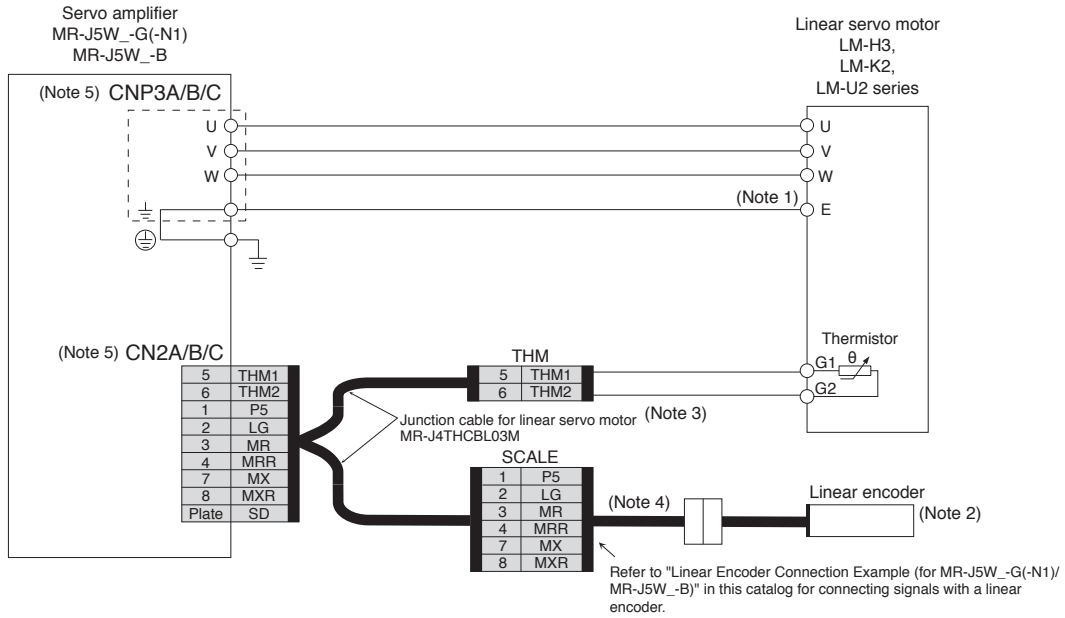

- Notes:
1. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  2. For linear encoders, refer to "List of Linear Encoders" in this catalog.
  3. MR-J4THCBL03M junction cable for linear servo motor is compatible with both two-wire and four-wire type linear encoders.
  4. Necessary cables vary depending on the linear encoder. Refer to "MR-J5 Partner's Encoder User's Manual" for details.
  5. CNP3C and CN2C connectors are available for MR-J5W3-G(-N1)/MR-J5W3-B servo amplifiers.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.




### Servo Motor Connection Example (Linear Servo Motor) Linear Servo System with MR-J5W\_-G(-N1)

● For LM-AJ series

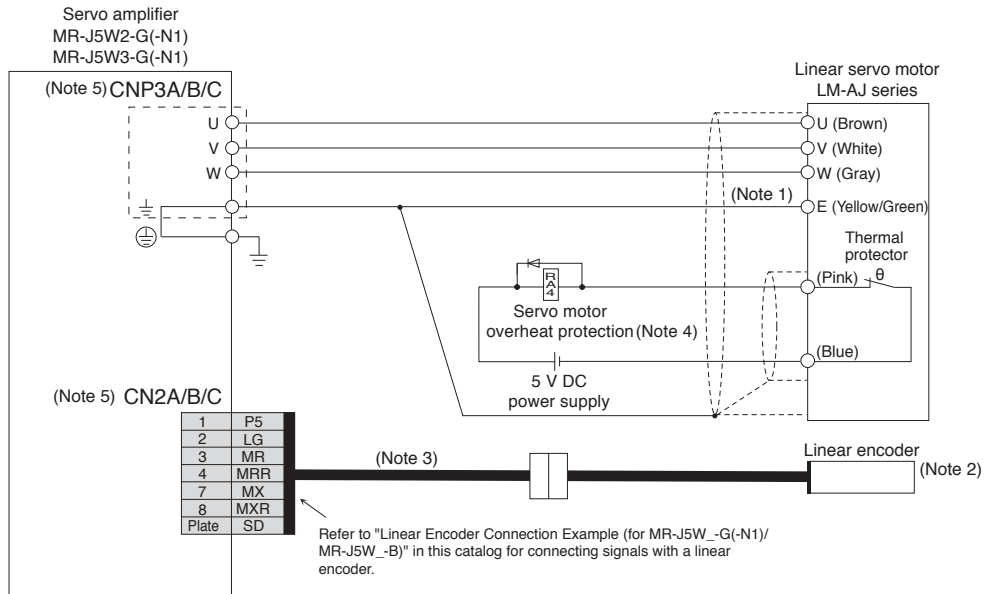

● For LM-AU series

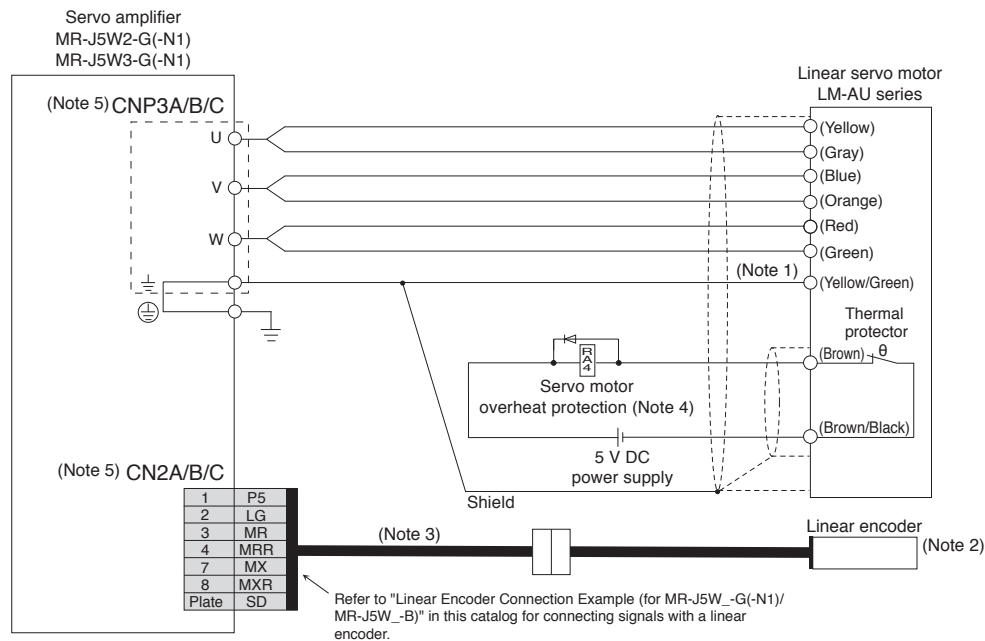

- Notes:
1. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  2. For linear encoders, refer to "List of Linear Encoders" in this catalog.
  3. Necessary cables vary depending on the linear encoder. Refer to "MR-J5 Partner's Encoder User's Manual" for details.
  4. Create a relay circuit to turn off the main circuit power supply when the thermal protector is opened by overheating. Use a relay designed for a flowing current of 1000 mA or less. If a mechanical relay is used, use a relay designed for a flowing current of 50 mA to 1000 mA.
  5. CNP3C and CN2C connectors are available for MR-J5W3-G(-N1)/MR-J5W3-B servo amplifiers.








Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

# Servo Amplifiers

## Linear Encoder Connection Example (for MR-J5W\_-G(-N1)/MR-J5W\_-B)

WG WB

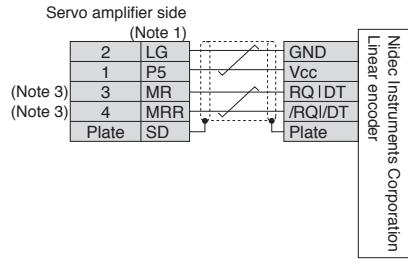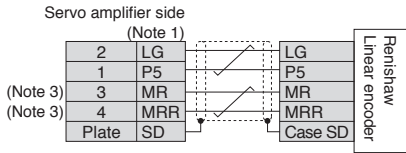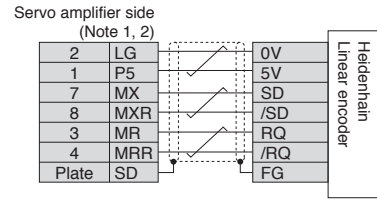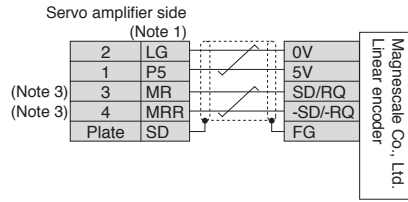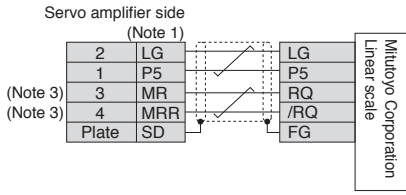


- Notes:
1. For the number of the wire pairs for LG and P5, refer to "MR-J5 Partner's Encoder User's Manual".
  2. For fully closed loop control, the load-side encoder and the servo motor encoder are compatible only with two-wire type communication method. Four-wire type cannot be used.
  3. For the fully closed loop control, MR and MRR of the servo amplifier-side connectors will be connected to MX and MXR of the SCALE connectors of MR-J4FCCBL03M.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

### Servo Motor Connection Example (Direct Drive Motor)

● For TM-RG2M series/TM-RU2M series/TM-RFM series (incremental system)

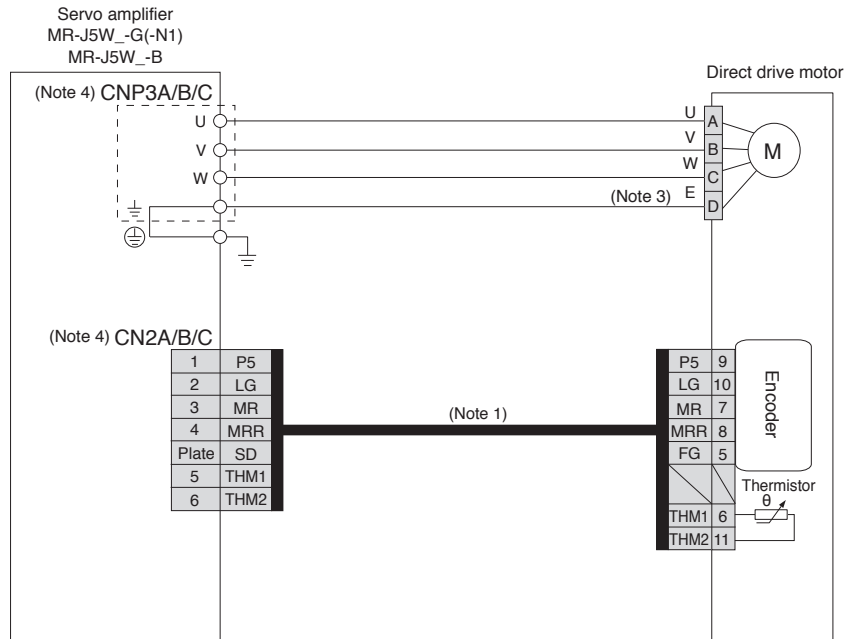

● For TM-RG2M series/TM-RU2M series/TM-RFM series (absolute position detection system)

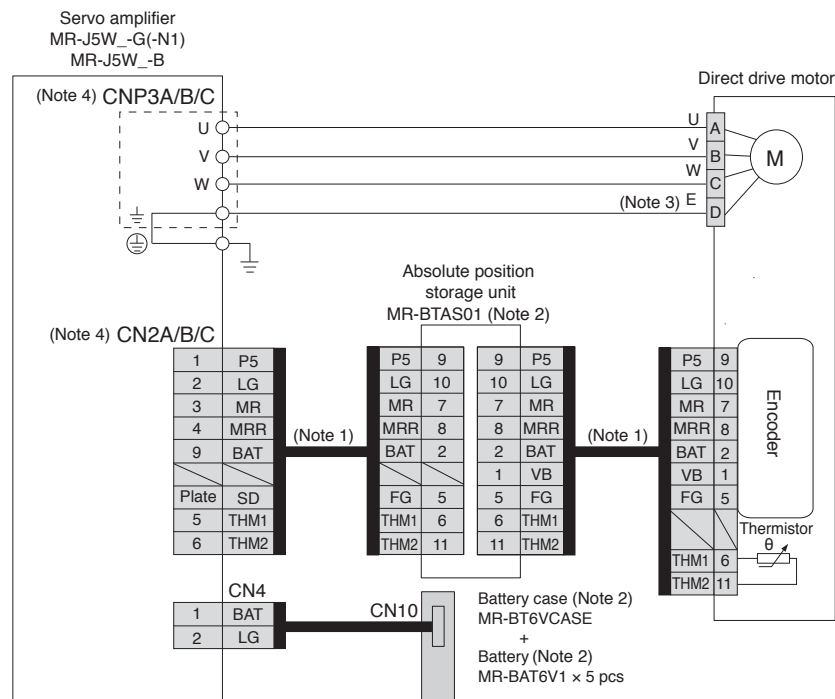

- Notes:
1. Fabricate this encoder cable. Refer to "Direct Drive Motor User's Manual" when fabricating the encoder cable.
  2. An MR-BTAS01 absolute position storage unit, MR-BT6VCASE battery case, and MR-BAT6V1 batteries (sold as options) are required for absolute position detection system. Refer to "MR-J5 User's Manual" and "Direct Drive Motor User's Manual" for details of absolute position detection system.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.
  4. CNP3C and CN2C connectors are available for MR-J5W3-G(-N1)/MR-J5W3-B servo amplifiers.


**!** Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

# Servo Amplifiers

WG


## MR-J5W2-G(-N1) Dimensions

- MR-J5W2-22G(-N1)
- MR-J5W2-44G(-N1)

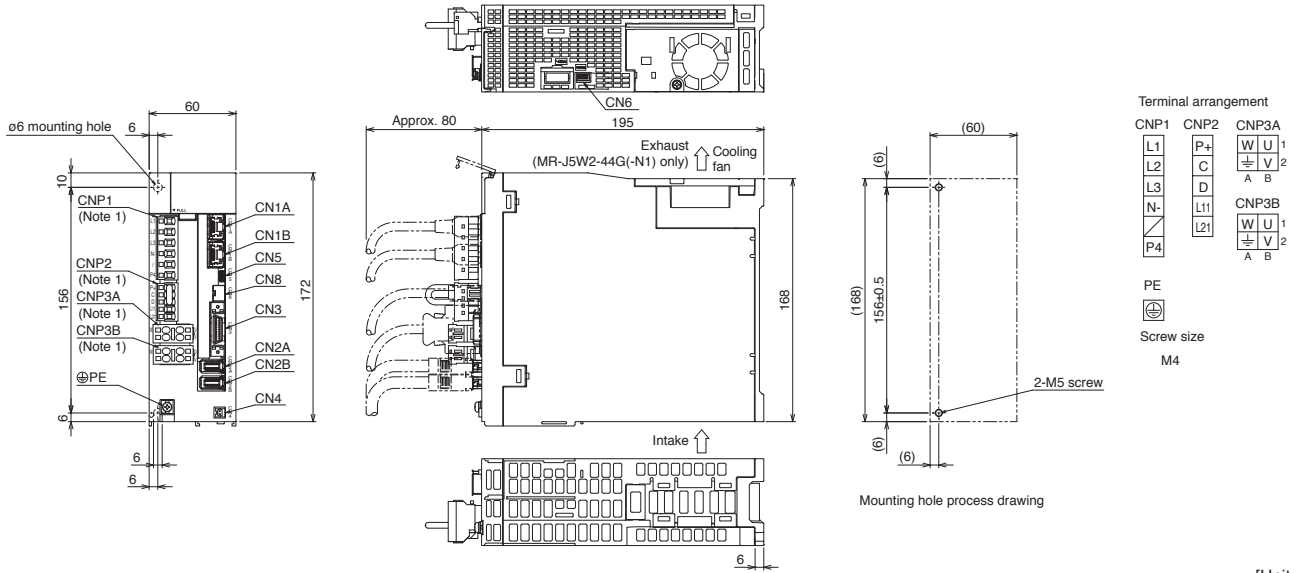

[Unit: mm]

- MR-J5W2-77G(-N1)
- MR-J5W2-1010G(-N1)

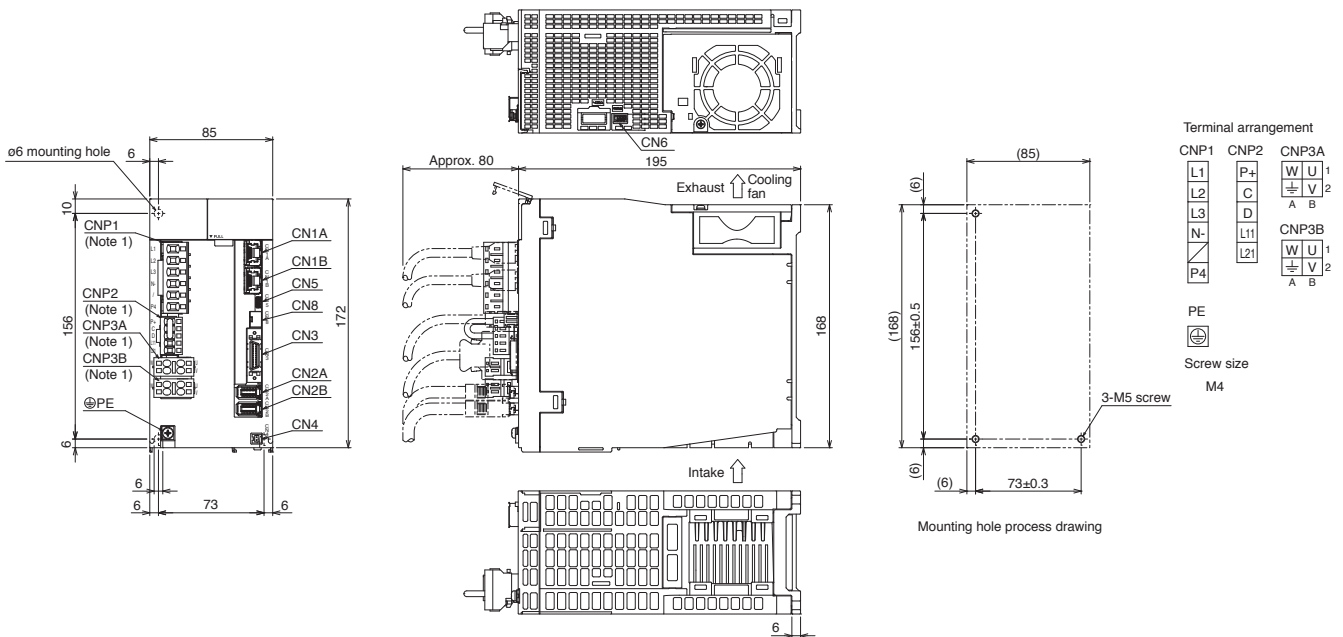


[Unit: mm]

Notes: 1. CNP1, CNP2, CNP3A, and CNP3B connectors are supplied with the servo amplifier.

**MR-J5W3-G(-N1) Dimensions**

- MR-J5W3-222G(-N1)
- MR-J5W3-444G(-N1)

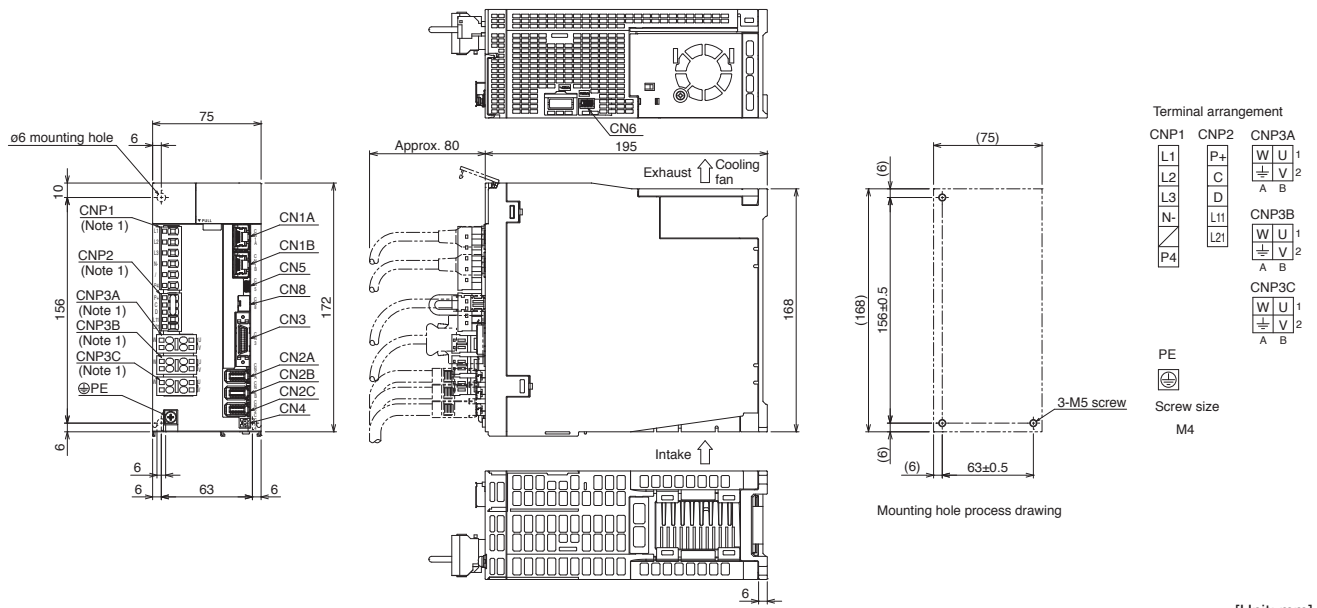

Notes: 1. CNP1, CNP2, CNP3A, CNP3B, and CNP3C connectors are supplied with the servo amplifier.

[Unit: mm]


WG

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

## MR-J5D\_-G4(-N1) Connections with Peripheral Equipment <sup>(Note 1)</sup>

DG

Peripheral equipment is connected to MR-J5D\_-G4(-N1) as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the drive unit easily and start using it right away.

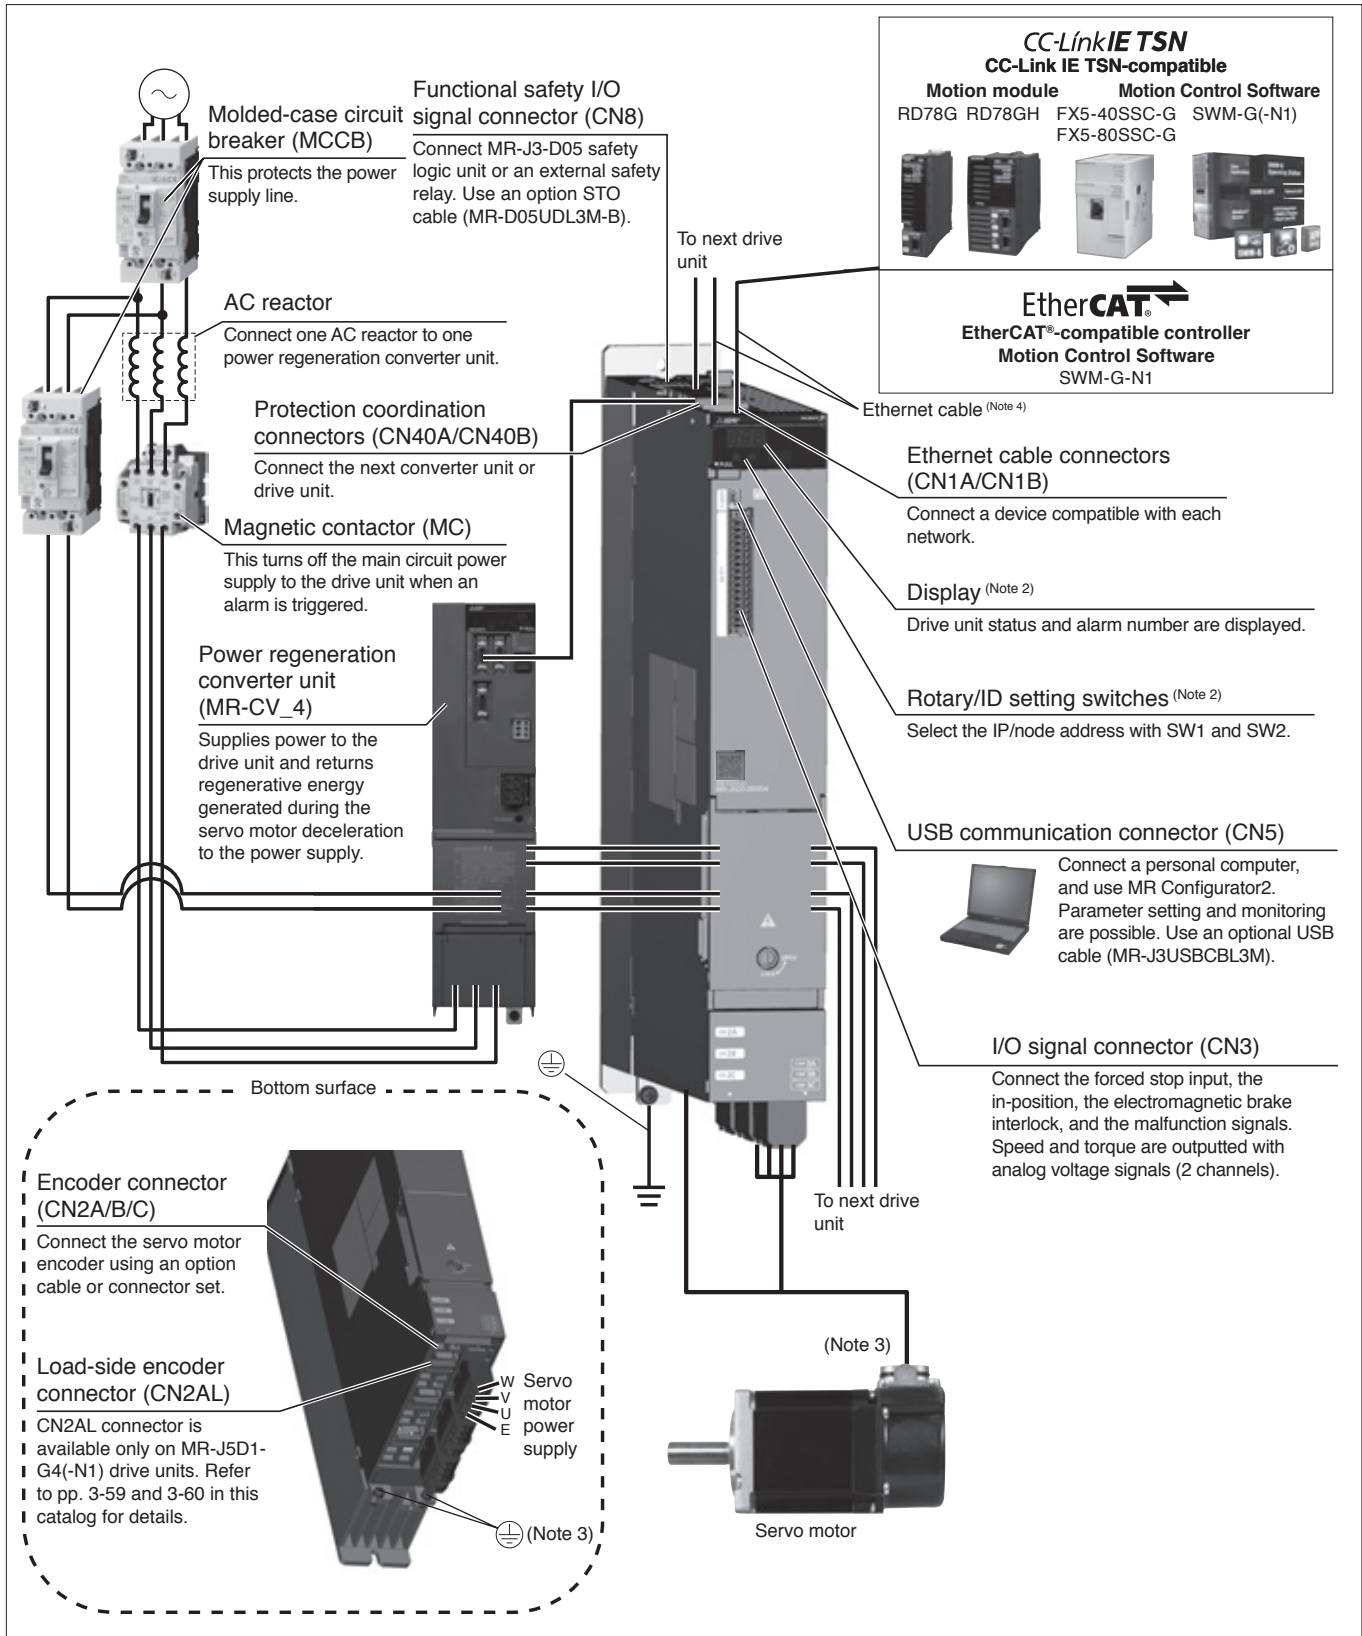

- Notes:
1. The connection with the peripheral equipment is an example for MR-J5D3-200G4(-N1) drive units. Refer to "MR-J5D User's Manual" for the actual connections.
  2. This illustration shows when the display cover is closed.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the drive unit for grounding the servo motor.
  4. For specifications of the Ethernet cable, refer to "Ethernet Cable Specifications" on p. 7-30 in this catalog.

**MR-J5D1-G4(-N1) (1-Axis, Network Compatible) Specifications (400 V)**

**DG**

|  |                                   |  |   |       |                                     |       |
|--|-----------------------------------|--|---|-------|-------------------------------------|-------|
| Drive unit model MR-J5D1-(-N1)                       |                                   | 100G4  | 200G4                                     | 350G4 | 500G4                               | 700G4 |
| Compatible converter unit model                      |                                   | MR-CV_4 (Note 8)   |   |       |                                     |       |
| Output   | Voltage                           | 3-phase 0 V AC to 480 V AC   |   |       |                                     |       |
|  | Rated current [A]                 | 3.0  | 5.5                                       | 8.6   | 14.0                                | 17.0  |
| Main circuit power supply input                      |                                   | Main circuit power is supplied from the power regeneration converter unit to the drive unit.   |   |       |                                     |       |
| Control circuit power supply input                   | Voltage/frequency                 | AC input   | 1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz |       |                                     |       |
|  | Rated current [A]                 |  | 0.2                                       |       |                                     |       |
|  | Permissible voltage fluctuation   | AC input   | 1-phase 323 V AC to 528 V AC              |       |                                     |       |
|  | Permissible frequency fluctuation |  | ±5 % maximum                              |       |                                     |       |
|  | Power consumption [W]             |  | 40  |       |                                     |       |
| Interface power supply                               |                                   | 24 V DC ± 10 % (required current capacity: 0.3 A (including CN8 connector signals))  |   |       |                                     |       |
| Control method                                       |                                   | Sine-wave PWM control/current control method   |   |       |                                     |       |
| Dynamic brake (Note 2)                               |                                   | Built-in   |   |       |                                     |       |
| CC-Link IE TSN Class B (Note 5) (MR-J5D1-G4)         | Communication cycle (Note 3, 4)   | 31.25 μs, 62.5 μs, 125 μs, 250 μs, 500 μs, 1 ms, 1.5 ms, 2 ms, 2.5 ms, 3 ms, 3.5 ms, 4 ms, 4.5 ms, 5 ms, 5.5 ms, 6 ms, 6.5 ms, 7 ms, 7.5 ms, 8 ms  |   |       |                                     |       |
|  | Protocol version                  | 1.0/2.0 (Note 6)   |   |       |                                     |       |
| CC-Link IE TSN Class A (Note 5, 6, 7) (MR-J5D1-G4)   | Communication cycle (Note 3)      | 500 μs to 500 ms   |   |       |                                     |       |
|  | Protocol version                  | 2.0  |   |       |                                     |       |
| EtherCAT® (MR-J5D1-G4-N1)                            | Communication cycle (Note 3, 4)   | 125 μs, 250 μs, 500 μs, 1 ms, 2 ms, 4 ms, 8 ms   |   |       |                                     |       |
| CC-Link IE Field Network Basic (Note 7) (MR-J5D1-G4) |                                   | Supported  |   |       |                                     |       |
| Communication function                               | USB                               | Connect a personal computer (MR Configurator2 compatible)  |   |       |                                     |       |
| Encoder output pulse                                 |                                   | Compatible (A/B/Z-phase pulse)   |   |       |                                     |       |
| Analog monitor                                       |                                   | 2 channels   |   |       |                                     |       |
| Positioning mode (Note 4)                            |                                   | Point table method   |   |       |                                     |       |
| Fully closed loop control (Note 4)                   |                                   | Two-wire/four-wire type communication method   |   |       |                                     |       |
| Load-side encoder interface                          |                                   | Mitsubishi Electric high-speed serial communication, A/B/Z-phase differential input signal   |   |       |                                     |       |
| Servo functions                                      |                                   | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, scale measurement function (Note 4), super trace control, continuous operation to torque control mode (Note 4, 9), driver communication function (Note 4, 6, 9) |   |       |                                     |       |
| Protective functions                                 |                                   | Overcurrent shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection  |   |       |                                     |       |
| Safety sub-function, Safety performance              |                                   | Refer to "Safety Sub-Functions" in section 1 of this catalog.  |   |       |                                     |       |
| Structure (IP rating)                                |                                   | Natural cooling, open (IP20) (Note 1)  |   |       | Force cooling, open (IP20) (Note 1) |       |
| Mass [kg]  |                                   | 5.5  |   |       | 4.6                                 |       |

- Notes: 1. IP20 requires a side protection cover (an option).  
 2. When using the dynamic brake, refer to "MR-J5D User's Manual" for the permissible load to motor inertia ratio.  
 3. The communication cycle depends on the controller specifications and the number of device stations connected.  
 4. For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.  
 5. A communication speed of 1 Gbps/100 Mbps can be selected. When 100 Mbps is selected, the minimum communication cycle is 500 μs.  
 6. For the servo amplifier firmware version supporting this function, refer to "MR-J5D User's Manual"  
 7. For the restrictions on the network, refer to "MR-J5D User's Manual".  
 8. MR-CV\_4 power regeneration converter units require a mounting attachment. Some drive units also require a mounting attachment depending on the power regeneration converter unit to be used. Refer to "Mounting Attachment" in this catalog for details.  
 9. The function is not available with MR-J5D\_-G4-N1.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

## MR-J5D2-G4(-N1) (2-Axis, Network Compatible) Specifications (400 V)

**DG**

|   |                                   |   |   |       |       |       |
|---|-----------------------------------|---|---|-------|-------|-------|
| Drive unit model MR-J5D2-_(N1)                      |                                   | 100G4   | 200G4   | 350G4 | 500G4 | 700G4 |
| Compatible converter unit model                     |                                   | MR-CV_4 (Note 2)  |   |       |       |       |
| Output  | Voltage                           |   | 3-phase 0 V AC to 480 V AC  |       |       |       |
|   | Rated current (each axis) [A]     |   | 3.0   | 5.5   | 8.6   | 14.0  |
| Main circuit power supply input                     |                                   | Main circuit power is supplied from the power regeneration converter unit to the drive unit.  |   |       |       |       |
| Control circuit power supply input                  | Voltage/frequency                 | AC input  | 1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz   |       |       |       |
|   | Rated current [A]                 |   | 0.2   |       |       |       |
|   | Permissible voltage fluctuation   | AC input  | 1-phase 323 V AC to 528 V AC  |       |       |       |
|   | Permissible frequency fluctuation |   | ±5 % maximum  |       |       |       |
| Power consumption [W]                               |                                   | 40  |   |       |       |       |
| Interface power supply                              |                                   | 24 V DC ± 10 % (required current capacity: 0.35 A (including CN8 connector signals))  |   |       |       |       |
| Control method                                      |                                   | Sine-wave PWM control/current control method  |   |       |       |       |
| Dynamic brake (Note 4)                              |                                   | Built-in  |   |       |       |       |
| CC-Link IE TSN Class B (Note 7) (MR-J5D2-G4)        | Communication cycle (Note 5, 6)   |   | 62.5 μs, 125 μs, 250 μs, 500 μs, 1 ms, 1.5 ms, 2 ms, 2.5 ms, 3 ms, 3.5 ms, 4 ms, 4.5 ms, 5 ms, 5.5 ms, 6 ms, 6.5 ms, 7 ms, 7.5 ms, 8 ms |       |       |       |
|   | Protocol version                  |   | 1.0/2.0 (Note 9)  |       |       |       |
| CC-Link IE TSN Class A (Note 7, 9, 10) (MR-J5D2-G4) | Communication cycle (Note 5)      |   | 500 μs to 500 ms  |       |       |       |
|   | Protocol version                  |   | 2.0   |       |       |       |
| EtherCAT® (MR-J5D2-G4-N1)                           | Communication cycle (Note 5, 6)   |   | 250 μs, 500 μs, 1 ms, 2 ms, 4 ms, 8 ms  |       |       |       |
| CC-Link IE Field Network Basic                      |                                   | Not supported   |   |       |       |       |
| Communication function                              | USB                               |   | Connect a personal computer (MR Configurator2 compatible)   |       |       |       |
| Encoder output pulse                                |                                   | Compatible (A/B-phase pulse) (Note 6, 8)  |   |       |       |       |
| Analog monitor                                      |                                   | 2 channels  |   |       |       |       |
| Positioning mode (Note 6)                           |                                   | Point table method  |   |       |       |       |
| Fully closed loop control (Note 6)                  |                                   | Two-wire type communication method  |   |       |       |       |
| Load-side encoder interface (Note 3)                |                                   | Mitsubishi Electric high-speed serial communication   |   |       |       |       |
| Servo functions                                     |                                   | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, scale measurement function (Note 6), super trace control, continuous operation to torque control mode (Note 6, 11) |   |       |       |       |
| Protective functions                                |                                   | Overcurrent shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection   |   |       |       |       |
| Safety sub-function, Safety performance             |                                   | Refer to "Safety Sub-Functions" in section 1 of this catalog.   |   |       |       |       |
| Structure (IP rating)                               |                                   | Natural cooling, open (IP20) (Note 1)   | Force cooling, open (IP20) (Note 1)   |       |       |       |
| Mass [kg]   |                                   | 5.7   | 5.6   | 6.2   |       |       |

- Notes:
1. IP20 requires a side protection cover (an option).
  2. MR-CV\_4 power regeneration converter units require a mounting attachment. Some drive units also require a mounting attachment depending on the power regeneration converter unit to be used. Refer to "Mounting Attachment" in this catalog for details.
  3. Not compatible with pulse train interface (A/B/Z-phase differential output type).
  4. When using the dynamic brake, refer to "MR-J5D User's Manual" for the permissible load to motor inertia ratio.
  5. The communication cycle depends on the controller specifications and the number of device stations connected.
  6. For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
  7. A communication speed of 1 Gbps/100 Mbps can be selected. When 100 Mbps is selected, the minimum communication cycle is 500 μs.
  8. When the safety sub-function (network connection) is enabled, encoder output pulses are not outputted.
  9. For the servo amplifier firmware version supporting this function, refer to "MR-J5D User's Manual"
  10. For the restrictions on the network, refer to "MR-J5D User's Manual".
  11. The function is not available with MR-J5D\_-G4-N1.



**MR-J5D3-G4(-N1) (3-Axis, Network Compatible) Specifications (400 V)**

**DG**

|  |                                   |  |   |
|--|-----------------------------------|--|---|
| Drive unit model MR-J5D3-(-N1)                     |                                   | 100G4  | 200G4                                     |
| Compatible converter unit model                    |                                   | MR-CV_4 (Note 3)   |   |
| Output   | Voltage                           | 3-phase 0 V AC to 480 V AC   |   |
|  | Rated current (each axis) [A]     | 3.0  | 5.5                                       |
| Main circuit power supply input                    |                                   | Main circuit power is supplied from the power regeneration converter unit to the drive unit.   |   |
| Control circuit power supply input                 | Voltage/frequency                 | AC input   | 1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz |
|  | Rated current [A]                 |  | 0.2                                       |
|  | Permissible voltage fluctuation   | AC input   | 1-phase 323 V AC to 528 V AC              |
|  | Permissible frequency fluctuation |  | ±5 % maximum                              |
| Power consumption [W]                              |                                   | 40   |   |
| Interface power supply                             |                                   | 24 V DC ± 10 % (required current capacity: 0.45 A (including CN8 connector signals))   |   |
| Control method                                     |                                   | Sine-wave PWM control/current control method   |   |
| Dynamic brake (Note 4)                             |                                   | Built-in   |   |
| CC-Link IE TSN Class B (Note 2) (MR-J5D3-G4)       | Communication cycle (Note 5, 6)   | 250 μs, 500 μs, 1 ms, 1.5 ms, 2 ms, 2.5 ms, 3 ms, 3.5 ms, 4 ms, 4.5 ms, 5 ms, 5.5 ms, 6 ms, 6.5 ms, 7 ms, 7.5 ms, 8 ms   |   |
|  | Protocol version                  | 1.0/2.0 (Note 8)   |   |
| CC-Link IE TSN Class A (Note 2, 8, 9) (MR-J5D3-G4) | Communication cycle (Note 5)      | 500 μs to 500 ms   |   |
|  | Protocol version                  | 2.0  |   |
| EtherCAT® (MR-J5D3-G4-N1)                          | Communication cycle (Note 5, 6)   | 250 μs, 500 μs, 1 ms, 2 ms, 4 ms, 8 ms   |   |
| CC-Link IE Field Network Basic                     |                                   | Not supported  |   |
| Communication function                             | USB                               | Connect a personal computer (MR Configurator2 compatible)  |   |
| Encoder output pulse                               | MR-J5D3-G4                        | Compatible only with A-axis and B-axis (A/B-phase pulse) (Note 6, 7)   |   |
|  | MR-J5D3-G4-N1                     | Not compatible   |   |
| Analog monitor                                     |                                   | 2 channels   |   |
| Positioning mode (Note 6)                          |                                   | Point table method   |   |
| Fully closed loop control                          |                                   | Not compatible   |   |
| Servo functions                                    |                                   | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, super trace control, continuous operation to torque control mode (Note 6, 10) |   |
| Protective functions                               |                                   | Overcurrent shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection  |   |
| Safety sub-function, Safety performance            |                                   | Refer to "Safety Sub-Functions" in section 1 of this catalog.  |   |
| Structure (IP rating)                              |                                   | Natural cooling, open (IP20) (Note 1)  | Force cooling, open (IP20) (Note 1)       |
| Mass [kg]  |                                   | 5.9  | 5.8                                       |

- Notes:
1. IP20 requires a side protection cover (an option).
  2. A communication speed of 1 Gbps/100 Mbps can be selected. When 100 Mbps is selected, the minimum communication cycle is 500 μs.
  3. MR-CV\_4 power regeneration converter units require a mounting attachment. Some drive units also require a mounting attachment depending on the power regeneration converter unit to be used. Refer to "Mounting Attachment" in this catalog for details.
  4. When using the dynamic brake, refer to "MR-J5D User's Manual" for the permissible load to motor inertia ratio.
  5. The communication cycle depends on the controller specifications and the number of device stations connected.
  6. For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
  7. When the command unit selection function (command unit/s), the safety sub-function (network connection), or the touch probe function is enabled, encoder output pulses are not outputted.
  8. For the servo amplifier firmware version supporting this function, refer to "MR-J5D User's Manual"
  9. For the restrictions on the network, refer to "MR-J5D User's Manual".
  10. The function is not available with MR-J5D\_-G4-N1.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LVSWires


Product List

Precautions

Support

## MR-J5D1-G4(-N1) Standard Wiring Diagram Example

DG

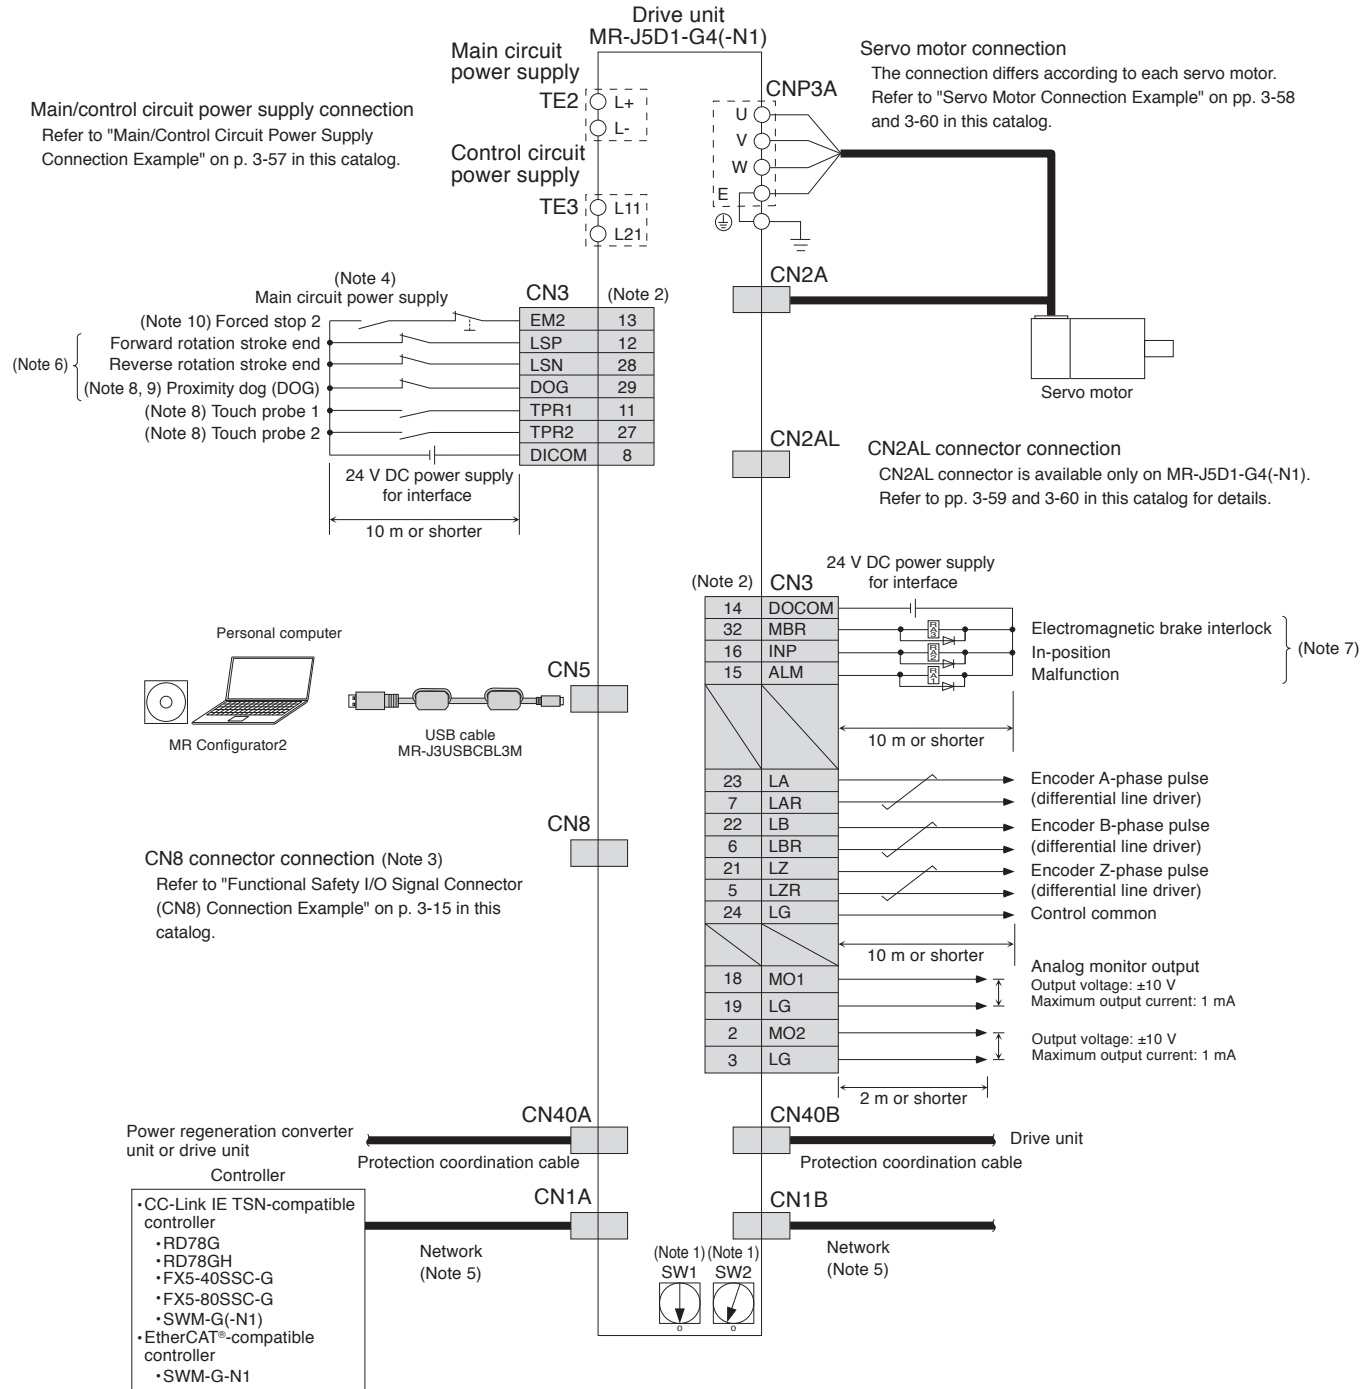

- Notes:
- The node address or the 4th octet of the IP address can be set between 1 and 254 with a combination of the ID setting switches or the rotary switches (SW1 and SW2). Note that the number of the connectable device stations depends on the controller specifications.
  - This is for sink wiring. Source wiring is also possible.
  - Attach a short-circuit connector supplied with the drive unit when the functional safety (STO function) is not used.
  - To prevent an unexpected restart of the drive unit, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  - When branching off CC-Link IE TSN (synchronous communication function) with a switching hub, use a switching hub (class B) recommended by CC-Link Partner Association. When a switching hub (class A) is used, there are restrictions on the topologies to be used. Refer to the controller manual for details.
  - Devices for these pins can be changed with [Pr. PD03], [Pr. PD04], and [Pr. PD05].
  - Devices for these pins can be changed with [Pr. PD07], [Pr. PD08], and [Pr. PD09].
  - For the restrictions on the communication cycle of the touch probe function, refer to "Restrictions" in this catalog.
  - This device can be changed to TPR3 (Touch probe 3) with [Pr. PD05]. When TPR3 is set, connect by using a normally open contact switch as the same as TPR1 (Touch probe 1) and TPR2 (Touch probe 2).
  - The forced stop signal is issued for the drive unit. For overall system, apply the emergency stop on the controller side.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

MR-J5D2-G4(-N1) Standard Wiring Diagram Example

DG

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/SWires  
Product List  
Precautions  
Support

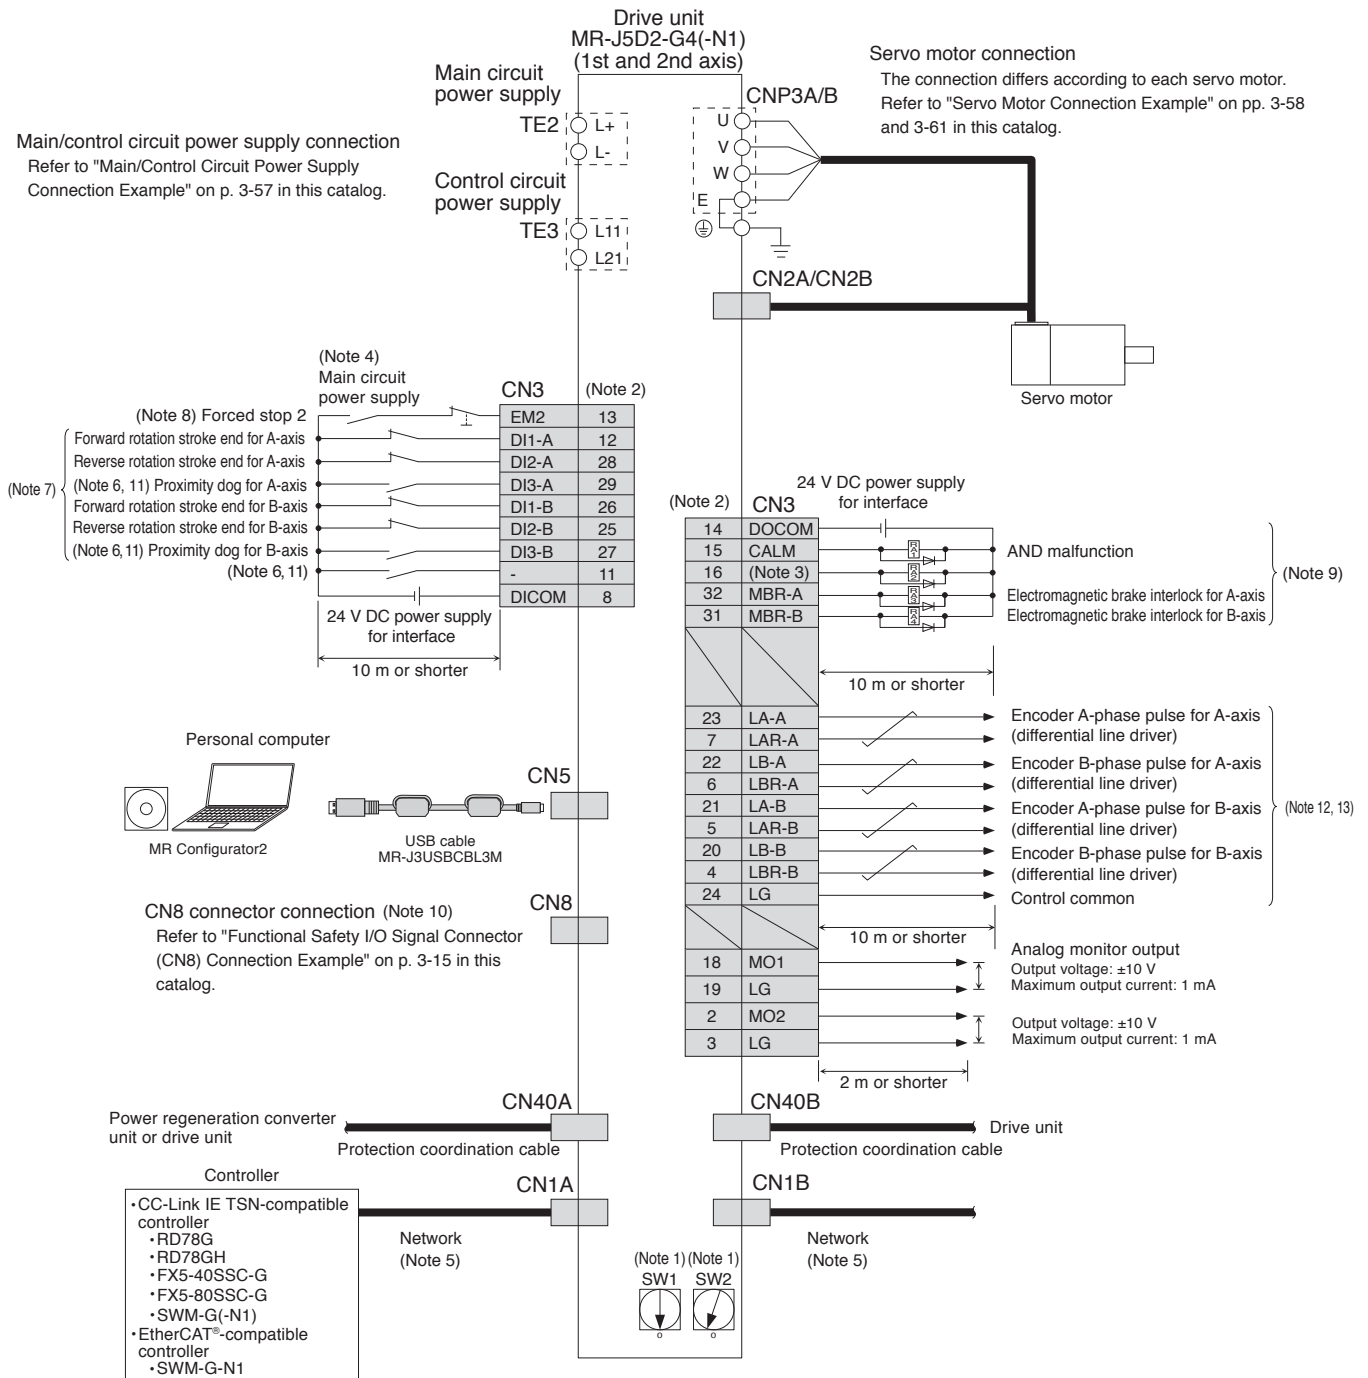


- Notes:
- The node address or the 4th octet of the IP address can be set to between 1 and 254 with a combination of the ID setting switches or the rotary switches (SW1 and SW2). Note that the number of the connectable device stations depends on the controller specifications.
  - This is for sink wiring. Source wiring is also possible.
  - CINP (AND in-position) is assigned to this pin as default. A device for this pin can be changed with [Pr. PD08].
  - To prevent an unexpected restart of the drive unit, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  - When branching off CC-Link IE TSN (synchronous communication function) with a switching hub, use a switching hub (class B) recommended by CC-Link Partner Association. When a switching hub (class A) is used, there are restrictions on the topologies to be used. Refer to the controller manual for details.
  - For the restrictions on the communication cycle of the touch probe function, refer to "Restrictions" in this catalog.
  - Devices for these pins can be changed with [Pr. PD03], [Pr. PD04], and [Pr. PD05].
  - The forced stop signal is issued for two axes of the drive unit. For overall system, apply the emergency stop on the controller side.
  - Devices for these pins can be changed with [Pr. PD07] and [Pr. PD09].
  - Attach a short-circuit connector supplied with the drive unit when the functional safety (STO function) is not used.
  - These devices can be changed to TPR1 (Touch probe 1), TPR2 (Touch probe 2), and TPR3 (Touch probe 3) with [Pr. PD05] and [Pr. PD51].
  - For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
  - For the availability of the encoder output pulse, refer to "MR-J5D2-G4(-N1) (2-Axis, Network Compatible) Specifications (400 V)" in this catalog.



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

## MR-J5D3-G4(-N1) Standard Wiring Diagram Example

DG

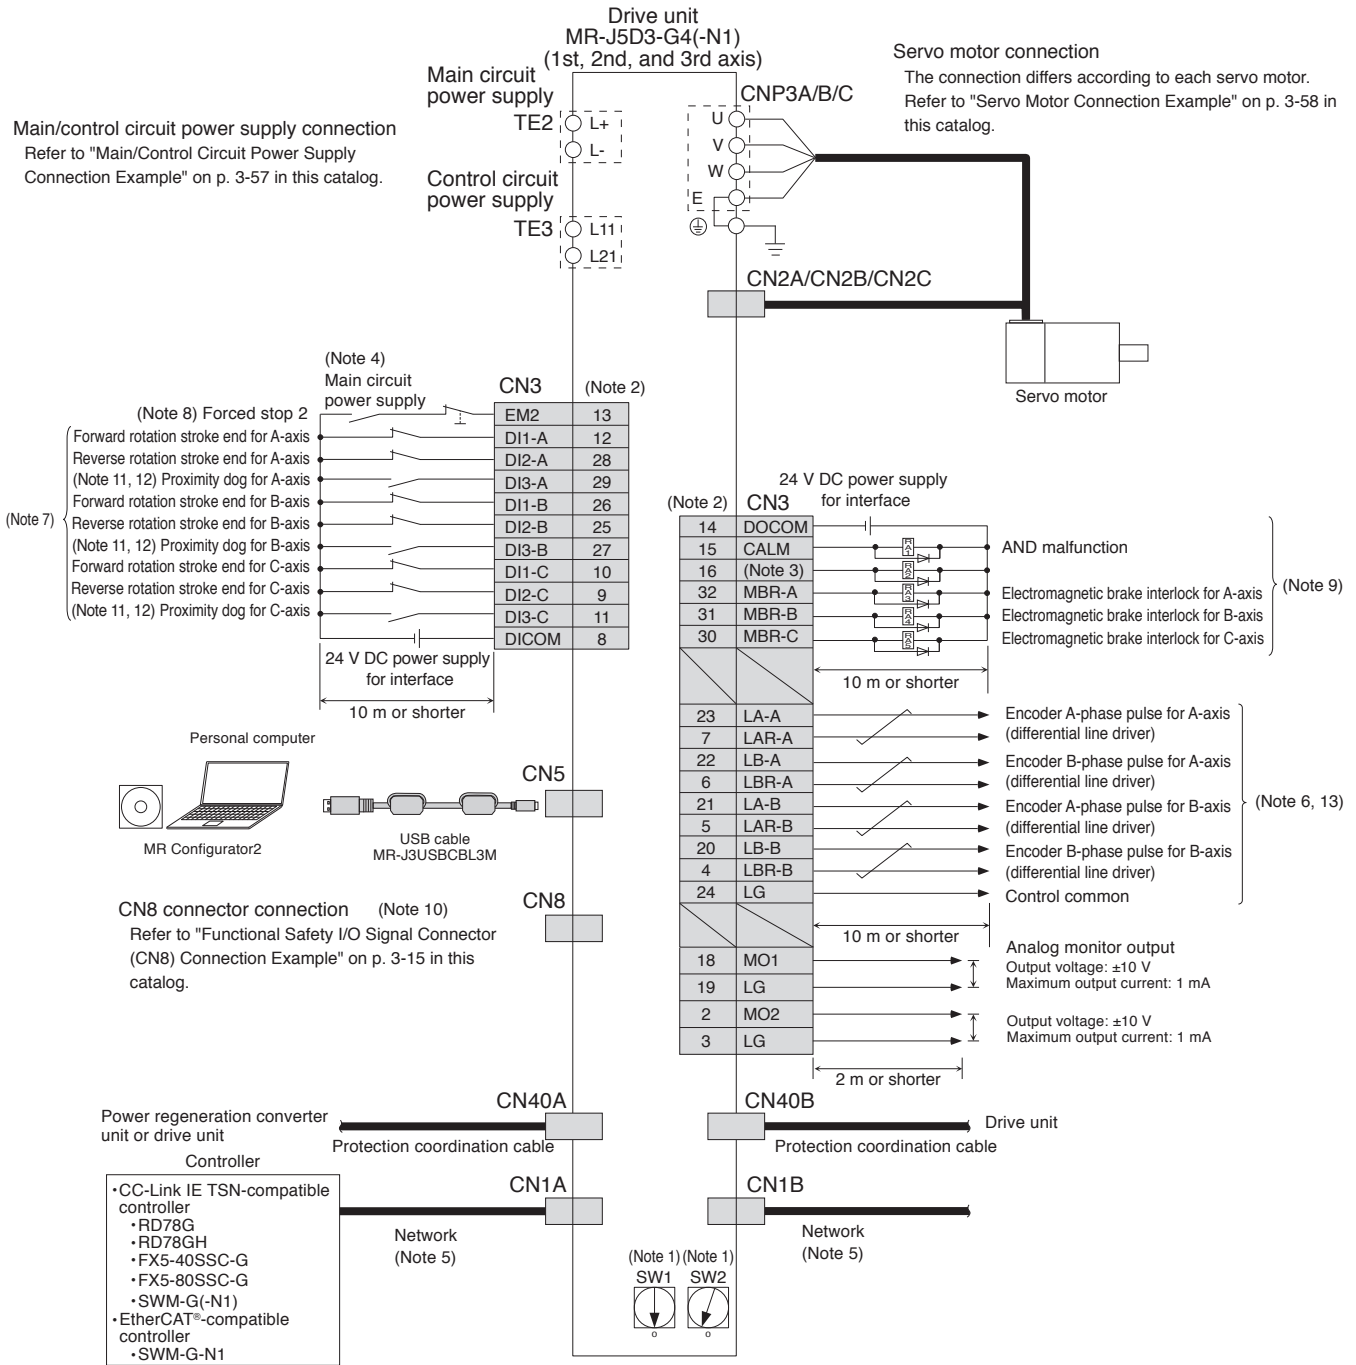


- Notes:
- The node address or the 4th octet of the IP address can be set to between 1 and 254 with a combination of the ID setting switches or the rotary switches (SW1 and SW2). Note that the number of the connectable device stations depends on the controller specifications.
  - This is for sink wiring. Source wiring is also possible.
  - CINP (AND in-position) is assigned to this pin as default. A device for this pin can be changed with [Pr. PD08].
  - To prevent an unexpected restart of the drive unit, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  - When branching off CC-Link IE TSN (synchronous communication function) with a switching hub, use a switching hub (class B) recommended by CC-Link Partner Association. When a switching hub (class A) is used, there are restrictions on the topologies to be used. Refer to the controller manual for details.
  - For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.
  - Devices for these pins can be changed with [Pr. PD03], [Pr. PD04], and [Pr. PD05].
  - The forced stop signal is issued for three axes of the drive unit. For overall system, apply the emergency stop on the controller side.
  - Devices for these pins can be changed with [Pr. PD07] and [Pr. PD09].
  - Attach a short-circuit connector supplied with the drive unit when the functional safety (STO function) is not used.
  - These devices can be changed to TPR1 (Touch probe 1), TPR2 (Touch probe 2), and TPR3 (Touch probe 3) with [Pr. PD05].
  - For the restrictions on the communication cycle of the touch probe function, refer to "Restrictions" in this catalog.
  - For the availability of the encoder output pulse, refer to "MR-J5D3-G4(-N1) (3-Axis, Network Compatible) Specifications (400 V)" in this catalog.



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

Main/Control Circuit Power Supply Connection Example (Note 11)

● For connecting MR-CV\_ and MR-J5D\_-G4(-N1)

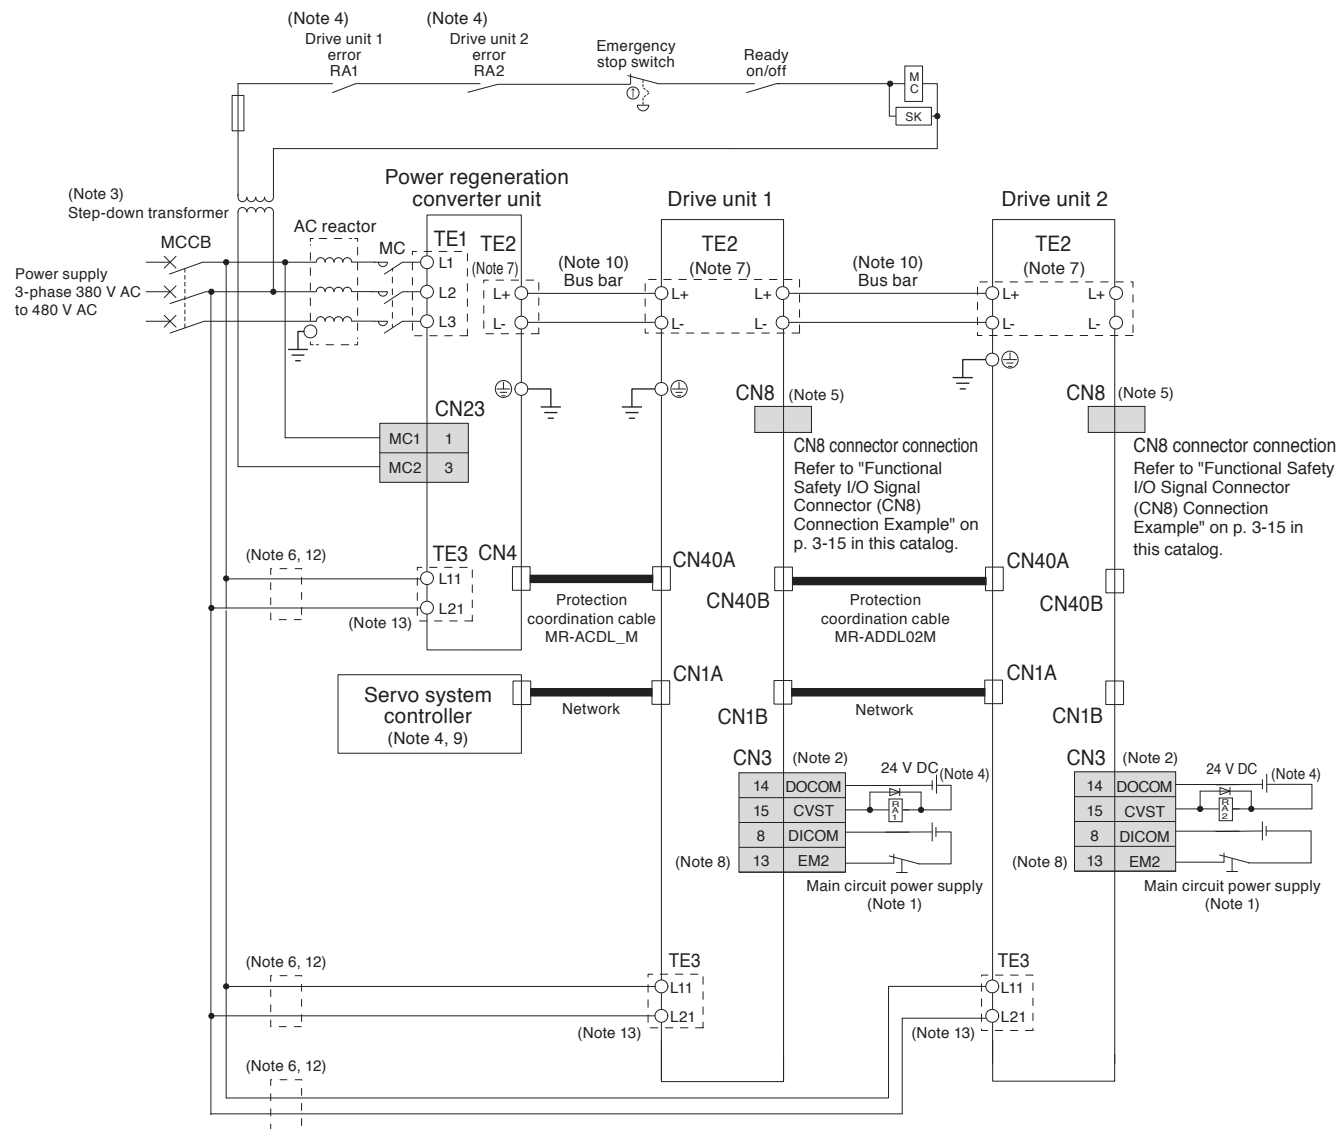

- Notes:
1. To prevent an unexpected restart of the drive unit, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  2. This is for sink wiring. Source wiring is also possible.
  3. A step-down transformer is required if the power regeneration converter unit is in 400 V class, and coil voltage of the magnetic contactor is in 200 V class.
  4. When connecting multiple drive units, create a sequence in which the servo system controller stops all axes and a sequence that shuts off the main circuit power if an alarm occurs on one axis.
  5. Attach a short-circuit connector supplied with the drive unit when the functional safety (STO function) is not used.
  6. Install an overcurrent protection device (molded-case circuit breaker, fuse, etc.) to protect the branch circuit.
  7. Terminal varies depending on the capacity of the power regeneration converter unit and the drive unit. Refer to "MR-CV\_ Power Regeneration Converter Unit Dimensions" and "MR-J5D\_-G4(-N1) Dimensions" in this catalog.
  8. To stop the servo motor by forcibly decelerating with EM2, parameter setting is required. Refer to "MR-J5 User's Manual" for details.
  9. Refer to the controller manual for the forced stop input of the servo system controller.
  10. The bus bar varies depending on the combination of the power regeneration converter unit and the drive unit. Refer to "Bus Bar" in this catalog for details.
  11. This example is for when magnetic contactor drive output is enabled.
  12. The control circuit power supply (L11/L21) can be connected by passing wiring. Refer to "MR-J5D User's Manual" for details.
  13. Do not ground the drive unit between L11 and L21 even when the control circuit power supply is separated from the main circuit power supply using an uninterruptible power supply (UPS) or an isolation transformer.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

DG


Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

**Servo Motor Connection Example (Rotary Servo Motor)  
Semi Closed Loop Control System with MR-J5D\_-G4(-N1)**

● For HK-KT series/HK-RT (1.0 kW to 2.0 kW) series

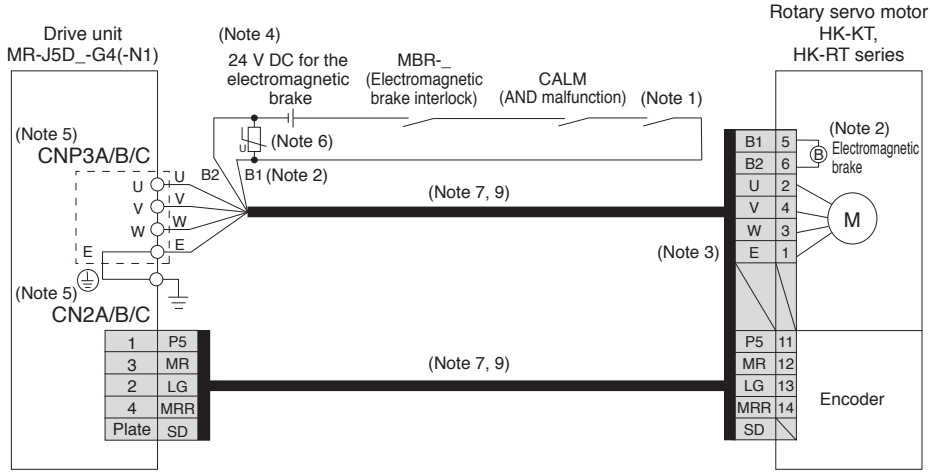

● For HK-ST series/HK-RT (3.5 kW to 7.0 kW) series

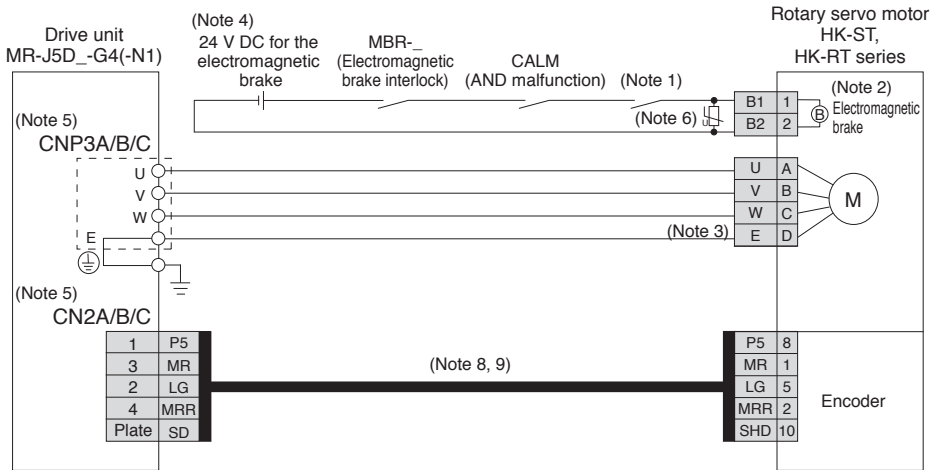

- Notes:
1. Create the circuit in order to shut off by being interlocked with the emergency stop switch.
  2. This is for the servo motors with an electromagnetic brake. The electromagnetic brake terminals do not have polarity.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the drive unit for grounding the servo motor.
  4. Do not use the 24 V DC interface power supply for the electromagnetic brake. Provide a dedicated power supply to the electromagnetic brake.
  5. CNP3B and CN2B connectors are available for MR-J5D2-G4(-N1) and MR-J5D3-G4(-N1) drive units. CNP3C and CN2C connectors are available for MR-J5D3-G4(-N1) drive units.
  6. Install a surge absorber between B1 and B2.
  7. This is for using an option dual cable type. Single cable types are also available.
  8. Encoder cables are available as an option.
  9. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

**External Encoder Connection Specifications**

Refer to the following table for the encoder communication method compatible with each system and for the drive unit connector to which a load-side encoder should be connected.

| Operation mode   | External encoder communication method  | Connector to be connected with the external encoder |  |                 |
|--|--|---|--|-----------------|
|  |  | MR-J5D1-G4(-N1)                                     | MR-J5D2-G4(-N1)  | MR-J5D3-G4(-N1) |
| Fully closed loop control system <small>(Note 3)</small> | Two-wire type                          | CN2AL   | CN2A <small>(Note 1, 2)</small><br>CN2B <small>(Note 1, 2)</small> | /               |
|  | Four-wire type                         |   |  |                 |
|  | A/B/Z-phase differential output method |   |  |                 |
| Scale measurement function <small>(Note 3)</small>       | Two-wire type                          | CN2AL   | CN2A <small>(Note 1, 2)</small><br>CN2B <small>(Note 1, 2)</small> | /               |
|  | Four-wire type                         |   |  |                 |
|  | A/B/Z-phase differential output method |   |  |                 |

- Notes: 1. MR-J4FCBL03M junction cable is required.  
 2. MR-J5D2-G4(-N1) does not support a servo motor encoder with the four-wire type communication method. Use MR-J5D1-G4(-N1).  
 3. For the restrictions on the communication cycle, refer to "Restrictions" in this catalog.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires


Product List

Precautions


Support

**Servo Motor Connection Example (Rotary Servo Motor)  
Fully Closed Loop Control System with MR-J5D1-G4(-N1)**

● For HK-KT series/HK-RT (1.0 kW to 2.0 kW) series

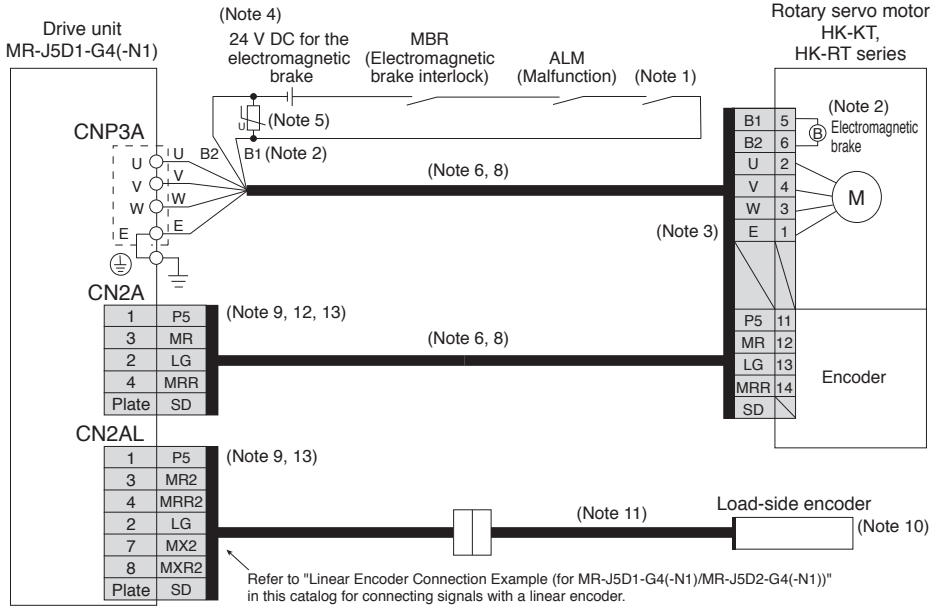

● For HK-ST series/HK-RT (3.5 kW to 7.0 kW) series

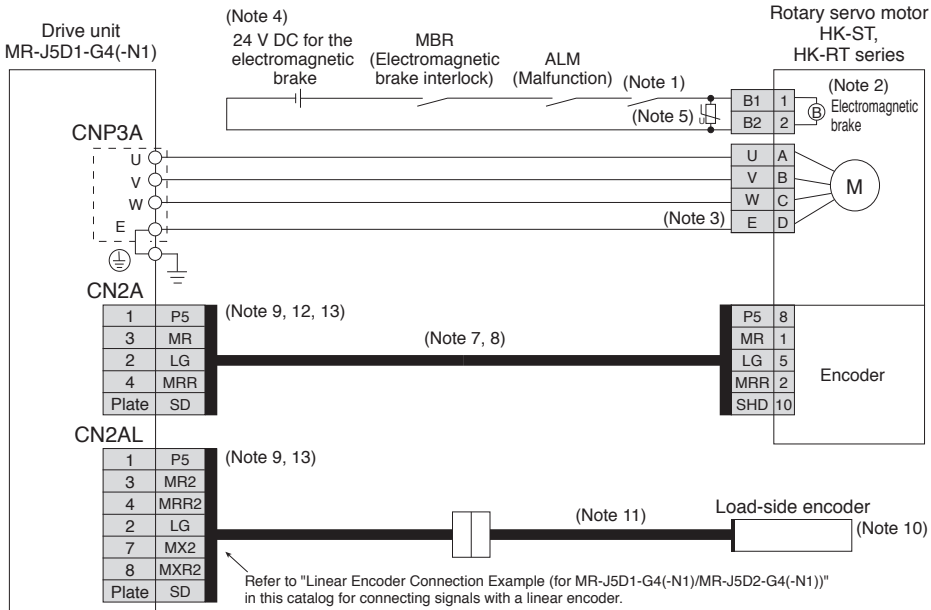

- Notes:
1. Create the circuit in order to shut off by being interlocked with the emergency stop switch.
  2. This is for the servo motors with an electromagnetic brake. The electromagnetic brake terminals do not have polarity.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the drive unit for grounding the servo motor.
  4. Do not use the 24 V DC interface power supply for the electromagnetic brake. Provide a dedicated power supply to the electromagnetic brake.
  5. Install a surge absorber between B1 and B2.
  6. This is for using an option dual cable type. Single cable types are also available.
  7. Encoder cables are available as an option.
  8. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.
  9. The load-side encoder and the servo motor encoder are compatible with both two-wire and four-wire type communication methods.
  10. For linear encoders, refer to "List of Linear Encoders" in this catalog. Refer to "MR-J5D User's Manual" for the fully closed loop control with a rotary encoder.
  11. Necessary encoder cables vary depending on the load-side encoder. Refer to "MR-J5D User's Manual" and "Rotary Servo Motor User's Manual (For MR-J5)".
  12. This wiring of the servo motor encoder is applicable for the two-wire type communication method.
  13. When configuring a fully closed loop control system with MR-J5D1-G4(-N1), connect a servo motor encoder to CN2A connector and a load-side encoder to CN2AL connector. Do not use MR-J4FCCBL03M junction cable or a junction cable fabricated using MR-J3THMCN2 connector set.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.




**Servo Motor Connection Example (Rotary Servo Motor)  
Fully Closed Loop Control System with MR-J5D2-G4(-N1)**

● For HK-KT series/HK-RT (1.0 kW to 2.0 kW) series

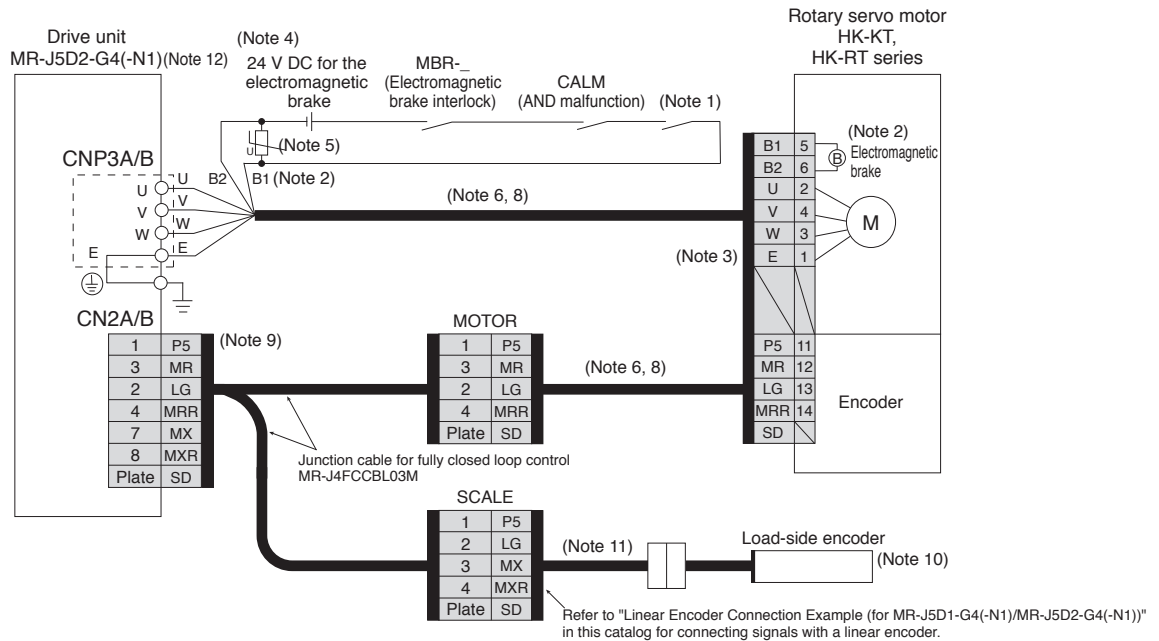

● For HK-ST series/HK-RT (3.5 kW to 7.0 kW) series

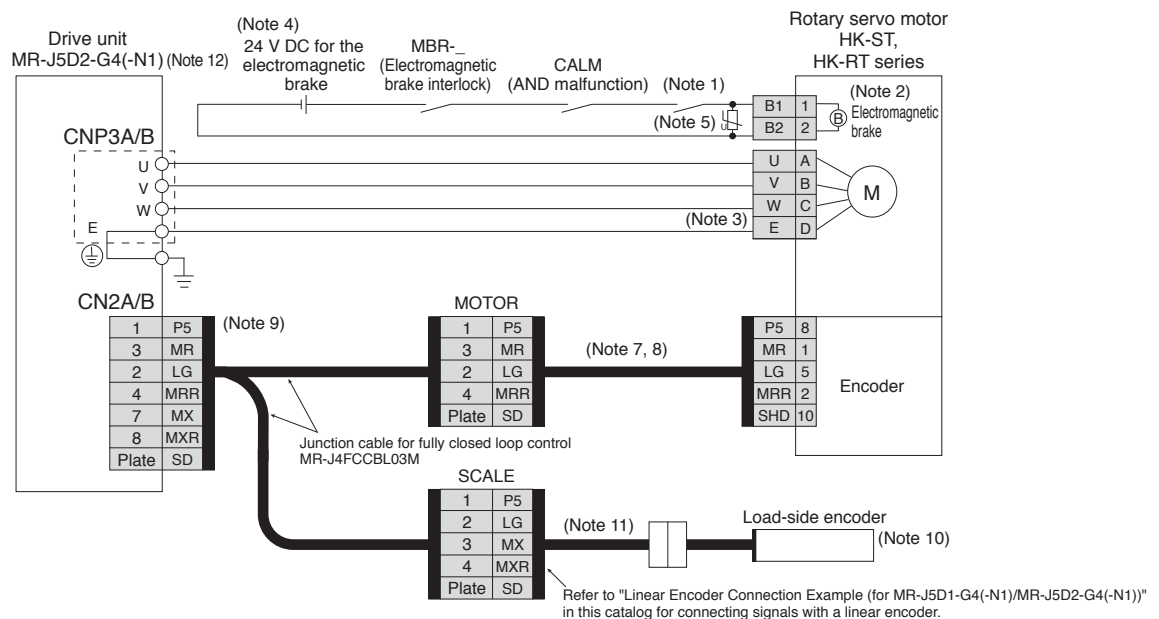


- Notes:
1. Create the circuit in order to shut off by being interlocked with the emergency stop switch.
  2. This is for the servo motors with an electromagnetic brake. The electromagnetic brake terminals do not have polarity.
  3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the drive unit for grounding the servo motor.
  4. Do not use the 24 V DC interface power supply for the electromagnetic brake. Provide a dedicated power supply to the electromagnetic brake.
  5. Install a surge absorber between B1 and B2.
  6. This is for using an option dual cable type. Single cable types are also available.
  7. Encoder cables are available as an option.
  8. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.
  9. For fully closed loop control, the load-side encoder and the servo motor encoder are compatible only with two-wire type communication method. Four-wire type cannot be used.
  10. For linear encoders, refer to "List of Linear Encoders" in this catalog. Refer to "MR-J5D User's Manual" for the fully closed loop control with a rotary encoder.
  11. Necessary encoder cables vary depending on the load-side encoder. Refer to "MR-J5D User's Manual" and "Rotary Servo Motor User's Manual (For MR-J5)".
  12. MR-J5D3-G4(-N1) does not support the fully closed loop control.



Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

## Linear Encoder Connection Example (for MR-J5D1-G4(-N1)/MR-J5D2-G4(-N1))

DG

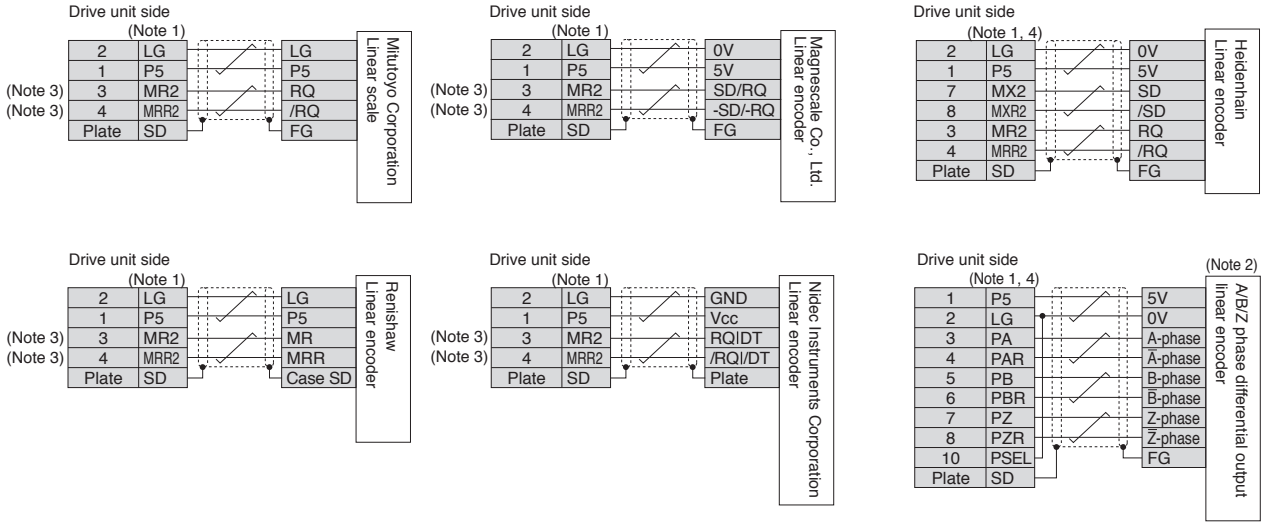

- Notes:
1. For the number of the wire pairs for LG and P5, refer to "MR-J5 Partner's Encoder User's Manual".
  2. If the encoder's current consumption exceeds 350 mA, supply power from an external source.
  3. When configuring a fully closed loop control system with MR-J5D2-G4(-N1), connect MR and MRR of the drive unit-side connectors to MX and MXR of the SCALE connectors of MR-J4FCCBL03M.
  4. This is for MR-J5D1-G4(-N1).




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.


DG

## MR-J5D\_-G4(-N1) Dimensions

- MR-J5D1-100G4(-N1)
- MR-J5D1-200G4(-N1)
- MR-J5D1-350G4(-N1)

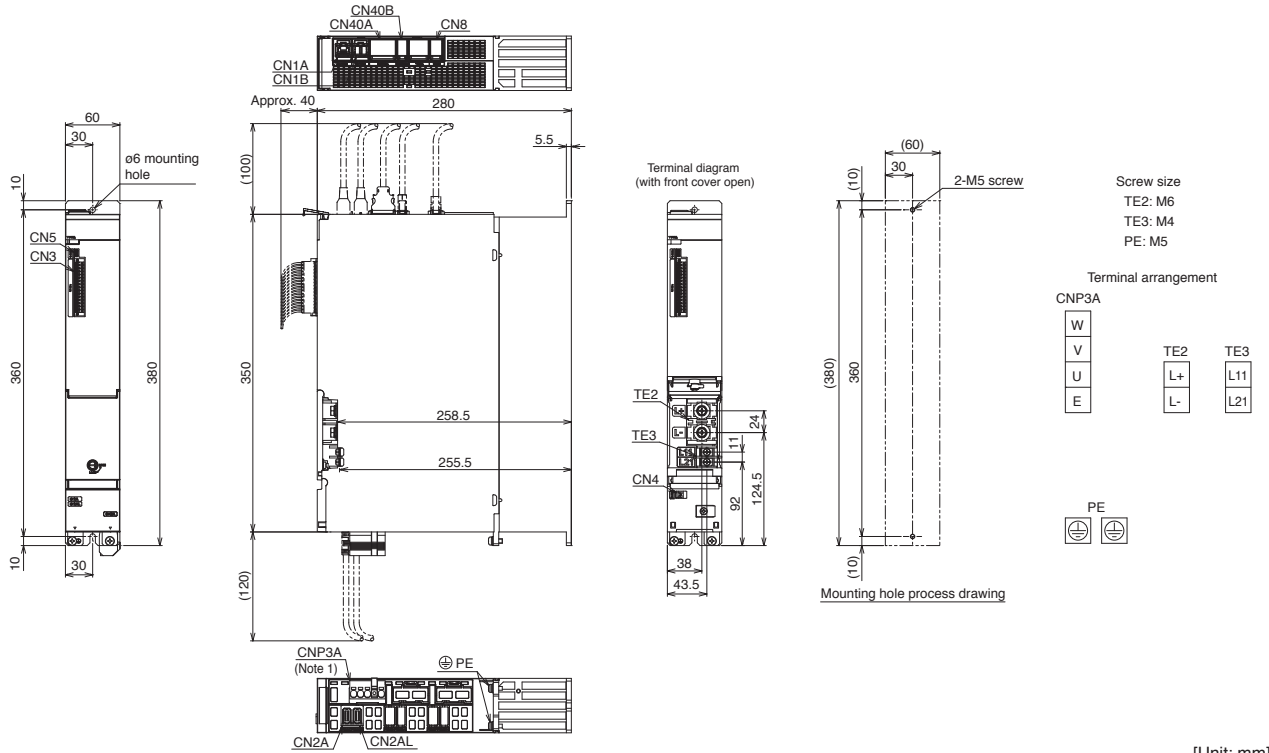


- MR-J5D1-500G4(-N1)
- MR-J5D1-700G4(-N1)

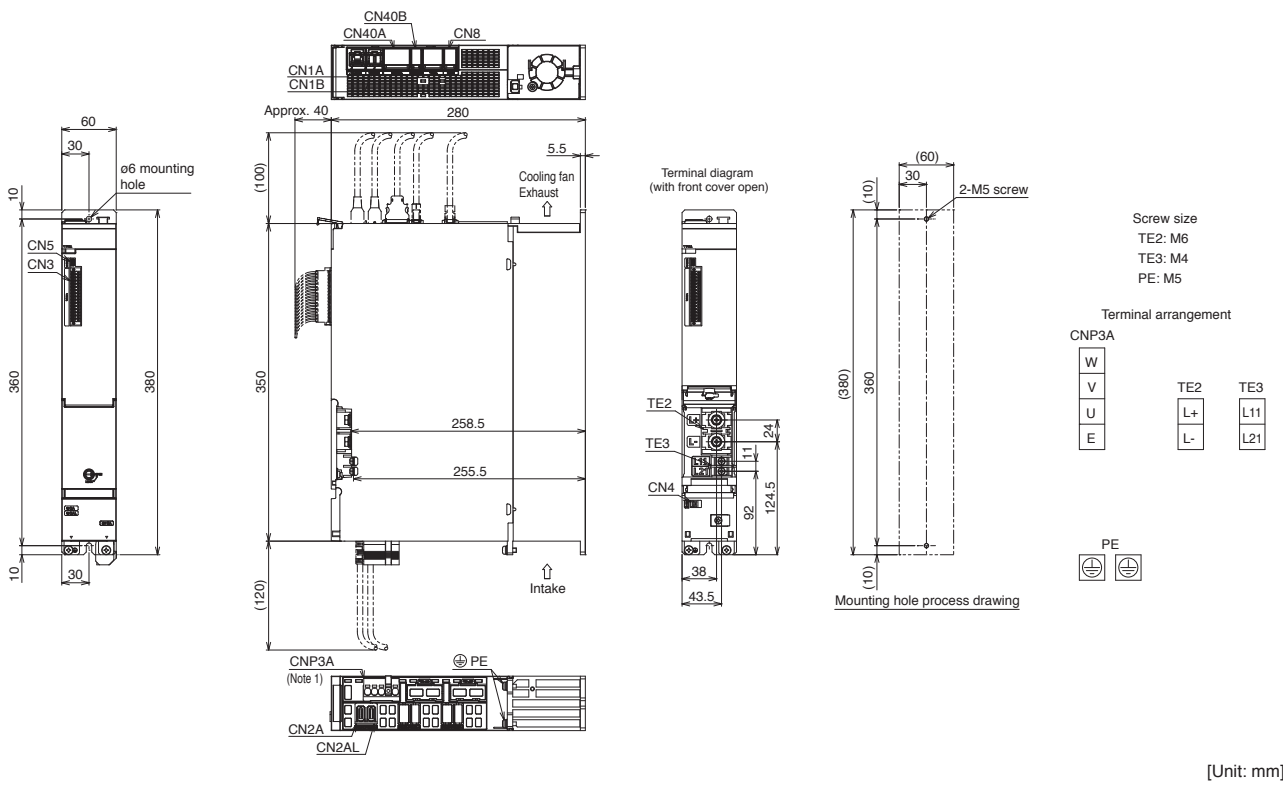

Notes: 1. CNP3A connector is supplied with the drive unit.


## MR-J5D\_G4(-N1) Dimensions

### ●MR-J5D2-100G4(-N1)

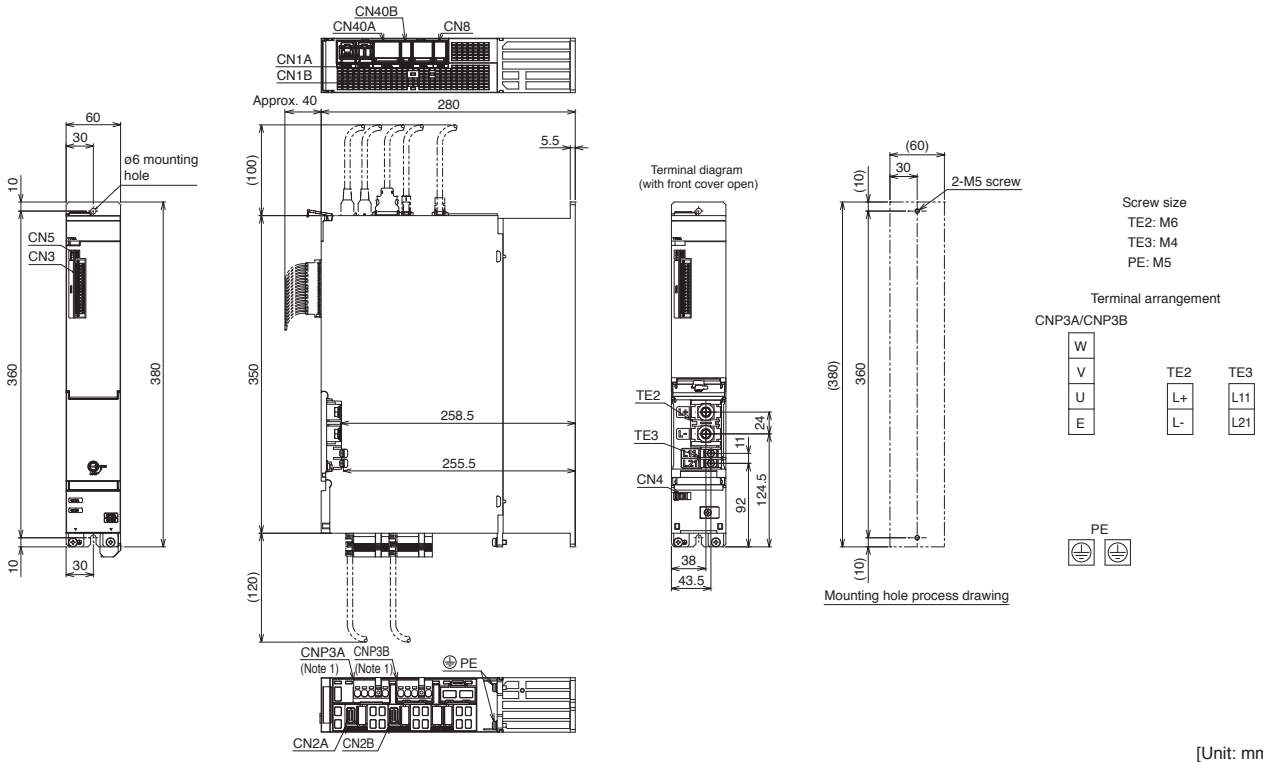

### ●MR-J5D2-200G4(-N1)

### ●MR-J5D2-350G4(-N1)

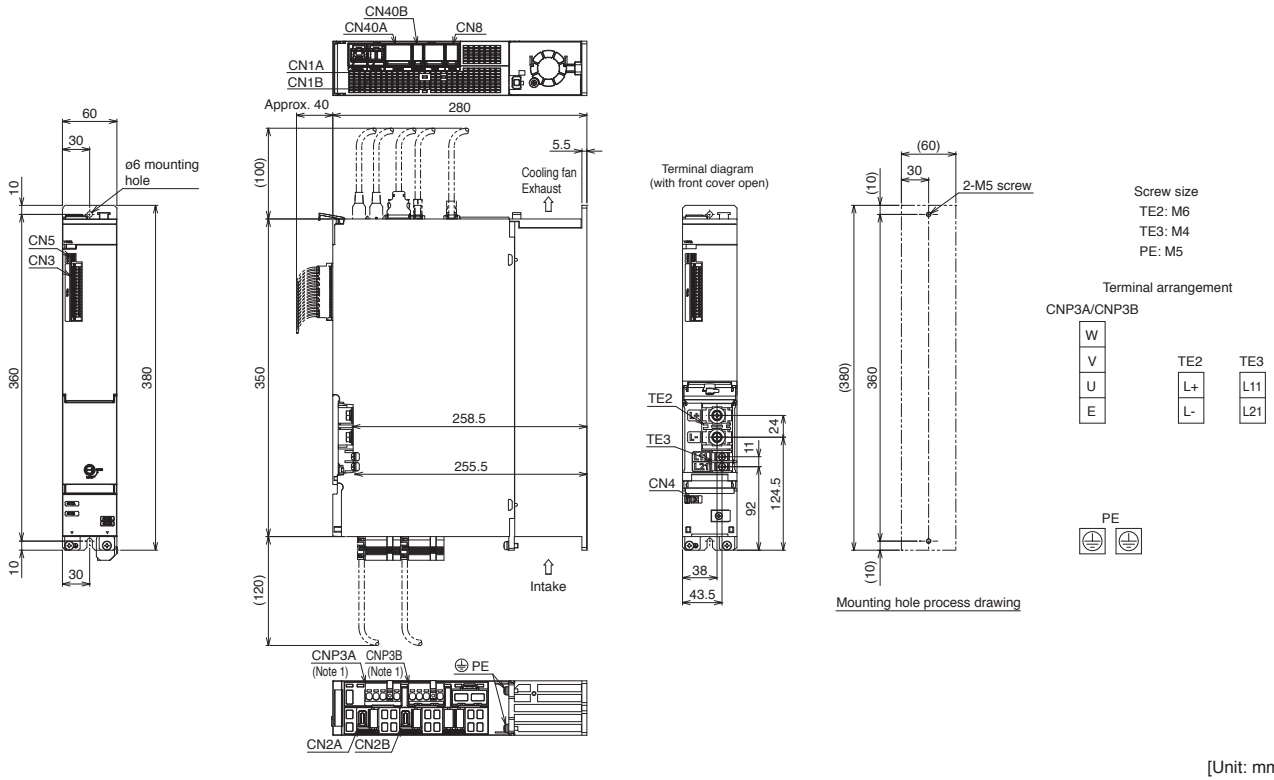


Notes: 1. CNP3A and CNP3B connectors are supplied with the drive unit.

DG


## MR-J5D\_-G4(-N1) Dimensions

- MR-J5D2-500G4(-N1)
- MR-J5D2-700G4(-N1)

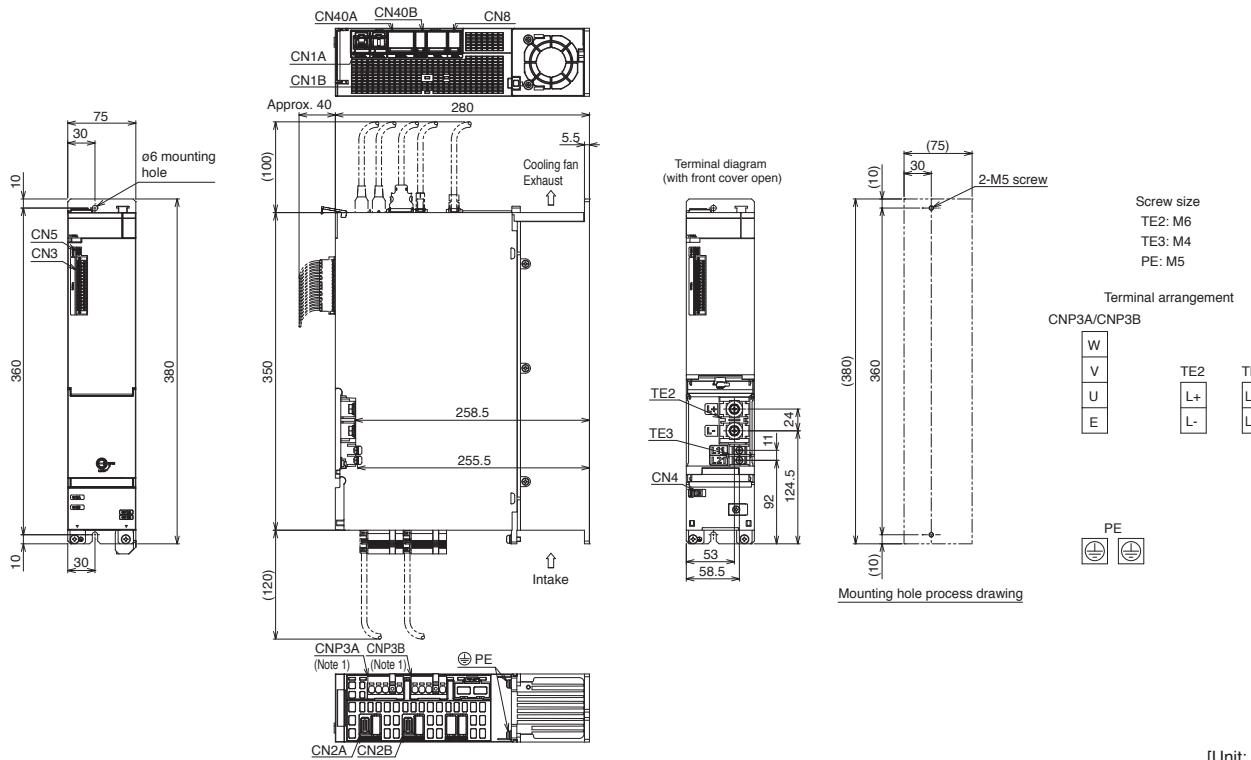

[Unit: mm]

## ● MR-J5D3-100G4(-N1)

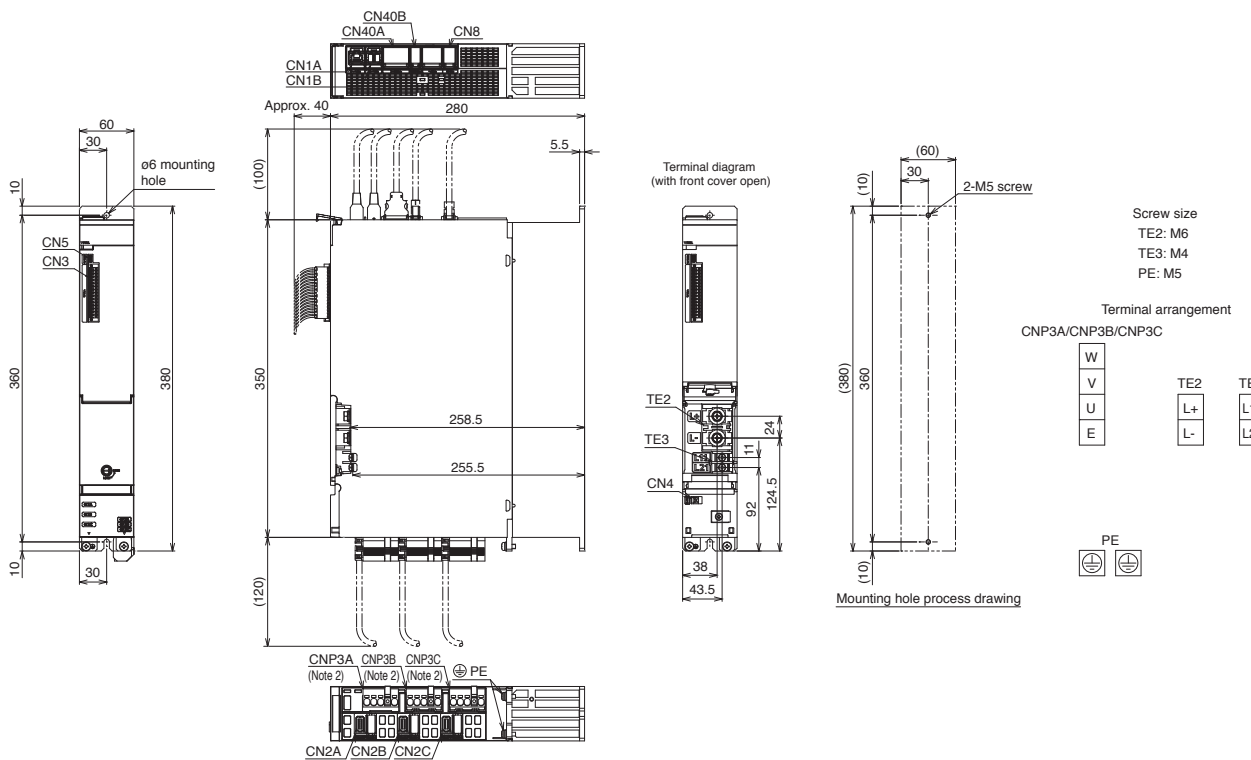

[Unit: mm]

- Notes: 1. CNP3A and CNP3B connectors are supplied with the drive unit.  
 2. CNP3A, CNP3B, and CNP3C connectors are supplied with the drive unit.


Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Servo Amplifiers

## MR-J5D\_-G4(-N1) Dimensions

DG

### ●MR-J5D3-200G4(-N1)

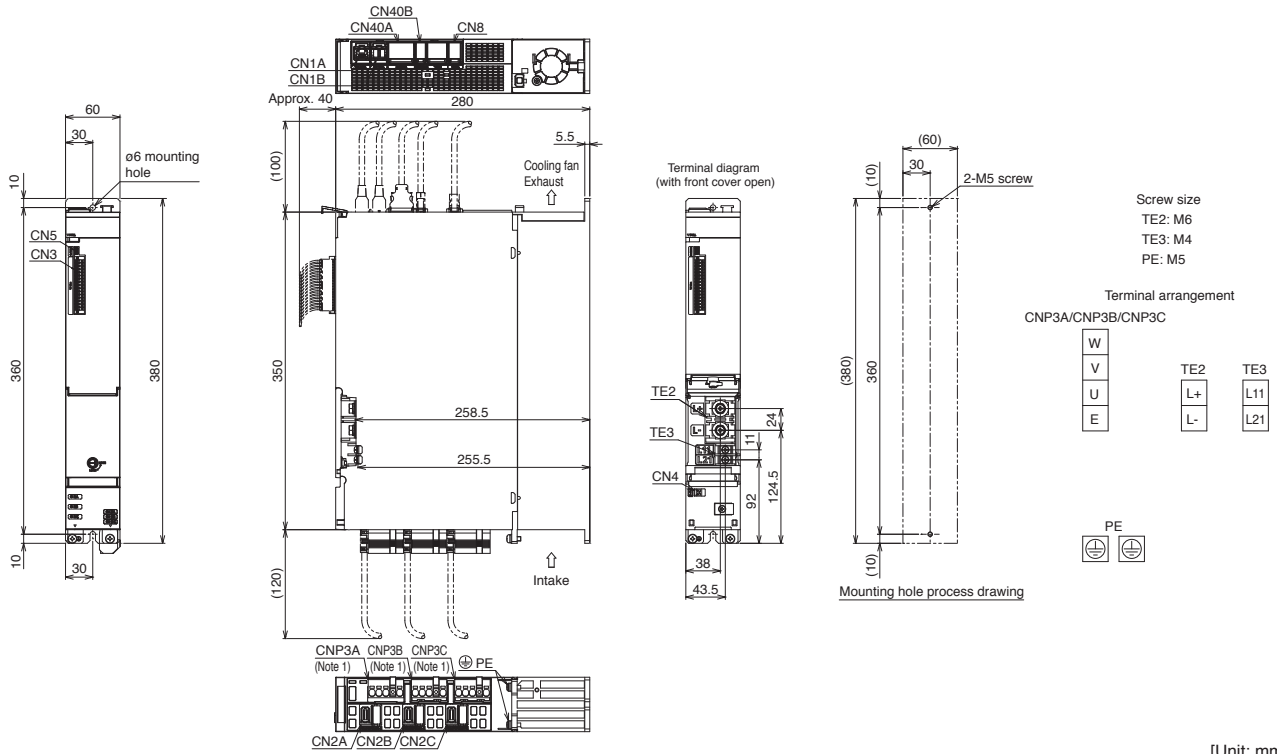

[Unit: mm]

Notes: 1. CNP3A, CNP3B, and CNP3C connectors are supplied with the drive unit.

**MR-J5-G /MR-J5W\_-G(-N1)/MR-J5D\_-G4(-N1) Positioning Function: Point Table Method**

**G G-RJ G-HS WG DG**

Set the position and speed data to the point table, and select the point table No. with the command interface signal to start the positioning operation.

| Item                                 | Description  |  |
|--------------------------------------|--|--|
| Command interface                    | Object dictionary  |  |
| Operation specifications             | Positioning by specifying the point table No. (255 points)   |  |
| System                               | Signed absolute value command method   |  |
| Position command input               | Absolute value command method  | Setting in the point table<br>Setting range of feed length for one point:<br>-2147483648 to 2147483647 [ $\mu\text{m}$ ],<br>-214748.3648 to 214748.3647 [inch],<br>-2147483648 to 2147483647 [pulse],<br>-360.000 to 360.000 [degree] |
| Speed command input                  | Set the servo motor speed in the point table.<br>Set the acceleration/deceleration time constants and acceleration/deceleration in the point table.<br>Set the S-pattern acceleration/deceleration time constant in [Pr. PT51].<br>The speed unit can be selected ([r/min], command unit/s)<br>The acceleration/deceleration unit can be selected ([ms], command unit/s <sup>2</sup> ).  |  |
| Torque limit                         | Set by the servo parameter or object dictionary.   |  |
| Point table mode (pt)                | One positioning operation  | Point table No. input method<br>Perform one positioning operation based on the position command and speed command.   |
|                                      | Continuous positioning operation   | Speed change operation (2nd gear to 255th gear)/<br>Continuous positioning operation (2 points to 255 points)/<br>Continuous operation to the point table selected at startup/<br>Continuous operation to the point table No. 1        |
| JOG operation mode (jg)              | JOG operation  | Perform inching operation in the network communication function based on the speed command.  |
| Homing mode (hm) <sup>(Note 1)</sup> | Dog type (rear end detection, Z-phase reference), stopper type (stopper position reference), count type (front end detection, Z-phase reference), dog type (rear end detection, rear end reference), count type (front end detection, front end reference), dog cradle type, dog type last Z-phase reference, dog type front end reference, dogless Z-phase reference,<br>Homing on negative limit switch and index pulse (method 1),<br>Homing on positive limit switch and index pulse (method 2),<br>Homing on positive home switch and index pulse (method 3, 4),<br>Homing on negative home switch and index pulse (method 5, 6),<br>Homing on home switch and index pulse (method 7, 8, 9, 10, 11, 12, 13, 14),<br>Homing without index pulse (method 17, 18, 19, 20, 21, 22, 23, 24, 27, 28),<br>Homing on index pulse (method 33, 34),<br>Homing on current position (method 35, 37) |  |
| Function on positioning operation    | Absolute position detection/external limit switch/software position limit/function for positioning to the home, etc.   |  |

Notes: 1. For the servo amplifier firmware version supporting the methods of No. 9, 10, 13, 14, 17, 18, refer to "MR-J5 User's Manual".

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LVSWires  
Product List  
Precautions  
Support

## MR-J5-G\_/MR-J5W\_-G(-N1)/MR-J5D\_-G4(-N1) Positioning Function: Point Table Method

G G-RJ G-HS WG DG

Absolute value command method: travels to a specified address (absolute value) with reference to the home position

| Item  | Setting range  | Description   |
|---|--|---|
| Point table No.                             | 1 to 255   | Specify a point table in which a target position, servo motor speed, acceleration/deceleration, acceleration time constant/deceleration time constant, dwell, auxiliary function, and M code will be set.   |
| Target position (Note 1)<br>(position data) | -2147483.648 to 2147483.647 [mm]<br>-214748.3648 to 214748.3647 [inch]<br>-360.000 to 360.000 [degree]<br>-2147483648 to 2147483647 [pulse]                              | Set a travel distance.<br>(1) When using as absolute position command method<br>Set a target address (absolute value).<br>(2) When using as relative position command method<br>Set a travel distance. Reverse rotation command is applied with a minus sign.   |
| Servo motor speed<br>(Note 2)               | 0 to maximum speed [r/min]<br>0 to 2147483.647 [mm/s]<br>0 to 214748.3647 [inch/s]<br>0 to 2147483.647 [degree/s]<br>0 to 2147483647 [pulse/s]                           | Set a command speed for the servo motor in positioning.   |
| Acceleration                                | 0 to 2147483.647 [mm/s <sup>2</sup> ]<br>0 to 214748.3647 [inch/s <sup>2</sup> ]<br>0 to 2147483.647 [degree/s <sup>2</sup> ]<br>0 to 2147483647 [pulse/s <sup>2</sup> ] | Set an acceleration for the servo motor to reach the set speed.<br>(Acceleration time [s] = Servo motor speed/Acceleration)   |
| Acceleration time constant                  | 0 to 20000 [ms]  | Set a time period for the servo motor to reach the rated speed.   |
| Deceleration                                | 0 to 2147483.647 [mm/s <sup>2</sup> ]<br>0 to 214748.3647 [inch/s <sup>2</sup> ]<br>0 to 2147483.647 [degree/s <sup>2</sup> ]<br>0 to 2147483647 [pulse/s <sup>2</sup> ] | Set a deceleration for the servo motor to decelerate from the set speed to a stop. (Deceleration time [s] = Servo motor speed/Deceleration)   |
| Deceleration time constant                  | 0 to 20000 [ms]  | Set a time period for the servo motor to decelerate from the set speed to a stop.   |
| Dwell                                       | 0 to 20000 [ms]  | Set a dwell.<br>When the dwell is set, the position command for the next point table will be started after the position command for the selected point table is completed and the set dwell is passed.<br>The dwell is disabled when the auxiliary function is set to 0 or 2.<br>Continuous operation is enabled when the auxiliary function is set to 1, 3, 8, 9, 10, or 11 and the dwell is set to 0.   |
| Auxiliary function                          | 0 to 3, 8 to 11  | Set auxiliary function.<br>(1) When using the point table with the absolute position command method<br>0: Automatic operation for a selected point table is performed.<br>1: Automatic operation is performed to the next point table.<br>8: Automatic operation for a point table selected at startup is performed.<br>9: Automatic operation of the point table No. 1 is performed.<br>(2) When using the point table with the relative position command method<br>2: Automatic operation for a selected point table is performed.<br>3: Automatic operation is performed to the next point table.<br>10: Automatic operation for a point table selected at startup is performed.<br>11: Automatic operation of the point table No. 1 is performed. |
| M code                                      | 0 to 255   | Set a code to be outputted when the positioning is complete.  |

Notes: 1. Change the unit to mm/inch/degree/pulse with [Pr. PT01].


2. The speed unit is r/min for the rotary servo motors and the direct drive motors, and mm/s for the linear servo motors.

### Example of setting point table data

#### Point table example

| Point table No. | Target position<br>(position data) | Servo motor<br>speed<br>[r/min] | Acceleration<br>time constant<br>[ms] | Deceleration<br>time constant<br>[ms] | Dwell<br>[ms] | Auxiliary<br>function | M code |
|-----------------|------------------------------------|---------------------------------|---------------------------------------|---------------------------------------|---------------|-----------------------|--------|
| 1               | 1000                               | 2000                            | 200                                   | 200                                   | 0             | 1                     | 1      |
| 2               | 2000                               | 1600                            | 100                                   | 100                                   | 0             | 0                     | 2      |
| :               | :                                  | :                               | :                                     | :                                     | :             | :                     | :      |
| 255             | 3000                               | 3000                            | 100                                   | 100                                   | 0             | 2                     | 99     |

#### Operation

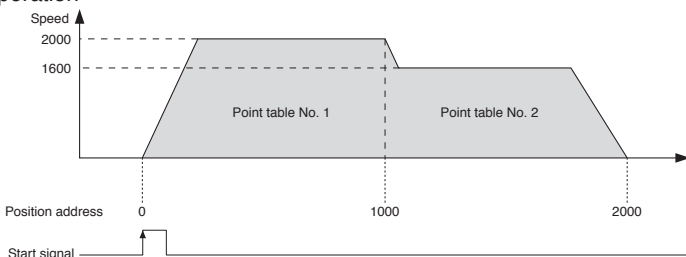



**Restrictions**

**G G-RJ G-HS WG DG**

The restrictions on the communication cycle for the functions in the list are as follows.

**Communication cycle**

● For MR-J5-G(4)/MR-J5-G(4)-RJ/MR-J5-G4-HS/MR-J5W\_-G/MR-J5D\_-G4

| Category           | Function  | Communication cycle (minimum) |  |                          |                       |                        |                        |                        |
|--------------------|---|-------------------------------|--|--------------------------|-----------------------|------------------------|------------------------|------------------------|
|                    |   | MR-J5-G(4)<br>(Note 1, 4)     | MR-J5-G(4)-RJ<br>(Note 1, 4)/<br>MR-J5-G4-HS | MR-J5W2-G<br>(Note 1, 4) | MR-J5W3-G<br>(Note 4) | MR-J5D1-G4<br>(Note 4) | MR-J5D2-G4<br>(Note 4) | MR-J5D3-G4<br>(Note 4) |
| Control mode       | Profile position mode (pp)  | 250 μs                        | 250 μs                                       | 500 μs                   | 500 μs                | 250 μs                 | 500 μs                 | 500 μs                 |
|                    | Profile velocity mode (pv)  | 250 μs                        | 250 μs                                       | -                        | -                     | 250 μs                 | -                      | -                      |
|                    | Profile torque mode (tq)  | 250 μs                        | 250 μs                                       | -                        | -                     | 250 μs                 | -                      | -                      |
|                    | Continuous operation to torque control mode (ct)  | 62.5 μs                       | 62.5 μs                                      | Not restricted           | Not restricted        | 62.5 μs                | Not restricted         | Not restricted         |
|                    | Positioning mode (point table method)   | 250 μs                        | 250 μs                                       | 500 μs                   | 500 μs                | 250 μs                 | 500 μs                 | 500 μs                 |
| Network            | Driver communication function   | 125 μs (Note 3)               | 125 μs (Note 3)                              | -                        | -                     | 125 μs (Note 3)        | -                      | -                      |
| Position detection | Fully closed loop control   | 125 μs                        | 125 μs                                       | 250 μs                   | -                     | 125 μs                 | 250 μs                 | -                      |
|                    | Scale measurement function  | 125 μs                        | 125 μs                                       | 250 μs                   | -                     | 125 μs                 | 250 μs                 | -                      |
| I/O, monitor       | A/B/Z-phase output  | Not restricted                | Not restricted                               | 125 μs                   | 250 μs                | Not restricted         | 125 μs                 | Not restricted         |
|                    | Touch probe function  | 62.5 μs                       | 62.5 μs                                      | 250 μs                   | 250 μs                | 62.5 μs                | 250 μs                 | Not restricted         |
| Functional safety  | Safety sub-function (Note 2)  | -                             | 125 μs                                       | 125 μs                   | Not restricted        | 125 μs                 | 125 μs                 | Not restricted         |
|                    | Safety sub-function (Network connection) (Note 2, 5)  | -                             | 125 μs                                       | 500 μs                   | 500 μs                | 125 μs                 | 500 μs                 | 500 μs                 |
|                    | Safety sub-function (position/speed observation by using a servo motor with functional safety) (Note 2) | -                             | 125 μs                                       | 500 μs                   | 500 μs                | 125 μs                 | 500 μs                 | 500 μs                 |
| Unit               | Command unit selection function (degree unit) (Note 2)  | 250 μs                        | 250 μs                                       | 500 μs                   | 500 μs                | 250 μs                 | 500 μs                 | 500 μs                 |
|                    | Command unit selection function (command unit/s) (Note 2)   | 125 μs                        | 125 μs                                       | 250 μs                   | 250 μs                | 125 μs                 | 250 μs                 | Not restricted         |

● For MR-J5-G(4)-N1/MR-J5-G(4)-RJN1/MR-J5-G4-HSN1/MR-J5W\_-G-N1/MR-J5D\_-G4-N1

| Category          | Function  | Communication cycle (minimum) |                                   |              |              |               |               |               |
|-------------------|---|-------------------------------|-----------------------------------|--------------|--------------|---------------|---------------|---------------|
|                   |   | MR-J5-G(4)-N1                 | MR-J5-G(4)-RJN1/<br>MR-J5-G4-HSN1 | MR-J5W2-G-N1 | MR-J5W3-G-N1 | MR-J5D1-G4-N1 | MR-J5D2-G4-N1 | MR-J5D3-G4-N1 |
| Control mode      | Profile position mode (pp)  | 250 μs                        | 250 μs                            | 500 μs       | 500 μs       | 250 μs        | 500 μs        | 500 μs        |
|                   | Profile velocity mode (pv)  | 250 μs                        | 250 μs                            | -            | -            | 250 μs        | -             | -             |
|                   | Profile torque mode (tq)  | 250 μs                        | 250 μs                            | -            | -            | 250 μs        | -             | -             |
|                   | Positioning mode (point table method)   | 250 μs                        | 250 μs                            | 500 μs       | 500 μs       | 250 μs        | 500 μs        | 500 μs        |
| Functional safety | Safety sub-function (Network connection) (Note 2)   | -                             | 250 μs                            | 500 μs       | 500 μs       | 250 μs        | 500 μs        | 500 μs        |
|                   | Safety sub-function (position/speed observation by using a servo motor with functional safety) (Note 2) | -                             | 250 μs                            | 500 μs       | 500 μs       | 250 μs        | 500 μs        | 500 μs        |
| Unit              | Command unit selection function (degree unit) (Note 2)  | 250 μs                        | 250 μs                            | 500 μs       | 500 μs       | 250 μs        | 500 μs        | 500 μs        |

- Notes: 1. When connecting a servo amplifier with a communication cycle of 31.25 μs and 62.5 μs, use the servo amplifier firmware version A6 or later.  
 2. For details of the function, refer to "MR-J5 User's manual".  
 3. When using the driver communication function, set the network communication cycle to 125 μs or 250 μs.  
 4. When connecting a servo amplifier with a communication cycle of 1.5 ms, 2.5 ms, 3 ms, 3.5 ms, 4.5 ms, 5 ms, 5.5 ms, 6 ms, 6.5 ms, 7 ms, or 7.5 ms, use the servo amplifier firmware version E0 or later.  
 5. When the safety sub-function through the network connection is used, the driver communication function is not available.


Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Servo Amplifiers

## MR-J5-B\_ Connections with Peripheral Equipment (Note 1)

**B B-RJ**

Peripheral equipment is connected to MR-J5-B\_ as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

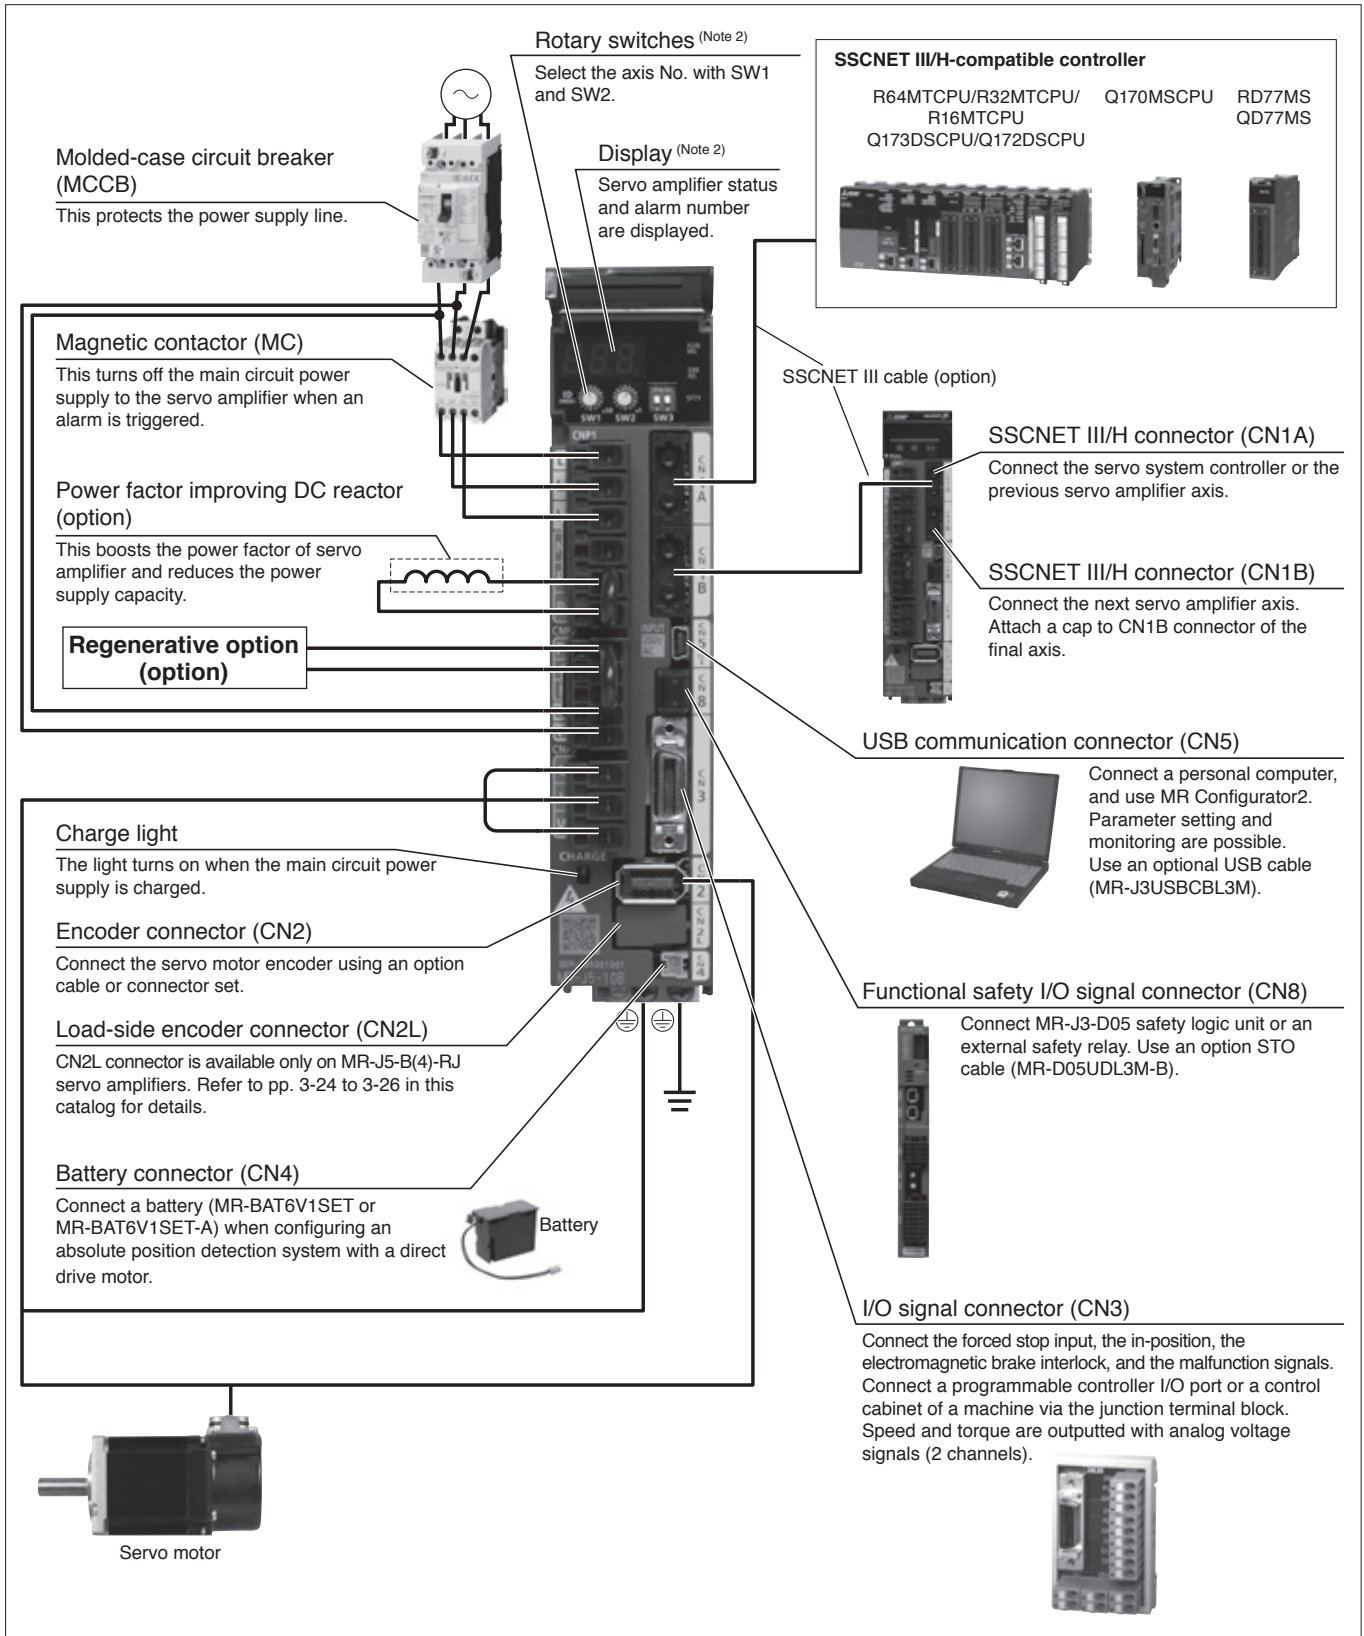

Notes: 1. The connection with the peripheral equipment is an example for MR-J5-350B(4)(-RJ) or smaller servo amplifiers. Refer to "MR-J5 User's Manual" for the actual connections.  
2. This picture shows when the display cover is open.

**MR-J5-B\_ (SSCNET III/H) Specifications (200 V)**

**B B-RJ**

| Servo amplifier model MR-J5-_-(-RJ)  |  | 10B  | 20B  | 40B       | 60B                        | 70B       | 100B  | 200B        | 350B                                | 500B                                      | 700B |
|--|--|--|--|-----------|----------------------------|-----------|---|-------------|-------------------------------------|---|------|
| Output   | Voltage  | 3-phase 0 V AC to 240 V AC   |  |           |                            |           |   |             |                                     |   |      |
|  | Rated current [A]  | 1.3  | 1.8  | 2.8       | 3.2                        | 5.8       | 6.0   | 11.0        | 17.0                                | 28.0                                      | 37.0 |
| Main circuit power supply input  | Voltage/frequency (Note 1)   | AC input   | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |           |                            |           | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz (Note 7) |             |                                     | 3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |      |
|  |  | DC input (Note 8)  | 283 V DC to 340 V DC                                 |           |                            |           |   |             |                                     |   |      |
|  | Rated current (Note 6) [A]   | 0.9 (1.5)  | 1.5 (2.5)  | 2.6 (4.5) | 3.2 (5.0)                  | 3.8 (6.5) | 5.0 (10.5)  | 10.5 (15.8) | 16.0                                | 21.7                                      | 28.9 |
|  | Permissible voltage fluctuation  | AC input   | 3-phase or 1-phase 170 V AC to 264 V AC              |           |                            |           | 3-phase or 1-phase 170 V AC to 264 V AC (Note 7)              |             |                                     | 3-phase 170 V AC to 264 V AC              |      |
|  |  | DC input (Note 8)  | 241 V DC to 374 V DC                                 |           |                            |           |   |             |                                     |   |      |
| Permissible frequency fluctuation  | ±5 % maximum   |  |  |           |                            |           |   |             |                                     |   |      |
| Control circuit power supply input   | Voltage/frequency  | AC input   | 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz            |           |                            |           |   |             |                                     |   |      |
|  |  | DC input (Note 8)  | 283 V DC to 340 V DC                                 |           |                            |           |   |             |                                     |   |      |
|  | Rated current [A]  | 0.2  |  |           |                            |           |   |             |                                     | 0.3                                       |      |
|  | Permissible voltage fluctuation  | AC input   | 1-phase 170 V AC to 264 V AC                         |           |                            |           |   |             |                                     |   |      |
|  |  | DC input (Note 8)  | 241 V DC to 374 V DC                                 |           |                            |           |   |             |                                     |   |      |
| Permissible frequency fluctuation  | ±5 % maximum   |  |  |           |                            |           |   |             |                                     |   |      |
| Power consumption [W]  | 30   |  |  |           |                            |           |   |             |                                     |   |      |
| Interface power supply   | 24 V DC ± 10 % (required current capacity: 0.3 A (including CN8 connector signals))  |  |  |           |                            |           |   |             |                                     |   |      |
| Control method   | Sine-wave PWM control/current control method   |  |  |           |                            |           |   |             |                                     |   |      |
| Permissible regenerative power of the built-in regenerative resistor (Note 2, 3) [W] | -  | 10   |  |           | 30                         |           | 100   |             | 130                                 |   | 170  |
| Dynamic brake (Note 4)   | Built-in   |  |  |           |                            |           |   |             |                                     |   |      |
| SSCNET III/H   | Communication cycle (Note 10)  | 0.222 ms, 0.444 ms, 0.888 ms   |  |           |                            |           |   |             |                                     |   |      |
| Communication function   | USB  | Connect a personal computer (MR Configurator2 compatible)                                  |  |           |                            |           |   |             |                                     |   |      |
| Encoder output pulse   | Compatible (A/B/Z-phase pulse)   |  |  |           |                            |           |   |             |                                     |   |      |
| Analog monitor   | 2 channels   |  |  |           |                            |           |   |             |                                     |   |      |
| Fully closed loop control  | MR-J5-B  | Two-wire type communication method   |  |           |                            |           |   |             |                                     |   |      |
|  | MR-J5-B-RJ   | Two-wire/four-wire type communication method   |  |           |                            |           |   |             |                                     |   |      |
| Load-side encoder interface  | MR-J5-B  | Mitsubishi Electric high-speed serial communication  |  |           |                            |           |   |             |                                     |   |      |
|  | MR-J5-B-RJ   | Mitsubishi Electric high-speed serial communication, A/B/Z-phase differential input signal |  |           |                            |           |   |             |                                     |   |      |
| Servo functions  | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, scale measurement function, super trace control, continuous operation to torque control mode, driver communication function |  |  |           |                            |           |   |             |                                     |   |      |
| Protective functions   | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection  |  |  |           |                            |           |   |             |                                     |   |      |
| Safety sub-function, Safety performance  | Refer to "Safety Sub-Functions" in section 1 of this catalog.  |  |  |           |                            |           |   |             |                                     |   |      |
| Structure (IP rating)  | Natural cooling, open (IP20)   |  |  |           | Force cooling, open (IP20) |           |   |             | Force cooling, open (IP20) (Note 9) |   |      |
| Close mounting   | 3-phase power supply input   | Possible (Note 5)  |  |           |                            |           |   |             |                                     |   |      |
|  | 1-phase power supply input   | Possible (Note 5)  |  |           |                            |           | Not possible  |             | -                                   |   |      |
| Mass [kg]  | 0.8  |  |  | 1.0       | 1.4                        |           | 2.2   |             | 3.7                                 |   | 6.2  |

- Notes:
- Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.
  - Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.
  - Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.
  - When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
  - When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifiers at 75 % or less of the effective load ratio.
  - The values in brackets are the rated current for the 1-phase power supply input.
  - When the servo amplifier is used with a 1-phase power supply and combined with a servo motor of over 750 W, use the servo amplifiers at 75 % or less of the effective load ratio.
  - For a connection example of power supply circuit with DC input, refer to "MR-J5 User's Manual".
  - The connector part is excluded.
  - The communication cycle depends on the controller specifications and the number of axes connected.

# Servo Amplifiers

## MR-J5-B\_ (SSCNET III/H) Specifications (400 V)


**B** **B-RJ**

| Servo amplifier model MR-J5_(-RJ)  |  | 60B4   | 100B4 | 200B4 | 350B4                      | 500B4 | 700B4 |
|--|--|--|-------|-------|----------------------------|-------|-------|
| Output   | Voltage                                  | 3-phase 0 V AC to 480 V AC   |       |       |                            |       |       |
|  | Rated current [A]                        | 1.6  | 2.8   | 5.5   | 8.6                        | 14    | 17    |
| Main circuit power supply input  | Voltage/frequency (Note 1) AC input      | 3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz  |       |       |                            |       |       |
|  | Rated current [A]                        | 1.4  | 2.5   | 5.1   | 7.9                        | 10.8  | 14.4  |
|  | Permissible voltage fluctuation AC input | 3-phase 323 V AC to 528 V AC   |       |       |                            |       |       |
|  | Permissible frequency fluctuation        | ±5 % maximum   |       |       |                            |       |       |
| Control circuit power supply input   | Voltage/frequency AC input               | 1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz  |       |       |                            |       |       |
|  | Rated current [A]                        | 0.1  |       |       |                            | 0.2   |       |
|  | Permissible voltage fluctuation AC input | 1-phase 323 V AC to 528 V AC   |       |       |                            |       |       |
|  | Permissible frequency fluctuation        | ±5 % maximum   |       |       |                            |       |       |
|  | Power consumption [W]                    | 30   |       |       |                            | 45    |       |
| Interface power supply   |  | 24 V DC ± 10 % (required current capacity: 0.3 A (including CN8 connector signals))  |       |       |                            |       |       |
| Control method   |  | Sine-wave PWM control/current control method   |       |       |                            |       |       |
| Permissible regenerative power of the built-in regenerative resistor (Note 2, 3) [W] |  | 15   | 15    | 100   | 120                        | 130   | 170   |
| Dynamic brake (Note 4)   |  | Built-in   |       |       |                            |       |       |
| SSCNET III/H   | Communication cycle (Note 5)             | 0.222 ms, 0.444 ms, 0.888 ms   |       |       |                            |       |       |
| Communication function   | USB                                      | Connect a personal computer (MR Configurator2 compatible)  |       |       |                            |       |       |
| Encoder output pulse   |  | Compatible (A/B/Z-phase pulse)   |       |       |                            |       |       |
| Analog monitor   |  | 2 channels   |       |       |                            |       |       |
| Fully closed loop control  | MR-J5-B4                                 | Two-wire type communication method   |       |       |                            |       |       |
|  | MR-J5-B4-RJ                              | Two-wire/four-wire type communication method   |       |       |                            |       |       |
| Load-side encoder interface  | MR-J5-B4                                 | Mitsubishi Electric high-speed serial communication  |       |       |                            |       |       |
|  | MR-J5-B4-RJ                              | Mitsubishi Electric high-speed serial communication, A/B/Z-phase differential input signal   |       |       |                            |       |       |
| Servo functions  |  | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, scale measurement function, super trace control, continuous operation to torque control mode, driver communication function |       |       |                            |       |       |
| Protective functions   |  | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection  |       |       |                            |       |       |
| Safety sub-function, Safety performance  |  | Refer to "Safety Sub-Functions" in section 1 of this catalog.  |       |       |                            |       |       |
| Structure (IP rating)  |  | Natural cooling, open (IP20)   |       |       | Force cooling, open (IP20) |       |       |
| Close mounting   |  | Not possible   |       |       |                            |       |       |
| Mass [kg]  |  | 1.6  | 2.2   | 2.3   | 5.2                        | 5.4   |       |

- Notes:
1. Rated output and speed of a rotary servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.
  2. Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.
  3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.
  4. When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio.
  5. The communication cycle depends on the controller specifications and the number of axes connected.

MR-J5-B\_Standard Wiring Diagram Example

B B-RJ

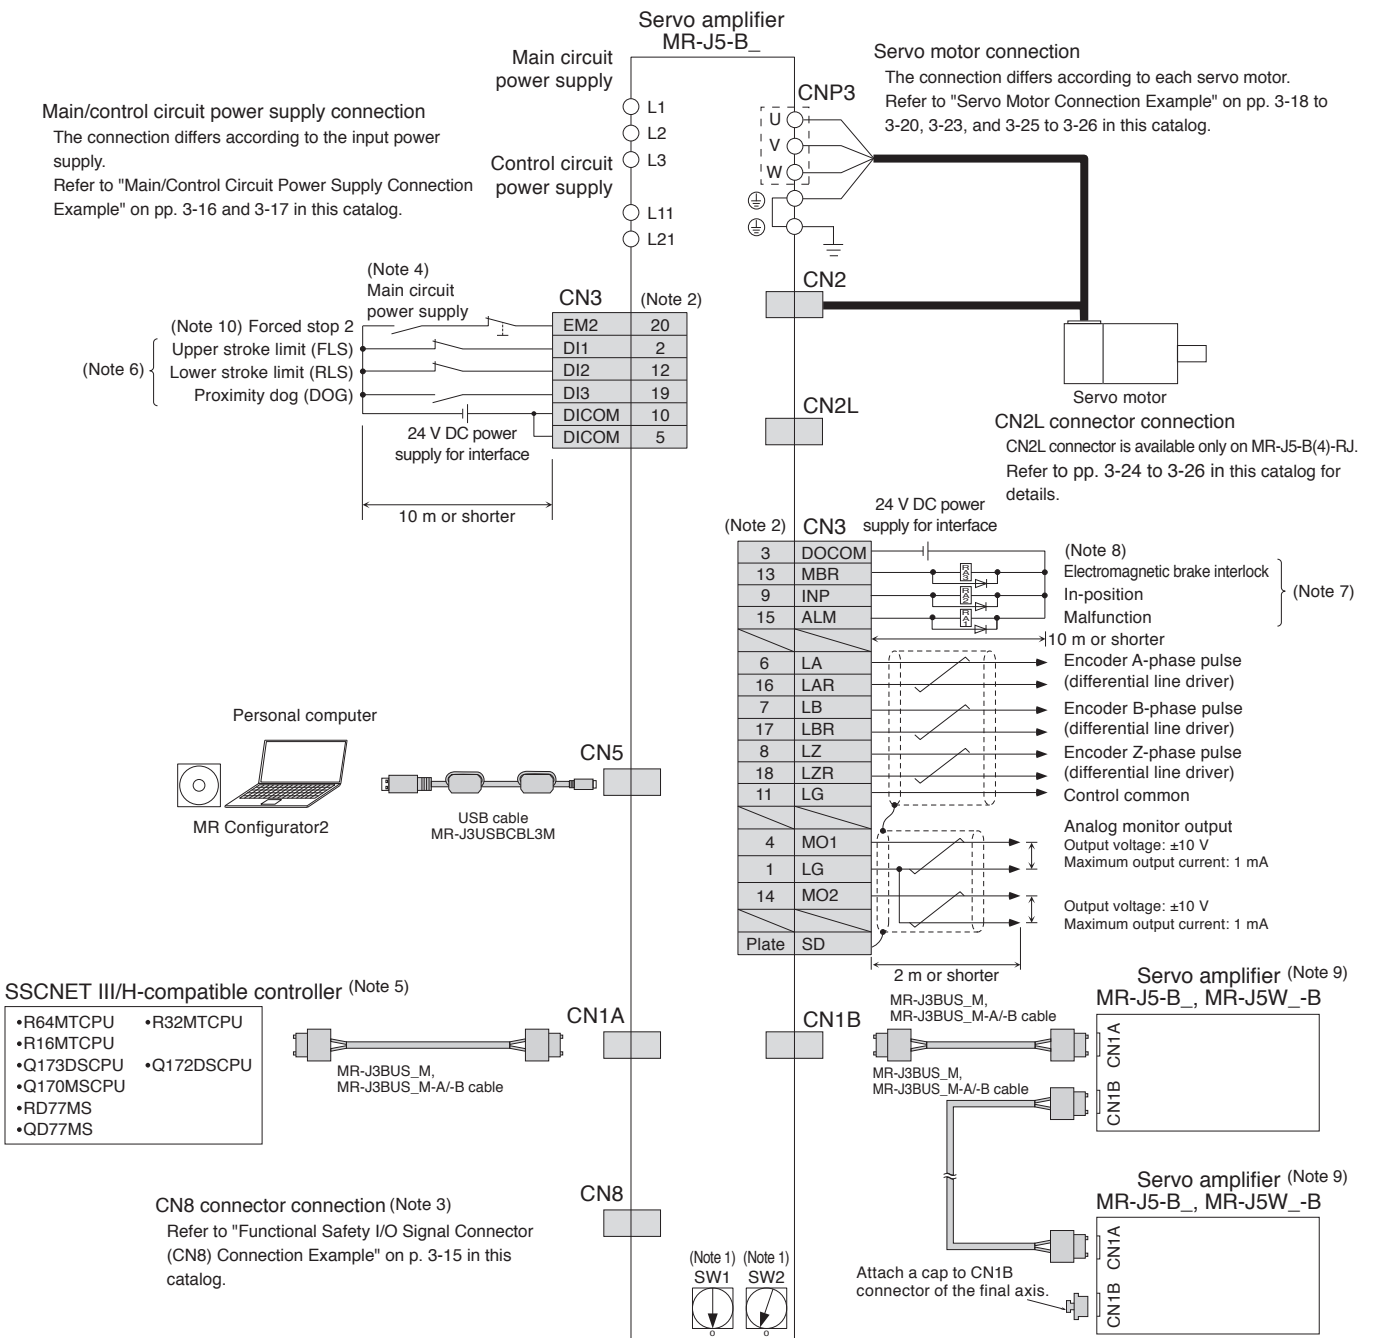

- Notes:
- Up to 64 axes can be set with a combination of rotary switches (SW1 and SW2). Note that the number of the connectable axes depends on the controller specifications.
  - This is for sink wiring. Source wiring is also possible.
  - Attach a short-circuit connector supplied with the servo amplifier when the functional safety (STO function) is not used.
  - To prevent an unexpected restart of the servo amplifier, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  - For details such as the servo system controller settings, refer to the controller manuals.
  - Devices can be assigned to DI1, DI2 and DI3 with servo system controller setting. Refer to the controller manuals for details on setting.
  - Devices for these pins can be changed with [Pr. PD07], [Pr. PD08], and [Pr. PD09].
  - When using a linear servo motor or direct drive motor, use MBR (Electromagnetic brake interlock) for an external brake mechanism.
  - Connections for the second and following axes are omitted.
  - The forced stop signal is issued for the servo amplifier. For overall system, apply the emergency stop on the controller side.


**!** Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

# Servo Amplifiers

## MR-J5-B\_ Dimensions


**B**   **B-RJ**

- MR-J5-10B, MR-J5-10B-RJ
- MR-J5-20B, MR-J5-20B-RJ
- MR-J5-40B, MR-J5-40B-RJ

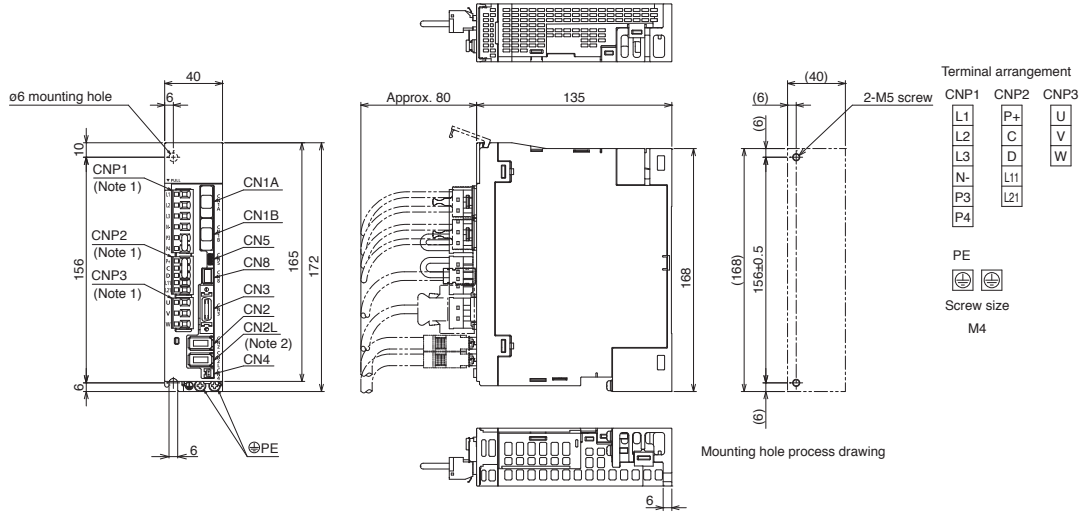

[Unit: mm]

- MR-J5-60B, MR-J5-60B-RJ

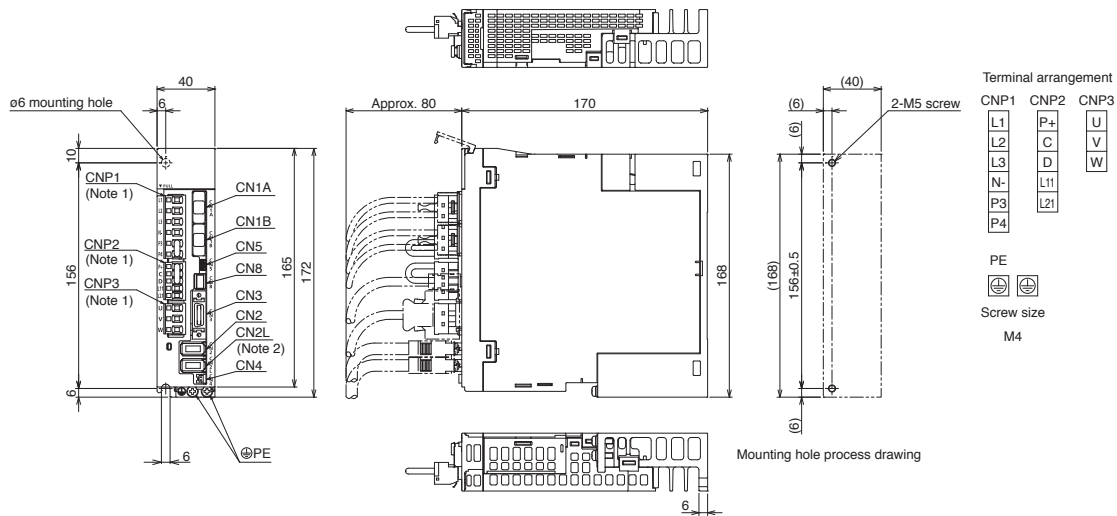


[Unit: mm]

- Notes: 1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.  
 2. CN2L connector is not available for MR-J5-B servo amplifiers.


## MR-J5-B\_Dimensions

- MR-J5-70B, MR-J5-70B-RJ
- MR-J5-100B, MR-J5-100B-RJ

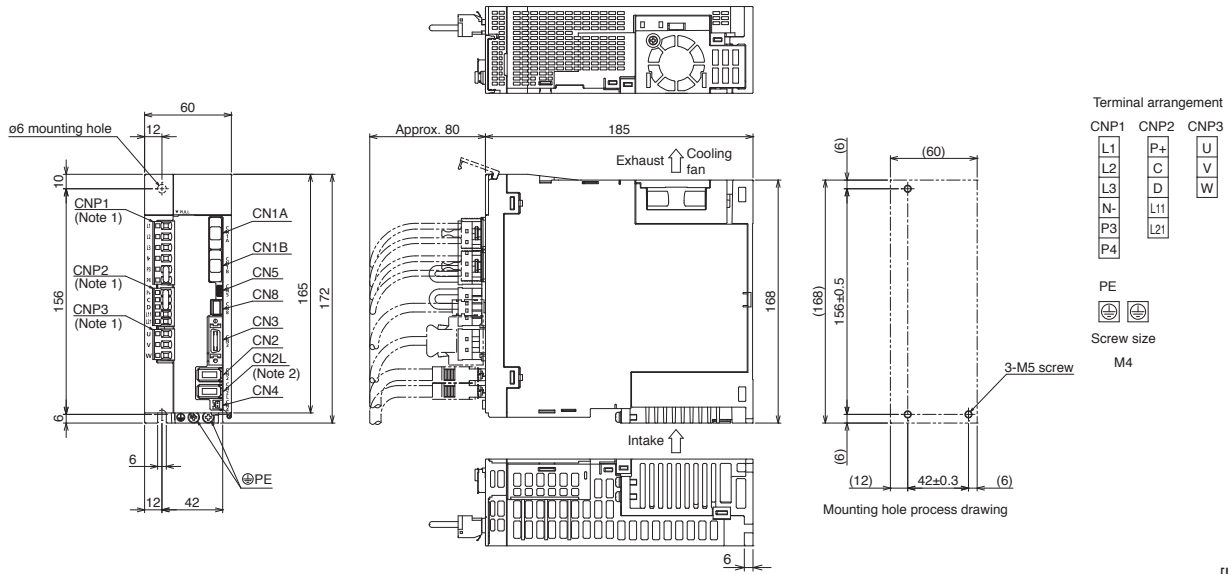

[Unit: mm]

- MR-J5-200B, MR-J5-200B-RJ (Note 3)
- MR-J5-350B, MR-J5-350B-RJ (Note 3)

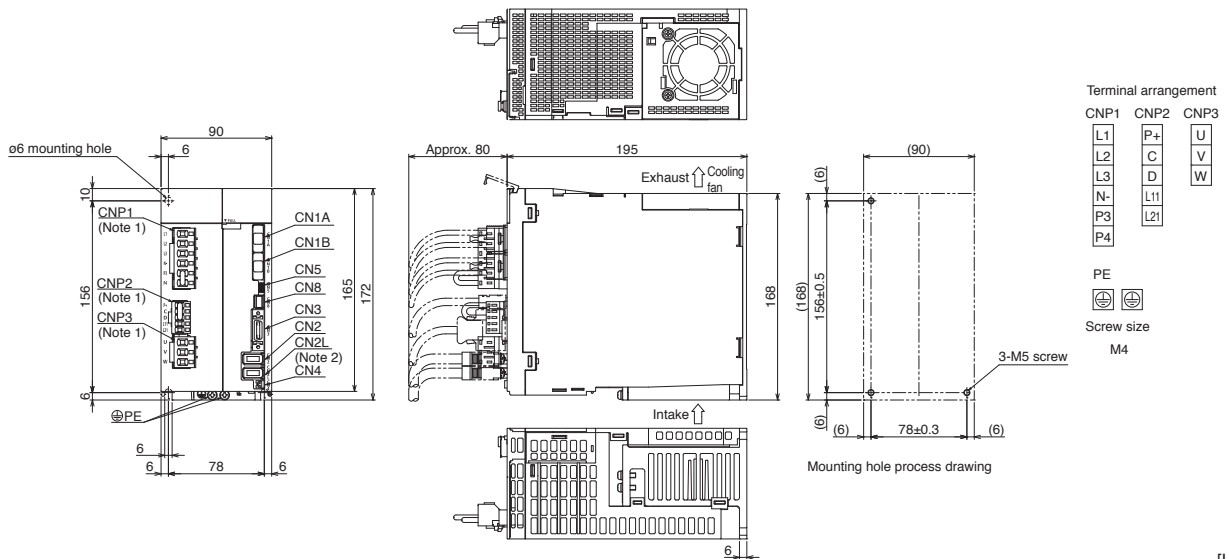

[Unit: mm]


- Notes:
1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.
  2. CN2L connector is not available for MR-J5-B servo amplifiers.
  3. For the servo amplifiers manufactured in August 2022 or later, the fan unit is mounted with two screws. Refer to "Mitsubishi Electric AC Servo System Sales and Service No. 22-02E" for details.

# Servo Amplifiers

## MR-J5-B\_ Dimensions


**B** **B-RJ**

### ●MR-J5-500B, MR-J5-500B-RJ

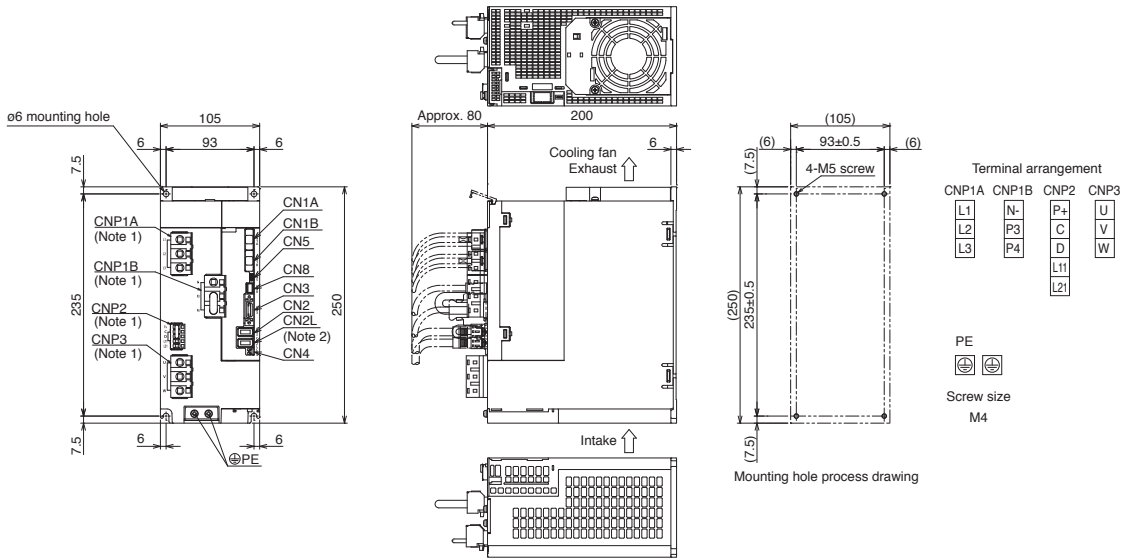

[Unit: mm]

### ●MR-J5-700B, MR-J5-700B-RJ

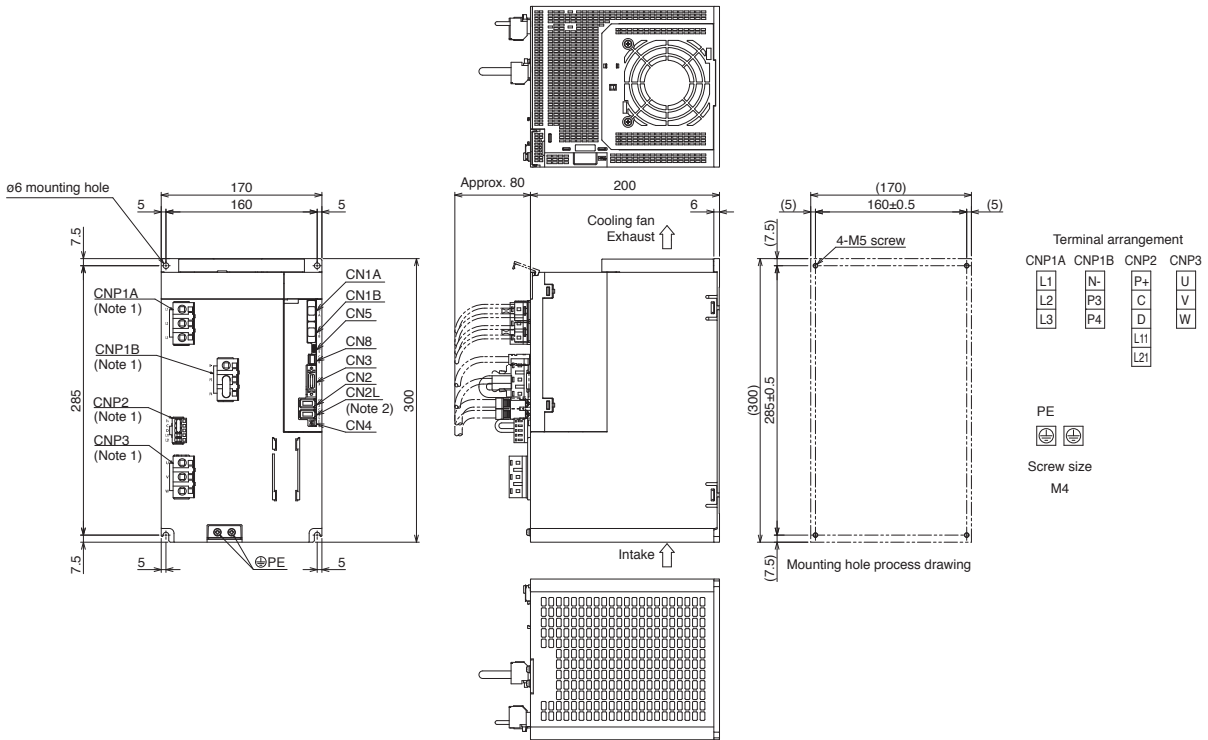

[Unit: mm]


- Notes: 1. CNP1A, CNP1B, CNP2, and CNP3 connectors are supplied with the servo amplifier.  
2. CN2L connector is not available for MR-J5-B servo amplifiers.



MR-J5-B\_Dimensions


- MR-J5-60B4, MR-J5-60B4-RJ
- MR-J5-100B4, MR-J5-100B4-RJ

B B-RJ

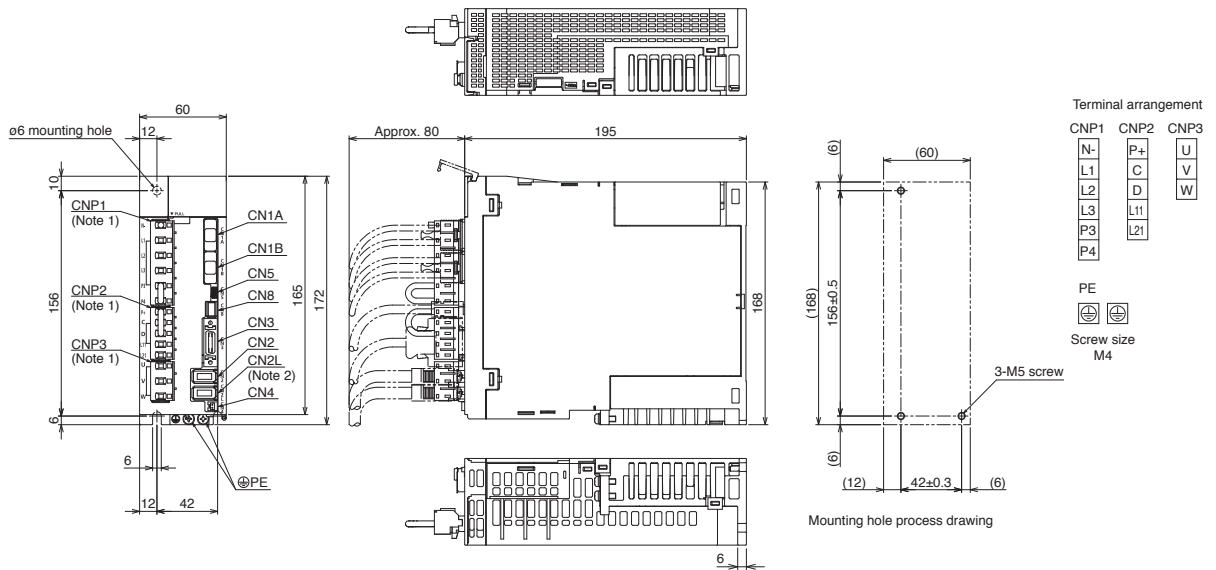

[Unit: mm]

- MR-J5-200B4, MR-J5-200B4-RJ (Note 3)
- MR-J5-350B4, MR-J5-350B4-RJ (Note 3)

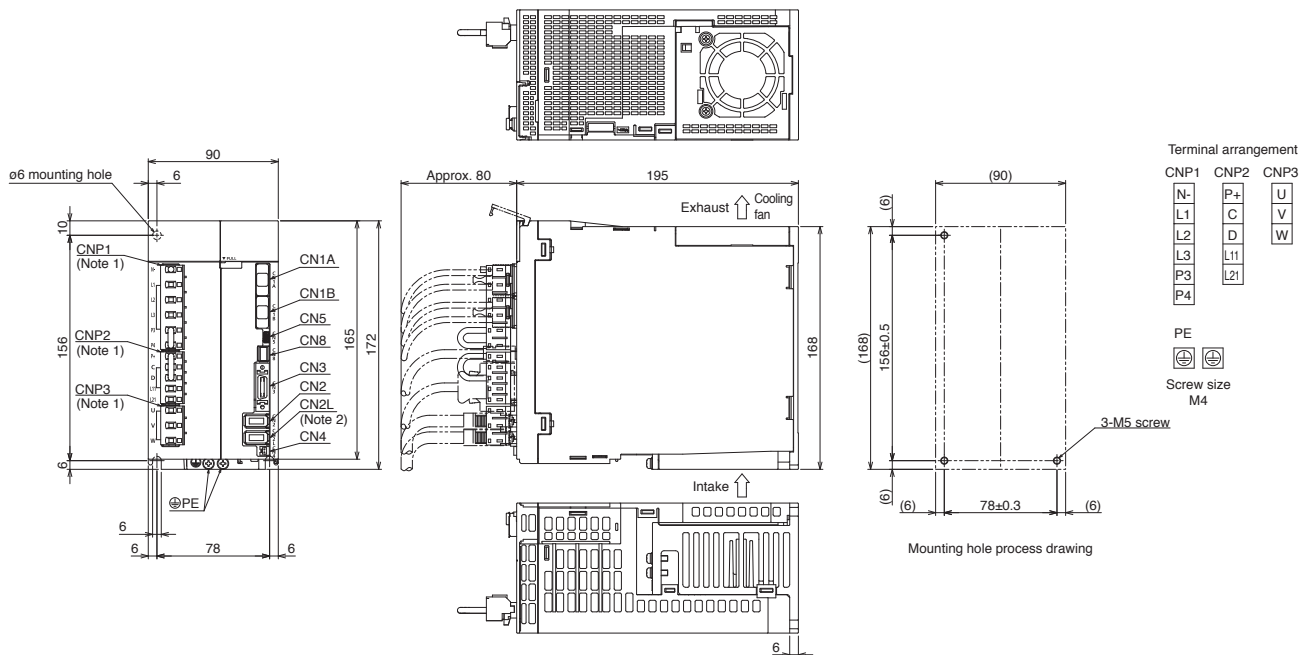

[Unit: mm]


- Notes:
1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.
  2. CN2L connector is not available for MR-J5-B4 servo amplifiers.
  3. For the servo amplifiers manufactured in August 2022 or later, the fan unit is mounted with two screws. Refer to "Mitsubishi Electric AC Servo System Sales and Service No. 22-02E" for details.

# Servo Amplifiers

## MR-J5-B\_ Dimensions

- MR-J5-500B4, MR-J5-500B4-RJ
- MR-J5-700B4, MR-J5-700B4-RJ

**B** **B-RJ**

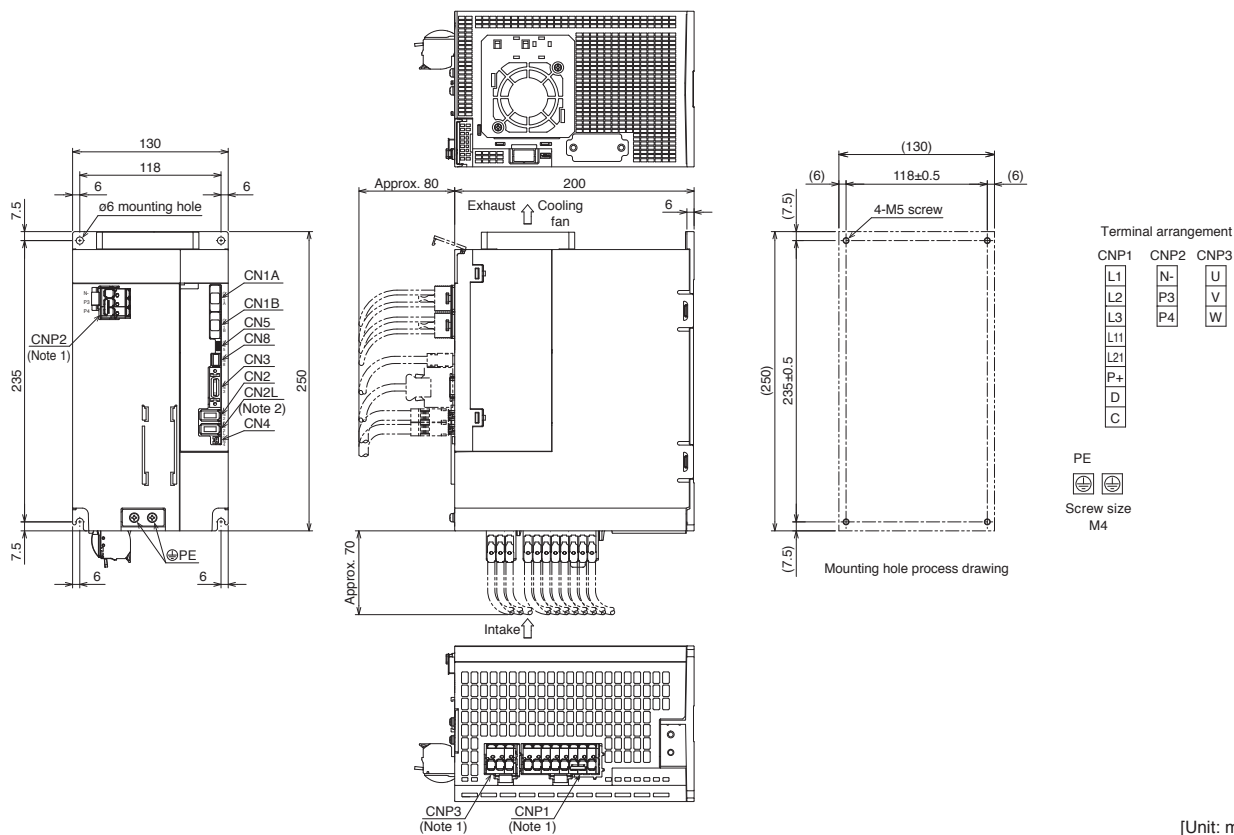


[Unit: mm]

- Notes: 1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.  
 2. CN2L connector is not available for MR-J5-B4 servo amplifiers.

**MR-J5W\_-B Connections with Peripheral Equipment** (Note 1)

Peripheral equipment is connected to MR-J5W\_-B as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

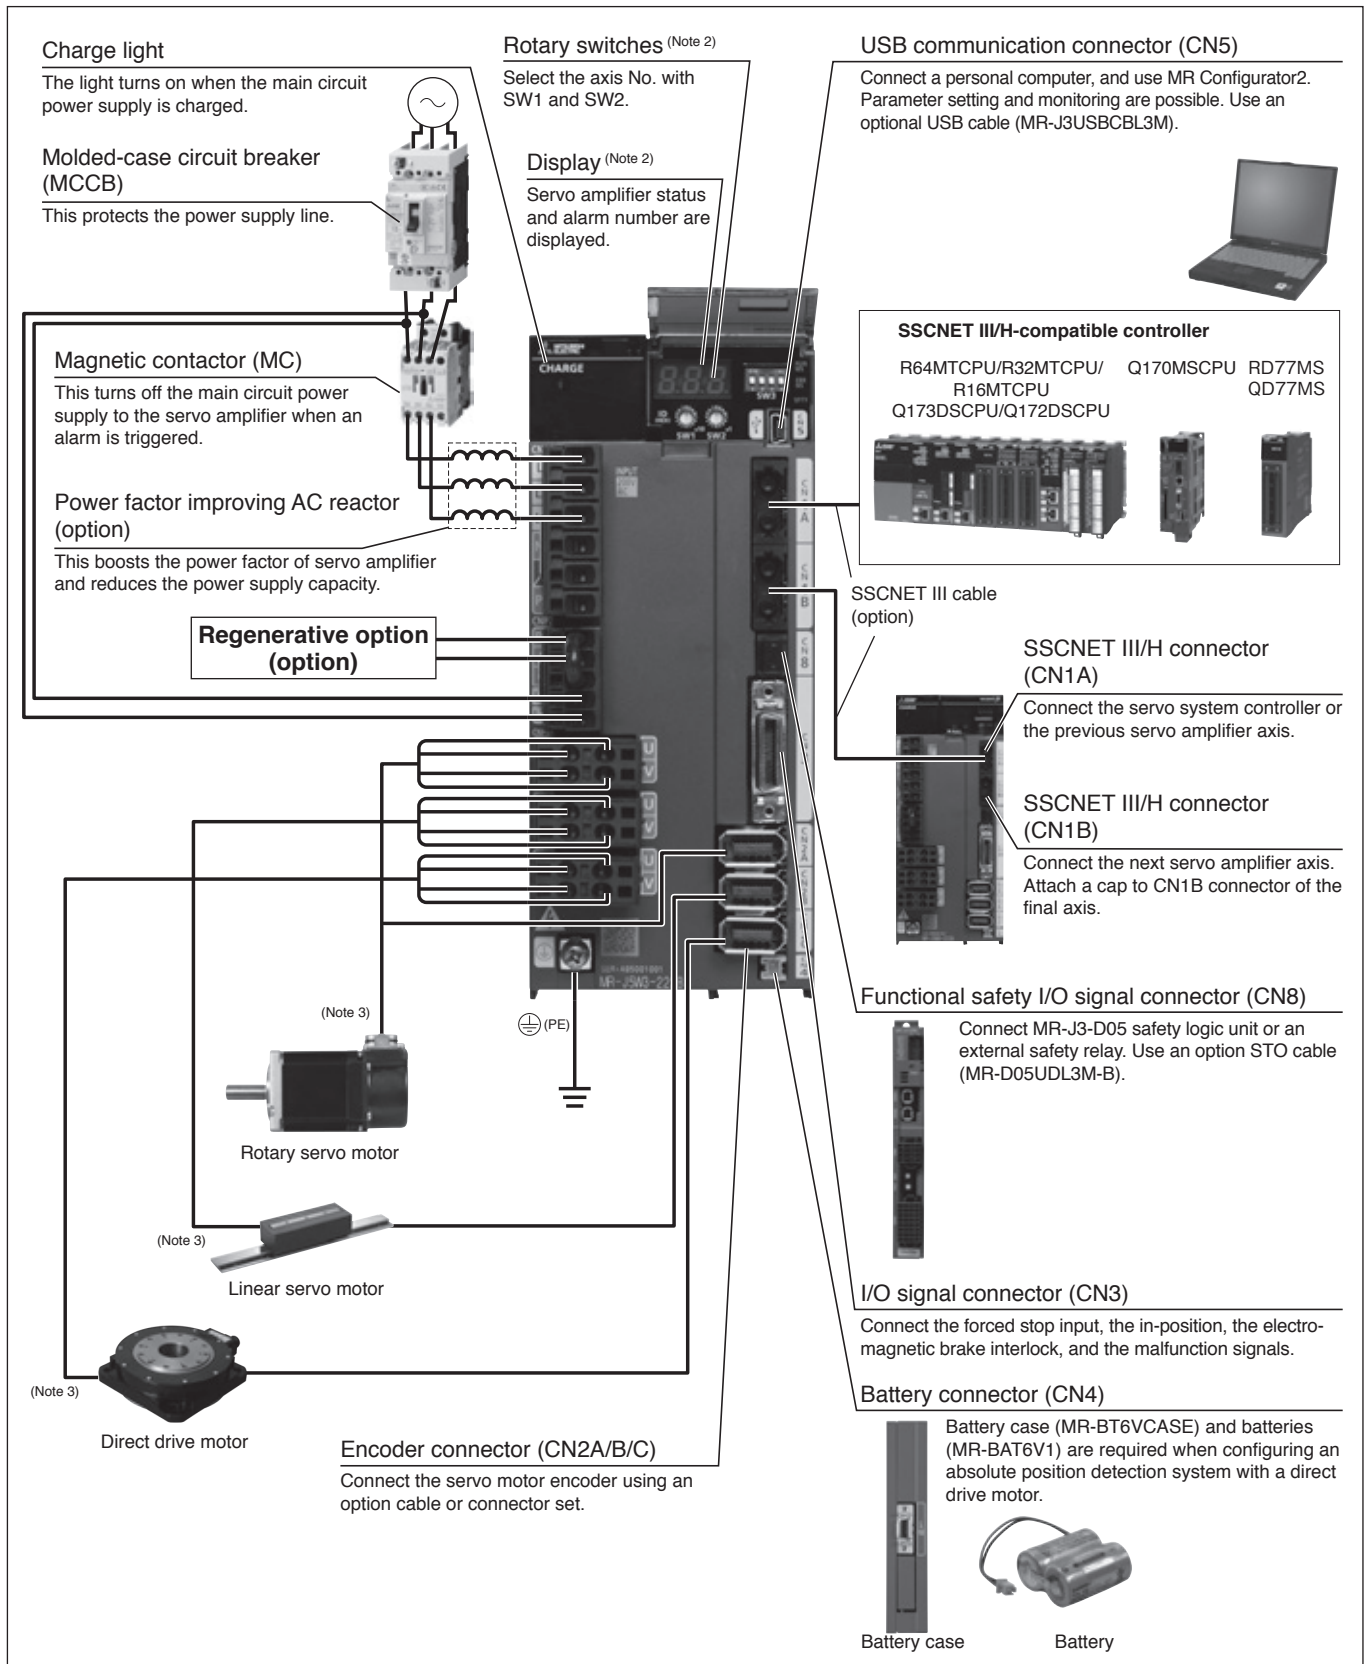

Notes: 1. The connection with the peripheral equipment is an example for MR-J5W3-222B. CNP3C and CN2C connectors are not available on MR-J5W2-B. Refer to "MR-J5 User's Manual" for the actual connections of each multi-axis servo amplifier.  
 2. This picture shows when the display cover is open.  
 3. Connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier for grounding the servo motor.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Servo Amplifiers

## MR-J5W2-B (2-Axis, SSCNET III/H) Specifications

WB

| Servo amplifier model MR-J5W2-__  |   | 22B   | 44B  | 77B           | 1010B |   |
|---|---|---|--|---------------|-------|---|
| Output  | Voltage                                 | 3-phase 0 V AC to 240 V AC  |  |               |       |   |
|   | Rated current (each axis) [A]           | 1.8   | 2.8  | 5.8           | 6.0   |   |
| Main circuit power supply input   | Voltage/frequency <sup>(Note 1)</sup>   | AC input  | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |               |       | 3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |
|   |   | DC input <sup>(Note 8)</sup>  | 283 V DC to 340 V DC                                 |               |       |   |
|   | Rated current <sup>(Note 6)</sup> [A]   | 2.9<br>(5.0)  | 5.2<br>(9.0)   | 7.5<br>(13.0) | 9.8   |   |
|   | Permissible voltage fluctuation         | AC input  | 3-phase or 1-phase 170 V AC to 264 V AC              |               |       | 3-phase 170 V AC to 264 V AC              |
|   |   | DC input <sup>(Note 8)</sup>  | 241 V DC to 374 V DC                                 |               |       |   |
| Permissible frequency fluctuation   |   | ±5 % maximum  |  |               |       |   |
| Control circuit power supply input  | Voltage/frequency                       | AC input  | 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz            |               |       |   |
|   |   | DC input <sup>(Note 8)</sup>  | 283 V DC to 340 V DC                                 |               |       |   |
|   | Rated current [A]                       | 0.4   |  |               |       |   |
|   | Permissible voltage fluctuation         | AC input  | 1-phase 170 V AC to 264 V AC                         |               |       |   |
|   |   | DC input <sup>(Note 8)</sup>  | 241 V DC to 374 V DC                                 |               |       |   |
| Permissible frequency fluctuation   |   | ±5 % maximum  |  |               |       |   |
| Power consumption [W]   |   | 55  |  |               |       |   |
| Interface power supply  |   | 24 V DC ± 10 % (required current capacity: 0.35 A (including CN8 connector signals))  |  |               |       |   |
| Control method  |   | Sine-wave PWM control/current control method  |  |               |       |   |
| Permissible regenerative power of the built-in regenerative resistor <sup>(Note 2, 3)</sup> [W] |   | 20  |  | 100           |       |   |
| Dynamic brake <sup>(Note 4)</sup>   |   | Built-in  |  |               |       |   |
| SSCNET III/H  | Communication cycle <sup>(Note 5)</sup> | 0.222 ms, 0.444 ms, 0.888 ms  |  |               |       |   |
| Communication function  | USB                                     | Connect a personal computer (MR Configurator2 compatible)   |  |               |       |   |
| Encoder output pulse  |   | Compatible (A/B-phase pulse)  |  |               |       |   |
| Analog monitor  |   | Not supported   |  |               |       |   |
| Fully closed loop control   |   | Two-wire type communication method  |  |               |       |   |
| Load-side encoder interface <sup>(Note 9)</sup>   |   | Mitsubishi Electric high-speed serial communication   |  |               |       |   |
| Servo functions   |   | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, scale measurement function, super trace control, continuous operation to torque control mode |  |               |       |   |
| Protective functions  |   | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection         |  |               |       |   |
| Safety sub-function, Safety performance   |   | Refer to "Safety Sub-Functions" in section 1 of this catalog.   |  |               |       |   |
| Structure (IP rating)   |   | Natural cooling, open (IP20)  | Force cooling, open (IP20)                           |               |       |   |
| Close mounting  |   | Possible <sup>(Note 7)</sup>  |  |               |       |   |
| Mass [kg]   |   | 1.5   |  | 1.9           |       |   |

- Notes:
1. Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.
  2. Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.
  3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.
  4. When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
  5. The communication cycle depends on the controller specifications and the number of axes connected.
  6. The values in brackets are the rated current for the 1-phase power supply input.
  7. When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifiers at 75 % or less of the effective load ratio.
  8. For a connection example of power supply circuit with DC input, refer to "MR-J5 User's Manual".
  9. Not compatible with pulse train interface (A/B/Z-phase differential output type).

**MR-J5W3-B (3-Axis, SSCNET III/H) Specifications**

**WB**


|  |                                   |   |  |  |
|--|-----------------------------------|---|--|--|
| Servo amplifier model MR-J5W3-   |                                   | 222B  | 444B   |  |
| Output   | Voltage                           | 3-phase 0 V AC to 240 V AC  |  |  |
|  | Rated current (each axis) [A]     | 1.8   | 2.8  |  |
| Main circuit power supply input  | Voltage/frequency (Note 1)        | AC input  | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |  |
|  |                                   | DC input (Note 8)   | 283 V DC to 340 V DC                                 |  |
|  | Rated current (Note 6) [A]        | 4.3 (7.5)   | 7.8 (13.5)   |  |
|  | Permissible voltage fluctuation   | AC input  | 3-phase or 1-phase 170 V AC to 264 V AC              |  |
|  |                                   | DC input (Note 8)   | 241 V DC to 374 V DC                                 |  |
| Permissible frequency fluctuation  |                                   | ±5 % maximum  |  |  |
| Control circuit power supply input   | Voltage/frequency                 | AC input  | 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz            |  |
|  |                                   | DC input (Note 8)   | 283 V DC to 340 V DC                                 |  |
|  | Rated current [A]                 | 0.4   |  |  |
|  | Permissible voltage fluctuation   | AC input  | 1-phase 170 V AC to 264 V AC                         |  |
|  |                                   | DC input (Note 8)   | 241 V DC to 374 V DC                                 |  |
|  | Permissible frequency fluctuation |   | ±5 % maximum   |  |
| Power consumption [W]  |                                   | 55  |  |  |
| Interface power supply   |                                   | 24 V DC ± 10 % (required current capacity: 0.45 A (including CN8 connector signals))  |  |  |
| Control method   |                                   | Sine-wave PWM control/current control method  |  |  |
| Permissible regenerative power of the built-in regenerative resistor (Note 2, 3) [W] |                                   | 30  |  |  |
| Dynamic brake (Note 4)   |                                   | Built-in  |  |  |
| SSCNET III/H   | Communication cycle (Note 5)      | 0.222 ms, 0.444 ms, 0.888 ms  |  |  |
| Communication function   | USB                               | Connect a personal computer (MR Configurator2 compatible)   |  |  |
| Encoder output pulse   |                                   | Compatible only with A-axis and B-axis (A/B-phase pulse)  |  |  |
| Analog monitor   |                                   | Not supported   |  |  |
| Fully closed loop control  |                                   | Not available   |  |  |
| Servo functions  |                                   | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, super trace control, continuous operation to torque control mode                     |  |  |
| Protective functions   |                                   | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection |  |  |
| Safety sub-function, Safety performance  |                                   | Refer to "Safety Sub-Functions" in section 1 of this catalog.   |  |  |
| Structure (IP rating)  |                                   | Force cooling, open (IP20)  |  |  |
| Close mounting   |                                   | Possible (Note 7)   |  |  |
| Mass [kg]  |                                   | 1.8   |  |  |

- Notes: 1. Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.  
 2. Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.  
 3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.  
 4. When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.  
 5. The communication cycle depends on the controller specifications and the number of axes connected.  
 6. The values in brackets are the rated current for the 1-phase power supply input.  
 7. When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifiers at 75 % or less of the effective load ratio.  
 8. For a connection example of power supply circuit with DC input, refer to "MR-J5 User's Manual".

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

## MR-J5W2-B Standard Wiring Diagram Example

WB

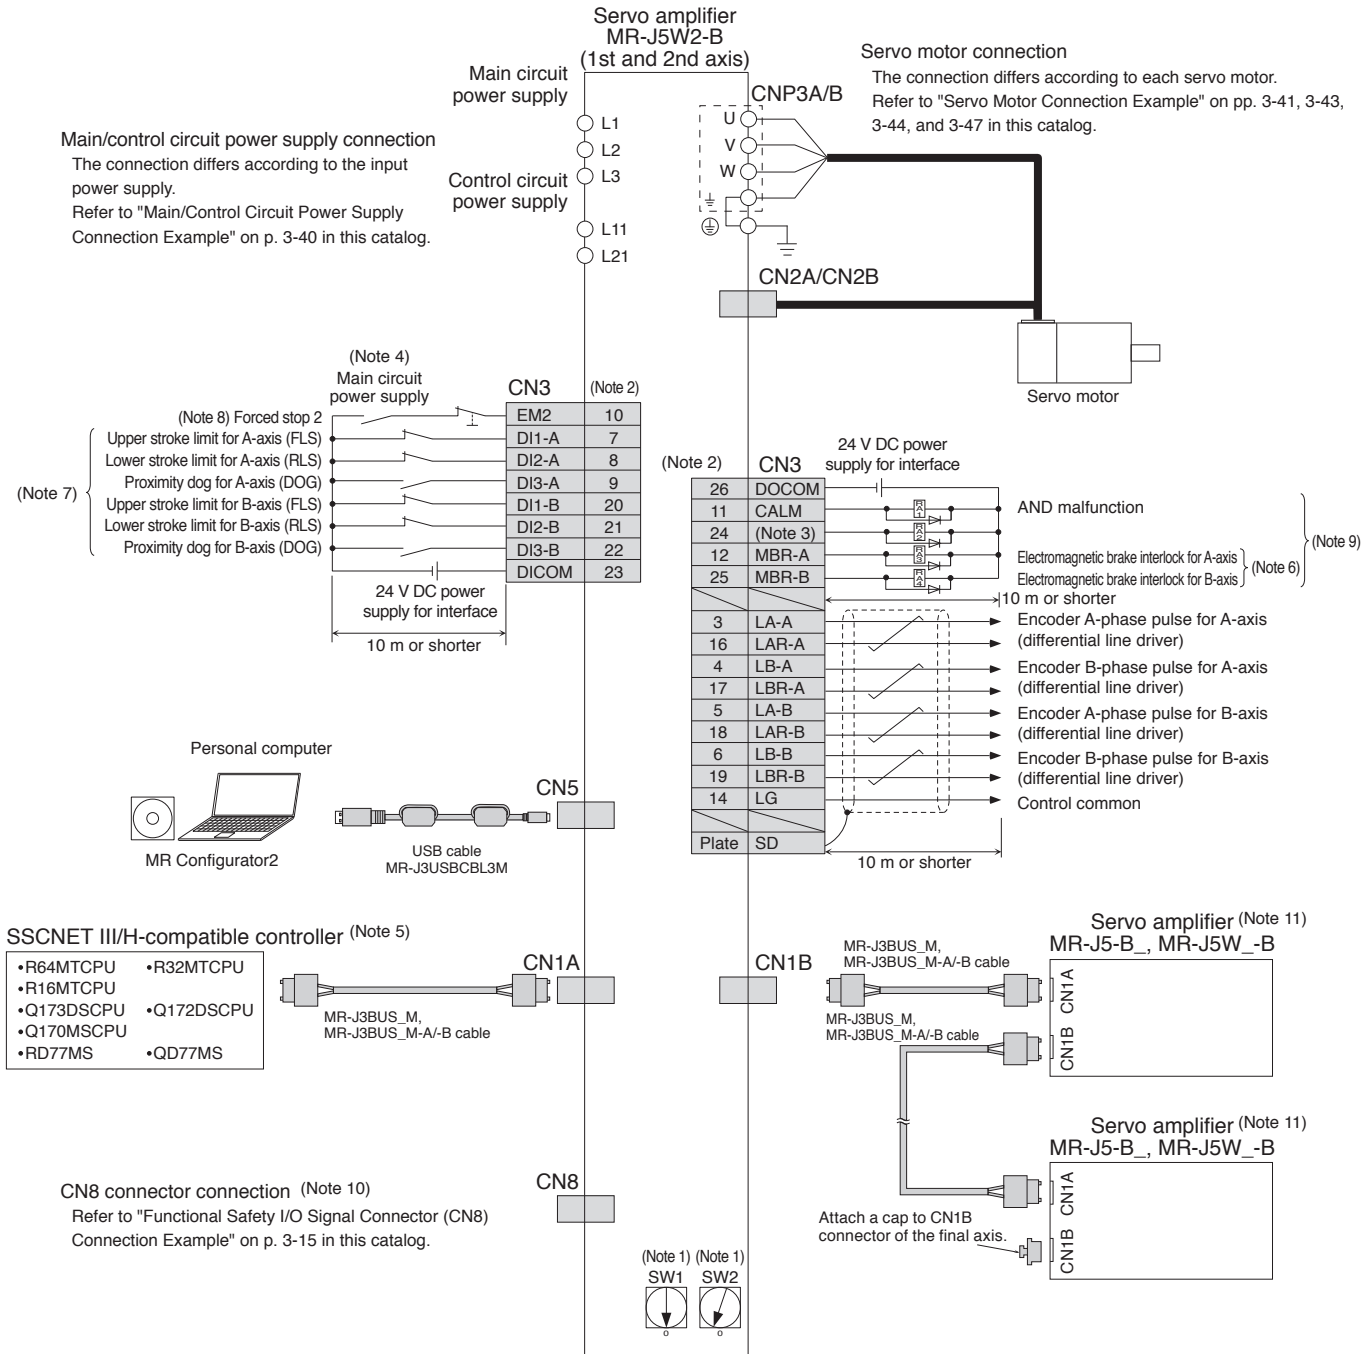

- Notes:
- Up to 64 axes can be set with a combination of rotary switches (SW1 and SW2). Note that the number of the connectable axes depends on the controller specifications.
  - This is for sink wiring. Source wiring is also possible.
  - CINP (AND in-position) is assigned to this pin as default. A device for this pin can be changed with [Pr. PD08].
  - To prevent an unexpected restart of the servo amplifier, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  - For details such as the servo system controller settings, refer to the controller manuals.
  - When using a linear servo motor or direct drive motor, use MBR (Electromagnetic brake interlock) for an external brake mechanism.
  - Devices can be assigned to these signals with the controller setting. Refer to the controller manuals for details on setting.
  - The forced stop signal is issued for two axes of the servo amplifier. For overall system, apply the emergency stop on the controller side.
  - Devices for these pins can be changed with [Pr. PD07] and [Pr. PD09].
  - Attach a short-circuit connector supplied with the servo amplifier when the functional safety (STO function) is not used.
  - Connections for the third and following axes are omitted.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

MR-J5W3-B Standard Wiring Diagram Example

WB

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

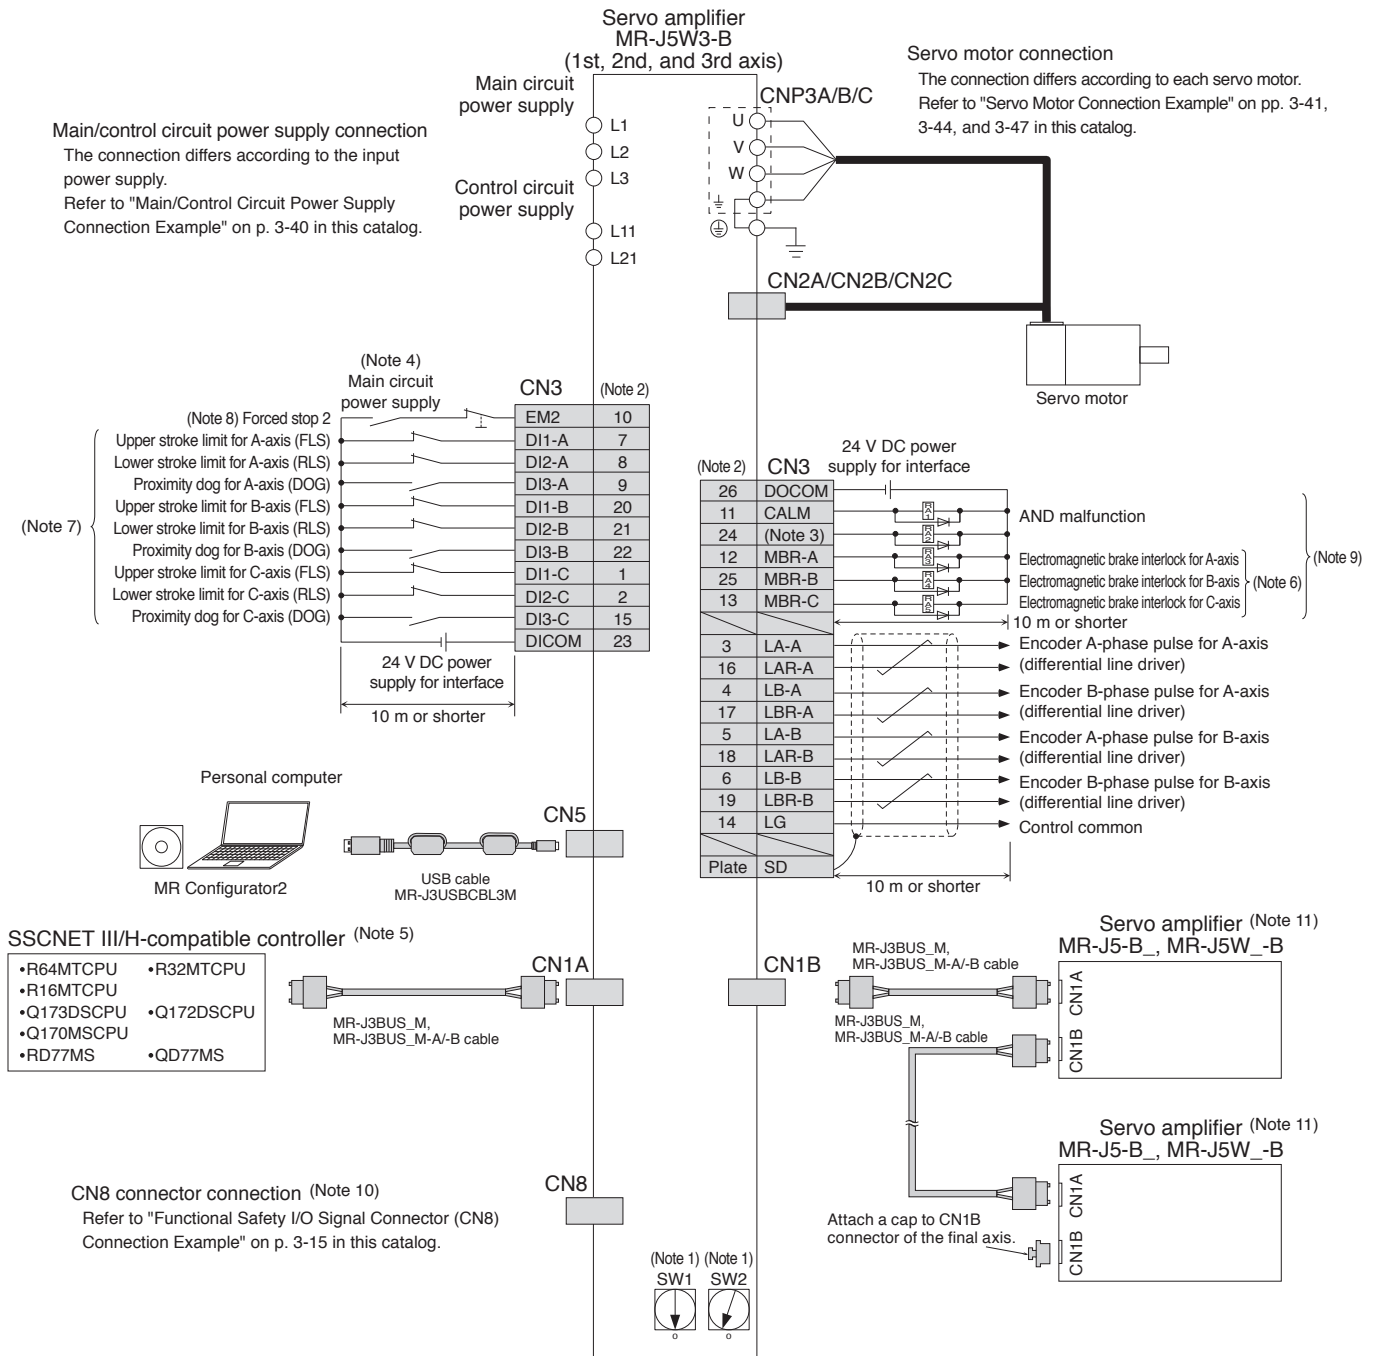

- Notes: 1. Up to 64 axes can be set with a combination of rotary switches (SW1 and SW2). Note that the number of the connectable axes depends on the controller specifications.  
 2. This is for sink wiring. Source wiring is also possible.  
 3. CINP (AND in-position) is assigned to this pin as default. A device for this pin can be changed with [Pr. PD08].  
 4. To prevent an unexpected restart of the servo amplifier, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.  
 5. For details such as the servo system controller settings, refer to the controller manuals.  
 6. When using a linear servo motor or direct drive motor, use MBR (Electromagnetic brake interlock) for an external brake mechanism.  
 7. Devices can be assigned to these signals with the controller setting. Refer to the controller manuals for details on setting.  
 8. The forced stop signal is issued for three axes of the servo amplifier. For overall system, apply the emergency stop on the controller side.  
 9. Devices for these pins can be changed with [Pr. PD07] and [Pr. PD09].  
 10. Attach a short-circuit connector supplied with the servo amplifier when the functional safety (STO function) is not used.  
 11. Connections for the fourth and following axes are omitted.


**!** Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

# Servo Amplifiers

WB


## MR-J5W2-B Dimensions

- MR-J5W2-22B
- MR-J5W2-44B

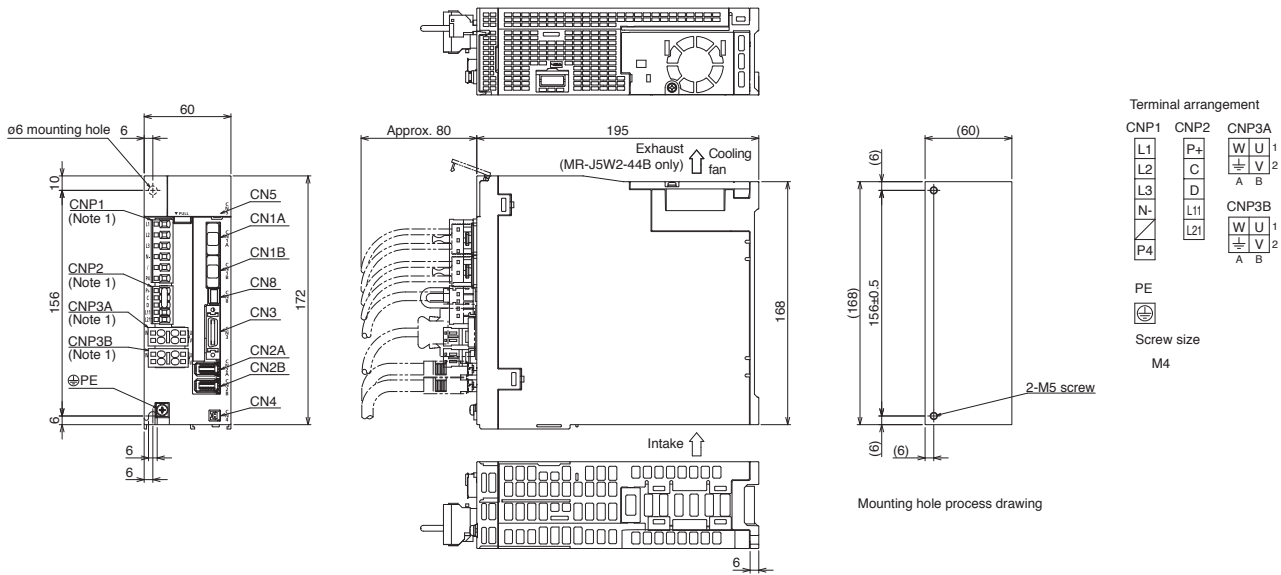

[Unit: mm]

- MR-J5W2-77B
- MR-J5W2-1010B

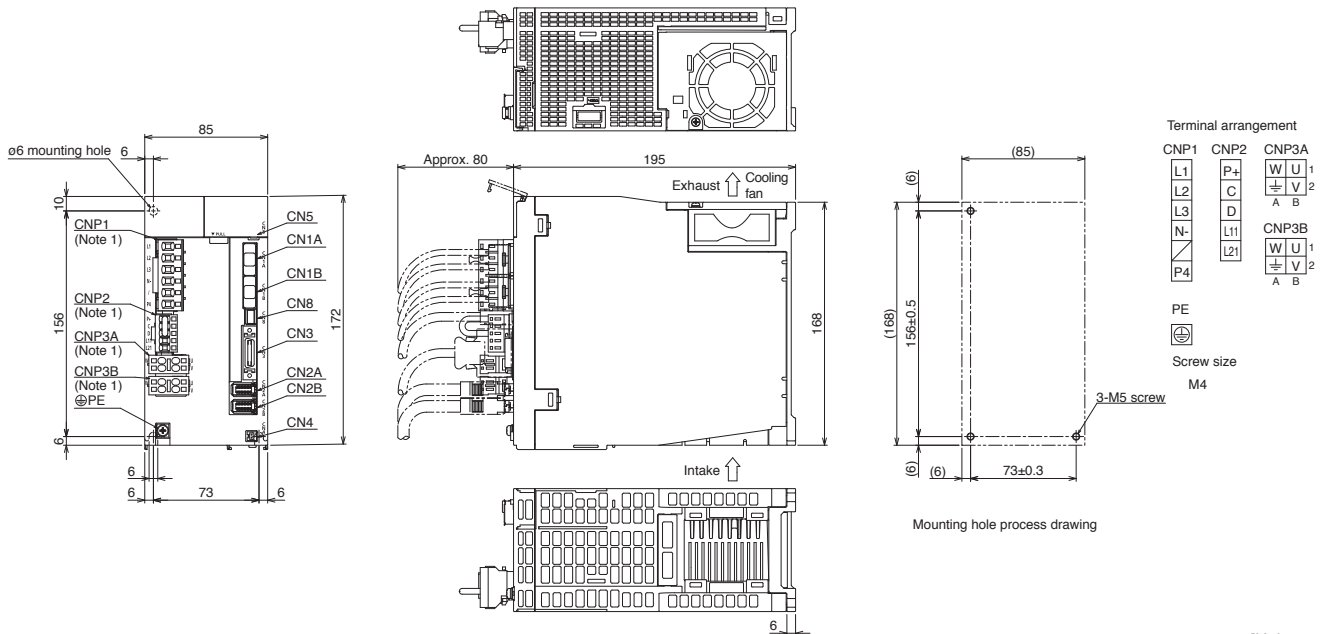


[Unit: mm]

Notes: 1. CNP1, CNP2, CNP3A, and CNP3B connectors are supplied with the servo amplifier.



MR-J5W3-B Dimensions

- MR-J5W3-222B
- MR-J5W3-444B

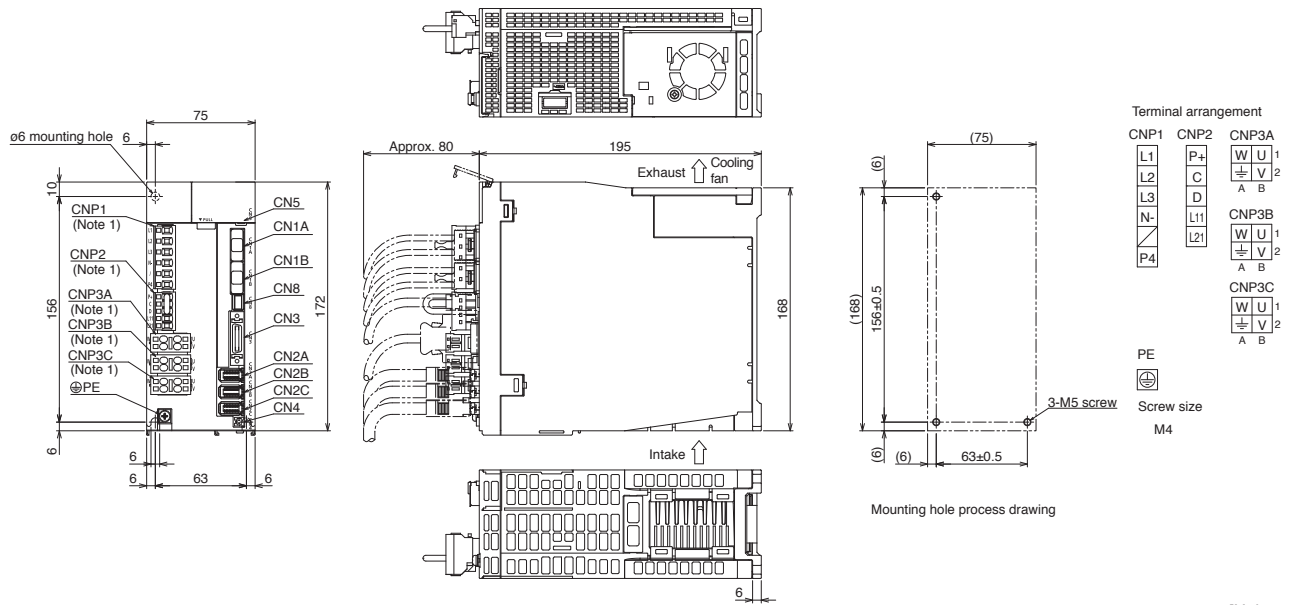

Notes: 1. CNP1, CNP2, CNP3A, CNP3B, and CNP3C connectors are supplied with the servo amplifier.


[Unit: mm]

# Servo Amplifiers

## MR-J5-A\_ Connections with Peripheral Equipment (Note 1)

A A-RJ

Peripheral equipment is connected to MR-J5-A\_ as described below. Connectors, cables, options, and other necessary equipment are available so that users can set up the servo amplifier easily and start using it right away.

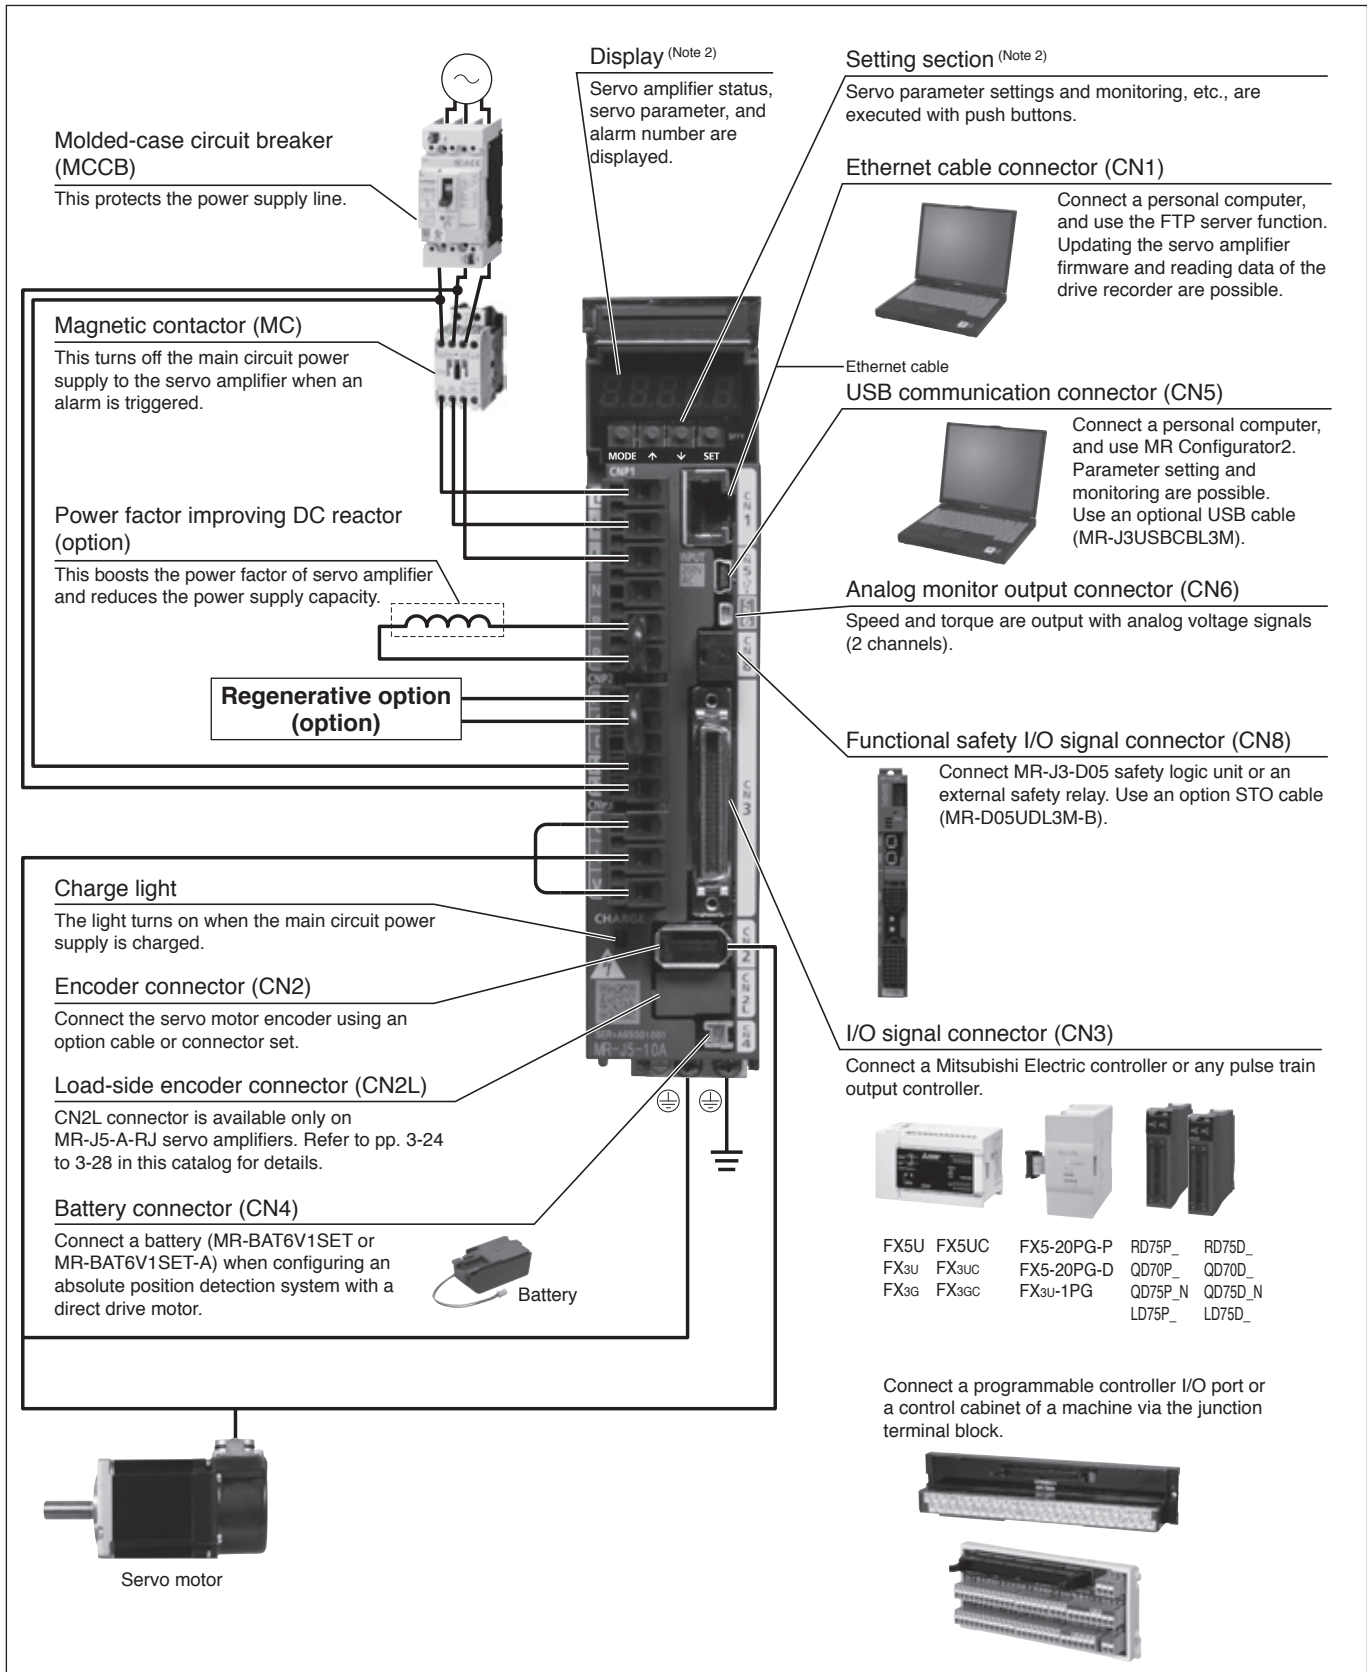

Notes: 1. The connection with the peripheral equipment is an example for MR-J5-350A(4)(-RJ) or smaller servo amplifiers. Refer to "MR-J5 User's Manual" for the actual connections.  
2. This picture shows when the display cover is open.

**MR-J5-A\_ (General-Purpose Interface) Specifications (200 V)**

**A A-RJ**

| Servo amplifier model MR-J5_ (-RJ)   |  | 10A   | 20A  | 40A       | 60A       | 70A       | 100A  | 200A        | 350A                                      | 500A | 700A |     |
|--|--|---|--|-----------|-----------|-----------|---|-------------|---|------|------|-----|
| Output   | Voltage  | 3-phase 0 V AC to 240 V AC  |  |           |           |           |   |             |   |      |      |     |
|  | Rated current [A]  | 1.3   | 1.8  | 2.8       | 3.2       | 5.8       | 6.0   | 11.0        | 17.0                                      | 28.0 | 37.0 |     |
| Main circuit power supply input  | Voltage/frequency (Note 1)   | AC input  | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |           |           |           | 3-phase or 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz (Note 7) |             | 3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz |      |      |     |
|  |  | DC input (Note 8)   | 283 V DC to 340 V DC                                 |           |           |           |   |             |   |      |      |     |
|  | Rated current (Note 6) [A]   | 0.9 (1.5)   | 1.5 (2.5)  | 2.6 (4.5) | 3.2 (5.0) | 3.8 (6.5) | 5.0 (10.5)  | 10.5 (15.8) | 16.0                                      | 21.7 | 28.9 |     |
|  | Permissible voltage fluctuation  | AC input  | 3-phase or 1-phase 170 V AC to 264 V AC              |           |           |           | 3-phase or 1-phase 170 V AC to 264 V AC (Note 7)              |             | 3-phase 170 V AC to 264 V AC              |      |      |     |
|  |  | DC input (Note 8)   | 241 V DC to 374 V DC                                 |           |           |           |   |             |   |      |      |     |
| Permissible frequency fluctuation  | ±5 % maximum   |   |  |           |           |           |   |             |   |      |      |     |
| Control circuit power supply input   | Voltage/frequency  | AC input  | 1-phase 200 V AC to 240 V AC, 50 Hz/60 Hz            |           |           |           |   |             |   |      |      |     |
|  |  | DC input (Note 8)   | 283 V DC to 340 V DC                                 |           |           |           |   |             |   |      |      |     |
|  | Rated current [A]  | 0.2   |  |           |           |           |   |             |   | 0.3  |      |     |
|  | Permissible voltage fluctuation  | AC input  | 1-phase 170 V AC to 264 V AC                         |           |           |           |   |             |   |      |      |     |
|  |  | DC input (Note 8)   | 241 V DC to 374 V DC                                 |           |           |           |   |             |   |      |      |     |
| Permissible frequency fluctuation  | ±5 % maximum   |   |  |           |           |           |   |             |   |      |      |     |
| Power consumption [W]  | 30   |   |  |           |           |           |   |             |   |      |      |     |
| Interface power supply   |  | 24 V DC ± 10 % (required current capacity: 0.5 A (including CN8 connector signals))   |  |           |           |           |   |             |   |      |      |     |
| Control method   |  | Sine-wave PWM control/current control method  |  |           |           |           |   |             |   |      |      |     |
| Permissible regenerative power of the built-in regenerative resistor (Note 2, 3) [W] |  | -   | 10   |           |           | 30        |   | 100         |   | 130  |      | 170 |
| Dynamic brake (Note 4)   |  | Built-in  |  |           |           |           |   |             |   |      |      |     |
| Communication function   | USB  | Connect a personal computer (MR Configurator2 compatible)   |  |           |           |           |   |             |   |      |      |     |
|  | RS-422/RS-485  | 1:n communication (up to 32 axes)   |  |           |           |           |   |             |   |      |      |     |
| Encoder output pulse   |  | Compatible (A/B/Z-phase pulse)  |  |           |           |           |   |             |   |      |      |     |
| Analog monitor   |  | 2 channels  |  |           |           |           |   |             |   |      |      |     |
| Position control mode  | Maximum input pulse frequency  | 4 Mpulses/s (when using differential receiver), 200 kpulses/s (when using open collector)   |  |           |           |           |   |             |   |      |      |     |
|  | Positioning feedback pulse   | Encoder resolution: 26 bits   |  |           |           |           |   |             |   |      |      |     |
|  | Command pulse multiplying factor   | Electronic gear A/B multiple, A: 1 to 2147483647, B: 1 to 2147483647, 1/10 < A/B < 64000  |  |           |           |           |   |             |   |      |      |     |
|  | In-position range setting  | 0 pulse to ±16777215 pulses (command pulse unit)  |  |           |           |           |   |             |   |      |      |     |
|  | Error excessive  | ±3 rotations  |  |           |           |           |   |             |   |      |      |     |
| Torque limit   | Set by servo parameters or external analog input (0 V DC to +10 V DC/maximum torque) |   |  |           |           |           |   |             |   |      |      |     |
| Speed control mode   | Speed control range  | Analog speed command 1:2000, internal speed command 1:5000  |  |           |           |           |   |             |   |      |      |     |
|  | Analog speed command input   | 0 V DC to ±10 V DC/rated speed (Speed at 10 V is changeable with [Pr. PC12].)   |  |           |           |           |   |             |   |      |      |     |
|  | Speed fluctuation rate   | ±0.01 % maximum (load fluctuation: 0 % to 100 %), 0 % (power fluctuation: ±10 %) ±0.2 % maximum (ambient temperature: 25 °C ± 10 °C) only when using analog speed command   |  |           |           |           |   |             |   |      |      |     |
| Torque control mode  | Torque limit   | Set by servo parameters or external analog input (0 V DC to +10 V DC/maximum torque)  |  |           |           |           |   |             |   |      |      |     |
| Fully closed loop control (Note 5)   | MR-J5-A  | Two-wire type communication method  |  |           |           |           |   |             |   |      |      |     |
|  | MR-J5-A-RJ   | Two-wire/four-wire type communication method  |  |           |           |           |   |             |   |      |      |     |
| Load-side encoder interface  | MR-J5-A  | Mitsubishi Electric high-speed serial communication   |  |           |           |           |   |             |   |      |      |     |
|  | MR-J5-A-RJ   | Mitsubishi Electric high-speed serial communication, A/B/Z-phase differential input signal  |  |           |           |           |   |             |   |      |      |     |
| Servo functions  |  | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, super trace control (Note 5)   |  |           |           |           |   |             |   |      |      |     |
| Protective functions   |  | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection |  |           |           |           |   |             |   |      |      |     |
| Safety sub-function, Safety performance  |  | Refer to "Safety Sub-Functions" in section 1 of this catalog.   |  |           |           |           |   |             |   |      |      |     |

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

# Servo Amplifiers

## MR-J5-A\_ (General-Purpose Interface) Specifications (200 V)

A

A-RJ

| Servo amplifier model MR-J5-_-(-RJ) | 10A                          | 20A                           | 40A | 60A | 70A                        | 100A         | 200A | 350A | 500A   | 700A |
|-------------------------------------|------------------------------|-------------------------------|-----|-----|----------------------------|--------------|------|------|--|------|
| Structure (IP rating)               | Natural cooling, open (IP20) |                               |     |     | Force cooling, open (IP20) |              |      |      | Force cooling, open (IP20) <sup>(Note 9)</sup> |      |
| Close mounting                      | 3-phase power supply input   | Possible <sup>(Note 10)</sup> |     |     |                            |              |      |      |  |      |
|                                     | 1-phase power supply input   | Possible <sup>(Note 10)</sup> |     |     |                            | Not possible |      | -    |  |      |
| Mass                                | [kg]                         | 0.8                           |     | 1.0 | 1.4                        |              | 2.2  |      | 3.7  | 6.2  |

- Notes:
1. Rated output and speed of a rotary servo motor and a direct drive motor; and continuous thrust and maximum speed of a linear servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.
  2. Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.
  3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.
  4. When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio and the permissible load to mass ratio.
  5. For the servo amplifier firmware version supporting this function, refer to "MR-J5 User's Manual".
  6. The values in brackets are the rated current for the 1-phase power supply input.
  7. When the servo amplifier is used with a 1-phase power supply and combined with a servo motor of over 750 W, use the servo amplifiers at 75 % or less of the effective load ratio.
  8. For a connection example of power supply circuit with DC input, refer to "MR-J5 User's Manual".
  9. The connector part is excluded.
  10. When the servo amplifiers are closely mounted, keep the ambient temperature within 0 °C to 45 °C, or use the servo amplifiers at 75 % or less of the effective load ratio.

**MR-J5-A\_ (General-Purpose Interface) Specifications (400 V)**

**A A-RJ**

| Servo amplifier model MR-J5-_-(-RJ)  |  | 60A4  | 100A4 | 200A4 | 350A4                      | 500A4 | 700A4 |
|--|--|---|-------|-------|----------------------------|-------|-------|
| Output   | Voltage                                  | 3-phase 0 V AC to 480 V AC  |       |       |                            |       |       |
|  | Rated current [A]                        | 1.6   | 2.8   | 5.5   | 8.6                        | 14    | 17    |
| Main circuit power supply input  | Voltage/frequency (Note 1) AC input      | 3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz   |       |       |                            |       |       |
|  | Rated current [A]                        | 1.4   | 2.5   | 5.1   | 7.9                        | 10.8  | 14.4  |
|  | Permissible voltage fluctuation AC input | 3-phase 323 V AC to 528 V AC  |       |       |                            |       |       |
|  | Permissible frequency fluctuation        | ±5 % maximum  |       |       |                            |       |       |
| Control circuit power supply input   | Voltage/frequency AC input               | 1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz   |       |       |                            |       |       |
|  | Rated current [A]                        | 0.1   |       |       |                            | 0.2   |       |
|  | Permissible voltage fluctuation AC input | 1-phase 323 V AC to 528 V AC  |       |       |                            |       |       |
|  | Permissible frequency fluctuation        | ±5 % maximum  |       |       |                            |       |       |
|  | Power consumption [W]                    | 30  |       |       |                            | 45    |       |
| Interface power supply   |  | 24 V DC ± 10 % (required current capacity: 0.5 A (including CN8 connector signals))   |       |       |                            |       |       |
| Control method   |  | Sine-wave PWM control/current control method  |       |       |                            |       |       |
| Permissible regenerative power of the built-in regenerative resistor (Note 2, 3) [W] |  | 15  | 15    | 100   | 120                        | 130   | 170   |
| Dynamic brake (Note 4)   |  | Built-in  |       |       |                            |       |       |
| Communication function   | USB                                      | Connect a personal computer (MR Configurator2 compatible)   |       |       |                            |       |       |
|  | RS-422/RS-485                            | 1:n communication (up to 32 axes)   |       |       |                            |       |       |
| Encoder output pulse   |  | Compatible (A/B/Z-phase pulse)  |       |       |                            |       |       |
| Analog monitor   |  | 2 channels  |       |       |                            |       |       |
| Position control mode  | Maximum input pulse frequency            | 4 Mpulses/s (when using differential receiver), 200 kpulses/s (when using open collector)   |       |       |                            |       |       |
|  | Positioning feedback pulse               | Encoder resolution: 26 bits   |       |       |                            |       |       |
|  | Command pulse multiplying factor         | Electronic gear A/B multiple, A: 1 to 2147483647, B: 1 to 2147483647, 1/10 < A/B < 64000  |       |       |                            |       |       |
|  | In-position range setting                | 0 pulse to ±16777215 pulses (command pulse unit)  |       |       |                            |       |       |
|  | Error excessive                          | ±3 rotations  |       |       |                            |       |       |
|  | Torque limit                             | Set by servo parameters or external analog input (0 V DC to +10 V DC/maximum torque)  |       |       |                            |       |       |
| Speed control mode   | Speed control range                      | Analog speed command 1:2000, internal speed command 1:5000  |       |       |                            |       |       |
|  | Analog speed command input               | 0 V DC to ±10 V DC/rated speed (Speed at 10 V is changeable with [Pr. PC12].)   |       |       |                            |       |       |
|  | Speed fluctuation rate                   | ±0.01 % maximum (load fluctuation: 0 % to 100 %), 0 % (power fluctuation: ±10 %)<br>±0.2 % maximum (ambient temperature: 25 °C ± 10 °C) only when using analog speed command  |       |       |                            |       |       |
|  | Torque limit                             | Set by servo parameters or external analog input (0 V DC to +10 V DC/maximum torque)  |       |       |                            |       |       |
| Torque control mode  | Analog torque command input              | 0 V DC to ±8 V DC/maximum torque (input impedance: 10 kΩ to 12 kΩ)  |       |       |                            |       |       |
|  | Speed limit                              | Set by servo parameters or external analog input (0 V DC to ± 10 V DC/rated speed)  |       |       |                            |       |       |
| Fully closed loop control  | MR-J5-A4                                 | Two-wire type communication method  |       |       |                            |       |       |
|  | MR-J5-A4-RJ                              | Two-wire/four-wire type communication method  |       |       |                            |       |       |
| Load-side encoder interface  | MR-J5-A4                                 | Mitsubishi Electric high-speed serial communication   |       |       |                            |       |       |
|  | MR-J5-A4-RJ                              | Mitsubishi Electric high-speed serial communication, A/B/Z-phase differential input signal  |       |       |                            |       |       |
| Servo functions  |  | Advanced vibration suppression control II, adaptive filter II, robust filter, quick tuning, auto tuning, one-touch tuning, tough drive function, drive recorder function, machine diagnosis function (including failure prediction), power monitoring function, lost motion compensation function, super trace control  |       |       |                            |       |       |
| Protective functions   |  | Overcurrent shut-off, regenerative overvoltage shut-off, overload shut-off (electronic thermal), servo motor overheat protection, encoder error protection, regenerative error protection, undervoltage protection, instantaneous power failure protection, overspeed protection, error excessive protection, magnetic pole detection protection, linear servo control fault protection |       |       |                            |       |       |
| Safety sub-function, Safety performance  |  | Refer to "Safety Sub-Functions" in section 1 of this catalog.   |       |       |                            |       |       |
| Structure (IP rating)  |  | Natural cooling, open (IP20)  |       |       | Force cooling, open (IP20) |       |       |
| Close mounting   |  | Not possible  |       |       |                            |       |       |
| Mass [kg]  |  | 1.6   | 2.2   | 2.3   | 5.2                        | 5.4   |       |


Notes: 1. Rated output and speed of a rotary servo motor are applicable when the servo amplifier is operated within the specified power supply voltage and frequency.  
 2. Select the most suitable regenerative option for your system with our drive system sizing software Motorizer.  
 3. Refer to "Regenerative Option" in this catalog for the permissible regenerative power [W] when a regenerative option is used.  
 4. When using the dynamic brake, refer to "MR-J5 User's Manual" for the permissible load to motor inertia ratio.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support



MR-J5-A\_ Standard Wiring Diagram Example: Speed Control Operation

A A-RJ

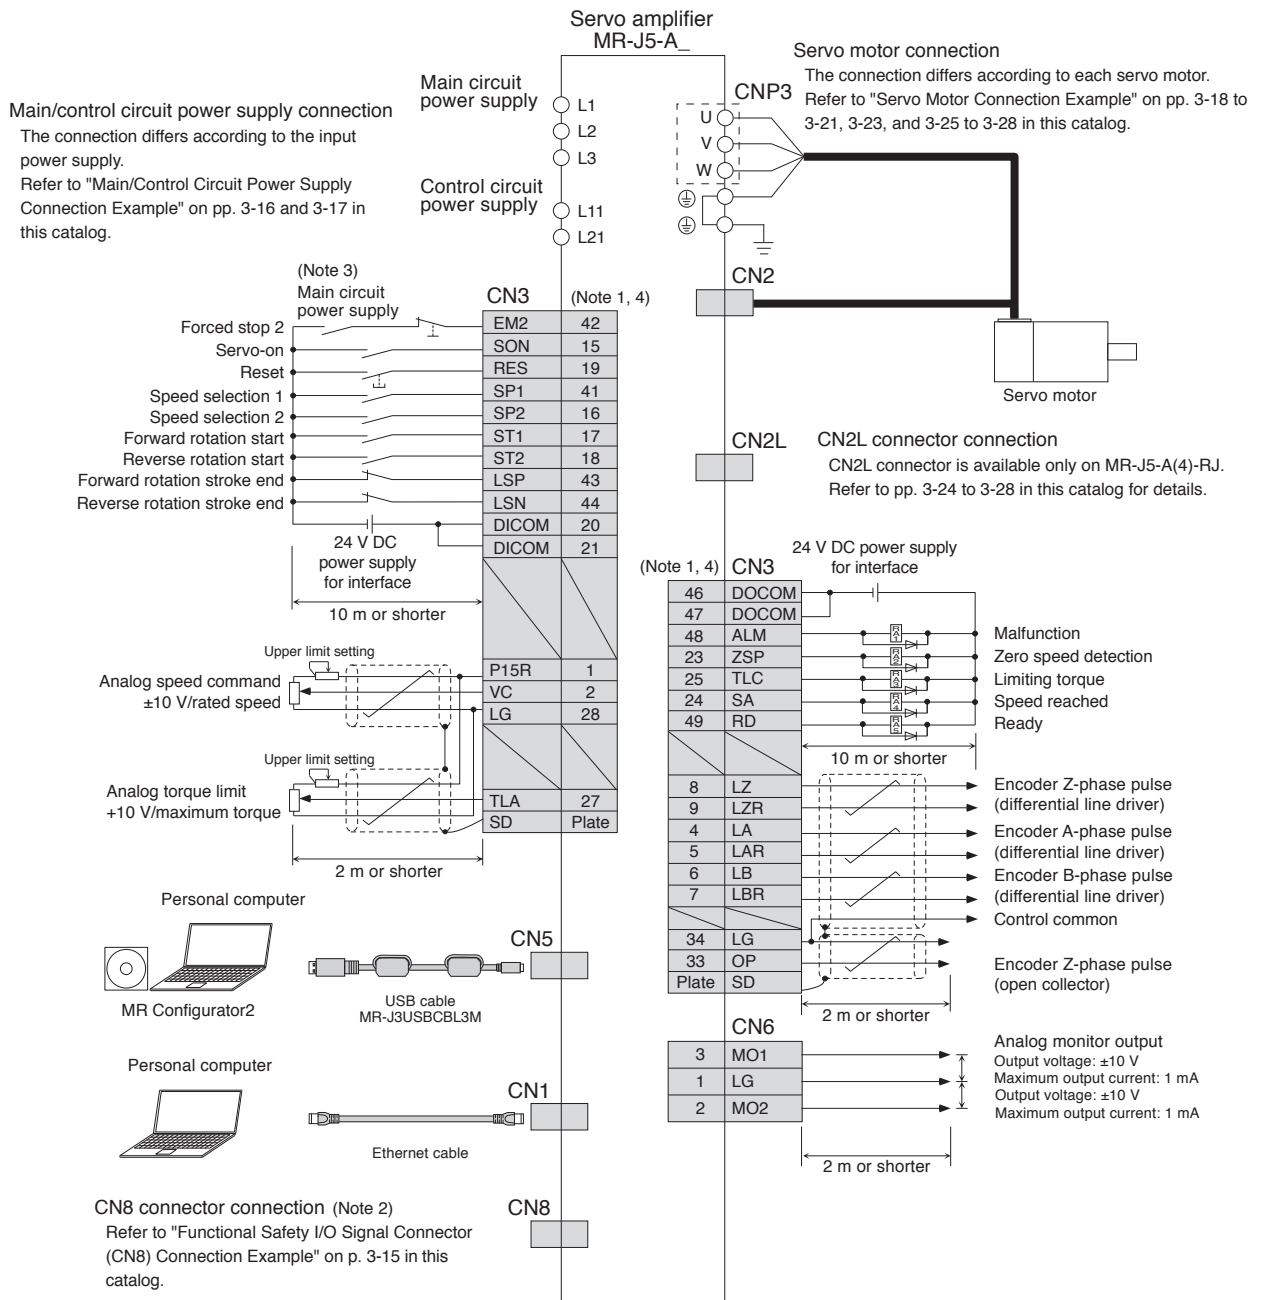


- Notes: 1. This is for sink wiring. Source wiring is also possible.  
2. Attach a short-circuit connector supplied with the servo amplifier when the functional safety (STO function) is not used.  
3. To prevent an unexpected restart of the servo amplifier, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.  
4. The pins with the same signal name are connected in the servo amplifier.

**!** Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

## MR-J5-A\_ Standard Wiring Diagram Example: Torque Control Operation

A A-RJ

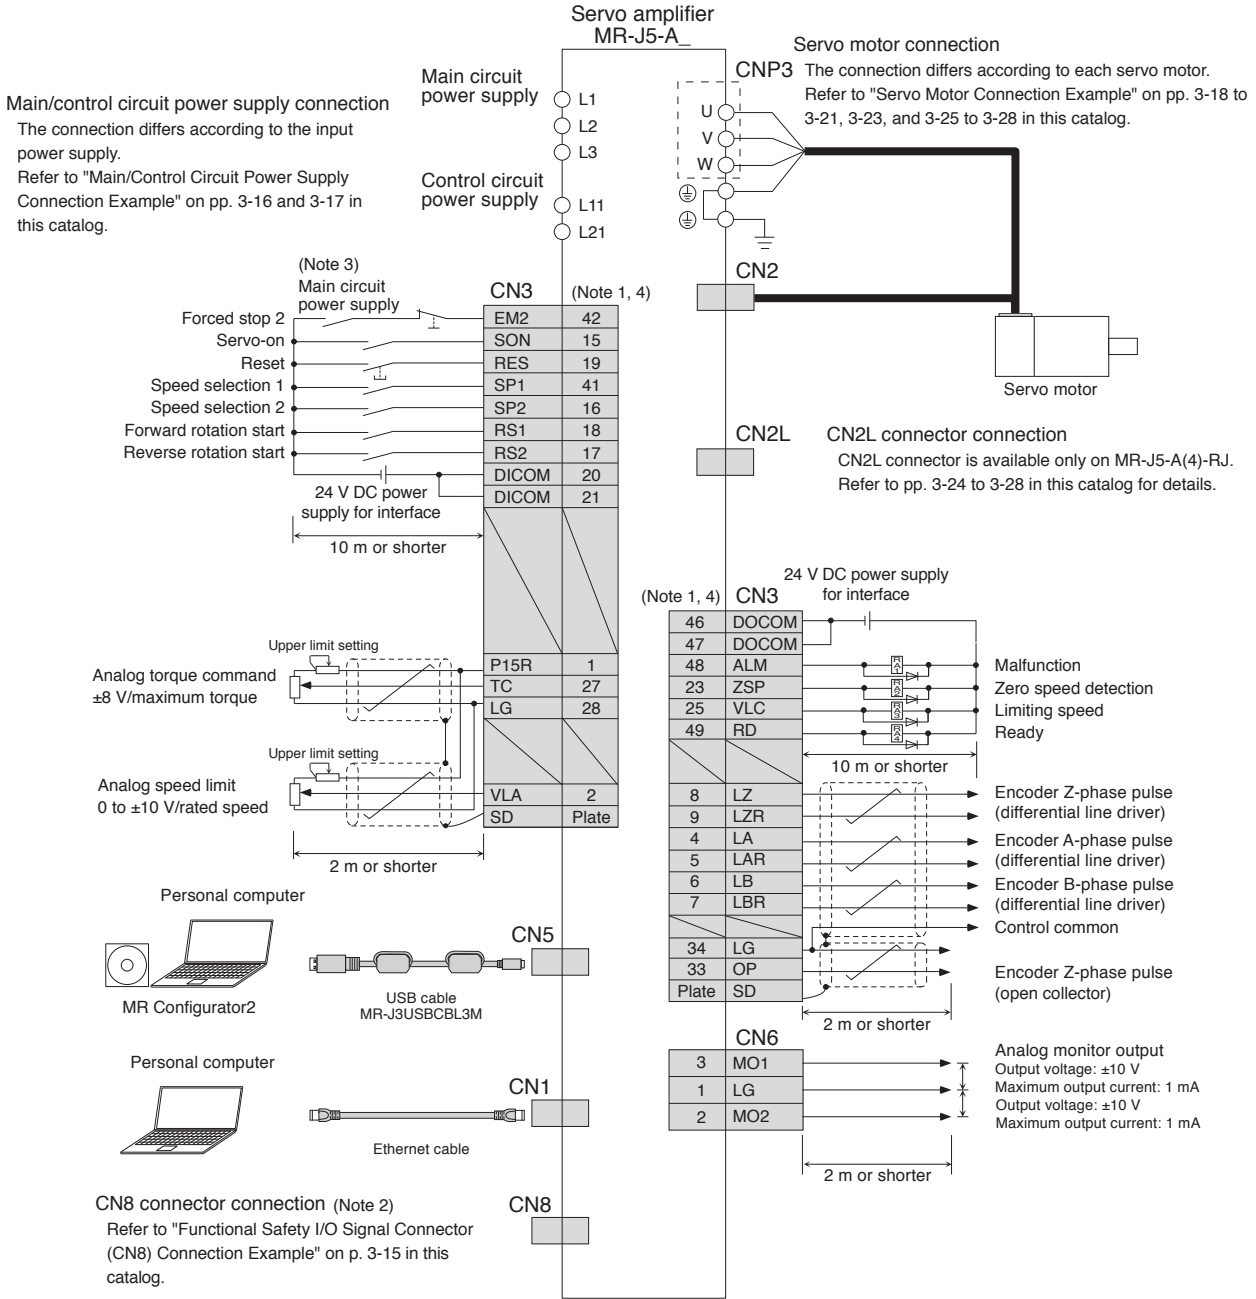

- Notes:
1. This is for sink wiring. Source wiring is also possible.
  2. Attach a short-circuit connector supplied with the servo amplifier when the functional safety (STO function) is not used.
  3. To prevent an unexpected restart of the servo amplifier, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  4. The pins with the same signal name are connected in the servo amplifier.




Be sure to read through User's Manual for the actual wiring and use. Use the equipment after you have a full knowledge of the equipment, safety information and instructions.



**A** **A-RJ**


## MR-J5-A Dimensions

- MR-J5-10A, MR-J5-10A-RJ
- MR-J5-20A, MR-J5-20A-RJ
- MR-J5-40A, MR-J5-40A-RJ

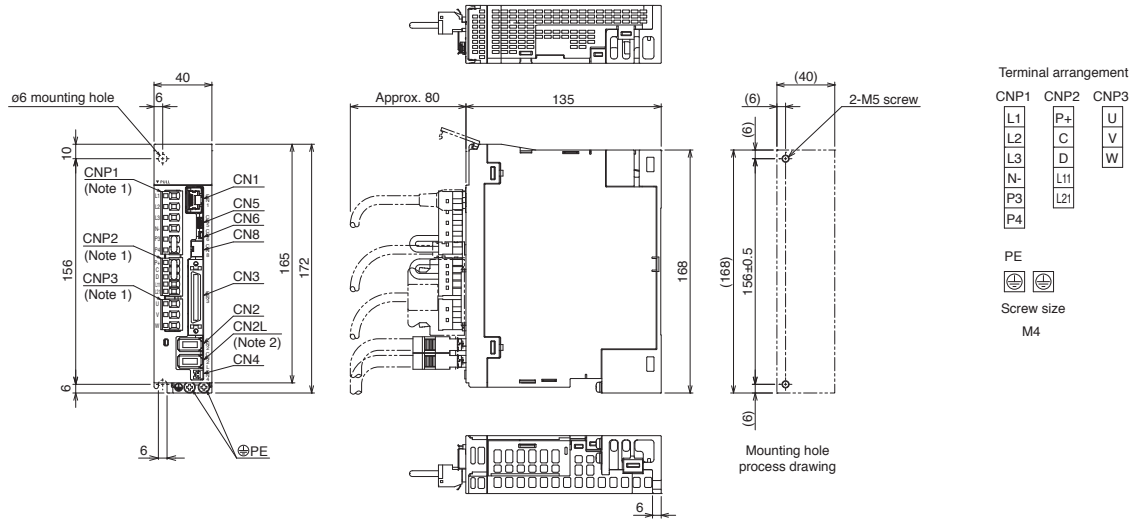

[Unit: mm]

## ● MR-J5-60A, MR-J5-60A-RJ

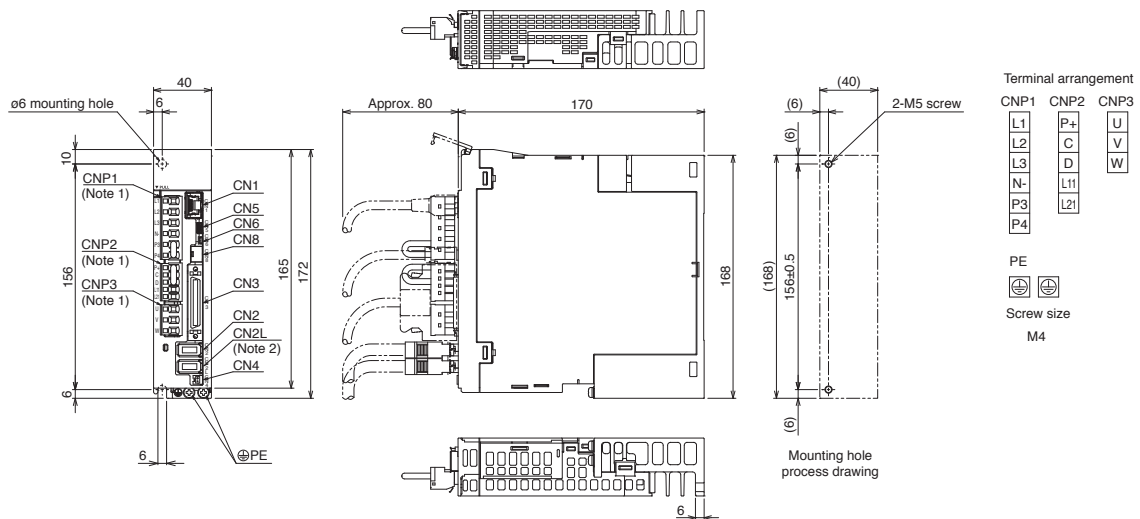

[Unit: mm]


Notes: 1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.  
2. CN2L connector is not available for MR-J5-A servo amplifiers.

# Servo Amplifiers

## MR-J5-A Dimensions


**A** **A-RJ**

- MR-J5-70A, MR-J5-70A-RJ
- MR-J5-100A, MR-J5-100A-RJ

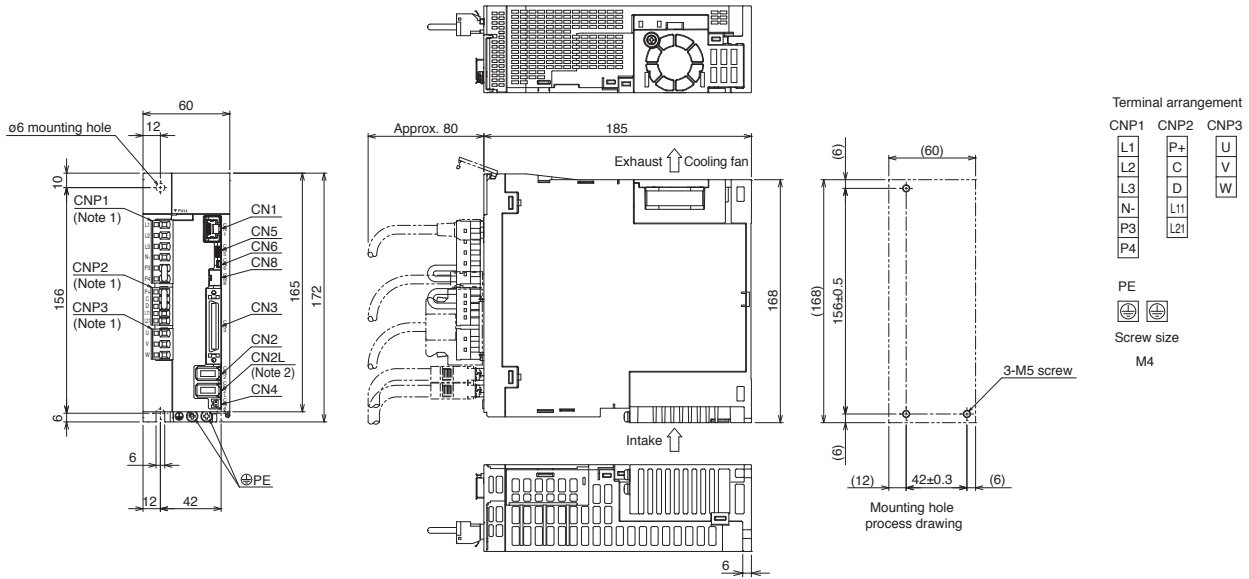

[Unit: mm]

- MR-J5-200A, MR-J5-200A-RJ (Note 3)
- MR-J5-350A, MR-J5-350A-RJ (Note 3)

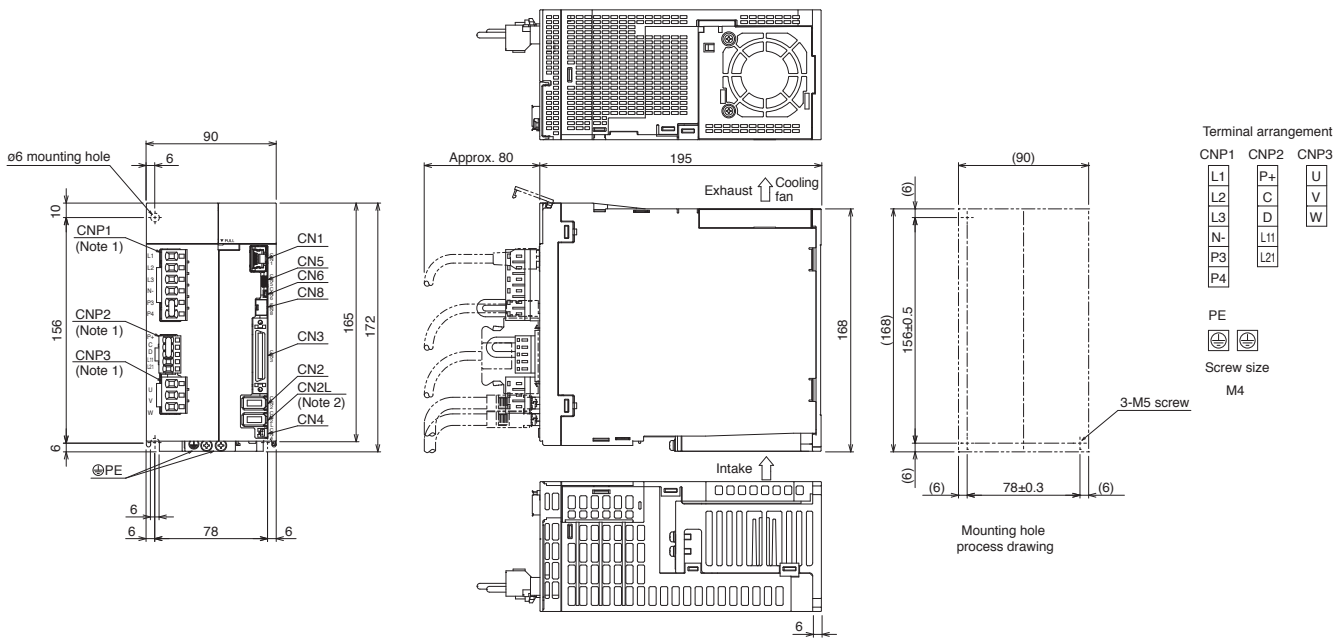


[Unit: mm]

- Notes:
1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.
  2. CN2L connector is not available for MR-J5-A servo amplifiers.
  3. For the servo amplifiers manufactured in August 2022 or later, the fan unit is mounted with two screws. Refer to "Mitsubishi Electric AC Servo System Sales and Service No. 22-02E" for details.

MR-J5-A Dimensions


●MR-J5-500A, MR-J5-500A-RJ

A A-RJ

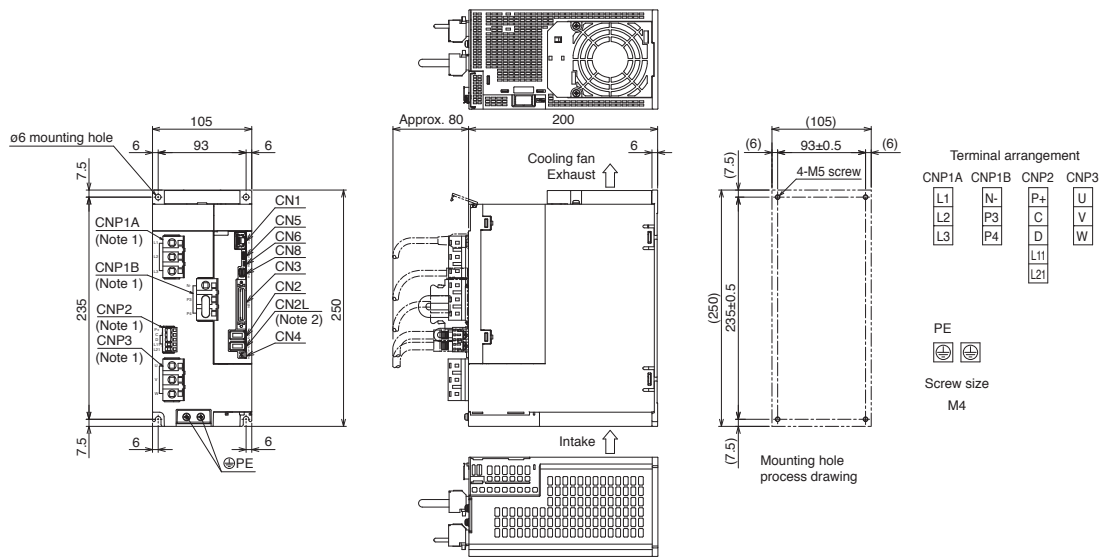

[Unit: mm]

●MR-J5-700A, MR-J5-700A-RJ

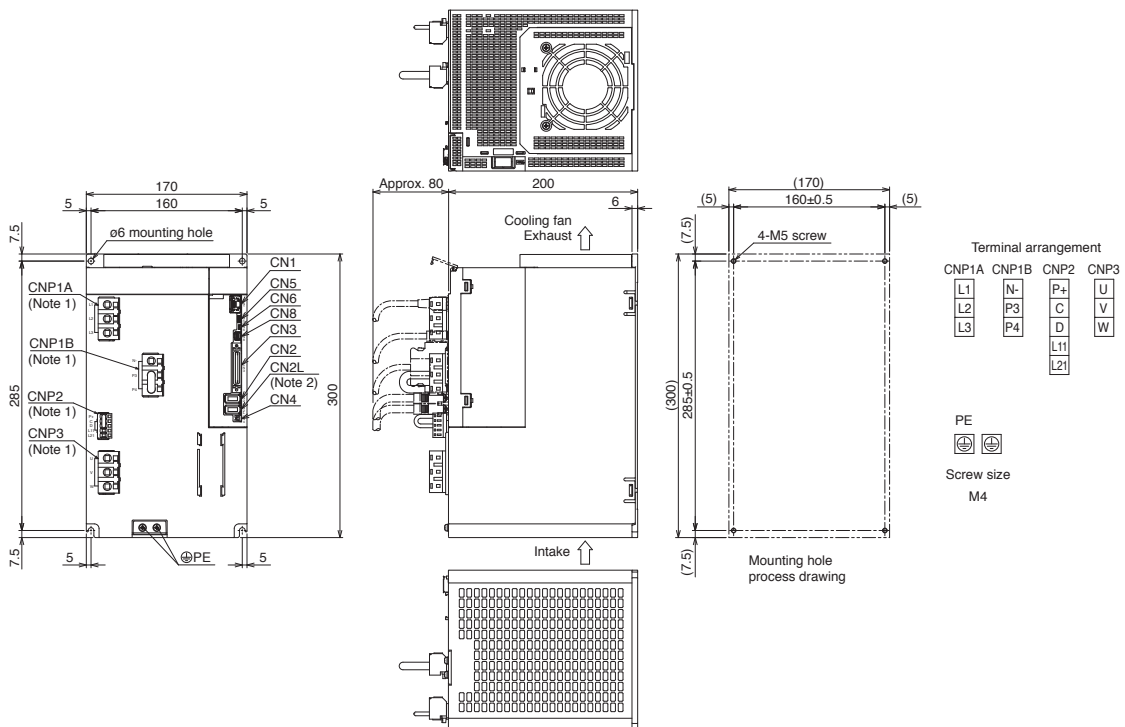

[Unit: mm]


Notes: 1. CNP1A, CNP1B, CNP2, and CNP3 connectors are supplied with the servo amplifier.  
2. CN2L connector is not available for MR-J5-A servo amplifiers.

# Servo Amplifiers

## MR-J5-A Dimensions


A A-RJ

- MR-J5-60A4, MR-J5-60A4-RJ
- MR-J5-100A4, MR-J5-100A4-RJ

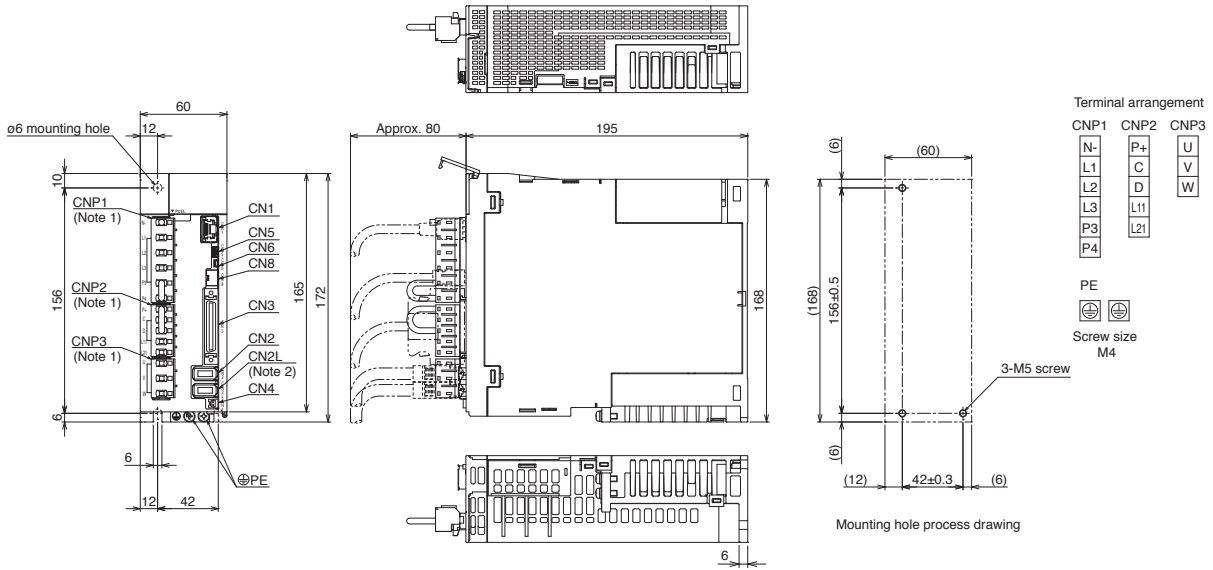

[Unit: mm]

- MR-J5-200A4, MR-J5-200A4-RJ (Note 3)
- MR-J5-350A4, MR-J5-350A4-RJ (Note 3)

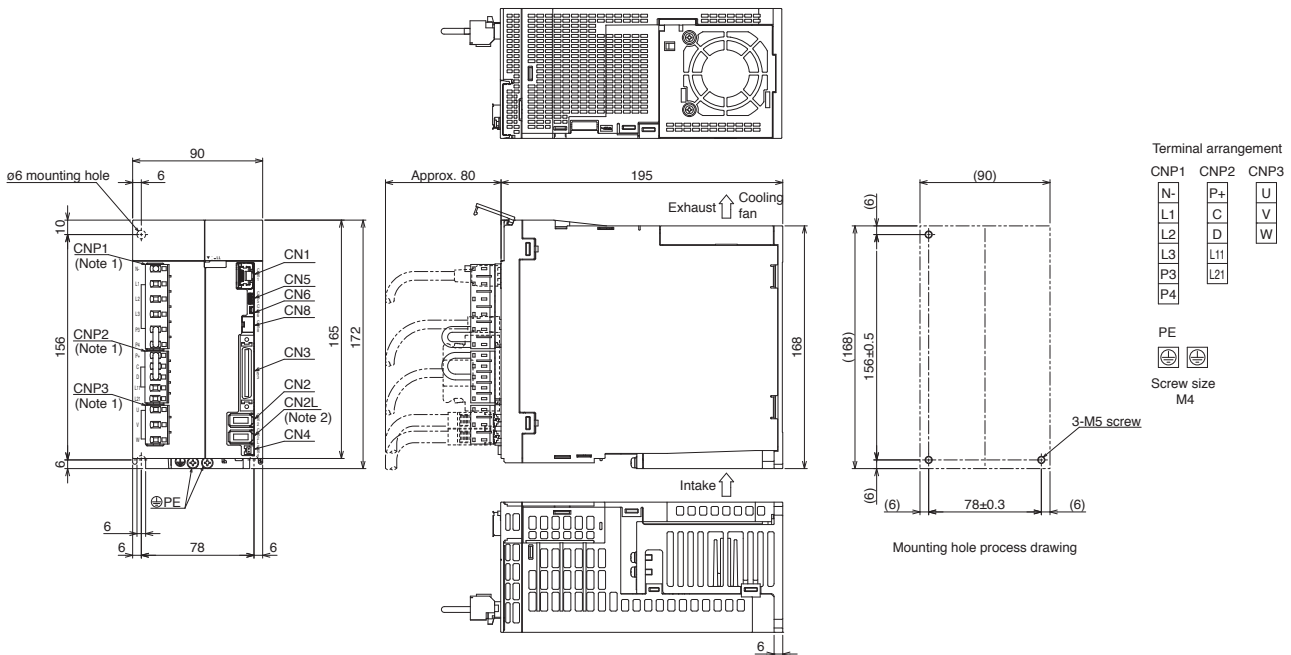


[Unit: mm]

- Notes:
1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.
  2. CN2L connector is not available for MR-J5-A4 servo amplifiers.
  3. For the servo amplifiers manufactured in August 2022 or later, the fan unit is mounted with two screws. Refer to "Mitsubishi Electric AC Servo System Sales and Service No. 22-02E" for details.

**MR-J5-A Dimensions**

- MR-J5-500A4, MR-J5-500A4-RJ
- MR-J5-700A4, MR-J5-700A4-RJ

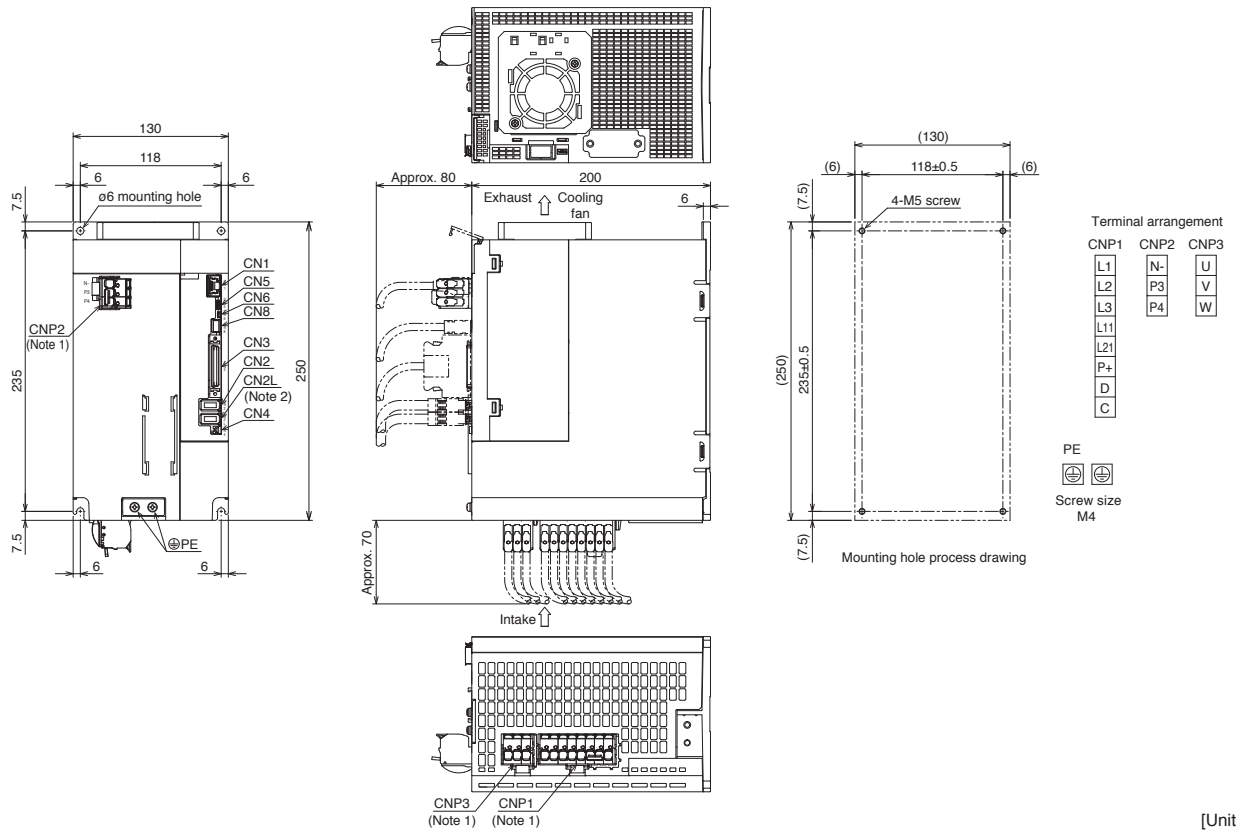

[Unit: mm]

Notes: 1. CNP1, CNP2, and CNP3 connectors are supplied with the servo amplifier.  
2. CN2L connector is not available for MR-J5-A4 servo amplifiers.

Common Specifications

Servo System Controllers

**Servo Amplifiers**

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List

Precautions

Support

# Servo Amplifiers


## MR-CM3K Specifications (200 V)

**G G-RJ WG B B-RJ WB A A-RJ**


|  |  |   |                  |
|--|--|---|------------------|
| Simple converter unit model  |  | MR-CM3K   |                  |
| Converter output   | Rated voltage  | 270 V DC to 324 V DC  |                  |
|  | Rated current [A]  | 20  |                  |
| Main circuit power supply input  | Voltage/frequency  | 3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz   |                  |
|  | Rated current [A]  | 16  |                  |
|  | Permissible voltage fluctuation  | 3-phase 170 V AC to 264 V AC  |                  |
| Overheat detection function  | Thermal sensor   |   |                  |
|  | The contact between TH1 and TH2 opens when the thermal sensor detects an overheat condition. |   |                  |
|  | Contact specification  | Maximum voltage   | 110 V AC/DC      |
|  |  | Maximum current   | 0.3 A at 20 V DC |
| Minimum current  |  | 0.1 mA at 1 V DC  |                  |
|  | Maximum capacity   | 6 VA  |                  |
| Compatible servo amplifier   |  | MR-J5-10G(-RJ)(N1)/B(-RJ)/A(-RJ) to MR-J5-200G(-RJ)(N1)/B(-RJ)/A(-RJ), MR-J5W2-22G(-N1)/B to MR-J5W2-1010G(-N1)/B, MR-J5W3-222G(-N1)/B, MR-J5W3-444G(-N1)/B |                  |
| Maximum number of connectable servo amplifiers                                 |  | 6 units   |                  |
| Total capacity of servo amplifiers to be driven [kW]                           |  | 3   |                  |
| Continuous rating [kW]   |  | 3   |                  |
| Instantaneous maximum rating [kW]  |  | 9   |                  |
| Structure (IP rating)  |  | IP20  |                  |
| Close mounting   |  | Possible  |                  |
| Environment  |  | The operating environment is the same as that for the servo amplifiers. Refer to "1. Common Specifications" in this catalog.                                |                  |
| Mass [kg]  |  | 0.7   |                  |
| Wire size  | L1/L2/L3/PE  | 2 mm <sup>2</sup> to 3.5 mm <sup>2</sup> (AWG 14 to 12)   |                  |
|  | P4/N-  | 2 mm <sup>2</sup> to 3.5 mm <sup>2</sup> (AWG 14 to 12)   |                  |
| Total wiring length from P4/N- of simple converter to P4/N- of servo amplifier |  | 5 m or shorter  |                  |

MR-CM3K Wiring Diagram Example

- G
- G-RJ
- WG
- B
- B-RJ
- WB
- A
- A-RJ

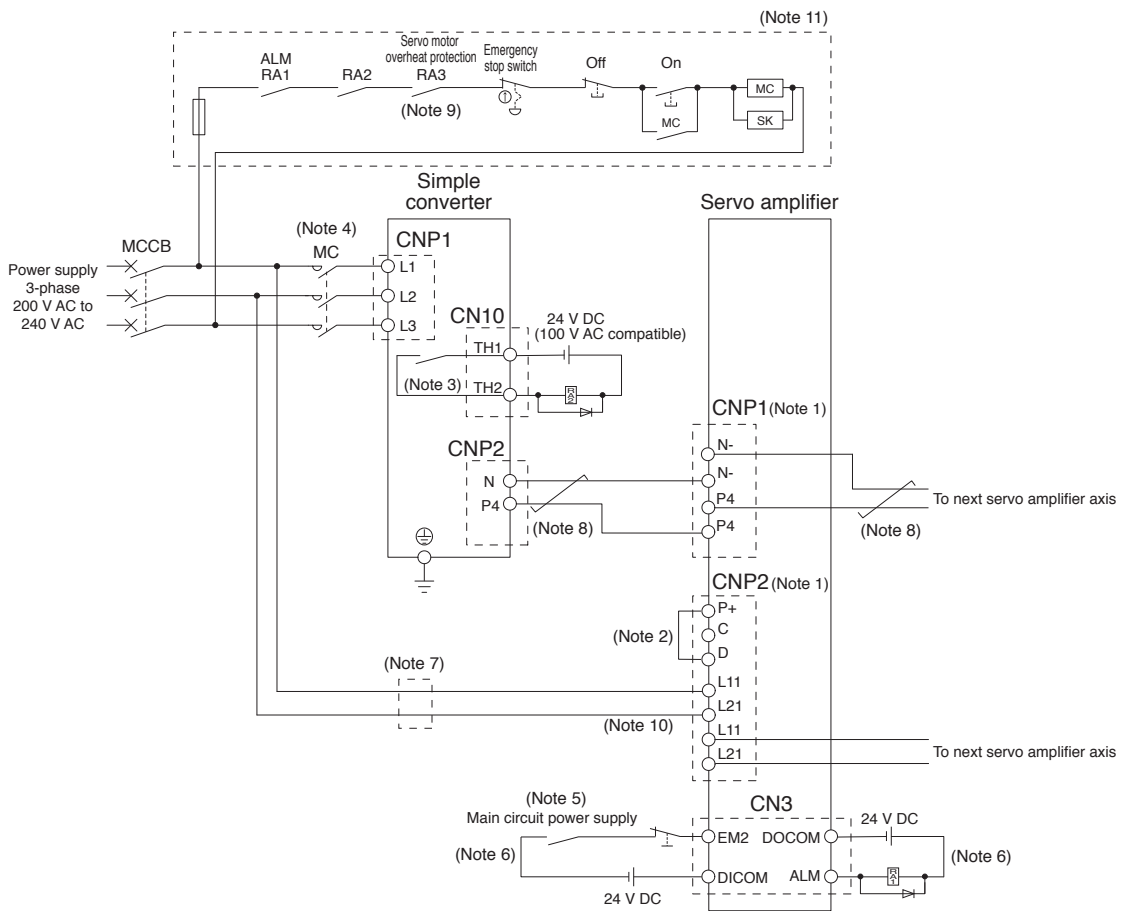

- Notes:
1. Use option daisy chain power connectors when using a simple converter.
  2. Connect P+ and D.
  3. The contact between TH1 and TH2 opens when the thermal sensor detects an overheat condition.
  4. Use a magnetic contactor with an operation delay time of 80 ms or less. The operation delay time is the time interval from current being applied to the coil until closure of contacts.
  5. To prevent an unexpected restart of the servo amplifier, create a circuit to turn off EM2 (Forced stop 2) when the main circuit power is turned off.
  6. Stop the commands from the controller as soon as the main circuit power supply is turned off when an alarm occurs even in one servo amplifier. The following are example methods to turn off the main circuit power supply: Configure a circuit with an I/O module, or connect relays for alarm output corresponding to each servo amplifier to the coil-side of the magnetic contactor in series.
  7. Install an overcurrent protection device (molded-case circuit breaker, fuse, etc.) to protect the branch circuit.
  8. Twist or bundle the wires between the simple converter and the servo amplifier and between the servo amplifiers with cable ties to keep the two wires close to each other. Keep the total wiring length between the simple converter and each servo amplifier 5 m or shorter.
  9. When connecting a linear servo motor with a thermal protector, add a contact to shut off by being interlocked with the thermal protector output of the linear servo motor.
  10. Do not ground the servo amplifier between L11 and L21 even when the control circuit power supply is separated from the main circuit power supply using an uninterruptible power supply (UPS) or an isolation transformer.
  11. To turn on/off the main circuit power supply by a DC power supply, wire the circuit as follows. Do not use the 24 V DC interface power supply for the magnetic contactor. Provide a dedicated power supply to the magnetic contactor.



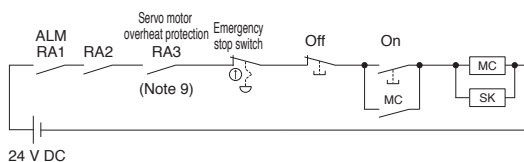


- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LV/S/Wires
- Product List
- Precautions
- Support


# Servo Amplifiers

## MR-CM3K Dimensions

**G G-RJ WG B B-RJ WB A A-RJ**

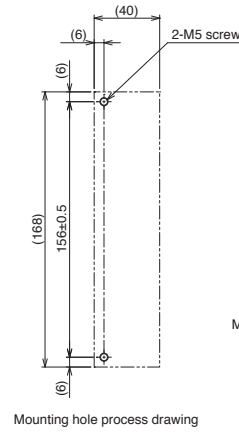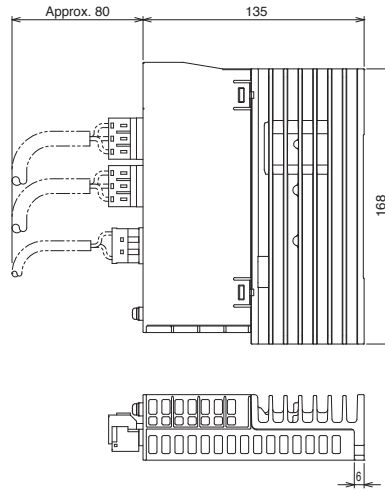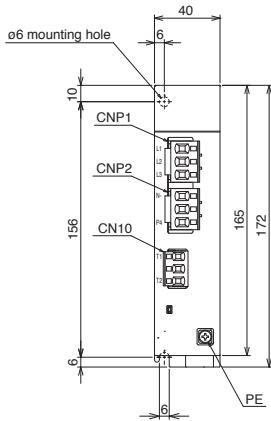

Terminal arrangement



PE



Screw size: M4

Mounting screw size: M5

[Unit: mm]



**MR-CV\_ Specifications (Note 3) (400 V)**

**DG**

| Power regeneration converter unit model MR-CV_ |                                   | 11K4   | 18K4 | 30K4 | 37K4 | 45K4 | 55K4 | 75K4 |
|--|-----------------------------------|--|------|------|------|------|------|------|
| Output   | Rated voltage                     | 513 V DC to 648 V DC   |      |      |      |      |      |      |
|  | Rated current [A]                 | 21   | 38   | 72   | 82   | 99   | 119  | 150  |
| Main circuit power supply input                | Voltage/frequency (Note 1)        | 3-phase 380 V AC to 480 V AC, 50 Hz/60 Hz  |      |      |      |      |      |      |
|  | Rated current [A]                 | 18   | 35   | 61   | 70   | 85   | 106  | 130  |
|  | Permissible voltage fluctuation   | 3-phase 323 V AC to 528 V AC   |      |      |      |      |      |      |
|  | Permissible frequency fluctuation | ±3 % maximum   |      |      |      |      |      |      |
| Control circuit power supply input             | Voltage/frequency                 | 1-phase 380 V AC to 480 V AC, 50 Hz/60 Hz  |      |      |      |      |      |      |
|  | Rated current [A]                 | 0.1  |      |      |      |      |      |      |
|  | Permissible voltage fluctuation   | 1-phase 323 V AC to 528 V AC   |      |      |      |      |      |      |
|  | Permissible frequency fluctuation | ±3 % maximum   |      |      |      |      |      |      |
|  | Power consumption [W]             | 30   |      |      |      |      |      |      |
| Interface power supply                         |                                   | 24 V DC ± 10 % (required current capacity: 0.35 A)   |      |      |      |      |      |      |
| Capacity                                       | [kW]                              | 11   | 18   | 30   | 37   | 45   | 55   | 75   |
| Protective functions                           |                                   | Undervoltage protection, regenerative error protection, regenerative overvoltage shut-off, MC drive circuit error protection, open-phase detection, inrush current suppression circuit error protection, main circuit device overheat error protection, cooling fan error protection, overload shut-off (electronic thermal) |      |      |      |      |      |      |
| Continuous rating                              | [kW]                              | 7.5  | 11   | 20   | 25   |      | 55   |      |
| Instantaneous maximum rating                   | [kW]                              | 39   | 60   | 92   | 101  | 125  | 175  | 180  |
| Structure (IP rating)                          |                                   | Force cooling, open (IP20) (Note 2)  |      |      |      |      |      |      |
| Mass   | [kg]                              | 6.1  |      | 12.1 |      |      | 25.0 |      |

- Notes: 1. Rated output and speed of a rotary servo motor are applicable when the power regeneration converter unit is operated within the specified power supply voltage and frequency.  
 2. Terminal blocks are excluded.  
 3. MR-CV\_4 power regeneration converter units require a mounting attachment. Refer to "Mounting Attachment" in this catalog for details.

**MR-CV\_ Connection Example**

For the connection example of power regeneration converter units, refer to "Main/Control Circuit Power Supply Connection Example For connecting MR-CV\_ and MR-J5D\_-G4(-N1)" in this catalog.


Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Servo Amplifiers

DG


## MR-CV\_ Dimensions

- MR-CV11K4
- MR-CV18K4

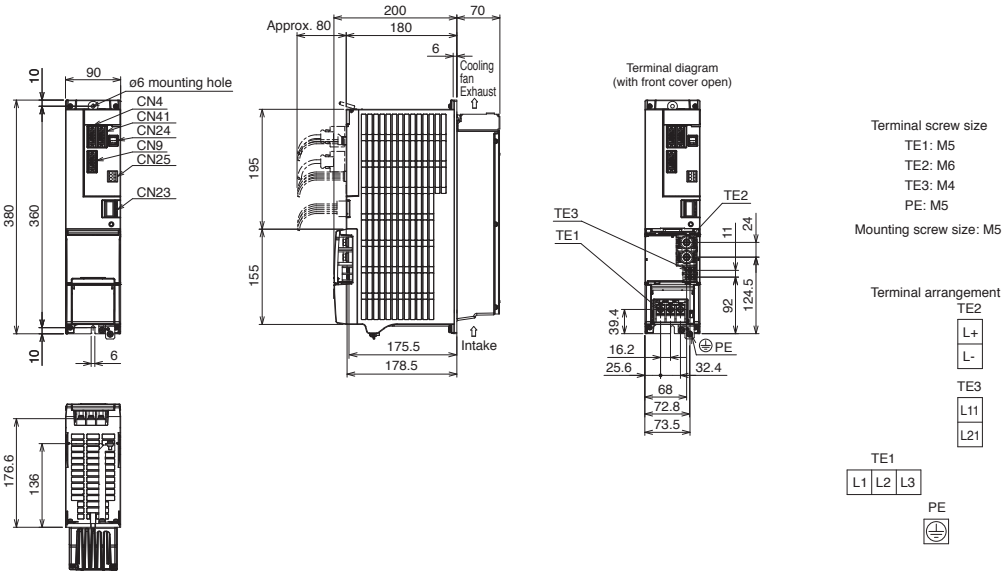

[Unit: mm]



- MR-CV30K4
- MR-CV37K4
- MR-CV45K4

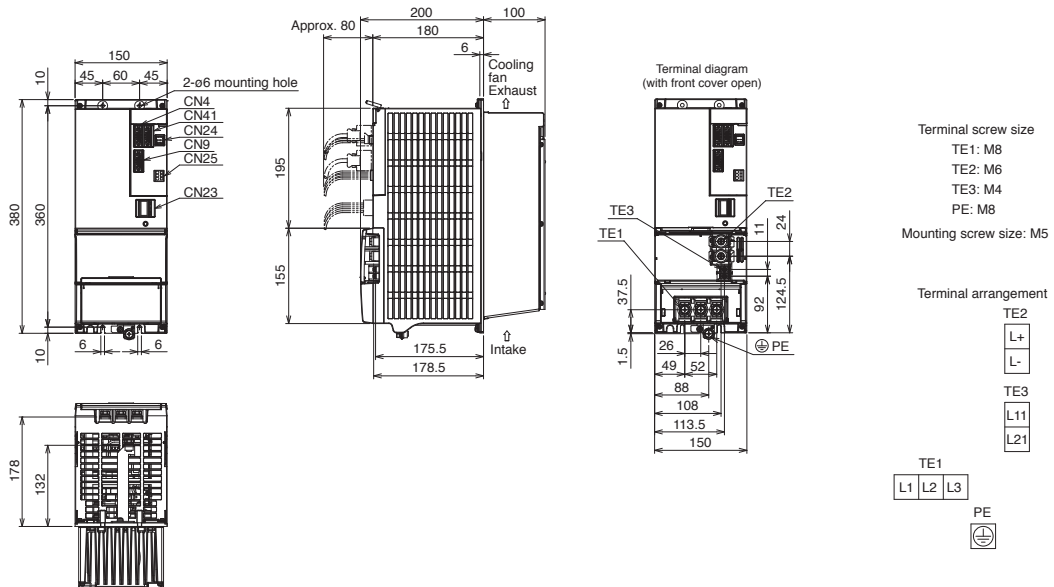

[Unit: mm]


MR-CV\_Dimensions

- MR-CV55K4
- MR-CV75K4

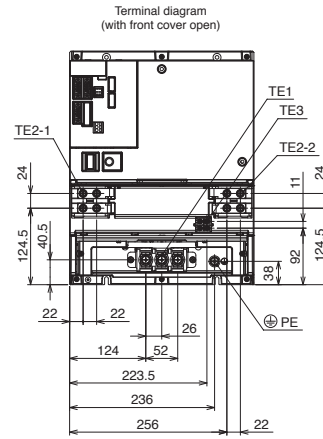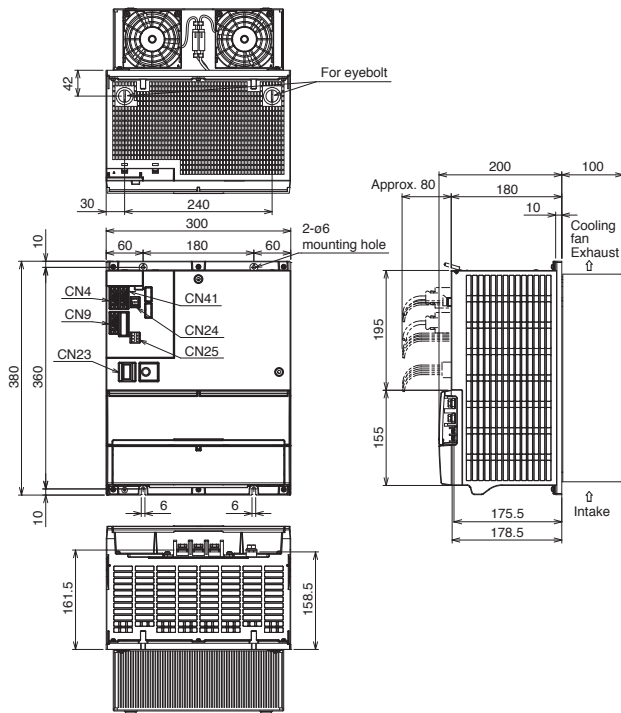

Terminal screw size  
 TE1: M8  
 TE2-1: M6  
 TE2-2: M6  
 TE3: M4  
 PE: M8  
 Mounting screw size: M5

Terminal arrangement



[Unit: mm]

DG

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List

Precautions

Support

# Servo Amplifiers

## Selection of Converter Unit, Servo Amplifier, and Drive Unit

Combination of a simple converter and servo amplifiers

**G** **G-RJ** **WG** **B** **B-RJ** **WB** **A** **A-RJ**

Select a servo amplifier for connection that meets the following conditions.

- Connectable servo amplifier models  
MR-J5-10\_ to MR-J5-200\_, MR-J5W2-22\_ to MR-J5W2-1010\_, MR-J5W3-222\_/MR-J5W3-444\_
- The sum of rated capacities [kW] of connected servo amplifiers  $\leq$  3 kW (MR-CM3K rated output)  
For multi-axis servo amplifiers, the calculation uses the sum of the rated capacities of all axes as the rated capacity of one servo amplifier.
- Number of connectable servo amplifiers to one MR-CM3K  $\leq$  6  
A multi-axis servo amplifier is counted as one servo amplifier unit, rather than the number of axes.

|  | MR-CM3K (200 V) |
|--|-----------------|
| Maximum number of connectable servo amplifiers | 6               |
| Total capacity of connectable servo amplifiers | 3 kW            |
| Continuous rating                              | 3 kW            |
| Instantaneous maximum rating                   | 9 kW            |

Combination of a power regeneration converter unit and drive units

**DG**

Select a power regeneration converter unit which meets the following conditions. When all the conditions are satisfied, multiple MR-J5D\_-G4(-N1) drive units can be connected to one power regeneration converter unit. When connecting the multiple MR-J5D\_-G4(-N1) drive units, install the drive units in descending order of capacity per axis from the right side of the power regeneration converter unit.

Refer to "MR-J5D User's Manual" for details of the selection.

- (1) Effective value [kW] of total output power of servo motors  $\leq$  Continuous rating [kW] of MR-CV\_
- (2) Maximum value [kW] of total output power of servo motors  $\times$  1.2  $\leq$  Instantaneous maximum rating [kW] of MR-CV\_
- (3) Total widths of MR-J5D\_-G4(-N1) (one side)  $\leq$  1500 mm

|                                   | MR-CV_ (400 V)     |      |      |      |      |      |      |
|-----------------------------------|--------------------|------|------|------|------|------|------|
|                                   | 11K4               | 18K4 | 30K4 | 37K4 | 45K4 | 55K4 | 75K4 |
| Continuous rating [kW]            | 7.5                | 11   | 20   | 25   | 25   | 55   | 55   |
| Instantaneous maximum rating [kW] | 39                 | 60   | 92   | 101  | 125  | 175  | 180  |
| Total widths of MR-J5D_-G4(-N1)   | 1500 mm or shorter |      |      |      |      |      |      |

|                 | MR-J5D1_-(-N1) |       |       |       |       | MR-J5D2_-(-N1) |       |       |       | MR-J5D3_-(-N1) |       |       |  |
|-----------------|----------------|-------|-------|-------|-------|----------------|-------|-------|-------|----------------|-------|-------|--|
|                 | 100G4          | 200G4 | 350G4 | 500G4 | 700G4 | 100G4          | 200G4 | 350G4 | 500G4 | 700G4          | 100G4 | 200G4 |  |
| Unit width [mm] | 60             |       |       |       |       | 60             |       |       |       | 75             |       | 60    |  |

# 4 Rotary Servo Motors

|  |      |
|--|------|
| Model Designation.....                           | 4-2  |
| HK-KT Series                                     |      |
| Specifications.....                              | 4-6  |
| Torque Characteristics.....                      | 4-13 |
| Dimensions.....                                  | 4-20 |
| Connector Dimensions.....                        | 4-23 |
| Special Shaft Dimensions.....                    | 4-24 |
| Geared Servo Motor Specifications.....           | 4-25 |
| Geared Servo Motor Dimensions.....               | 4-28 |
| Geared Servo Motor Special Shaft Dimensions..... | 4-31 |
| HK-MT Series                                     |      |
| Specifications.....                              | 4-32 |
| Torque Characteristics.....                      | 4-34 |
| Dimensions.....                                  | 4-36 |
| Connector Dimensions.....                        | 4-38 |
| Special Shaft Dimensions.....                    | 4-39 |
| HK-ST Series                                     |      |
| Specifications.....                              | 4-40 |
| Torque Characteristics.....                      | 4-48 |
| Dimensions.....                                  | 4-54 |
| Special Shaft Dimensions.....                    | 4-56 |
| Geared Servo Motor Specifications.....           | 4-57 |
| Geared Servo Motor Dimensions.....               | 4-63 |
| Geared Servo Motor Special Shaft Dimensions..... | 4-67 |
| HK-RT Series                                     |      |
| Specifications.....                              | 4-68 |
| Torque Characteristics.....                      | 4-70 |
| Dimensions.....                                  | 4-72 |
| Connector Dimensions.....                        | 4-73 |
| Special Shaft Dimensions.....                    | 4-73 |
| Power Supply Capacity.....                       | 4-74 |

\* Refer to p. 7-78 in this catalog for conversion of units.

\* In this section, a term of servo amplifier includes a combination of a drive unit and a converter unit.


\* The characteristics and numerical values without tolerances mentioned in this catalog are representative values.

# Rotary Servo Motors

## Model Designation (Note 2)

●HK-KT series (low inertia, small capacity)

H K - K T 4 3 4 W B

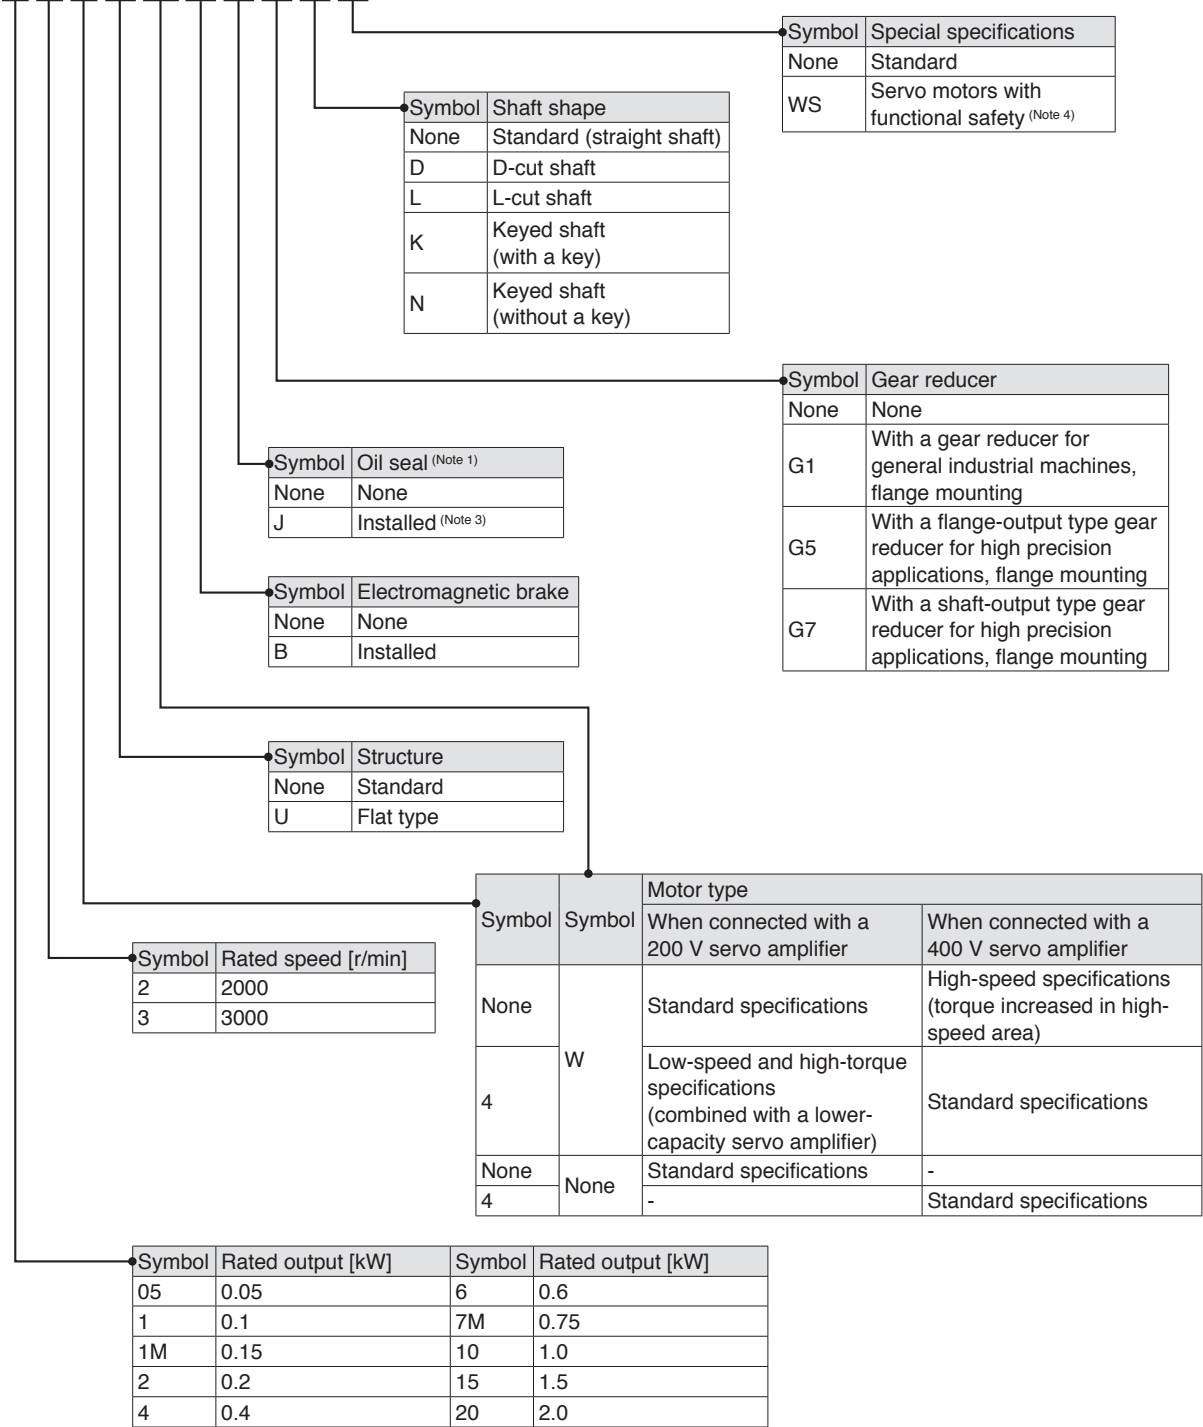


- Notes: 1. The dimensions are the same regardless of whether or not an oil seal is installed.  
 2. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.  
 3. A geared servo motor with an oil seal installed is not available.  
 4. The dimensions of the servo motors with functional safety are the same as those of the standard servo motors.

## Model Designation (Note 2)

●HK-MT series (ultra-low inertia, small capacity)

H K - M T 4 3 V W B

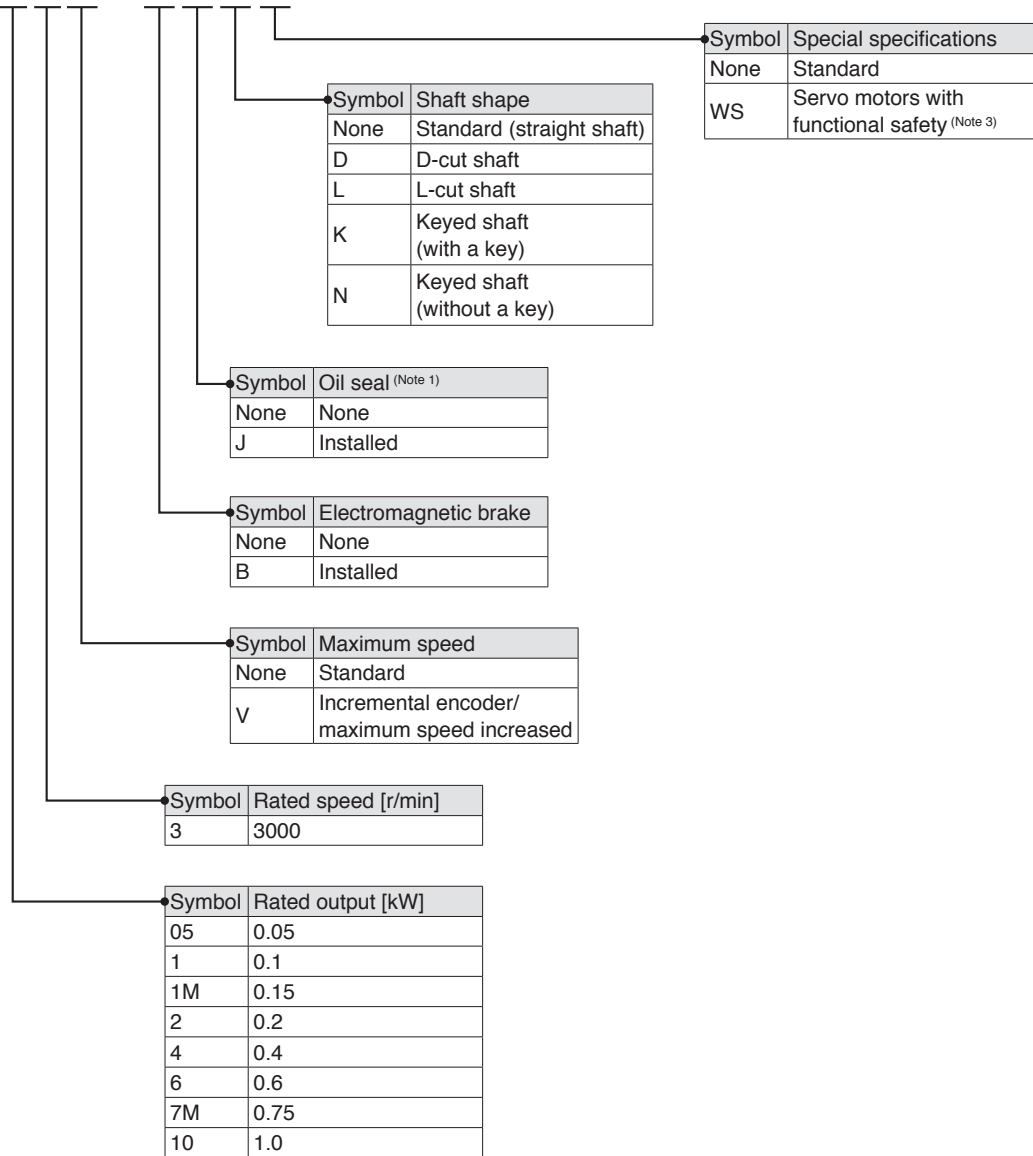


- Notes:
1. The dimensions are the same regardless of whether or not an oil seal is installed.
  2. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.
  3. The dimensions of the servo motors with functional safety are the same as those of the standard servo motors.

# Rotary Servo Motors

## Model Designation (Note 2)

●HK-ST series (medium inertia, medium capacity)

H K - S T 2 0 2 4 A W B

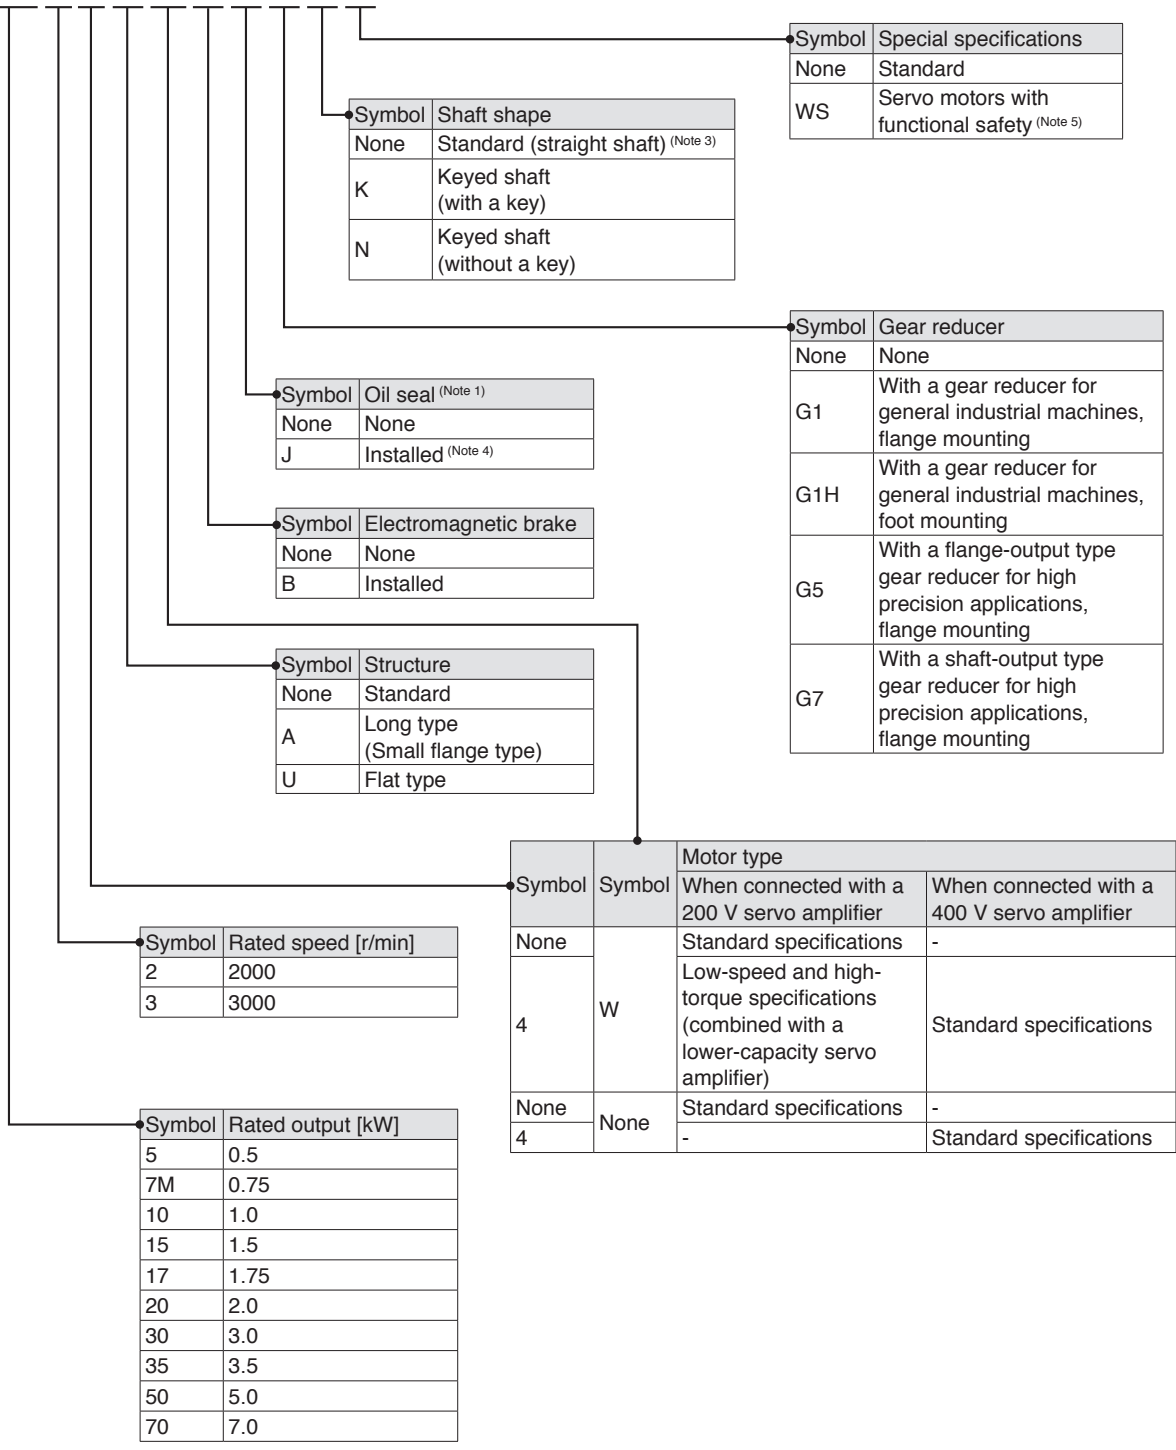


- Notes:
1. The dimensions are the same regardless of whether or not an oil seal is installed.
  2. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.
  3. The standard HK-ST G1/G1H servo motors have a keyed shaft (with a key).
  4. A geared servo motor with an oil seal installed is not available.
  5. The dimensions of the servo motors with functional safety are the same as those of the standard servo motors.



## Model Designation (Note 2)

●HK-RT series (ultra-low inertia, medium capacity)

H K - R T 1 0 3 4 W B

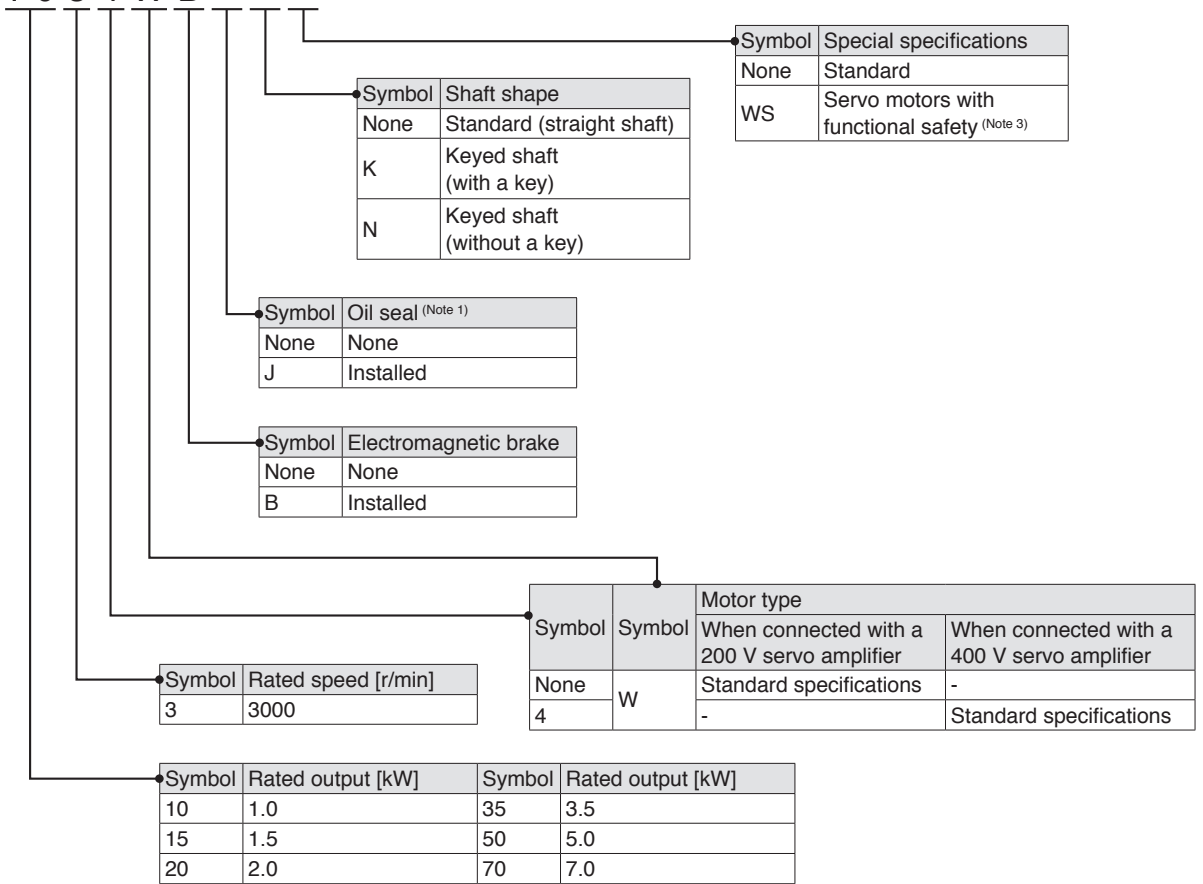

- Notes:
1. The dimensions are the same regardless of whether or not an oil seal is installed.
  2. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.
  3. The dimensions of the servo motors with functional safety are the same as those of the standard servo motors.

# Rotary Servo Motors

## HK-KT\_W (Low Inertia, Small Capacity)

Specifications when connected with a 200 V servo amplifier

| Flange size  |                               | [mm]                | 40 × 40   |              |                  | 60 × 60                   |                           |                  |                  |  |
|--|-------------------------------|---------------------|---|--------------|------------------|---------------------------|---------------------------|------------------|------------------|--|
| Rotary servo motor model                                       |                               | HK-KT               | 053W  | 13W          | 1M3W             | 13UW                      | 23W                       | 43W              | 63W              |  |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 0.05  | 0.1          | 0.15             | 0.1                       | 0.2                       | 0.4              | 0.6              |  |
|  | Rated torque (Note 5)         | [N·m]               | 0.16 (Note 6)   | 0.32         | 0.48             | 0.32                      | 0.64                      | 1.3              | 1.9              |  |
| Maximum torque (Note 3)  |                               | [N·m]               | 0.56<br>(0.72)  | 1.1<br>(1.4) | 1.7<br>(2.1)     | 1.1<br>(1.4)              | 2.2<br>(2.9)              | 4.5<br>(5.7)     | 6.7<br>(8.6)     |  |
| Rated speed (Note 4)   |                               | [r/min]             | 3000  |              |                  |                           |                           |                  |                  |  |
| Maximum speed (Note 4)   |                               | [r/min]             | 6700  |              |                  |                           |                           |                  |                  |  |
| Power rate at continuous rated torque [kW/s]                   | Without electromagnetic brake |                     | 6.4   | 14.8         | 23.3             | 8.4                       | 19.4                      | 39.5             | 61.0             |  |
|  | With electromagnetic brake    |                     | 5.8   | 14.0         | 22.4             | 6.6                       | 16.0                      | 36.7             | 58.0             |  |
| Rated current  |                               | [A]                 | 1.3   | 1.2          | 1.2              | 1.1                       | 1.4                       | 2.6              | 4.5              |  |
| Maximum current (Note 3)                                       |                               | [A]                 | 4.6<br>(6.2)  | 4.6<br>(6.0) | 4.5<br>(6.0)     | 4.6<br>(6.0)              | 5.4<br>(7.1)              | 9.8<br>(14)      | 19<br>(25)       |  |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 0.0394  | 0.0686       | 0.0977           | 0.121                     | 0.209                     | 0.410            | 0.598            |  |
|  | With electromagnetic brake    |                     | 0.0434  | 0.0725       | 0.102            | 0.153                     | 0.254                     | 0.442            | 0.629            |  |
| Recommended load to motor inertia ratio (Note 1)               |                               |                     | 20 times or less (Note 9)   |              | 20 times or less | 10 times or less (Note 9) | 23 times or less (Note 8) | 23 times or less | 25 times or less |  |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |              |                  |                           |                           |                  |                  |  |
| Type   |                               |                     | Permanent magnet synchronous motor  |              |                  |                           |                           |                  |                  |  |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.) (Note 6)                        |              |                  |                           |                           |                  |                  |  |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |              |                  |                           |                           |                  |                  |  |
| Thermistor   |                               |                     | None  |              |                  |                           |                           |                  |                  |  |
| Insulation class   |                               |                     | 155 (F)   |              |                  |                           |                           |                  |                  |  |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2, 7)                     |              |                  |                           |                           |                  |                  |  |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 49, Y: 49  |              |                  |                           |                           |                  |                  |  |
| Vibration rank   |                               |                     | V10 <sup>-3</sup>   |              |                  |                           |                           |                  |                  |  |
| Permissible load for the shaft *2                              | L                             | [mm]                | 25  |              |                  |                           | 30                        |                  |                  |  |
|  | Radial                        | [N]                 | 88  |              |                  |                           | 245                       |                  |                  |  |
|  | Thrust                        | [N]                 | 59  |              |                  |                           | 98                        |                  |                  |  |
| Mass [kg]  | Without electromagnetic brake |                     | 0.27  | 0.37         | 0.47             | 0.57                      | 0.77                      | 1.2              | 1.5              |  |
|  | With electromagnetic brake    |                     | 0.53  | 0.63         | 0.73             | 0.79                      | 1.2                       | 1.6              | 1.9              |  |

- Notes:
- Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.
  - The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.
  - The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.
  - The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.
  - When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.
  - For HK-KT053W\_J\_ (with an oil seal), use the servo motor at a derating rate of 80 %.
  - When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  - When the speed is 6000 r/min or less, the recommended load to motor inertia ratio is 28 times or less.
  - When the servo motor is combined with a 0.1 kW servo amplifier, this recommended load to motor inertia ratio is applicable for operating the servo motor at the rated speed. If operating speed exceeds the rated speed, check whether a regenerative option is required using drive sizing software Motorizer. A servo amplifier with a larger capacity can be combined.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

## Electromagnetic brake specifications (Note 1)

| Model  | HK-KT                   | 053WB                             | 13WB | 1M3WB | 13UWB | 23WB          | 43WB | 63WB |  |
|--|-------------------------|-----------------------------------|------|-------|-------|---------------|------|------|--|
| Type   |                         | Spring actuated type safety brake |      |       |       |               |      |      |  |
| Rated voltage                                      |                         | 24 V DC (-10 % to 0 %)            |      |       |       |               |      |      |  |
| Power consumption [W] at 20 °C                     |                         | 6.4                               |      |       |       | 7.9           |      |      |  |
| Electromagnetic brake static friction torque [N·m] |                         | 0.48 or higher                    |      |       |       | 1.9 or higher |      |      |  |
| Permissible braking work                           | Per braking [J]         | 5.6                               |      |       |       | 22            |      |      |  |
|  | Per hour [J]            | 56                                |      |       |       | 220           |      |      |  |
| Electromagnetic brake life (Note 2)                | Number of braking times | 20000                             |      |       |       |               |      |      |  |
|  | Work per braking [J]    | 5.6                               |      |       |       | 22            |      |      |  |

- Notes:
- The electromagnetic brake is for holding. It cannot be used for deceleration applications.
  - Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

## HK-KT\_W (Low Inertia, Small Capacity)

Specifications when connected with a 200 V servo amplifier

|  |                               |   |                  |              |                  |                  |
|--|-------------------------------|---|------------------|--------------|------------------|------------------|
| Flange size  |                               | [mm]  | 80 × 80          |              |                  |                  |
| Rotary servo motor model                                       |                               | HK-KT   | 23UW             | 43UW         | 7M3W             | 103W             |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]  | 0.2              | 0.4          | 0.75             | 1.0              |
|  | Rated torque (Note 5)         | [N•m]   | 0.64             | 1.3          | 2.4              | 3.2              |
| Maximum torque (Note 3)  |                               | [N•m]   | 1.9<br>(2.5)     | 4.5<br>(5.7) | 8.4<br>(10.7)    | 11.1<br>(14.3)   |
| Rated speed (Note 4)   |                               | [r/min]   | 3000             |              |                  |                  |
| Maximum speed (Note 4)   |                               | [r/min]   | 6700             |              |                  | 6500             |
| Power rate at continuous rated torque<br>[kW/s]                | Without electromagnetic brake |   | 9.7              | 22.3         | 41.6             | 60.3             |
|  | With electromagnetic brake    |   | 7.3              | 18.8         | 37.7             | 56.0             |
| Rated current  |                               | [A]   | 1.5              | 2.1          | 4.7              | 5.0              |
| Maximum current (Note 3)                                       |                               | [A]   | 5.9<br>(9.0)     | 9.2<br>(13)  | 20<br>(26)       | 21<br>(28)       |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg•m <sup>2</sup> ] | Without electromagnetic brake |   | 0.419            | 0.726        | 1.37             | 1.68             |
|  | With electromagnetic brake    |   | 0.557            | 0.864        | 1.51             | 1.81             |
| Recommended load to motor inertia ratio (Note 1)               |                               |   | 10 times or less |              | 16 times or less | 17 times or less |
| Speed/position detector  |                               | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                  |              |                  |                  |
| Type   |                               | Permanent magnet synchronous motor  |                  |              |                  |                  |
| Oil seal   |                               | None (Servo motors with an oil seal are available.)                                 |                  |              |                  |                  |
| Electromagnetic brake  |                               | None (Servo motors with an electromagnetic brake are available.)                    |                  |              |                  |                  |
| Thermistor   |                               | None  |                  |              |                  |                  |
| Insulation class   |                               | 155 (F)   |                  |              |                  |                  |
| Structure  |                               | Totally enclosed, natural cooling (IP rating: IP67) (Note 2, 6)                     |                  |              |                  |                  |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ]   | X: 49, Y: 49     |              |                  |                  |
| Vibration rank   |                               | V10 <sup>-3</sup>   |                  |              |                  |                  |
| Permissible load for the shaft *2                              | L                             | [mm]  | 30               |              | 40               |                  |
|  | Radial                        | [N]   | 245              |              | 392              |                  |
|  | Thrust                        | [N]   | 98               |              | 147              |                  |
| Mass [kg]  | Without electromagnetic brake |   | 1.2              | 1.5          | 2.2              | 2.4              |
|  | With electromagnetic brake    |   | 1.6              | 1.9          | 2.9              | 3.1              |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
 3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
 4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
 5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
 6. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

|  |                         |                                   |               |       |               |       |
|--|-------------------------|-----------------------------------|---------------|-------|---------------|-------|
| Model  |                         | HK-KT                             | 23UWB         | 43UWB | 7M3WB         | 103WB |
| Type   |                         | Spring actuated type safety brake |               |       |               |       |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |               |       |               |       |
| Power consumption                            |                         | [W] at 20 °C                      | 8.2           |       | 10            |       |
| Electromagnetic brake static friction torque |                         | [N•m]                             | 1.3 or higher |       | 3.2 or higher |       |
| Permissible braking work                     | Per braking             | [J]                               | 22            |       | 64            |       |
|  | Per hour                | [J]                               | 220           |       | 640           |       |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 20000         |       |               |       |
|  | Work per braking        | [J]                               | 22            |       | 64            |       |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
 2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Rotary Servo Motors

## HK-KT\_W (Low Inertia, Small Capacity)

Specifications when connected with a 200 V servo amplifier

| Flange size  |                               | [mm]                | 90 × 90   |               |                  |                  |                |                |
|--|-------------------------------|---------------------|---|---------------|------------------|------------------|----------------|----------------|
| Rotary servo motor model                                       |                               | HK-KT               | 63UW  | 7M3UW         | 103UW            | 153W             | 203W           | 202W           |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 0.6   | 0.75          | 1.0              | 1.5              | 2.0            | 2.0            |
|  | Rated torque (Note 3, 5)      | [N·m]               | 1.9<br>(2.4)  | 2.4           | 3.2              | 4.8              | 6.4            | 9.5            |
| Maximum torque (Note 3)  |                               | [N·m]               | 6.3<br>(10.3)   | 8.4<br>(10.7) | 11.1<br>(14.3)   | 16.7<br>(21.5)   | 19.1<br>(25.5) | 28.6<br>(38.2) |
| Rated speed (Note 3, 4)  |                               | [r/min]             | 3000<br>(2400)  | 3000          |                  |                  | 2000           |                |
| Maximum speed (Note 3, 4)                                      |                               | [r/min]             | 6000<br>(6700)  | 6700          | 6000             | 6700             | 6000           | 3000           |
| Power rate at continuous rated torque<br>(Note 3)<br>[kW/s]    | Without electromagnetic brake |                     | 17.3<br>(27.0)  | 27.0          | 37.0             | 52.0             | 71.7           | 111            |
|  | With electromagnetic brake    |                     | 14.9<br>(23.3)  | 23.3          | 32.9             | 48.3             | 67.7           | 107            |
| Rated current (Note 3)   |                               | [A]                 | 3.2<br>(4.0)  | 4.0           | 4.9              | 8.7              | 11             | 9.0            |
| Maximum current (Note 3)                                       |                               | [A]                 | 12<br>(20)  | 16<br>(22)    | 21<br>(27)       | 34<br>(46)       | 34<br>(48)     | 30<br>(41)     |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 2.11  |               | 2.74             | 4.38             | 5.65           | 8.18           |
|  | With electromagnetic brake    |                     | 2.45  |               | 3.08             | 4.72             | 5.99           | 8.53           |
| Recommended load to motor inertia ratio (Note 1)               |                               |                     | 10 times or less  |               | 15 times or less |                  |                |                |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |               |                  |                  |                |                |
| Type   |                               |                     | Permanent magnet synchronous motor  |               |                  |                  |                |                |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |               |                  |                  |                |                |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |               |                  |                  |                |                |
| Thermistor   |                               |                     | None  |               |                  |                  |                |                |
| Insulation class   |                               |                     | 155 (F)   |               |                  |                  |                |                |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2, 6)                     |               |                  |                  |                |                |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 24.5, Y: 49  |               |                  | X: 24.5, Y: 24.5 |                |                |
| Vibration rank   |                               |                     | V10 *3  |               |                  |                  |                |                |
| Permissible load for the shaft *2                              | L                             | [mm]                | 40  |               |                  |                  |                |                |
|  | Radial                        | [N]                 | 392   |               |                  |                  |                |                |
|  | Thrust                        | [N]                 | 147   |               |                  |                  |                |                |
| Mass [kg]  | Without electromagnetic brake |                     | 2.3   | 2.7           | 3.6              | 4.4              | 5.9            |                |
|  | With electromagnetic brake    |                     | 2.9   | 3.3           | 4.7              | 5.5              | 7.0            |                |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
 3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
 4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
 5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
 6. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

## Electromagnetic brake specifications (Note 1)

| Model  |                         | HK-KT        | 63UWB                             | 7M3UWB | 103UWB | 153WB         | 203WB | 202WB |
|--|-------------------------|--------------|-----------------------------------|--------|--------|---------------|-------|-------|
| Type   |                         |              | Spring actuated type safety brake |        |        |               |       |       |
| Rated voltage                                |                         |              | 24 V DC (-10 % to 0 %)            |        |        |               |       |       |
| Power consumption                            |                         | [W] at 20 °C | 9.0                               |        |        | 13.8          |       |       |
| Electromagnetic brake static friction torque |                         | [N·m]        | 3.2 or higher                     |        |        | 9.5 or higher |       |       |
| Permissible braking work                     | Per braking             | [J]          | 66                                |        |        | 64            |       |       |
|  | Per hour                | [J]          | 660                               |        |        | 640           |       |       |
| Electromagnetic brake life (Note 2)          | Number of braking times |              | 20000                             |        |        | 5000          |       |       |
|  | Work per braking        | [J]          | 33                                |        |        | 64            |       |       |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
 2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

## HK-KT\_4\_W (Low Inertia, Small Capacity)

Specifications when connected with a 200 V servo amplifier

| Flange size  |                               | [mm]  | 60 × 60          | 80 × 80      | 90 × 90          |                |                  |                |       |  |
|--|-------------------------------|---|------------------|--------------|------------------|----------------|------------------|----------------|-------|--|
| Rotary servo motor model                                       |                               | HK-KT   | 434W             | 634W         | 7M34W            | 1034W          | 1534W            | 2034W          | 2024W |  |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]  | 0.2              | 0.3          | 0.375            | 0.5            | 0.75             | 1.0            | 1.0   |  |
|  | Rated torque (Note 5)         | [N·m]   | 1.3              | 1.9          | 2.4              | 3.2            | 4.8              | 6.4            | 9.5   |  |
| Maximum torque (Note 3)  |                               | [N·m]   | 4.5<br>(5.7)     | 6.7<br>(8.6) | 8.4<br>(10.7)    | 11.1<br>(14.3) | 19.1<br>(21.5)   | 22.3<br>(25.5) | 38.2  |  |
| Rated speed (Note 4)   |                               | [r/min]   | 1500             |              |                  |                |                  |                | 1000  |  |
| Maximum speed (Note 4)   |                               | [r/min]   | 3500             |              |                  | 3000           |                  |                | 1500  |  |
| Power rate at continuous rated torque [kW/s]                   | Without electromagnetic brake |   | 39.5             | 61.0         | 41.6             | 60.3           | 52.0             | 71.7           | 111   |  |
|  | With electromagnetic brake    |   | 36.7             | 58.0         | 37.7             | 56.0           | 48.3             | 67.7           | 107   |  |
| Rated current  |                               | [A]   | 1.3              | 2.3          | 2.4              | 2.5            | 4.4              | 5.3            | 4.5   |  |
| Maximum current (Note 3)                                       |                               | [A]   | 4.9<br>(6.6)     | 9.1<br>(13)  | 9.7<br>(13)      | 11<br>(14)     | 20<br>(23)       | 21<br>(24)     | 21    |  |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |   | 0.410            | 0.598        | 1.37             | 1.68           | 4.38             | 5.65           | 8.18  |  |
|  | With electromagnetic brake    |   | 0.442            | 0.629        | 1.51             | 1.81           | 4.72             | 5.99           | 8.53  |  |
| Recommended load to motor inertia ratio (Note 1)               |                               |   | 25 times or less |              | 17 times or less |                | 15 times or less |                |       |  |
| Speed/position detector  |                               | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                  |              |                  |                |                  |                |       |  |
| Type   |                               | Permanent magnet synchronous motor  |                  |              |                  |                |                  |                |       |  |
| Oil seal   |                               | None (Servo motors with an oil seal are available.)                                 |                  |              |                  |                |                  |                |       |  |
| Electromagnetic brake  |                               | None (Servo motors with an electromagnetic brake are available.)                    |                  |              |                  |                |                  |                |       |  |
| Thermistor   |                               | None  |                  |              |                  |                |                  |                |       |  |
| Insulation class   |                               | 155 (F)   |                  |              |                  |                |                  |                |       |  |
| Structure  |                               | Totally enclosed, natural cooling (IP rating: IP67) (Note 2, 6)                     |                  |              |                  |                |                  |                |       |  |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ]   | X: 49, Y: 49     |              |                  |                | X: 24.5, Y: 24.5 |                |       |  |
| Vibration rank   |                               | V10 <sup>-3</sup>   |                  |              |                  |                |                  |                |       |  |
| Permissible load for the shaft *2                              | L                             | [mm]  | 30               |              | 40               |                |                  |                |       |  |
|  | Radial                        | [N]   | 245              |              | 392              |                |                  |                |       |  |
|  | Thrust                        | [N]   | 98               |              | 147              |                |                  |                |       |  |
| Mass [kg]  | Without electromagnetic brake |   | 1.2              | 1.5          | 2.2              | 2.4            | 3.6              | 4.4            | 5.9   |  |
|  | With electromagnetic brake    |   | 1.6              | 1.9          | 2.9              | 3.1            | 4.7              | 5.5            | 7.0   |  |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
6. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

| Model  |                         | HK-KT                             | 434WB         | 634WB | 7M34WB        | 1034WB | 1534WB        | 2034WB | 2024WB |
|--|-------------------------|-----------------------------------|---------------|-------|---------------|--------|---------------|--------|--------|
| Type   |                         | Spring actuated type safety brake |               |       |               |        |               |        |        |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |               |       |               |        |               |        |        |
| Power consumption                            |                         | [W] at 20 °C                      | 7.9           |       | 10            |        | 13.8          |        |        |
| Electromagnetic brake static friction torque |                         | [N·m]                             | 1.9 or higher |       | 3.2 or higher |        | 9.5 or higher |        |        |
| Permissible braking work                     | Per braking             | [J]                               | 22            |       | 64            |        |               |        |        |
|  | Per hour                | [J]                               | 220           |       | 640           |        |               |        |        |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 20000         |       |               |        | 5000          |        |        |
|  | Work per braking        | [J]                               | 22            |       | 64            |        |               |        |        |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LVSWires  
Product List  
Precautions  
Support

# Rotary Servo Motors

## HK-KT\_W (Low Inertia, Small Capacity)

Specifications when connected with a 400 V servo amplifier

|  |                               |                     |   |              |              |
|--|-------------------------------|---------------------|---|--------------|--------------|
| Flange size  |                               | [mm]                | 40 × 40   |              |              |
| Rotary servo motor model                                       |                               | HK-KT               | 053W  | 13W          | 1M3W         |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 0.05  | 0.1          | 0.15         |
|  | Rated torque (Note 5)         | [N·m]               | 0.16 (Note 6)   | 0.32         | 0.48         |
| Maximum torque (Note 3)  |                               | [N·m]               | 0.56<br>(0.72)  | 1.1<br>(1.4) | 1.7<br>(2.1) |
| Rated speed (Note 4)   |                               | [r/min]             | 3000  |              |              |
| Maximum speed (Note 4)   |                               | [r/min]             | 6700  |              |              |
| Power rate at continuous rated torque [kW/s]                   | Without electromagnetic brake |                     | 6.4   | 14.8         | 23.3         |
|  | With electromagnetic brake    |                     | 5.8   | 14.0         | 22.4         |
| Rated current  |                               | [A]                 | 1.3   | 1.2          | 1.2          |
| Maximum current (Note 3)                                       |                               | [A]                 | 4.6<br>(6.2)  | 4.6<br>(6.0) | 4.5<br>(6.0) |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 0.0394  | 0.0686       | 0.0977       |
|  | With electromagnetic brake    |                     | 0.0434  | 0.0725       | 0.102        |
| Recommended load to motor inertia ratio (Note 1)               | MR-J5                         |                     | 20 times or less  |              |              |
|  | MR-J5D                        |                     | 20 times or less  |              |              |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |              |              |
| Type   |                               |                     | Permanent magnet synchronous motor  |              |              |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.) (Note 6)                        |              |              |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |              |              |
| Thermistor   |                               |                     | None  |              |              |
| Insulation class   |                               |                     | 155 (F)   |              |              |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2, 7)                     |              |              |
| Vibration resistance <sup>*1</sup>                             |                               | [m/s <sup>2</sup> ] | X: 49, Y: 49  |              |              |
| Vibration rank   |                               |                     | V10 <sup>-3</sup>   |              |              |
| Permissible load for the shaft <sup>*2</sup>                   | L                             | [mm]                | 25  |              |              |
|  | Radial                        | [N]                 | 88  |              |              |
|  | Thrust                        | [N]                 | 59  |              |              |
| Mass [kg]  | Without electromagnetic brake |                     | 0.27  | 0.37         | 0.47         |
|  | With electromagnetic brake    |                     | 0.53  | 0.63         | 0.73         |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
6. For HK-KT053W\_J\_ (with an oil seal), use the servo motor at a derating rate of 80 %.  
7. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

## Electromagnetic brake specifications (Note 1)

|  |                         |              |                                   |      |       |
|--|-------------------------|--------------|-----------------------------------|------|-------|
| Model  |                         | HK-KT        | 053WB                             | 13WB | 1M3WB |
| Type   |                         |              | Spring actuated type safety brake |      |       |
| Rated voltage                                |                         |              | 24 V DC (-10 % to 0 %)            |      |       |
| Power consumption                            |                         | [W] at 20 °C | 6.4                               |      |       |
| Electromagnetic brake static friction torque |                         | [N·m]        | 0.48 or higher                    |      |       |
| Permissible braking work                     | Per braking             | [J]          | 5.6                               |      |       |
|  | Per hour                | [J]          | 56                                |      |       |
| Electromagnetic brake life (Note 2)          | Number of braking times |              | 20000                             |      |       |
|  | Work per braking        | [J]          | 5.6                               |      |       |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

## HK-KT\_4\_W (Low Inertia, Small Capacity)

Specifications when connected with a 400 V servo amplifier

|  |                               |                     |   |                           |                          |                          |
|--|-------------------------------|---------------------|---|---------------------------|--------------------------|--------------------------|
| Flange size  |                               | [mm]                | 60 × 60   |                           | 80 × 80                  |                          |
| Rotary servo motor model                                       |                               | HK-KT               | 434W  | 634W                      | 7M34W                    | 1034W                    |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 0.4   | 0.6                       | 0.75                     | 1.0                      |
|  | Rated torque (Note 5)         | [N·m]               | 1.3   | 1.9                       | 2.4                      | 3.2                      |
| Maximum torque (Note 3)  |                               | [N·m]               | 4.5<br>(5.7)  | 6.7<br>(8.6)              | 8.4<br>(10.7)            | 11.1<br>(14.3)           |
| Rated speed (Note 4)   |                               | [r/min]             | 3000  |                           |                          |                          |
| Maximum speed (Note 4)   |                               | [r/min]             | 6700  |                           |                          | 6500                     |
| Power rate at continuous rated torque [kW/s]                   | Without electromagnetic brake |                     | 39.5  | 61.0                      | 41.6                     | 60.3                     |
|  | With electromagnetic brake    |                     | 36.7  | 58.0                      | 37.7                     | 56.0                     |
| Rated current  |                               | [A]                 | 1.3   | 2.3                       | 2.4                      | 2.5                      |
| Maximum current (Note 3)                                       |                               | [A]                 | 4.9<br>(6.6)  | 9.1<br>(13)               | 9.7<br>(13)              | 10<br>(14)               |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 0.410   | 0.598                     | 1.37                     | 1.68                     |
|  | With electromagnetic brake    |                     | 0.442   | 0.629                     | 1.51                     | 1.81                     |
| Recommended load to motor inertia ratio (Note 1)               | MR-J5                         |                     | 23 times or less  | 20 times or less (Note 7) | 9 times or less (Note 8) | 7 times or less (Note 7) |
|  | MR-J5D                        |                     | 23 times or less  | 30 times or less          | 20 times or less         | 30 times or less         |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                           |                          |                          |
| Type   |                               |                     | Permanent magnet synchronous motor  |                           |                          |                          |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |                           |                          |                          |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |                           |                          |                          |
| Thermistor   |                               |                     | None  |                           |                          |                          |
| Insulation class   |                               |                     | 155 (F)   |                           |                          |                          |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2, 6)                     |                           |                          |                          |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 49, Y: 49  |                           |                          |                          |
| Vibration rank   |                               |                     | V10 <sup>-3</sup>   |                           |                          |                          |
| Permissible load for the shaft *2                              | L                             | [mm]                | 30  |                           | 40                       |                          |
|  | Radial                        | [N]                 | 245   |                           | 392                      |                          |
|  | Thrust                        | [N]                 | 98  |                           | 147                      |                          |
| Mass [kg]  | Without electromagnetic brake |                     | 1.2   | 1.5                       | 2.2                      | 2.4                      |
|  | With electromagnetic brake    |                     | 1.6   | 1.9                       | 2.9                      | 3.1                      |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
 3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
 4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
 5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
 6. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)  
 7. When the speed is 3000 r/min or less, the recommended load to motor inertia ratio is 30 times or less.  
 8. When the speed is 3000 r/min or less, the recommended load to motor inertia ratio is 20 times or less.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

|  |                                   |               |       |        |               |
|--|-----------------------------------|---------------|-------|--------|---------------|
| Model  | HK-KT                             | 434WB         | 634WB | 7M34WB | 1034WB        |
| Type   | Spring actuated type safety brake |               |       |        |               |
| Rated voltage                                | 24 V DC (-10 % to 0 %)            |               |       |        |               |
| Power consumption                            | [W] at 20 °C                      | 7.9           |       | 10     |               |
| Electromagnetic brake static friction torque | [N·m]                             | 1.9 or higher |       |        | 3.2 or higher |
| Permissible braking work                     | Per braking                       | [J]           | 22    |        | 64            |
|  | Per hour                          | [J]           | 220   |        | 640           |
| Electromagnetic brake life (Note 2)          | Number of braking times           | 20000         |       |        |               |
|  | Work per braking                  | [J]           | 22    |        | 64            |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
 2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

# Rotary Servo Motors

## HK-KT\_4\_W (Low Inertia, Small Capacity)

Specifications when connected with a 400 V servo amplifier

| Flange size  |                               | [mm]                | 90 × 90   |                |                              |                              |                  |
|--|-------------------------------|---------------------|---|----------------|------------------------------|------------------------------|------------------|
| Rotary servo motor model                                       |                               | HK-KT               | 634UW   | 1034UW         | 1534W                        | 2034W                        | 2024W            |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 0.6   | 1.0            | 1.5                          | 2.0                          | 2.0              |
|  | Rated torque (Note 3, 5)      | [N·m]               | 1.9<br>(2.4)  | 3.2            | 4.8                          | 6.4                          | 9.5              |
| Maximum torque (Note 3)  |                               | [N·m]               | 6.3<br>(10.3)   | 11.1<br>(14.3) | 16.7<br>(21.5)               | 19.1<br>(25.5)               | 28.6<br>(38.2)   |
| Rated speed (Note 3, 4)  |                               | [r/min]             | 3000<br>(2400)  | 3000           |                              |                              | 2000             |
| Maximum speed (Note 3, 4)                                      |                               | [r/min]             | 6000<br>(6700)  | 6000           | 6700                         | 6000                         | 3000             |
| Power rate at continuous rated torque<br>(Note 3)<br>[kW/s]    | Without electromagnetic brake |                     | 17.3<br>(27.0)  | 37.0           | 52.0                         | 71.7                         | 111              |
|  | With electromagnetic brake    |                     | 14.9<br>(23.3)  | 32.9           | 48.3                         | 67.7                         | 107              |
| Rated current (Note 3)   |                               | [A]                 | 1.6<br>(2.0)  | 2.5            | 4.4                          | 5.3                          | 4.5              |
| Maximum current (Note 3)                                       |                               | [A]                 | 5.6<br>(9.7)  | 9.7<br>(14)    | 17<br>(23)                   | 17<br>(24)                   | 15<br>(21)       |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 2.11  | 2.74           | 4.38                         | 5.65                         | 8.18             |
|  | With electromagnetic brake    |                     | 2.45  | 3.08           | 4.72                         | 5.99                         | 8.53             |
| Recommended load to motor inertia ratio<br>(Note 1)            | MR-J5                         |                     | 10 times or less  |                | 11 times or less<br>(Note 7) | 10 times or less<br>(Note 7) | 15 times or less |
|  | MR-J5D                        |                     | 10 times or less  |                | 10 times or less             | 9 times or less              | 15 times or less |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                |                              |                              |                  |
| Type   |                               |                     | Permanent magnet synchronous motor  |                |                              |                              |                  |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |                |                              |                              |                  |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |                |                              |                              |                  |
| Thermistor   |                               |                     | None  |                |                              |                              |                  |
| Insulation class   |                               |                     | 155 (F)   |                |                              |                              |                  |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2, 6)                     |                |                              |                              |                  |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 24.5, Y: 49  |                | X: 24.5, Y: 24.5             |                              |                  |
| Vibration rank   |                               |                     | V10 <sup>-3</sup>   |                |                              |                              |                  |
| Permissible load for the shaft *2                              | L                             | [mm]                | 40  |                |                              |                              |                  |
|  | Radial                        | [N]                 | 392   |                |                              |                              |                  |
|  | Thrust                        | [N]                 | 147   |                |                              |                              |                  |
| Mass [kg]  | Without electromagnetic brake |                     | 2.3   | 2.7            | 3.6                          | 4.4                          | 5.9              |
|  | With electromagnetic brake    |                     | 2.9   | 3.3            | 4.7                          | 5.5                          | 7.0              |

- Notes:
- Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.
  - The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.
  - The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.
  - The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.
  - When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.
  - When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@meisc.jp)
  - When the speed is 3000 r/min or less, the recommended load to motor inertia ratio is 30 times or less.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

| Model  | HK-KT                   | 634UWB                            | 1034UWB       | 1534WB | 2034WB        | 2024WB |
|--|-------------------------|-----------------------------------|---------------|--------|---------------|--------|
| Type   |                         | Spring actuated type safety brake |               |        |               |        |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |               |        |               |        |
| Power consumption                            |                         | [W] at 20 °C                      | 9.0           |        | 13.8          |        |
| Electromagnetic brake static friction torque |                         | [N·m]                             | 3.2 or higher |        | 9.5 or higher |        |
| Permissible braking work                     | Per braking             | [J]                               | 66            |        | 64            |        |
|  | Per hour                | [J]                               | 660           |        | 640           |        |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 20000         |        | 5000          |        |
|  | Work per braking        | [J]                               | 33            |        | 64            |        |

- Notes:
- The electromagnetic brake is for holding. It cannot be used for deceleration applications.
  - Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.




## HK-KT\_W Torque Characteristics (Note 1)

When connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


### HK-KT053W

Standard torque




### HK-KT053W

Torque increased




### HK-KT13W

Standard torque




### HK-KT13W

Torque increased




### HK-KT1M3W

Standard torque




### HK-KT1M3W

Torque increased




### HK-KT13UW

Standard torque




### HK-KT13UW

Torque increased




### HK-KT23W

Standard torque




### HK-KT23W

Torque increased




### HK-KT43W

Standard torque




### HK-KT43W

Torque increased




### HK-KT63W

Standard torque



### HK-KT63W

Torque increased



Notes: 1. Torque drops when the power supply voltage is below the specified value.

# Rotary Servo Motors


## HK-KT\_W Torque Characteristics (Note 1)

When connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


### HK-KT23UW

Standard torque




### HK-KT23UW

Torque increased




### HK-KT43UW

Standard torque




### HK-KT43UW

Torque increased




### HK-KT7M3W

Standard torque




### HK-KT7M3W

Torque increased




### HK-KT103W (Note 2)

Standard torque



### HK-KT103W (Note 2)

Torque increased




- Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

## HK-KT\_W Torque Characteristics (Note 1)


When connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


**HK-KT63UW**  
Standard torque




**HK-KT63UW**  
Torque increased




**HK-KT7M3UW**  
Standard torque




**HK-KT7M3UW**  
Torque increased




**HK-KT103UW (Note 2)**  
Standard torque




**HK-KT103UW (Note 2)**  
Torque increased




**HK-KT153W (Note 2)**  
Standard torque




**HK-KT153W**  
Torque increased




**HK-KT203W (Note 2)**  
Standard torque




**HK-KT203W**  
Torque increased



**HK-KT202W (Note 2)**  
Standard torque



**HK-KT202W**  
Torque increased



Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - - : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Rotary Servo Motors


## HK-KT\_4\_W Torque Characteristics (Note 1)

When connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


### HK-KT434W

Standard torque




### HK-KT434W

Torque increased




### HK-KT634W

Standard torque




### HK-KT634W

Torque increased




### HK-KT7M34W

Standard torque




### HK-KT7M34W

Torque increased




### HK-KT1034W

Standard torque




### HK-KT1034W

Torque increased




### HK-KT1534W

Standard torque




### HK-KT1534W

Torque increased




### HK-KT2034W (Note 2)

Standard torque




### HK-KT2034W (Note 2)

Torque increased



### HK-KT2024W (Note 2)

Standard torque




Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - - : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

### HK-KT\_W Torque Characteristics (Note 1)


When connected with a 400 V servo amplifier

— : For 3-phase 400 V AC  
 — : For 3-phase 380 V AC


**HK-KT053W**  
Standard torque




**HK-KT053W**  
Torque increased




**HK-KT13W**  
Standard torque




**HK-KT13W**  
Torque increased



**HK-KT1M3W**  
Standard torque



**HK-KT1M3W**  
Torque increased



Notes: 1. Torque drops when the power supply voltage is below the specified value.

# Rotary Servo Motors


## HK-KT\_4\_W Torque Characteristics (Note 1)

When connected with a 400 V servo amplifier

— : For 3-phase 400 V AC  
 — : For 3-phase 380 V AC


### HK-KT434W

Standard torque




### HK-KT434W

Torque increased




### HK-KT634W

Standard torque




### HK-KT634W

Torque increased




### HK-KT7M34W

Standard torque




### HK-KT7M34W

Torque increased




### HK-KT1034W

Standard torque



### HK-KT1034W

Torque increased




Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - : A rough indication of the possible continuous running range for 3-phase 323 V AC

## HK-KT\_4\_W Torque Characteristics (Note 1)


When connected with a 400 V servo amplifier

— : For 3-phase 400 V AC  
 — : For 3-phase 380 V AC


**HK-KT634UW**  
Standard torque




**HK-KT634UW**  
Torque increased




**HK-KT1034UW**  
Standard torque




**HK-KT1034UW**  
Torque increased




**HK-KT1534W**  
Standard torque




**HK-KT1534W**  
Torque increased




**HK-KT2034W**  
Standard torque




**HK-KT2034W**  
Torque increased



**HK-KT2024W**  
Standard torque



**HK-KT2024W**  
Torque increased





Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - - : A rough indication of the possible continuous running range for 3-phase 323 V AC

# Rotary Servo Motors

## HK-KT Series Dimensions (Note 3, 4, 5)

HK-KT053W(B), HK-KT13W(B), HK-KT1M3W(B)

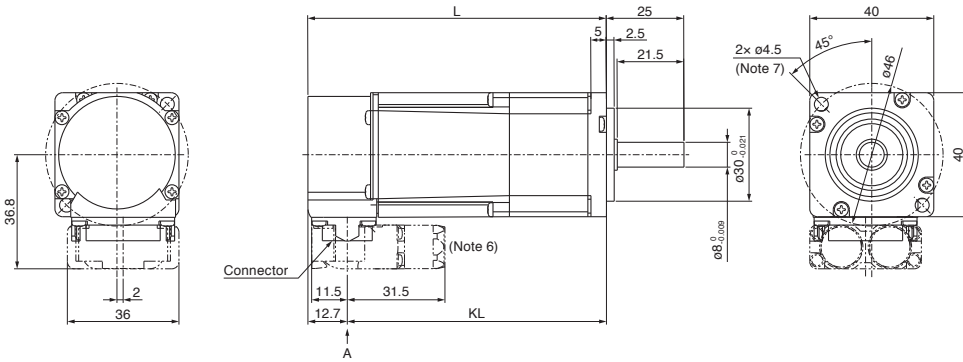

| Pin No. | Signal name |
|---------|-------------|
| 1       | E           |
| 2       | U           |
| 3       | W           |
| 4       | V           |

Electromagnetic brake (Note 2)

| Pin No. | Signal name |
|---------|-------------|
| 5       | B1          |
| 6       | B2          |



Encoder

| Pin No. | Signal name |
|---------|-------------|
| 11      | P5          |
| 12      | MR          |
| 13      | LG          |
| 14      | MRR         |

| Model        | Variable dimensions (Note 1) |                 |
|--------------|------------------------------|-----------------|
|              | L                            | KL              |
| HK-KT053W(B) | 55.5<br>(90.5)               | 42.8<br>(77.8)  |
| HK-KT13W(B)  | 68<br>(103)                  | 55.3<br>(90.3)  |
| HK-KT1M3W(B) | 80.5<br>(115.5)              | 67.8<br>(102.8) |

[Unit: mm]

## HK-KT13UW(B)

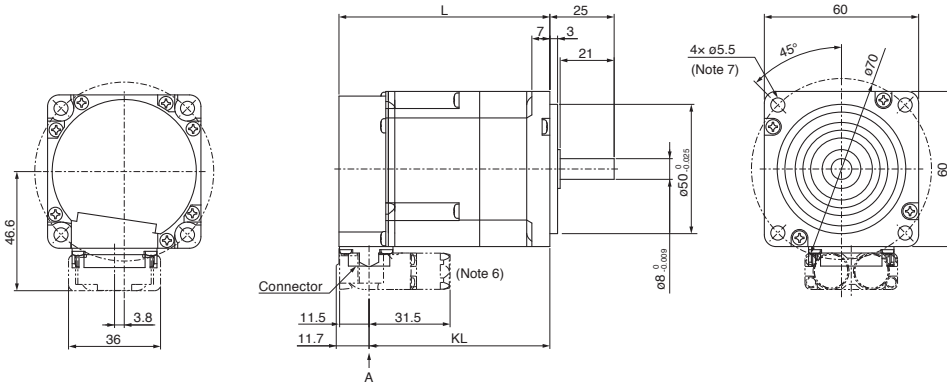

| Pin No. | Signal name |
|---------|-------------|
| 1       | E           |
| 2       | U           |
| 3       | W           |
| 4       | V           |

Electromagnetic brake (Note 2)

| Pin No. | Signal name |
|---------|-------------|
| 5       | B1          |
| 6       | B2          |

Encoder

| Pin No. | Signal name |
|---------|-------------|
| 11      | P5          |
| 12      | MR          |
| 13      | LG          |
| 14      | MRR         |

| Model        | Variable dimensions (Note 1) |                |
|--------------|------------------------------|----------------|
|              | L                            | KL             |
| HK-KT13UW(B) | 58.5<br>(82)                 | 46.8<br>(70.3) |


[Unit: mm]

- Notes:
1. The dimensions in brackets are for the models with an electromagnetic brake.
  2. The electromagnetic brake terminals do not have polarity.
  3. The dimensions are the same regardless of whether or not an oil seal is installed.
  4. Use a friction coupling to fasten a load.
  5. The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  6. The dimensions are applicable when a dual type motor cable is led to the load side. Refer to "HK-KT Series Connector Dimensions" in this catalog for the dimensions when leading the cable to the opposite to the load side or leading vertically and when using a single type motor cable.
  7. Use hexagonal cap head bolts when mounting the servo motor.




## HK-KT Series Dimensions (Note 3, 4, 5)

HK-KT23W(B), HK-KT43W(B), HK-KT63W(B),  
HK-KT434W(B), HK-KT634W(B)

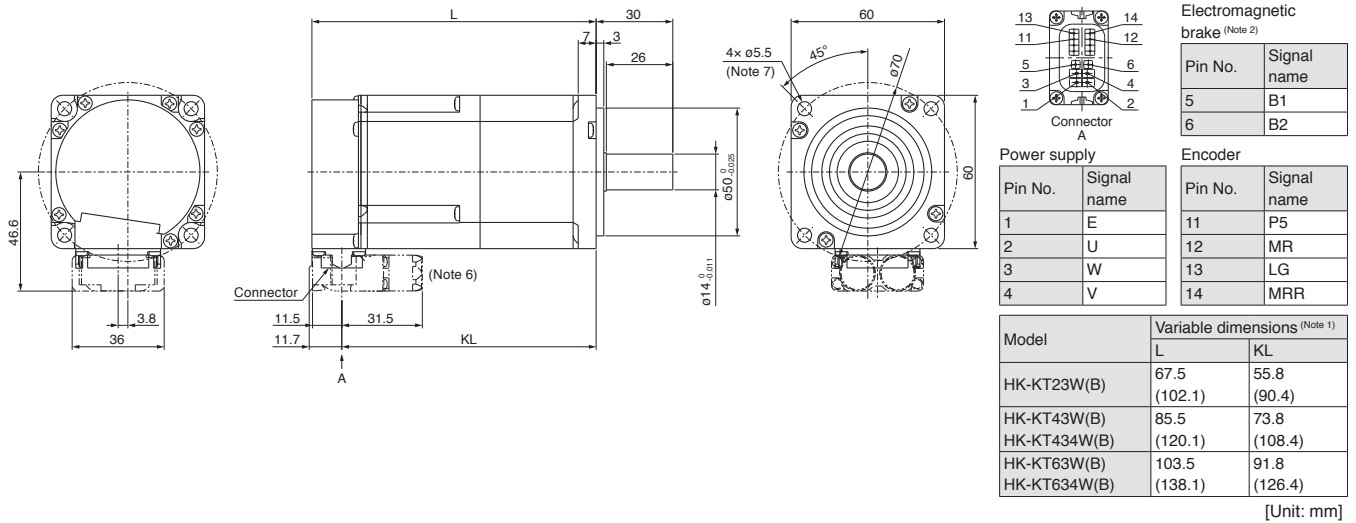

## HK-KT23UW(B), HK-KT43UW(B)


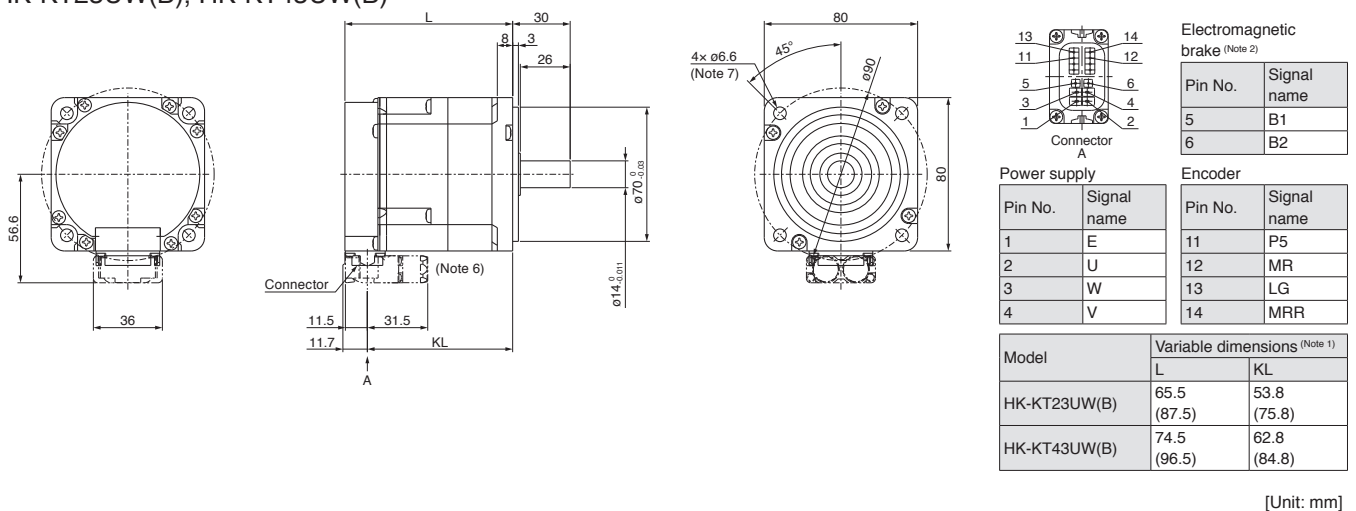


- Notes:
1. The dimensions in brackets are for the models with an electromagnetic brake.
  2. The electromagnetic brake terminals do not have polarity.
  3. The dimensions are the same regardless of whether or not an oil seal is installed.
  4. Use a friction coupling to fasten a load.
  5. The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  6. The dimensions are applicable when a dual type motor cable is led to the load side. Refer to "HK-KT Series Connector Dimensions" in this catalog for the dimensions when leading the cable to the opposite to the load side or leading vertically and when using a single type motor cable.
  7. Use hexagonal cap head bolts when mounting the servo motor.

# Rotary Servo Motors

## HK-KT Series Dimensions (Note 3, 4, 5)

HK-KT7M3W(B), HK-KT103W(B), HK-KT7M34W(B), HK-KT1034W(B)

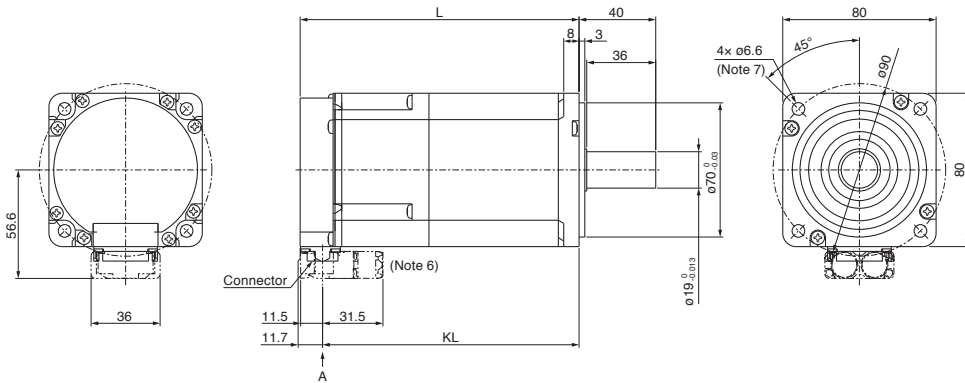

Electromagnetic brake (Note 2)

| Pin No. | Signal name |
|---------|-------------|
| 5       | B1          |
| 6       | B2          |

Power supply

| Pin No. | Signal name |
|---------|-------------|
| 1       | E           |
| 2       | U           |
| 3       | W           |
| 4       | V           |



Encoder

| Pin No. | Signal name |
|---------|-------------|
| 11      | P5          |
| 12      | MR          |
| 13      | LG          |
| 14      | MRR         |

| Model         | Variable dimensions (Note 1) |         |
|---------------|------------------------------|---------|
|               | L                            | KL      |
| HK-KT7M3W(B)  | 92.5                         | 80.8    |
| HK-KT7M34W(B) | (128)                        | (116.3) |
| HK-KT103W(B)  | 101.5                        | 89.8    |
| HK-KT1034W(B) | (137)                        | (125.3) |

[Unit: mm]

HK-KT63UW(B), HK-KT7M3UW(B), HK-KT103UW(B), HK-KT153W(B),  
 HK-KT203W(B), HK-KT202W(B),  
 HK-KT634UW(B), HK-KT1034UW(B), HK-KT1534W(B),  
 HK-KT2034W(B), HK-KT2024W(B)

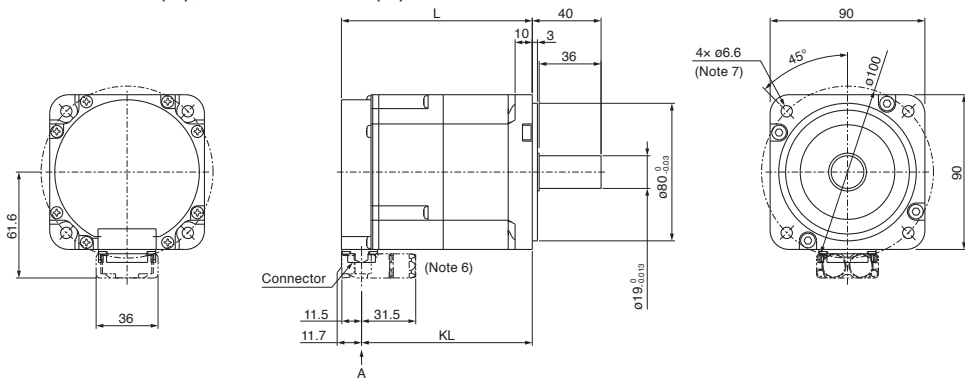

Electromagnetic brake (Note 2)

| Pin No. | Signal name |
|---------|-------------|
| 5       | B1          |
| 6       | B2          |

Power supply

| Pin No. | Signal name |
|---------|-------------|
| 1       | E           |
| 2       | U           |
| 3       | W           |
| 4       | V           |

Encoder

| Pin No. | Signal name |
|---------|-------------|
| 11      | P5          |
| 12      | MR          |
| 13      | LG          |
| 14      | MRR         |

| Model         | Variable dimensions (Note 1) |         |
|---------------|------------------------------|---------|
|               | L                            | KL      |
| HK-KT63UW(B)  | 83.5                         | 71.8    |
| HK-KT634UW(B) | (111)                        | (99.3)  |
| HK-KT7M3UW(B) | 92.5                         | 80.8    |
| HK-KT103UW(B) | (120)                        | (108.3) |
| HK-KT153W(B)  | 118.9                        | 107.2   |
| HK-KT1534W(B) | (158.3)                      | (146.6) |
| HK-KT203W(B)  | 136.9                        | 125.2   |
| HK-KT2034W(B) | (176.3)                      | (164.6) |
| HK-KT202W(B)  | 172.9                        | 161.2   |
| HK-KT2024W(B) | (212.3)                      | (200.6) |


[Unit: mm]

- Notes:
- The dimensions in brackets are for the models with an electromagnetic brake.
  - The electromagnetic brake terminals do not have polarity.
  - The dimensions are the same regardless of whether or not an oil seal is installed.
  - Use a friction coupling to fasten a load.
  - The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  - The dimensions are applicable when a dual type motor cable is led to the load side. Refer to "HK-KT Series Connector Dimensions" in this catalog for the dimensions when leading the cable to the opposite to the load side or leading vertically and when using a single type motor cable.
  - Use hexagonal cap head bolts when mounting the servo motor.

### HK-KT Series Connector Dimensions

Cable direction: load side/opposite to load side

| Model   | Variable dimensions |      |      |      |                   |    |      |    |      |
|---|---------------------|------|------|------|-------------------|----|------|----|------|
|   | Dual cable type     |      |      |      | Single cable type |    |      |    |      |
|   | A                   | B    | C    | D    | A                 | B  | C    | D  |      |
| HK-KT053W<br>HK-KT13W<br>HK-KT1M3W  | 36.8                | 36   | 12.7 | 31.5 | 39.6              | 32 | 12.7 | 40 |      |
| HK-KT13UW<br>HK-KT23W<br>HK-KT43(4)W<br>HK-KT63(4)W   | 46.6                |      | 11.7 |      | 59.4              |    | 11.7 |    |      |
| HK-KT23UW<br>HK-KT43UW<br>HK-KT7M3(4)W<br>HK-KT103(4)W                                      | 56.6                | 61.6 | 11.7 | 31.5 | 64.4              | 32 | 11.7 | 40 |      |
| HK-KT63(4)UW<br>HK-KT7M3UW<br>HK-KT103(4)UW<br>HK-KT153(4)W<br>HK-KT203(4)W<br>HK-KT202(4)W | 61.6                |      |      |      | 64.4              |    |      |    | 11.7 |

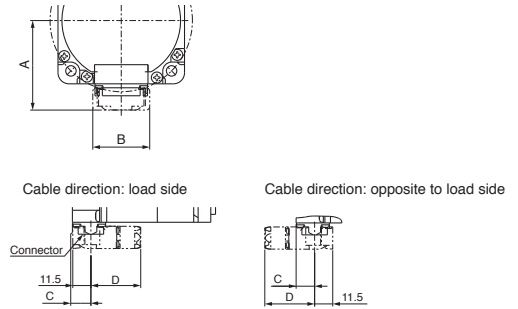


\* The drawing shows a dual cable type as an example.

[Unit: mm]

Cable direction: vertical

| Model   | Variable dimensions |      |      |                   |    |      |      |
|---|---------------------|------|------|-------------------|----|------|------|
|   | Dual cable type     |      |      | Single cable type |    |      |      |
|   | A                   | B    | C    | A                 | B  | C    |      |
| HK-KT053W<br>HK-KT13W<br>HK-KT1M3W  | 63.4                | 36   | 12.7 | 71.9              | 32 | 12.7 |      |
| HK-KT13UW<br>HK-KT23W<br>HK-KT43(4)W<br>HK-KT63(4)W   | 73.2                |      | 11.7 | 91.7              |    | 11.7 |      |
| HK-KT23UW<br>HK-KT43UW<br>HK-KT7M3(4)W<br>HK-KT103(4)W                                      | 83.2                | 61.6 | 11.7 | 96.7              | 32 | 11.7 |      |
| HK-KT63(4)UW<br>HK-KT7M3UW<br>HK-KT103(4)UW<br>HK-KT153(4)W<br>HK-KT203(4)W<br>HK-KT202(4)W | 88.2                |      |      | 96.7              |    |      | 11.7 |



\* The drawing shows a dual cable type as an example.

[Unit: mm]


# Rotary Servo Motors

## HK-KT Series with Special Shaft Dimensions

Servo motors with the following specifications are also available.

### D: D-cut shaft (Note 1)


| Model      | Variable dimensions |      |
|------------|---------------------|------|
|            | Q1                  | Q2   |
| HK-KT053WD | 21.5                | 20.5 |
| HK-KT13WD  |                     |      |
| HK-KT1M3WD |                     |      |
| HK-KT13UWD | 21                  | 20   |



[Unit: mm]

### L: L-cut shaft (Note 1)


| Model      | Variable dimensions |      |
|------------|---------------------|------|
|            | Q1                  | Q2   |
| HK-KT053WL | 21.5                | 20.5 |
| HK-KT13WL  |                     |      |
| HK-KT1M3WL |                     |      |
| HK-KT13UWL | 21                  | 20   |



[Unit: mm]

### K: Keyed shaft (with a double round-ended key) (Note 1)


| Model          | Variable dimensions |    |      |    |    |    |                  |     |    |       |
|----------------|---------------------|----|------|----|----|----|------------------|-----|----|-------|
|                | S                   | LR | Q    | W  | QK | QL | U                | R   | T  | Y     |
| HK-KT053WK     | $8_{-0.009}^0$      | 25 | 21.5 | 3  | 14 | 5  | $6.2_{-0.085}^0$ | 1.5 | 3  | M3×8  |
| HK-KT13WK      |                     |    | 21   |    |    |    |                  |     |    |       |
| HK-KT1M3WK     |                     |    | 21   |    |    |    |                  |     |    |       |
| HK-KT23WK      | $14_{-0.011}^0$     | 30 | 26   | 5  | 20 | 3  | $11_{-0.085}^0$  | 2.5 | 5  | M4×15 |
| HK-KT43(4)WK   |                     |    | 26   |    |    |    |                  |     |    |       |
| HK-KT63(4)WK   |                     |    | 26   |    |    |    |                  |     |    |       |
| HK-KT23UWK     |                     |    | 26   |    |    |    |                  |     |    |       |
| HK-KT43UWK     | 26                  | 26 | 26   | 26 | 26 | 26 | 26               | 26  | 26 | 26    |
| HK-KT7M3(4)WK  | $19_{-0.013}^0$     | 40 | 36   | 6  | 25 | 5  | $15.5_{-0.1}^0$  | 3   | 6  | M5×20 |
| HK-KT103(4)WK  |                     |    | 36   |    |    |    |                  |     |    |       |
| HK-KT63(4)UWK  |                     |    | 36   |    |    |    |                  |     |    |       |
| HK-KT7M3UWK    |                     |    | 36   |    |    |    |                  |     |    |       |
| HK-KT103(4)UWK |                     |    | 36   |    |    |    |                  |     |    |       |
| HK-KT153(4)WK  |                     |    | 36   |    |    |    |                  |     |    |       |
| HK-KT203(4)WK  |                     |    | 36   |    |    |    |                  |     |    |       |
| HK-KT202(4)WK  |                     |    | 36   |    |    |    |                  |     |    |       |

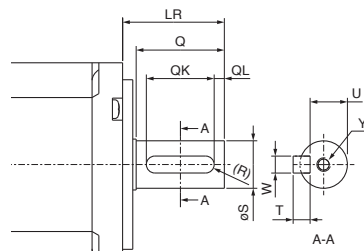

[Unit: mm]

### N: Keyed shaft (without a key) (Note 1, 2)

| Model          | Variable dimensions |    |      |                       |    |    |                  |     |    |       |
|----------------|---------------------|----|------|-----------------------|----|----|------------------|-----|----|-------|
|                | S                   | LR | Q    | W                     | QK | QL | U                | R   | Y  |       |
| HK-KT053WN     | $8_{-0.009}^0$      | 25 | 21.5 | $3_{-0.029}^{-0.004}$ | 14 | 5  | $6.2_{-0.085}^0$ | 1.5 | 3  | M3×8  |
| HK-KT13WN      |                     |    | 21   |                       |    |    |                  |     |    |       |
| HK-KT1M3WN     |                     |    | 21   |                       |    |    |                  |     |    |       |
| HK-KT23WN      | $14_{-0.011}^0$     | 30 | 26   | $5_{-0.03}^0$         | 20 | 3  | $11_{-0.085}^0$  | 2.5 | 5  | M4×15 |
| HK-KT43(4)WN   |                     |    | 26   |                       |    |    |                  |     |    |       |
| HK-KT63(4)WN   |                     |    | 26   |                       |    |    |                  |     |    |       |
| HK-KT23UWN     |                     |    | 26   |                       |    |    |                  |     |    |       |
| HK-KT43UWN     | 26                  | 26 | 26   | 26                    | 26 | 26 | 26               | 26  | 26 | 26    |
| HK-KT7M3(4)WN  | $19_{-0.013}^0$     | 40 | 36   | $6_{-0.03}^0$         | 25 | 5  | $15.5_{-0.1}^0$  | 3   | 6  | M5×20 |
| HK-KT103(4)WN  |                     |    | 36   |                       |    |    |                  |     |    |       |
| HK-KT63(4)UWN  |                     |    | 36   |                       |    |    |                  |     |    |       |
| HK-KT7M3UWN    |                     |    | 36   |                       |    |    |                  |     |    |       |
| HK-KT103(4)UWN |                     |    | 36   |                       |    |    |                  |     |    |       |
| HK-KT153(4)WN  |                     |    | 36   |                       |    |    |                  |     |    |       |
| HK-KT203(4)WN  |                     |    | 36   |                       |    |    |                  |     |    |       |
| HK-KT202(4)WN  |                     |    | 36   |                       |    |    |                  |     |    |       |

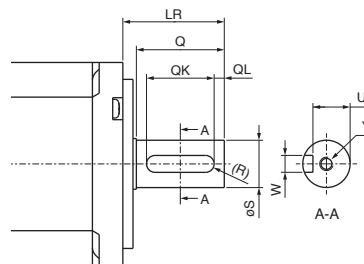

[Unit: mm]

- Notes: 1. Do not use the servo motors with a D-cut shaft, an L-cut shaft, or a keyed shaft for frequent start/stop applications as this may cause the damage to the shaft.  
2. The servo motor is supplied without a key. The user needs to prepare a key.

### HK-KT Series Geared Servo Motor Specifications

With a gear reducer for general industrial machines, flange mounting: G1

| Model HK-KT | Output [kW] | Reduction ratio | Actual reduction ratio | Moment of inertia J [ $\times 10^{-4} \text{ kg}\cdot\text{m}^2$ ] <sup>(Note 1)</sup> |                             | Permissible load to motor inertia ratio <sup>(Note 2)</sup><br>(when converted into the servo motor shaft) | Permissible load for the shaft <sup>1</sup> |            |            | Mass [kg]                      |                             | Lubrication method | Mounting direction |                 |               |
|-------------|-------------|-----------------|------------------------|--|-----------------------------|--|---|------------|------------|--------------------------------|-----------------------------|--------------------|--------------------|-----------------|---------------|
|             |             |                 |                        | Without electro-magnetic brake   | With electro-magnetic brake |  | Q [mm]                                      | Radial [N] | Thrust [N] | Without electro-magnetic brake | With electro-magnetic brake |                    |                    |                 |               |
| 053G1       | 0.05        | 1/5             | 9/44                   | 0.0764   | 0.0804                      | 5 times or less  | 12.5  | 150        | 200        | 1.4                            | 1.6                         | Grease (filled)    | Any direction      |                 |               |
|             |             | 1/12            | 49/576                 | 0.0984   | 0.102                       |  |   | 240        | 320        | 1.8                            | 2.0                         |                    |                    |                 |               |
|             |             | 1/20            | 25/484                 | 0.0804   | 0.0844                      |  |   | 370        | 450        | 1.8                            | 2.0                         |                    |                    |                 |               |
| 13G1        | 0.1         | 1/5             | 9/44                   | 0.106  | 0.110                       | 5 times or less  | 12.5  | 150        | 200        | 1.5                            | 1.7                         |                    |                    | Grease (filled) | Any direction |
|             |             | 1/12            | 49/576                 | 0.128  | 0.132                       |  |   | 240        | 320        | 1.9                            | 2.1                         |                    |                    |                 |               |
|             |             | 1/20            | 25/484                 | 0.110  | 0.114                       |  |   | 370        | 450        | 1.9                            | 2.1                         |                    |                    |                 |               |
| 23G1        | 0.2         | 1/5             | 19/96                  | 0.363  | 0.408                       | 7 times or less  | 17.5  | 330        | 350        | 3.2                            | 3.6                         | Grease (filled)    | Any direction      |                 |               |
|             |             | 1/12            | 961/11664              | 0.494  | 0.539                       |  |   | 710        | 720        | 3.8                            | 4.2                         |                    |                    |                 |               |
|             |             | 1/20            | 513/9984               | 0.375  | 0.420                       |  |   | 780        | 780        | 3.8                            | 4.2                         |                    |                    |                 |               |
| 43G1        | 0.4         | 1/5             | 19/96                  | 0.564  | 0.596                       | 7 times or less  | 17.5  | 330        | 350        | 3.5                            | 3.9                         |                    |                    | Grease (filled) | Any direction |
|             |             | 1/12            | 961/11664              | 0.695  | 0.727                       |  |   | 710        | 720        | 4.1                            | 4.5                         |                    |                    |                 |               |
|             |             | 1/20            | 7/135                  | 0.687  | 0.719                       |  |   | 760        | 760        | 5.2                            | 5.6                         |                    |                    |                 |               |
| 7M3G1       | 0.75        | 1/5             | 1/5                    | 1.79   | 1.93                        | 5 times or less  | 25  | 430        | 430        | 5.4                            | 6.1                         | Grease (filled)    | Any direction      |                 |               |
|             |             | 1/12            | 7/87                   | 1.85   | 1.99                        |  |   | 620        | 620        | 6.5                            | 7.2                         |                    |                    |                 |               |
|             |             | 1/20            | 625/12544              | 2.52   | 2.66                        |  |   | 970        | 960        | 9.4                            | 11                          |                    |                    |                 |               |

| Item  | Specifications  |
|---|---|
| Mounting method   | Flange mounting   |
| Output shaft rotation direction                           | Same as the servo motor output shaft direction  |
| Backlash <sup>(Note 4)</sup>                              | 60 minutes or less at gear reducer output shaft   |
| Maximum torque (at servo motor shaft) <sup>(Note 5)</sup> | Three times of the rated torque<br>(Refer to HK-KT series specifications in this catalog for the rated torque.) |
| Maximum speed (at servo motor shaft)                      | 4500 r/min  |
| IP rating (gear reducer part)                             | Equivalent to IP44  |
| Gear reducer efficiency <sup>(Note 3)</sup>               | 40 % to 85 %  |

- Notes: 1. The moments of inertia in the table are the values that are converted into the shaft of the servo motor with a gear reducer (and with an electromagnetic brake).  
 2. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 3. The gear reducer efficiency varies depending on the reduction ratio and the conditions of use such as an output torque, speed, and temperature. The values in the table are not guaranteed as they are representative values at the rated torque and speed at a temperature of 20 °C.  
 4. The backlash can be converted: 1 minute = 0.0167°  
 5. The torques of the geared servo motors do not increase even when these servo motors are combined with larger capacity servo amplifiers.

Refer to "Annotations for Geared Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Rotary Servo Motors

## HK-KT Series Geared Servo Motor Specifications

With a flange-output type gear reducer for high precision applications, flange mounting: G5

| Model<br>HK-KT | Output<br>[kW] | Reduction<br>ratio (Note 3) | Moment of inertia J<br>[ $\times 10^{-4} \text{ kg}\cdot\text{m}^2$ ] (Note 1) |                                       | Permissible load<br>to motor inertia<br>ratio (Note 2)<br>(when converted<br>into the servo<br>motor shaft) | Permissible load for<br>the shaft *1 |               |                  | Mass [kg]                                |                                       | Lubrication<br>method | Mounting<br>direction |
|----------------|----------------|-----------------------------|--|---------------------------------------|---|--------------------------------------|---------------|------------------|--|---------------------------------------|-----------------------|-----------------------|
|                |                |                             | Without<br>electro-<br>magnetic<br>brake                                       | With<br>electro-<br>magnetic<br>brake |   | L<br>[mm]                            | Radial<br>[N] | Thrust<br>[N]    | Without<br>electro-<br>magnetic<br>brake | With<br>electro-<br>magnetic<br>brake |                       |                       |
| 053G5          | 0.05           | 1/5 (40 × 40)               | 0.0429   | 0.0469                                | 10 times or less  | 17                                   | 93            | 431              | 0.48                                     | 0.66                                  | Grease<br>(filled)    | Any<br>direction      |
|                |                | 1/5 (60 × 60)               | 0.107  | 0.111                                 |   | 23                                   | 177           | 706              | 1.1                                      | 1.3                                   |                       |                       |
|                |                | 1/9                         | 0.0419   | 0.0459                                |   | 17                                   | 111           | 514              | 0.49                                     | 0.67                                  |                       |                       |
|                |                | 1/11                        | 0.0994   | 0.103                                 |   | 23                                   | 224           | 895              | 1.2                                      | 1.4                                   |                       |                       |
|                |                | 1/21                        | 0.0904   | 0.0944                                |   | 23                                   | 272           | 1987             | 1.2                                      | 1.4                                   |                       |                       |
|                |                | 1/33                        | 0.0844   | 0.0884                                |   | 23                                   | 311           | 1244             | 1.2                                      | 1.4                                   |                       |                       |
|                |                | 1/45                        | 0.0844   | 0.0884                                |   | 23                                   | 342           | 1366             | 1.2                                      | 1.4                                   |                       |                       |
| 13G5           | 0.1            | 1/5 (40 × 40)               | 0.0721   | 0.0760                                | 10 times or less  | 17                                   | 93            | 431              | 0.58                                     | 0.76                                  |                       |                       |
|                |                | 1/5 (60 × 60)               | 0.137  | 0.141                                 |   | 23                                   | 177           | 706              | 1.2                                      | 1.4                                   |                       |                       |
|                |                | 1/11                        | 0.129  | 0.133                                 |   | 23                                   | 224           | 895              | 1.3                                      | 1.5                                   |                       |                       |
|                |                | 1/21                        | 0.120  | 0.124                                 |   | 23                                   | 272           | 1087             | 1.3                                      | 1.5                                   |                       |                       |
|                |                | 1/33                        | 0.131  | 0.135                                 |   | 32                                   | 733           | 2581             | 2.5                                      | 2.7                                   |                       |                       |
|                |                | 1/45                        | 0.130  | 0.134                                 |   | 32                                   | 804           | 2833             | 2.5                                      | 2.7                                   |                       |                       |
|                |                | 23G5                        | 0.2  | 1/5                                   |   | 0.410                                | 0.455         | 14 times or less | 23                                       | 177                                   |                       |                       |
| 1/11           | 0.412          |                             |  | 0.457                                 | 23  | 224                                  | 895           |                  | 1.8                                      | 2.2                                   |                       |                       |
| 1/21           | 0.707          |                             |  | 0.752                                 | 32  | 640                                  | 2254          |                  | 3.3                                      | 3.7                                   |                       |                       |
| 1/33           | 0.661          |                             |  | 0.706                                 | 32  | 733                                  | 2581          |                  | 3.3                                      | 3.7                                   |                       |                       |
| 1/45           | 0.660          |                             |  | 0.705                                 | 32  | 804                                  | 2833          |                  | 3.3                                      | 3.7                                   |                       |                       |
| 43G5           | 0.4            | 1/5                         | 0.611  | 0.643                                 | 14 times or less  | 23                                   | 177           | 706              | 2.1                                      | 2.5                                   |                       |                       |
|                |                | 1/11                        | 0.986  | 1.02                                  |   | 32                                   | 527           | 1856             | 3.7                                      | 4.1                                   |                       |                       |
|                |                | 1/21                        | 0.908  | 0.940                                 |   | 32                                   | 640           | 2254             | 3.7                                      | 4.1                                   |                       |                       |
|                |                | 1/33                        | 0.960  | 0.992                                 |   | 57                                   | 1252          | 4992             | 5.8                                      | 6.2                                   |                       |                       |
|                |                | 1/45                        | 0.954  | 0.986                                 |   | 57                                   | 1374          | 5478             | 5.8                                      | 6.2                                   |                       |                       |
| 7M3G5          | 0.75           | 1/5                         | 2.02   | 2.16                                  | 10 times or less  | 32                                   | 416           | 1465             | 4.2                                      | 4.9                                   |                       |                       |
|                |                | 1/11                        | 1.93   | 2.07                                  |   | 32                                   | 527           | 1856             | 4.5                                      | 5.2                                   |                       |                       |
|                |                | 1/21                        | 2.12   | 2.26                                  |   | 57                                   | 1094          | 4359             | 6.6                                      | 7.3                                   |                       |                       |
|                |                | 1/33                        | 1.90   | 2.04                                  |   | 57                                   | 1252          | 4992             | 6.6                                      | 7.3                                   |                       |                       |
|                |                | 1/45                        | 1.90   | 2.04                                  |   | 57                                   | 1374          | 5478             | 6.6                                      | 7.3                                   |                       |                       |

| Item  | Specifications   |
|---|--|
| Mounting method                                   | Flange mounting  |
| Output shaft rotation direction                   | Same as the servo motor output shaft direction   |
| Backlash (Note 5)                                 | 3 minutes or less at gear reducer output shaft   |
| Maximum torque (at servo motor shaft)<br>(Note 6) | Three times of the rated torque<br>(Refer to HK-KT series specifications in this catalog for the rated torque.)  |
| Maximum speed (at servo motor shaft)              | 6000 r/min   |
| IP rating (gear reducer part)                     | Equivalent to IP44   |
| Gear reducer efficiency (Note 4)                  | HK-KT053G5 1/5 (60 × 60): 12 %<br>HK-KT053G5 1/11, 1/21, 1/33, and 1/45: 22 % to 34 %<br>HK-KT053G5 1/5 (40 × 40) and 1/9, and HK-KT13G5 to HK-KT7M3G5: 48 % to 84 % |

Notes: 1. The moments of inertia in the table are the values that are converted into the shaft of the servo motor with a gear reducer (and with an electromagnetic brake).

2. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.

3. The values in brackets represent the dimensions of the flange.

4. The gear reducer efficiency varies depending on the reduction ratio and the conditions of use such as an output torque, speed, and temperature. The values in the table are not guaranteed as they are representative values at the rated torque and speed at a temperature of 20 °C.

5. The backlash can be converted: 1 minute = 0.0167°

6. The torques of the geared servo motors do not increase even when these servo motors are combined with larger capacity servo amplifiers.

Refer to "Annotations for Geared Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1.

### HK-KT Series Geared Servo Motor Specifications

With a shaft-output type gear reducer for high precision applications, flange mounting: G7

| Model HK-KT | Output [kW] | Reduction ratio (Note 3) | Moment of inertia J [ $\times 10^{-4}$ kg·m <sup>2</sup> ] (Note 1) |                             | Permissible load to motor inertia ratio (Note 2)<br>(when converted into the servo motor shaft) | Permissible load for the shaft <sup>*1</sup> |            |                  | Mass [kg]                      |                             | Lubrication method | Mounting direction |
|-------------|-------------|--------------------------|---|-----------------------------|---|--|------------|------------------|--------------------------------|-----------------------------|--------------------|--------------------|
|             |             |                          | Without electro-magnetic brake                                      | With electro-magnetic brake |   | Q [mm]                                       | Radial [N] | Thrust [N]       | Without electro-magnetic brake | With electro-magnetic brake |                    |                    |
| 053G7       | 0.05        | 1/5 (40 × 40)            | 0.0456  | 0.0496                      | 10 times or less  | 17   | 93         | 431              | 0.51                           | 0.69                        | Grease (filled)    | Any direction      |
|             |             | 1/5 (60 × 60)            | 0.113   | 0.117                       |   | 23   | 177        | 706              | 1.1                            | 1.3                         |                    |                    |
|             |             | 1/9                      | 0.0436  | 0.0476                      |   | 17   | 111        | 514              | 0.51                           | 0.69                        |                    |                    |
|             |             | 1/11                     | 0.100   | 0.104                       |   | 23   | 224        | 895              | 1.2                            | 1.4                         |                    |                    |
|             |             | 1/21                     | 0.0904  | 0.0944                      |   | 23   | 272        | 1987             | 1.2                            | 1.4                         |                    |                    |
|             |             | 1/33                     | 0.0844  | 0.0884                      |   | 23   | 311        | 1244             | 1.2                            | 1.4                         |                    |                    |
|             |             | 1/45                     | 0.0844  | 0.0884                      |   | 23   | 342        | 1366             | 1.2                            | 1.4                         |                    |                    |
| 13G7        | 0.1         | 1/5 (40 × 40)            | 0.0748  | 0.0787                      | 10 times or less  | 17   | 93         | 431              | 0.61                           | 0.79                        |                    |                    |
|             |             | 1/5 (60 × 60)            | 0.143   | 0.147                       |   | 23   | 177        | 706              | 1.2                            | 1.4                         |                    |                    |
|             |             | 1/11                     | 0.130   | 0.134                       |   | 23   | 224        | 895              | 1.3                            | 1.5                         |                    |                    |
|             |             | 1/21                     | 0.120   | 0.124                       |   | 23   | 272        | 1087             | 1.3                            | 1.5                         |                    |                    |
|             |             | 1/33                     | 0.132   | 0.136                       |   | 32   | 733        | 2581             | 2.8                            | 3.0                         |                    |                    |
|             |             | 1/45                     | 0.130   | 0.134                       |   | 32   | 804        | 2833             | 2.8                            | 3.0                         |                    |                    |
|             |             | 23G7                     | 0.2   | 1/5                         |   | 0.416  | 0.461      | 14 times or less | 23                             | 177                         |                    |                    |
| 1/11        | 0.412       |                          |   | 0.457                       | 23  | 224  | 895        |                  | 1.8                            | 2.3                         |                    |                    |
| 1/21        | 0.709       |                          |   | 0.754                       | 32  | 640  | 2254       |                  | 3.7                            | 4.1                         |                    |                    |
| 1/33        | 0.662       |                          |   | 0.707                       | 32  | 733  | 2581       |                  | 3.7                            | 4.1                         |                    |                    |
| 1/45        | 0.660       |                          |   | 0.705                       | 32  | 804  | 2833       |                  | 3.7                            | 4.1                         |                    |                    |
| 43G7        | 0.4         | 1/5                      | 0.617   | 0.649                       | 14 times or less  | 23   | 177        | 706              | 2.2                            | 2.6                         |                    |                    |
|             |             | 1/11                     | 0.994   | 1.03                        |   | 32   | 527        | 1856             | 4.1                            | 4.5                         |                    |                    |
|             |             | 1/21                     | 0.910   | 0.942                       |   | 32   | 640        | 2254             | 4.1                            | 4.5                         |                    |                    |
|             |             | 1/33                     | 0.966   | 0.998                       |   | 57   | 1252       | 4992             | 7.2                            | 7.6                         |                    |                    |
|             |             | 1/45                     | 0.957   | 0.989                       |   | 57   | 1374       | 5478             | 7.2                            | 7.6                         |                    |                    |
| 7M3G7       | 0.75        | 1/5                      | 2.06  | 2.20                        | 10 times or less  | 32   | 416        | 1465             | 4.6                            | 5.3                         |                    |                    |
|             |             | 1/11                     | 1.94  | 2.08                        |   | 32   | 527        | 1856             | 4.9                            | 5.6                         |                    |                    |
|             |             | 1/21                     | 2.14  | 2.28                        |   | 57   | 1094       | 4359             | 8.0                            | 8.7                         |                    |                    |
|             |             | 1/33                     | 1.91  | 2.05                        |   | 57   | 1252       | 4992             | 8.0                            | 8.7                         |                    |                    |
|             |             | 1/45                     | 1.90  | 2.04                        |   | 57   | 1374       | 5478             | 8.0                            | 8.7                         |                    |                    |

| Item   | Specifications   |
|--|--|
| Mounting method                                | Flange mounting  |
| Output shaft rotation direction                | Same as the servo motor output shaft direction   |
| Backlash (Note 5)                              | 3 minutes or less at gear reducer output shaft   |
| Maximum torque (at servo motor shaft) (Note 6) | Three times of the rated torque<br>(Refer to HK-KT series specifications in this catalog for the rated torque.)  |
| Maximum speed (at servo motor shaft)           | 6000 r/min   |
| IP rating (gear reducer part)                  | Equivalent to IP44   |
| Gear reducer efficiency (Note 4)               | HK-KT053G7 1/5 (60 × 60): 12 %<br>HK-KT053G7 1/11, 1/21, 1/33, and 1/45: 22 % to 34 %<br>HK-KT053G7 1/5 (40 × 40) and 1/9, and HK-KT13G7 to HK-KT7M3G7: 48 % to 84 % |

- Notes: 1. The moments of inertia in the table are the values that are converted into the shaft of the servo motor with a gear reducer (and with an electromagnetic brake).  
 2. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 3. The values in brackets represent the dimensions of the flange.  
 4. The gear reducer efficiency varies depending on the reduction ratio and the conditions of use such as an output torque, speed, and temperature. The values in the table are not guaranteed as they are representative values at the rated torque and speed at a temperature of 20 °C.  
 5. The backlash can be converted: 1 minute = 0.0167°  
 6. The torques of the geared servo motors do not increase even when these servo motors are combined with larger capacity servo amplifiers.

Refer to "Annotations for Geared Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support


# Rotary Servo Motors

## HK-KT Series Geared Servo Motor Dimensions (Note 1, 5)

With a gear reducer for general industrial machines, flange mounting

### HK-KT\_G1 (Note 6)

The drawing is schematic only. The actual shapes of the servo motors and the location of the mounting screws may differ from the drawing.

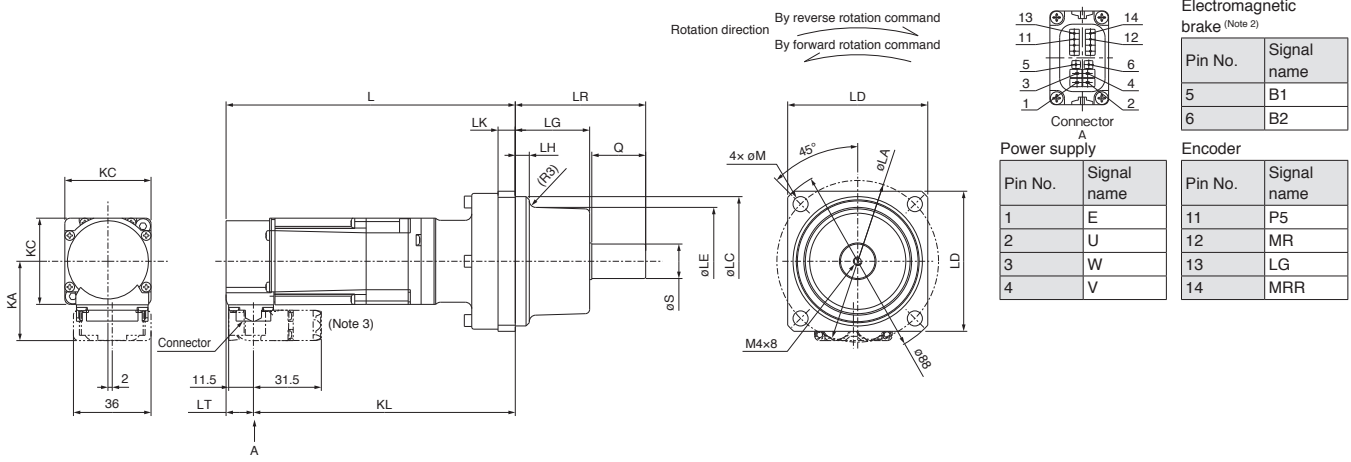

[Unit: mm]

| Model    | Reduction ratio<br>(Actual reduction ratio) | Variable dimensions (Note 4) |     |                                   |     |    |                                  |      |    |                  |      |    |       |    |      |      |    |
|----------|---|------------------------------|-----|-----------------------------------|-----|----|----------------------------------|------|----|------------------|------|----|-------|----|------|------|----|
| HK-KT    |   | L                            | LA  | LC                                | LD  | LE | S                                | LH   | LK | KL               | LG   | Q  | LR    | M  | KA   | LT   | KC |
| 053(B)G1 | 1/5<br>(9/44)                               | 99.2<br>(134.2)              | 75  | 60 <sup>0</sup> <sub>0.03</sub>   | 65  | 50 | 16 <sup>0</sup> <sub>0.011</sub> | 6.5  | 8  | 86.5<br>(121.5)  | 34.5 | 25 | 60.5  | 7  | 36.8 | 12.7 | 40 |
|          | 1/12<br>(49/576)                            | 118<br>(153)                 |     |                                   |     |    |                                  |      |    | 105.3<br>(140.3) |      |    |       |    |      |      |    |
|          | 1/20<br>(25/484)                            | 111.7<br>(146.7)             |     |                                   |     |    |                                  |      |    | 99<br>(134)      |      |    |       |    |      |      |    |
| 13(B)G1  | 1/5<br>(9/44)                               | 111.7<br>(146.7)             | 100 | 82 <sup>0</sup> <sub>0.035</sub>  | 90  | 75 | 25 <sup>0</sup> <sub>0.013</sub> | 8    | 10 | 109<br>(143.6)   | 38   | 35 | 74    | 9  | 46.6 | 11.7 | 60 |
|          | 1/12<br>(49/576)                            | 130.5<br>(165.5)             |     |                                   |     |    |                                  |      |    | 128.8<br>(163.4) |      |    |       |    |      |      |    |
|          | 1/20<br>(25/484)                            | 120.7<br>(155.3)             |     |                                   |     |    |                                  |      |    | 127<br>(161.6)   |      |    |       |    |      |      |    |
| 23(B)G1  | 1/5<br>(9/44)                               | 138.7<br>(173.3)             | 115 | 95 <sup>0</sup> <sub>0.035</sub>  | 100 | 83 | 32 <sup>0</sup> <sub>0.016</sub> | 9.5  | 15 | 145.8<br>(181.3) | 39   | 50 | 90    | 14 | 56.6 | 80   |    |
|          | 1/12<br>(49/576)                            | 158.5<br>(193.1)             |     |                                   |     |    |                                  |      |    | 146.8<br>(181.4) |      |    |       |    |      |      |    |
|          | 1/20<br>(7/135)                             | 162.5<br>(197.1)             |     |                                   |     |    |                                  |      |    | 150.8<br>(185.4) |      |    |       |    |      |      |    |
| 43(B)G1  | 1/5<br>(1/5)                                | 157.5<br>(193)               | 140 | 115 <sup>0</sup> <sub>0.035</sub> | 120 | 98 | 40 <sup>0</sup> <sub>0.016</sub> | 11.5 | 15 | 145.8<br>(181.3) | 44.5 | 60 | 105.5 | 14 | 56.6 | 80   |    |
|          | 1/12<br>(7/87)                              | 179.5<br>(215)               |     |                                   |     |    |                                  |      |    | 167.8<br>(203.3) |      |    |       |    |      |      |    |
|          | 1/20<br>(625/12544)                         | 192.5<br>(228)               |     |                                   |     |    |                                  |      |    | 180.8<br>(216.3) |      |    |       |    |      |      |    |

- Notes:
- The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  - The electromagnetic brake terminals do not have polarity.
  - The dimensions are applicable when a dual type motor cable is led to the load side. Refer to "HK-KT Series Connector Dimensions" in this catalog for the dimensions when leading the cable to the opposite to the load side or leading vertically and when using a single type motor cable.
  - The dimensions in brackets are for the models with an electromagnetic brake.
  - Use a friction coupling to fasten a load.
  - HK-KT\_G1K, a geared servo motor with a keyed shaft (with a key), is also available. Refer to "HK-KT Series Geared Servo Motor Special Shaft Dimensions" in this catalog for details.




**HK-KT Series Geared Servo Motor Dimensions** (Note 1)

With a flange-output type gear reducer for high precision applications, flange mounting

HK-KT\_G5

The drawing is schematic only. The actual shapes of the servo motors and the location of the mounting screws may differ from the drawing.

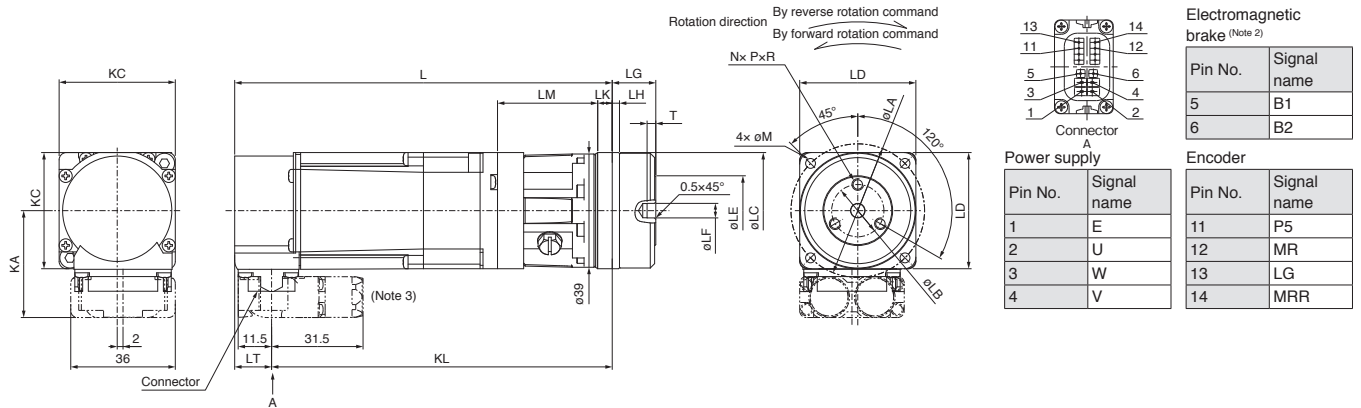

[Unit: mm]

| Model    | Reduction ratio (Note 5) | Variable dimensions (Note 4) |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
|----------|--------------------------|------------------------------|-----|----|-----------------------------------|-----|----|-----------------------------------|-------------------------------------|-----|----|------|---------------|---|---|----|----|-----|------|------|----|
|          |                          | L                            | LA  | LB | LC                                | LD  | LE | LF                                | LG                                  | LH  | LK | LM   | KL            | T | N | P  | R  | M   | KA   | LT   | KC |
| 053(B)G5 | 1/5 (40 × 40)            | 95 (130)                     | 46  | 18 | 40 <sup>0</sup> <sub>0.025</sub>  | 40  | 24 | 5 <sup>+0.012</sup> <sub>0</sub>  | 15 <sup>+0.25</sup> <sub>0.20</sub> | 2.5 | 5  | 34.5 | 82.3 (117.3)  | 3 | 3 | M4 | 6  | 3.4 | 36.8 | 12.7 | 40 |
|          | 1/5 (60 × 60)            | 119.5 (154.5)                | 70  | 30 | 56 <sup>0</sup> <sub>0.03</sub>   | 60  | 40 | 14 <sup>+0.018</sup> <sub>0</sub> | 21 <sup>+0.4</sup> <sub>0.5</sub>   | 3   | 8  | 56   | 106.8 (141.8) | 5 | 6 |    | 7  | 5.5 |      |      |    |
|          | 1/9                      | 95 (130)                     | 46  | 18 | 40 <sup>0</sup> <sub>0.025</sub>  | 40  | 24 | 5 <sup>+0.012</sup> <sub>0</sub>  | 15 <sup>+0.25</sup> <sub>0.20</sub> | 2.5 | 5  | 34.5 | 82.3 (117.3)  | 3 | 3 |    | 6  | 3.4 |      |      |    |
|          | 1/11                     | 119.5 (154.5)                | 70  | 30 | 56 <sup>0</sup> <sub>0.03</sub>   | 60  | 40 | 14 <sup>+0.018</sup> <sub>0</sub> | 21 <sup>+0.4</sup> <sub>0.5</sub>   | 3   | 8  | 56   | 106.8 (141.8) | 5 | 6 |    | 7  | 5.5 |      |      |    |
|          | 1/33                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
| 1/45     |                          |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
| 13(B)G5  | 1/5 (40 × 40)            | 107.5 (142.5)                | 46  | 18 | 40 <sup>0</sup> <sub>0.025</sub>  | 40  | 24 | 5 <sup>+0.012</sup> <sub>0</sub>  | 15 <sup>+0.25</sup> <sub>0.20</sub> | 2.5 | 5  | 34.5 | 94.8 (129.8)  | 3 | 3 | M6 | 6  | 3.4 | 46.6 | 11.7 | 60 |
|          | 1/5 (60 × 60)            | 132 (167)                    | 70  | 30 | 56 <sup>0</sup> <sub>0.03</sub>   | 60  | 40 | 14 <sup>+0.018</sup> <sub>0</sub> | 21 <sup>+0.4</sup> <sub>0.5</sub>   | 3   | 8  | 56   | 119.3 (154.3) | 5 | 6 |    | 7  | 5.5 |      |      |    |
|          | 1/11                     | 134.5 (169.5)                | 105 | 45 | 85 <sup>0</sup> <sub>0.035</sub>  | 90  | 59 | 24 <sup>+0.021</sup> <sub>0</sub> | 27 <sup>+0.4</sup> <sub>0.5</sub>   | 8   | 10 | 56.5 | 121.8 (156.8) | 5 | 6 |    | 10 | 9   |      |      |    |
|          | 1/21                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
|          | 1/33                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
| 1/45     |                          |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
| 23(B)G5  | 1/5                      | 131.5 (166.1)                | 70  | 30 | 56 <sup>0</sup> <sub>0.03</sub>   | 60  | 40 | 14 <sup>+0.018</sup> <sub>0</sub> | 21 <sup>+0.4</sup> <sub>0.5</sub>   | 3   | 8  | 56   | 119.8 (154.4) | 5 | 6 | M4 | 7  | 5.5 | 56.6 | 11.7 | 80 |
|          | 1/11                     | 138.5 (173.1)                | 105 | 45 | 85 <sup>0</sup> <sub>0.035</sub>  | 90  | 59 | 24 <sup>+0.021</sup> <sub>0</sub> | 27 <sup>+0.4</sup> <sub>0.5</sub>   | 8   | 10 | 61   | 126.8 (161.4) | 5 | 6 |    | 10 | 9   |      |      |    |
|          | 1/21                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
|          | 1/33                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
|          | 1/45                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
| 43(B)G5  | 1/5                      | 149.5 (184.1)                | 70  | 30 | 56 <sup>0</sup> <sub>0.03</sub>   | 60  | 40 | 14 <sup>+0.018</sup> <sub>0</sub> | 21 <sup>+0.4</sup> <sub>0.5</sub>   | 3   | 8  | 56   | 137.8 (172.4) | 5 | 6 | M4 | 7  | 5.5 | 56.6 | 11.7 | 80 |
|          | 1/11                     | 156.5 (191.1)                | 105 | 45 | 85 <sup>0</sup> <sub>0.035</sub>  | 90  | 59 | 24 <sup>+0.021</sup> <sub>0</sub> | 27 <sup>+0.4</sup> <sub>0.5</sub>   | 8   | 10 | 61   | 144.8 (179.4) | 5 | 6 |    | 10 | 9   |      |      |    |
|          | 1/21                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
|          | 1/33                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
|          | 1/45                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
| 7M3(B)G5 | 1/5                      | 170.5 (206)                  | 105 | 45 | 85 <sup>0</sup> <sub>0.035</sub>  | 90  | 59 | 24 <sup>+0.021</sup> <sub>0</sub> | 27 <sup>+0.4</sup> <sub>0.5</sub>   | 8   | 10 | 68   | 158.8 (194.3) | 5 | 6 | M6 | 10 | 9   | 56.6 | 11.7 | 80 |
|          | 1/11                     | 180.5 (216)                  | 135 | 60 | 115 <sup>0</sup> <sub>0.035</sub> | 120 | 84 | 32 <sup>+0.025</sup> <sub>0</sub> | 35 <sup>+0.4</sup> <sub>0.5</sub>   | 13  | 13 | 75   | 168.8 (204.3) | 5 | 6 |    | 12 | 11  |      |      |    |
|          | 1/21                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
|          | 1/33                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |
|          | 1/45                     |                              |     |    |                                   |     |    |                                   |                                     |     |    |      |               |   |   |    |    |     |      |      |    |

- Notes: 1. The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.  
 2. The electromagnetic brake terminals do not have polarity.  
 3. The dimensions are applicable when a dual type motor cable is led to the load side. Refer to "HK-KT Series Connector Dimensions" in this catalog for the dimensions when leading the cable to the opposite to the load side or leading vertically and when using a single type motor cable.  
 4. The dimensions in brackets are for the models with an electromagnetic brake.  
 5. The values in brackets represent the dimensions of the flange.


# Rotary Servo Motors

## HK-KT Series Geared Servo Motor Dimensions (Note 1, 5)

With a shaft-output type gear reducer for high precision applications, flange mounting

HK-KT\_G7 (Note 7)

The drawing is schematic only. The actual shapes of the servo motors and the location of the mounting screws may differ from the drawing.

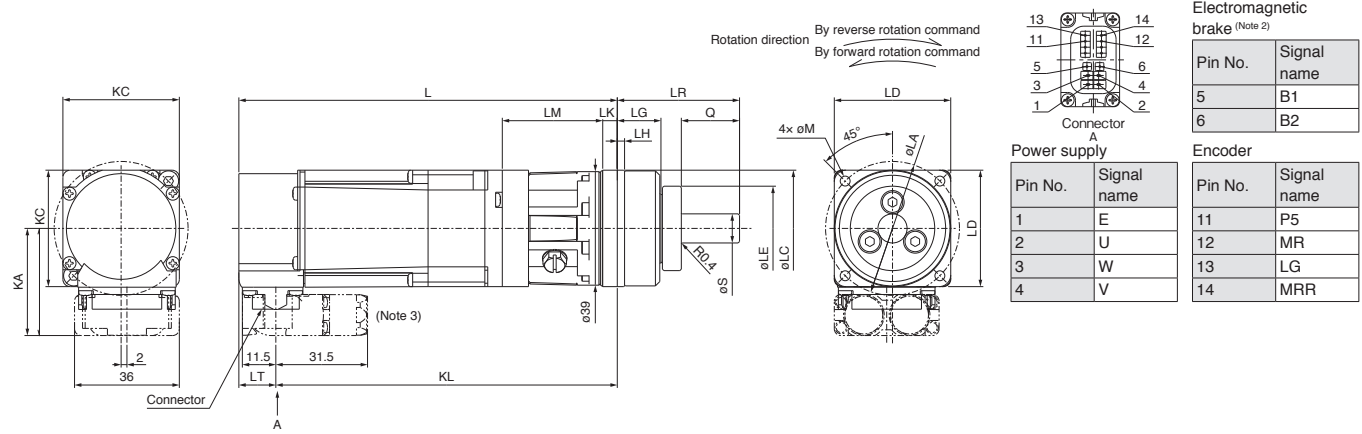

Electromagnetic brake (Note 2)

| Pin No. | Signal name |
|---------|-------------|
| 5       | B1          |
| 6       | B2          |

Power supply

| Pin No. | Signal name |
|---------|-------------|
| 1       | E           |
| 2       | U           |
| 3       | W           |
| 4       | V           |

Encoder

| Pin No. | Signal name |
|---------|-------------|
| 11      | P5          |
| 12      | MR          |
| 13      | LG          |
| 14      | MRR         |

[Unit: mm]

| Model    | Reduction ratio (Note 6) | Variable dimensions (Note 4) |     |                                    |     |    |                                   |    |     |    |     |    |      |                  |     |      |      |    |
|----------|--------------------------|------------------------------|-----|------------------------------------|-----|----|-----------------------------------|----|-----|----|-----|----|------|------------------|-----|------|------|----|
|          |                          | L                            | LA  | LC                                 | LD  | LE | S                                 | LG | LH  | Q  | LR  | LK | LM   | KL               | M   | KA   | LT   | KC |
| 053(B)G7 | 1/5 (40 × 40)            | 95<br>(130)                  | 46  | 40 <sup>0</sup> <sub>-0.025</sub>  | 40  | 29 | 10 <sup>0</sup> <sub>-0.015</sub> | 15 | 2.5 | 20 | 42  | 5  | 34.5 | 82.3<br>(117.3)  | 3.4 | 36.8 | 12.7 | 40 |
|          | 1/5 (60 × 60)            | 119.5<br>(154.5)             | 70  | 56 <sup>0</sup> <sub>-0.03</sub>   | 60  | 40 | 16 <sup>0</sup> <sub>-0.018</sub> | 21 | 3   | 28 | 58  | 8  | 56   | 106.8<br>(141.8) | 5.5 |      |      |    |
|          | 1/9                      | 95<br>(130)                  | 46  | 40 <sup>0</sup> <sub>-0.025</sub>  | 40  | 29 | 10 <sup>0</sup> <sub>-0.015</sub> | 15 | 2.5 | 20 | 42  | 5  | 34.5 | 82.3<br>(117.3)  | 3.4 |      |      |    |
|          | 1/11                     | 119.5<br>(154.5)             | 70  | 56 <sup>0</sup> <sub>-0.03</sub>   | 60  | 40 | 16 <sup>0</sup> <sub>-0.018</sub> | 21 | 3   | 28 | 58  | 8  | 56   | 106.8<br>(141.8) | 5.5 |      |      |    |
|          | 1/21                     | 119.5<br>(154.5)             | 70  | 56 <sup>0</sup> <sub>-0.03</sub>   | 60  | 40 | 16 <sup>0</sup> <sub>-0.018</sub> | 21 | 3   | 28 | 58  | 8  | 56   | 106.8<br>(141.8) | 5.5 |      |      |    |
| 13(B)G7  | 1/5 (40 × 40)            | 107.5<br>(142.5)             | 46  | 40 <sup>0</sup> <sub>-0.025</sub>  | 40  | 29 | 10 <sup>0</sup> <sub>-0.015</sub> | 15 | 2.5 | 20 | 42  | 5  | 34.5 | 94.8<br>(129.8)  | 3.4 | 36.8 | 12.7 | 40 |
|          | 1/5 (60 × 60)            | 132<br>(167)                 | 70  | 56 <sup>0</sup> <sub>-0.03</sub>   | 60  | 40 | 16 <sup>0</sup> <sub>-0.018</sub> | 21 | 3   | 28 | 58  | 8  | 56   | 119.3<br>(154.3) | 5.5 |      |      |    |
|          | 1/11                     | 132<br>(167)                 | 70  | 56 <sup>0</sup> <sub>-0.03</sub>   | 60  | 40 | 16 <sup>0</sup> <sub>-0.018</sub> | 21 | 3   | 28 | 58  | 8  | 56   | 119.3<br>(154.3) | 5.5 |      |      |    |
|          | 1/21                     | 134.5<br>(169.5)             | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59 | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8   | 42 | 80  | 10 | 61   | 121.8<br>(156.8) | 9   |      |      |    |
|          | 1/33                     | 134.5<br>(169.5)             | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59 | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8   | 42 | 80  | 10 | 61   | 121.8<br>(156.8) | 9   |      |      |    |
| 23(B)G7  | 1/5                      | 131.5<br>(166.1)             | 70  | 56 <sup>0</sup> <sub>-0.03</sub>   | 60  | 40 | 16 <sup>0</sup> <sub>-0.018</sub> | 21 | 3   | 28 | 58  | 8  | 56   | 119.8<br>(154.4) | 5.5 | 46.6 | 11.7 | 60 |
|          | 1/11                     | 131.5<br>(166.1)             | 70  | 56 <sup>0</sup> <sub>-0.03</sub>   | 60  | 40 | 16 <sup>0</sup> <sub>-0.018</sub> | 21 | 3   | 28 | 58  | 8  | 56   | 119.8<br>(154.4) | 5.5 |      |      |    |
|          | 1/21                     | 138.5<br>(173.1)             | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59 | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8   | 42 | 80  | 10 | 61   | 126.8<br>(161.4) | 9   |      |      |    |
|          | 1/33                     | 138.5<br>(173.1)             | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59 | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8   | 42 | 80  | 10 | 61   | 126.8<br>(161.4) | 9   |      |      |    |
|          | 1/45                     | 138.5<br>(173.1)             | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59 | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8   | 42 | 80  | 10 | 61   | 126.8<br>(161.4) | 9   |      |      |    |
| 43(B)G7  | 1/5                      | 149.5<br>(184.1)             | 70  | 56 <sup>0</sup> <sub>-0.03</sub>   | 60  | 40 | 16 <sup>0</sup> <sub>-0.018</sub> | 21 | 3   | 28 | 58  | 8  | 56   | 137.8<br>(172.4) | 5.5 | 46.6 | 11.7 | 60 |
|          | 1/11                     | 149.5<br>(184.1)             | 70  | 56 <sup>0</sup> <sub>-0.03</sub>   | 60  | 40 | 16 <sup>0</sup> <sub>-0.018</sub> | 21 | 3   | 28 | 58  | 8  | 56   | 137.8<br>(172.4) | 5.5 |      |      |    |
|          | 1/21                     | 156.5<br>(191.1)             | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59 | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8   | 42 | 80  | 10 | 61   | 144.8<br>(179.4) | 9   |      |      |    |
|          | 1/33                     | 156.5<br>(191.1)             | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59 | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8   | 42 | 80  | 10 | 61   | 144.8<br>(179.4) | 9   |      |      |    |
|          | 1/45                     | 168.5<br>(203.1)             | 135 | 115 <sup>0</sup> <sub>-0.035</sub> | 120 | 84 | 40 <sup>0</sup> <sub>-0.025</sub> | 35 | 13  | 82 | 133 | 13 | 70   | 156.8<br>(191.4) | 11  |      |      |    |
| 7M3(B)G7 | 1/5                      | 170.5<br>(206)               | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59 | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8   | 42 | 80  | 10 | 68   | 158.8<br>(194.3) | 9   | 56.6 | 11.7 | 80 |
|          | 1/11                     | 170.5<br>(206)               | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59 | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8   | 42 | 80  | 10 | 68   | 158.8<br>(194.3) | 9   |      |      |    |
|          | 1/21                     | 180.5<br>(216)               | 135 | 115 <sup>0</sup> <sub>-0.035</sub> | 120 | 84 | 40 <sup>0</sup> <sub>-0.025</sub> | 35 | 13  | 82 | 133 | 13 | 75   | 168.8<br>(204.3) | 11  |      |      |    |
|          | 1/33                     | 180.5<br>(216)               | 135 | 115 <sup>0</sup> <sub>-0.035</sub> | 120 | 84 | 40 <sup>0</sup> <sub>-0.025</sub> | 35 | 13  | 82 | 133 | 13 | 75   | 168.8<br>(204.3) | 11  |      |      |    |
|          | 1/45                     | 180.5<br>(216)               | 135 | 115 <sup>0</sup> <sub>-0.035</sub> | 120 | 84 | 40 <sup>0</sup> <sub>-0.025</sub> | 35 | 13  | 82 | 133 | 13 | 75   | 168.8<br>(204.3) | 11  |      |      |    |


- Notes:
- The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  - The electromagnetic brake terminals do not have polarity.
  - The dimensions are applicable when a dual type motor cable is led to the load side. Refer to "HK-KT Series Connector Dimensions" in this catalog for the dimensions when leading the cable to the opposite to the load side or leading vertically and when using a single type motor cable.
  - The dimensions in brackets are for the models with an electromagnetic brake.
  - Use a friction coupling to fasten a load.
  - The values in brackets represent the dimensions of the flange.
  - HK-KT\_G7K, a geared servo motor with a keyed shaft (with a key), is also available. Refer to "HK-KT Series Geared Servo Motor Special Shaft Dimensions" in this catalog for details.

### HK-KT Series Geared Servo Motor Special Shaft Dimensions

The standard HK-KT\_G1 (with a gear reducer for general industrial machines) and HK-KT\_G7 (with a shaft-output type gear reducer for high precision applications, flange mounting) have a straight shaft. Note that these motors are also available with a keyed shaft (with a key) as HK-KT\_G1K and HK-KT\_G7K.

HK-KT\_G1K (Note 1, 2)


Keyed shaft (with a double square-ended key)

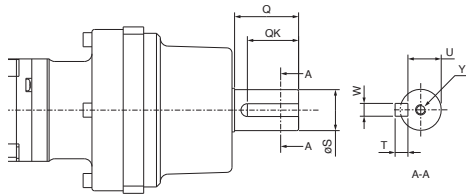

[Unit: mm]

HK-KT\_G7K (Note 1, 2)

Keyed shaft (with a single pointed key)

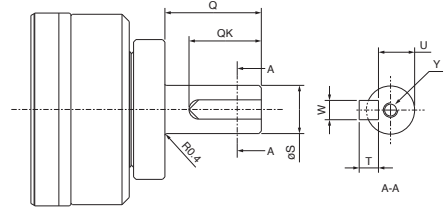

[Unit: mm]

| Model          | Reduction ratio<br>(Actual reduction ratio) | Variable dimensions               |    |    |    |    |   |        |
|----------------|---|-----------------------------------|----|----|----|----|---|--------|
|                |   | S                                 | Q  | W  | QK | U  | T | Y      |
| HK-KT053(B)G1K | 1/5<br>(9/44)                               | 16 <sup>0</sup> <sub>-0.011</sub> | 25 | 5  | 20 | 13 | 5 | M4×8   |
|                | 1/12<br>(49/576)                            |                                   |    |    |    |    |   |        |
|                | 1/20<br>(25/484)                            |                                   |    |    |    |    |   |        |
| HK-KT13(B)G1K  | 1/5<br>(9/44)                               | 16 <sup>0</sup> <sub>-0.011</sub> | 25 | 5  | 20 | 13 | 5 | M4×8   |
|                | 1/12<br>(49/576)                            |                                   |    |    |    |    |   |        |
|                | 1/20<br>(25/484)                            |                                   |    |    |    |    |   |        |
| HK-KT23(B)G1K  | 1/5<br>(19/96)                              | 25 <sup>0</sup> <sub>-0.013</sub> | 35 | 8  | 30 | 21 | 7 | M6×12  |
|                | 1/12<br>(961/11664)                         |                                   |    |    |    |    |   |        |
|                | 1/20<br>(513/9984)                          |                                   |    |    |    |    |   |        |
| HK-KT43(B)G1K  | 1/5<br>(19/96)                              | 25 <sup>0</sup> <sub>-0.013</sub> | 35 | 8  | 30 | 21 | 7 | M6×12  |
|                | 1/12<br>(961/11664)                         |                                   |    |    |    |    |   |        |
|                | 1/20<br>(7/135)                             |                                   |    |    |    |    |   |        |
| HK-KT7M3(B)G1K | 1/5<br>(1/5)                                | 32 <sup>0</sup> <sub>-0.016</sub> | 50 | 10 | 40 | 27 | 8 | M8×16  |
|                | 1/12<br>(7/87)                              |                                   |    |    |    |    |   |        |
|                | 1/20<br>(625/12544)                         |                                   |    |    |    |    |   |        |
|                |   | 40 <sup>0</sup> <sub>-0.016</sub> | 60 | 12 | 50 | 35 |   | M10×20 |

| Model          | Reduction ratio<br>(Note 3) | Variable dimensions |    |    |    |     |       |        |
|----------------|-----------------------------|---------------------|----|----|----|-----|-------|--------|
|                |                             | S                   | Q  | W  | QK | U   | T     | Y      |
| HK-KT053(B)G7K | 1/5<br>(40 × 40)            | 10                  | 20 | 4  | 15 | 7.5 | 4     | M3×6   |
|                | 1/5<br>(60 × 60)            | 16                  | 28 | 5  | 25 | 13  | 5     | M4×8   |
|                | 1/9                         | 10                  | 20 | 4  | 15 | 7.5 | 4     | M3×6   |
|                | 1/11                        | 16                  | 28 | 5  | 25 | 13  | 5     | M4×8   |
|                | 1/21                        |                     |    |    |    |     |       |        |
| 1/33           | 16                          | 28                  | 5  | 25 | 13 | 5   | M4×8  |        |
| 1/45           | 16                          | 28                  | 5  | 25 | 13 | 5   | M4×8  |        |
| HK-KT13(B)G7K  | 1/5<br>(40 × 40)            | 10                  | 20 | 4  | 15 | 7.5 | 4     | M3×6   |
|                | 1/5<br>(60 × 60)            | 16                  | 28 | 5  | 25 | 13  | 5     | M4×8   |
|                | 1/11                        | 16                  | 28 | 5  | 25 | 13  | 5     | M4×8   |
|                | 1/21                        |                     |    |    |    |     |       |        |
|                | 1/33                        | 25                  | 42 | 8  | 36 | 21  | 7     | M6×12  |
| 1/45           | 25                          | 42                  | 8  | 36 | 21 | 7   | M6×12 |        |
| HK-KT23(B)G7K  | 1/5                         | 16                  | 28 | 5  | 25 | 13  | 5     | M4×8   |
|                | 1/11                        | 16                  | 28 | 5  | 25 | 13  | 5     | M4×8   |
|                | 1/21                        |                     |    |    |    |     |       |        |
|                | 1/33                        | 25                  | 42 | 8  | 36 | 21  | 7     | M6×12  |
|                | 1/45                        | 25                  | 42 | 8  | 36 | 21  | 7     | M6×12  |
| HK-KT43(B)G7K  | 1/5                         | 16                  | 28 | 5  | 25 | 13  | 5     | M4×8   |
|                | 1/11                        | 25                  | 42 | 8  | 36 | 21  | 7     | M6×12  |
|                | 1/21                        |                     |    |    |    |     |       |        |
|                | 1/33                        | 40                  | 82 | 12 | 70 | 35  | 8     | M10×20 |
|                | 1/45                        | 40                  | 82 | 12 | 70 | 35  | 8     | M10×20 |
| HK-KT7M3(B)G7K | 1/5                         | 25                  | 42 | 8  | 36 | 21  | 7     | M6×12  |
|                | 1/11                        | 25                  | 42 | 8  | 36 | 21  | 7     | M6×12  |
|                | 1/21                        |                     |    |    |    |     |       |        |
|                | 1/33                        | 40                  | 82 | 12 | 70 | 35  | 8     | M10×20 |
|                | 1/45                        | 40                  | 82 | 12 | 70 | 35  | 8     | M10×20 |

- Notes: 1. Do not use the servo motors with a keyed shaft for frequent start/stop applications as this may cause the damage to the shaft.  
 2. Dimensions not shown in the tables are respectively the same as those of HK-KT\_G1 and HK-KT\_G7 with a straight shaft. Refer to "HK-KT\_G1" and "HK-KT\_G7" of "HK-KT Series Geared Servo Motor Dimensions" in this catalog.  
 3. The values in brackets represent the dimensions of the flange.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Rotary Servo Motors

## HK-MT\_W (Ultra-Low Inertia, Small Capacity)

Specifications when connected with a 200 V servo amplifier

| Flange size  |                               | [mm]                | 40 × 40   |               |              | 60 × 60          |              |              | 80 × 80      |               |
|--|-------------------------------|---------------------|---|---------------|--------------|------------------|--------------|--------------|--------------|---------------|
| Rotary servo motor model                                       |                               | HK-MT               | 053W  | 13W           | 1M3W         | 23W              | 43W          | 63W          | 7M3W         | 103W          |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 0.05  | 0.1           | 0.15         | 0.2              | 0.4          | 0.6          | 0.75         | 1.0           |
|  | Rated torque (Note 5)         | [N·m]               | 0.16 (Note 6)   | 0.32          | 0.48         | 0.64             | 1.3          | 1.9          | 2.4          | 3.2           |
| Maximum torque (Note 3)  |                               | [N·m]               | 0.48<br>(0.64)  | 0.95<br>(1.3) | 1.4<br>(1.9) | 1.9<br>(2.3)     | 3.8<br>(4.5) | 5.7<br>(7.1) | 7.2<br>(8.8) | 9.5<br>(12.4) |
| Rated speed (Note 4)   |                               | [r/min]             | 3000  |               |              |                  |              |              |              |               |
| Maximum speed (Note 4)   |                               | [r/min]             | 6700  |               |              |                  |              |              |              |               |
| Power rate at continuous rated torque [kW/s]                   | Without electromagnetic brake |                     | 12.5  | 31.7          | 52.2         | 41.5             | 101.3        | 155.9        | 104.6        | 142.5         |
|  | With electromagnetic brake    |                     | 10.4  | 28.1          | 47.8         | 31.2             | 84.4         | 137.1        | 83.4         | 119.3         |
| Rated current  |                               | [A]                 | 1.2   | 1.2           | 1.2          | 1.6              | 2.5          | 5.3          | 5.8          | 5.4           |
| Maximum current (Note 3)                                       |                               | [A]                 | 4.3<br>(6.3)  | 4.6<br>(5.9)  | 4.6<br>(6.5) | 6.3<br>(9.8)     | 9.7<br>(13)  | 21<br>(28)   | 21<br>(31)   | 20<br>(31)    |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 0.0203  | 0.0320        | 0.0437       | 0.0976           | 0.160        | 0.234        | 0.545        | 0.711         |
|  | With electromagnetic brake    |                     | 0.0243  | 0.0360        | 0.0477       | 0.130            | 0.192        | 0.266        | 0.683        | 0.849         |
| Recommended load to motor inertia ratio (Note 1)               |                               |                     | 35 times or less (Note 8)   |               |              | 35 times or less |              |              |              |               |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |               |              |                  |              |              |              |               |
| Type   |                               |                     | Permanent magnet synchronous motor  |               |              |                  |              |              |              |               |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.) (Note 6)                        |               |              |                  |              |              |              |               |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |               |              |                  |              |              |              |               |
| Thermistor   |                               |                     | None  |               |              |                  |              |              |              |               |
| Insulation class   |                               |                     | 155 (F)   |               |              |                  |              |              |              |               |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2, 7)                     |               |              |                  |              |              |              |               |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 49, Y: 49  |               |              |                  |              |              |              |               |
| Vibration rank   |                               |                     | V10 <sup>-3</sup>   |               |              |                  |              |              |              |               |
| Permissible load for the shaft *2                              | L                             | [mm]                | 25  |               |              | 30               |              |              | 40           |               |
|  | Radial                        | [N]                 | 88  |               |              | 245              |              |              | 392          |               |
|  | Thrust                        | [N]                 | 59  |               |              | 98               |              |              | 147          |               |
| Mass [kg]  | Without electromagnetic brake |                     | 0.31  | 0.43          | 0.54         | 0.92             | 1.4          | 1.8          | 2.8          | 3.3           |
|  | With electromagnetic brake    |                     | 0.59  | 0.74          | 0.82         | 1.4              | 1.8          | 2.2          | 3.5          | 3.9           |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
6. For HK-MT053W\_J\_ (with an oil seal), use the servo motor at a derating rate of 80 %.  
7. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)  
8. When the servo motor is combined with a 0.1 kW servo amplifier, this recommended load to motor inertia ratio is applicable for operating the servo motor at the rated speed. If operating speed exceeds the rated speed, check whether a regenerative option is required using drive sizing software Motorizer. A servo amplifier with a larger capacity can be combined.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

| Model  | HK-MT                   | 053WB                             | 13WB           | 1M3WB | 23WB | 43WB          | 63WB | 7M3WB         | 103WB |  |
|--|-------------------------|-----------------------------------|----------------|-------|------|---------------|------|---------------|-------|--|
| Type   |                         | Spring actuated type safety brake |                |       |      |               |      |               |       |  |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |                |       |      |               |      |               |       |  |
| Power consumption                            |                         | [W] at 20 °C                      | 6.4            |       |      | 7.9           |      | 10            |       |  |
| Electromagnetic brake static friction torque |                         | [N·m]                             | 0.48 or higher |       |      | 1.9 or higher |      | 3.2 or higher |       |  |
| Permissible braking work                     | Per braking             | [J]                               | 5.6            |       |      | 22            |      | 64            |       |  |
|  | Per hour                | [J]                               | 56             |       |      | 220           |      | 640           |       |  |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 20000          |       |      |               |      |               |       |  |
|  | Work per braking        | [J]                               | 5.6            |       |      | 22            |      | 64            |       |  |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

## HK-MT\_VW (Ultra-Low Inertia, Small Capacity)

Specifications when connected with a 200 V servo amplifier

| Flange size  |                               | [mm]                | 40 × 40  |               |              | 60 × 60          |              |                  | 80 × 80      |               |
|--|-------------------------------|---------------------|--|---------------|--------------|------------------|--------------|------------------|--------------|---------------|
| Rotary servo motor model                                       |                               | HK-MT               | 053VW  | 13VW          | 1M3VW        | 23VW             | 43VW         | 63VW             | 7M3VW        | 103VW         |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 0.05   | 0.1           | 0.15         | 0.2              | 0.4          | 0.6              | 0.75         | 1.0           |
|  | Rated torque (Note 5)         | [N·m]               | 0.16 (Note 6)  | 0.32          | 0.48         | 0.64             | 1.3          | 1.9              | 2.4          | 3.2           |
| Maximum torque (Note 3)  |                               | [N·m]               | 0.48<br>(0.64)   | 0.95<br>(1.3) | 1.4<br>(1.9) | 1.9<br>(2.3)     | 3.8<br>(4.5) | 5.7<br>(7.1)     | 7.2<br>(8.8) | 9.5<br>(11.5) |
| Rated speed (Note 4)   |                               | [r/min]             | 3000   |               |              |                  |              |                  |              |               |
| Maximum speed (Note 4)   |                               | [r/min]             | 10000  |               |              |                  |              |                  |              |               |
| Power rate at continuous rated torque [kW/s]                   | Without electromagnetic brake |                     | 12.5   | 31.7          | 52.2         | 41.5             | 101.3        | 155.9            | 104.6        | 142.5         |
|  | With electromagnetic brake    |                     | 10.4   | 28.1          | 47.8         | 31.2             | 84.4         | 137.2            | 83.4         | 119.3         |
| Rated current  |                               | [A]                 | 1.2  | 1.2           | 1.2          | 1.6              | 3.0          | 5.3              | 5.8          | 8.1           |
| Maximum current (Note 3)                                       |                               | [A]                 | 4.3<br>(6.3)   | 4.6<br>(5.9)  | 4.6<br>(6.5) | 6.3<br>(9.8)     | 12<br>(15)   | 21<br>(28)       | 21<br>(31)   | 30<br>(37)    |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 0.0203   | 0.0320        | 0.0437       | 0.0976           | 0.160        | 0.234            | 0.545        | 0.711         |
|  | With electromagnetic brake    |                     | 0.0243   | 0.0360        | 0.0477       | 0.130            | 0.192        | 0.266            | 0.683        | 0.849         |
| Recommended load to motor inertia ratio (Note 1)               |                               |                     | 24 times or less (Note 8)  |               |              | 24 times or less |              | 30 times or less |              |               |
| Speed/position detector  |                               |                     | Incremental 26-bit encoder (resolution: 67,108,864 pulses/rev)   |               |              |                  |              |                  |              |               |
| Type   |                               |                     | Permanent magnet synchronous motor                               |               |              |                  |              |                  |              |               |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.) (Note 6)     |               |              |                  |              |                  |              |               |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.) |               |              |                  |              |                  |              |               |
| Thermistor   |                               |                     | None   |               |              |                  |              |                  |              |               |
| Insulation class   |                               |                     | 155 (F)  |               |              |                  |              |                  |              |               |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2, 7)  |               |              |                  |              |                  |              |               |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 49, Y: 49   |               |              |                  |              |                  |              |               |
| Vibration rank   |                               |                     | V10 *3   |               |              |                  |              |                  |              |               |
| Permissible load for the shaft *2                              | L                             | [mm]                | 25   |               |              | 30               |              |                  | 40           |               |
|  | Radial                        | [N]                 | 88   |               |              | 245              |              |                  | 392          |               |
|  | Thrust                        | [N]                 | 59   |               |              | 98               |              |                  | 147          |               |
| Mass [kg]  | Without electromagnetic brake |                     | 0.31   | 0.43          | 0.54         | 0.92             | 1.4          | 1.8              | 2.8          | 3.3           |
|  | With electromagnetic brake    |                     | 0.59   | 0.74          | 0.82         | 1.4              | 1.8          | 2.2              | 3.5          | 3.9           |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
6. For HK-MT053VW\_J\_ (with an oil seal), use the servo motor at a derating rate of 80 %.  
7. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@mesc.jp)  
8. When the servo motor is combined with a 0.1 kW servo amplifier, this recommended load to motor inertia ratio is applicable for operating the servo motor at the rated speed. If operating speed exceeds the rated speed, check whether a regenerative option is required using drive sizing software Motorizer. A servo amplifier with a larger capacity can be combined.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

| Model  |                         | HK-MT                             | 053VWB         | 13VWB | 1M3VWB | 23VWB         | 43VWB | 63VWB | 7M3VWB        | 103VWB |
|--|-------------------------|-----------------------------------|----------------|-------|--------|---------------|-------|-------|---------------|--------|
| Type   |                         | Spring actuated type safety brake |                |       |        |               |       |       |               |        |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |                |       |        |               |       |       |               |        |
| Power consumption [W] at 20 °C               |                         | 6.4                               |                |       | 7.9    |               |       | 10    |               |        |
| Electromagnetic brake static friction torque |                         | [N·m]                             | 0.48 or higher |       |        | 1.9 or higher |       |       | 3.2 or higher |        |
| Permissible braking work                     | Per braking             | [J]                               | 5.6            |       |        | 22            |       |       | 64            |        |
|  | Per hour                | [J]                               | 56             |       |        | 220           |       |       | 640           |        |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 20000          |       |        |               |       |       |               |        |
|  | Work per braking        | [J]                               | 5.6            |       |        | 22            |       |       | 64            |        |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.


# Rotary Servo Motors

## HK-MT\_W Torque Characteristics (Note 1)


Specifications when connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


**HK-MT053W**  
Standard torque




**HK-MT053W**  
Torque increased




**HK-MT13W**  
Standard torque




**HK-MT13W**  
Torque increased




**HK-MT1M3W**  
Standard torque




**HK-MT1M3W**  
Torque increased




**HK-MT23W**  
Standard torque




**HK-MT23W**  
Torque increased




**HK-MT43W**  
Standard torque




**HK-MT43W**  
Torque increased




**HK-MT63W**  
Standard torque




**HK-MT63W**  
Torque increased




**HK-MT7M3W**  
Standard torque




**HK-MT7M3W**  
Torque increased



**HK-MT103W (Note 2)**  
Standard torque



**HK-MT103W (Note 2)**  
Torque increased




Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - - : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

## HK-MT\_VW Torque Characteristics (Note 1)


Specifications when connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 - - - : For 1-phase 200 V AC


**HK-MT053VW**  
Standard torque




**HK-MT053VW**  
Torque increased




**HK-MT13VW**  
Standard torque




**HK-MT13VW**  
Torque increased




**HK-MT1M3VW**  
Standard torque




**HK-MT1M3VW**  
Torque increased




**HK-MT23VW**  
Standard torque




**HK-MT23VW**  
Torque increased




**HK-MT43VW**  
Standard torque




**HK-MT43VW**  
Torque increased




**HK-MT63VW**  
Standard torque




**HK-MT63VW**  
Torque increased




**HK-MT7M3VW**  
Standard torque




**HK-MT7M3VW**  
Torque increased



**HK-MT103VW (Note 2)**  
Standard torque



**HK-MT103VW**  
Torque increased




Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

# Rotary Servo Motors

## HK-MT Series Dimensions (Note 3, 4, 5)

HK-MT053W(B), HK-MT13W(B), HK-MT1M3W(B)  
 HK-MT053VW(B), HK-MT13VW(B), HK-MT1M3VW(B)

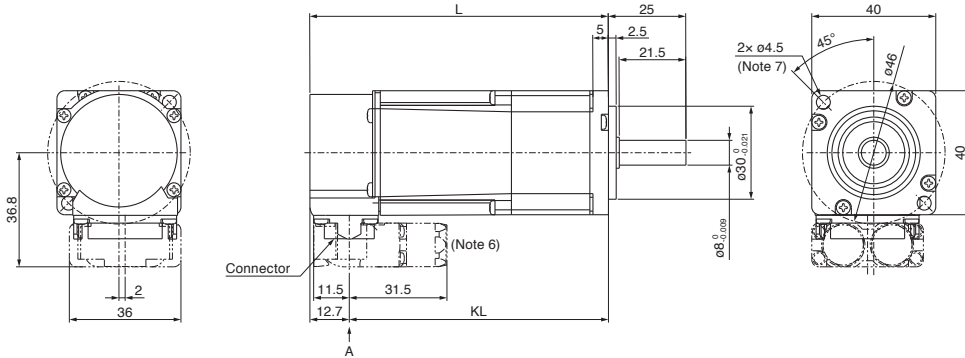

| Electromagnetic brake (Note 2) |             |
|--------------------------------|-------------|
| Pin No.                        | Signal name |
| 5                              | B1          |
| 6                              | B2          |

| Power supply |             |
|--------------|-------------|
| Pin No.      | Signal name |
| 1            | E           |
| 2            | U           |
| 3            | W           |
| 4            | V           |


  

| Encoder |             |
|---------|-------------|
| Pin No. | Signal name |
| 11      | P5          |
| 12      | MR          |
| 13      | LG          |
| 14      | MRR         |

| Model         | Variable dimensions (Note 1) |         |
|---------------|------------------------------|---------|
|               | L                            | KL      |
| HK-MT053W(B)  | 61.3                         | 48.6    |
| HK-MT053VW(B) | (96.3)                       | (83.6)  |
| HK-MT13W(B)   | 74.8                         | 62.1    |
| HK-MT13VW(B)  | (109.8)                      | (97.1)  |
| HK-MT1M3W(B)  | 88.3                         | 75.6    |
| HK-MT1M3VW(B) | (123.3)                      | (110.6) |

[Unit: mm]

HK-MT23W(B), HK-MT43W(B), HK-MT63W(B),  
 HK-MT23VW(B), HK-MT43VW(B), HK-MT63VW(B)

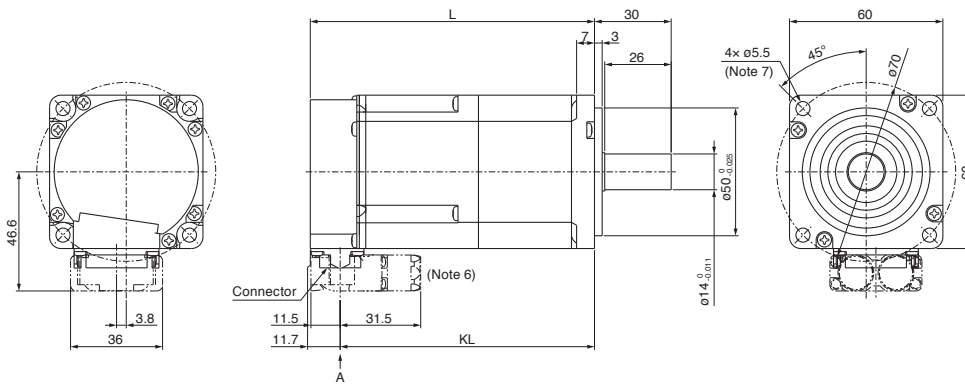

| Electromagnetic brake (Note 2) |             |
|--------------------------------|-------------|
| Pin No.                        | Signal name |
| 5                              | B1          |
| 6                              | B2          |

| Power supply |             |
|--------------|-------------|
| Pin No.      | Signal name |
| 1            | E           |
| 2            | U           |
| 3            | W           |
| 4            | V           |

| Encoder |             |
|---------|-------------|
| Pin No. | Signal name |
| 11      | P5          |
| 12      | MR          |
| 13      | LG          |
| 14      | MRR         |

| Model        | Variable dimensions (Note 1) |         |
|--------------|------------------------------|---------|
|              | L                            | KL      |
| HK-MT23W(B)  | 76.6                         | 64.9    |
| HK-MT23VW(B) | (111.2)                      | (99.5)  |
| HK-MT43W(B)  | 96.1                         | 84.4    |
| HK-MT43VW(B) | (130.7)                      | (119)   |
| HK-MT63W(B)  | 118.6                        | 106.9   |
| HK-MT63VW(B) | (153.2)                      | (141.5) |

[Unit: mm]



- Notes:
1. The dimensions in brackets are for the models with an electromagnetic brake.
  2. The electromagnetic brake terminals do not have polarity.
  3. The dimensions are the same regardless of whether or not an oil seal is installed.
  4. Use a friction coupling to fasten a load.
  5. The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  6. The dimensions are applicable when a dual type motor cable is led to the load side. Refer to "HK-MT Series Connector Dimensions" in this catalog for the dimensions when leading the cable to the opposite to the load side or leading vertically and when using a single type motor cable.
  7. Use hexagonal cap head bolts when mounting the servo motor.



## HK-MT Series Dimensions (Note 3, 4, 5)

HK-MT7M3W(B), HK-MT103W(B)

HK-MT7M3VW(B), HK-MT103VW(B)

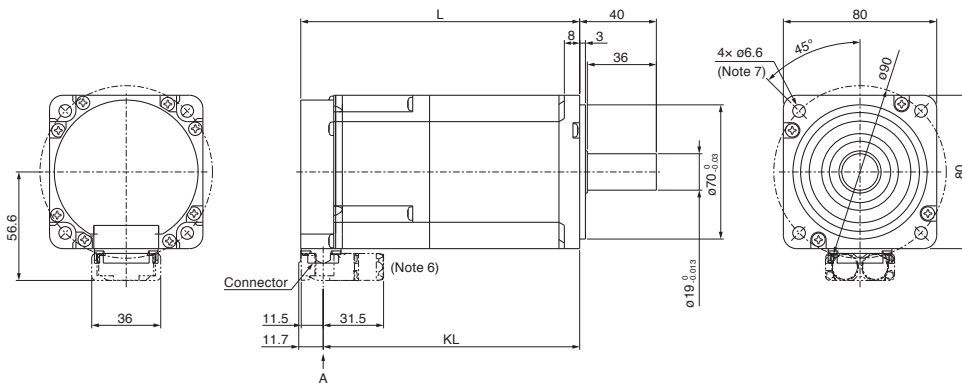

Electromagnetic brake (Note 2)

| Pin No. | Signal name |
|---------|-------------|
| 5       | B1          |
| 6       | B2          |

Power supply

| Pin No. | Signal name |
|---------|-------------|
| 1       | E           |
| 2       | U           |
| 3       | W           |
| 4       | V           |

Encoder

| Pin No. | Signal name |
|---------|-------------|
| 11      | P5          |
| 12      | MR          |
| 13      | LG          |
| 14      | MRR         |

| Model         | Variable dimensions (Note 1) |         |
|---------------|------------------------------|---------|
|               | L                            | KL      |
| HK-MT7M3W(B)  | 110                          | 98.3    |
| HK-MT7M3VW(B) | (145.5)                      | (133.8) |
| HK-MT103W(B)  | 129.5                        | 117.8   |
| HK-MT103VW(B) | (165)                        | (153.3) |

[Unit: mm]


- Notes:
1. The dimensions in brackets are for the models with an electromagnetic brake.
  2. The electromagnetic brake terminals do not have polarity.
  3. The dimensions are the same regardless of whether or not an oil seal is installed.
  4. Use a friction coupling to fasten a load.
  5. The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  6. The dimensions are applicable when a dual type motor cable is led to the load side. Refer to "HK-MT Series Connector Dimensions" in this catalog for the dimensions when leading the cable to the opposite to the load side or leading vertically and when using a single type motor cable.
  7. Use hexagonal cap head bolts when mounting the servo motor.

# Rotary Servo Motors

## HK-MT Series Connector Dimensions

Cable direction: load side/opposite to load side

| Model                                       | Variable dimensions |    |      |      |                   |    |      |    |
|---|---------------------|----|------|------|-------------------|----|------|----|
|   | Dual cable type     |    |      |      | Single cable type |    |      |    |
|   | A                   | B  | C    | D    | A                 | B  | C    | D  |
| HK-MT053(V)W<br>HK-MT13(V)W<br>HK-MT1M3(V)W | 36.8                | 36 | 12.7 | 31.5 | 39.6              | 32 | 12.7 | 40 |
| HK-MT23(V)W<br>HK-MT43(V)W<br>HK-MT63(V)W   | 46.6                |    | 11.7 |      | 49.4              |    | 11.7 |    |
| HK-MT7M3(V)W<br>HK-MT103(V)W                | 56.6                |    | 59.4 |      |                   |    |      |    |

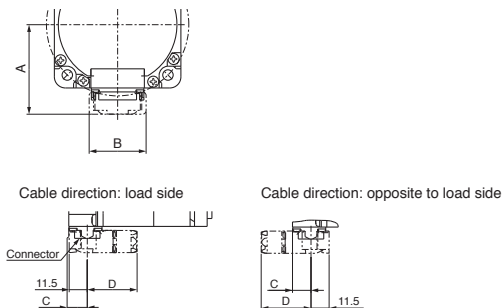


\* The drawing shows a dual cable type as an example.

[Unit: mm]

Cable direction: vertical

| Model                                       | Variable dimensions |    |      |                   |    |      |
|---|---------------------|----|------|-------------------|----|------|
|   | Dual cable type     |    |      | Single cable type |    |      |
|   | A                   | B  | C    | A                 | B  | C    |
| HK-MT053(V)W<br>HK-MT13(V)W<br>HK-MT1M3(V)W | 63.4                | 36 | 12.7 | 71.9              | 32 | 12.7 |
| HK-MT23(V)W<br>HK-MT43(V)W<br>HK-MT63(V)W   | 73.2                |    | 11.7 | 81.7              |    | 11.7 |
| HK-MT7M3(V)W<br>HK-MT103(V)W                | 83.2                |    | 91.7 |                   |    |      |



\* The drawing shows a dual cable type as an example.


[Unit: mm]

## HK-MT Series with Special Shaft Dimensions

Servo motors with the following specifications are also available.


### D: D-cut shaft (Note 1)

| Model         | Variable dimensions |      |
|---------------|---------------------|------|
|               | Q1                  | Q2   |
| HK-MT053(V)WD | 21.5                | 20.5 |
| HK-MT13(V)WD  |                     |      |
| HK-MT1M3(V)WD |                     |      |

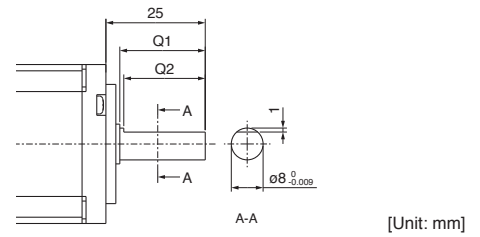


### L: L-cut shaft (Note 1)

| Model         | Variable dimensions |      |
|---------------|---------------------|------|
|               | Q1                  | Q2   |
| HK-MT053(V)WL | 21.5                | 20.5 |
| HK-MT13(V)WL  |                     |      |
| HK-MT1M3(V)WL |                     |      |

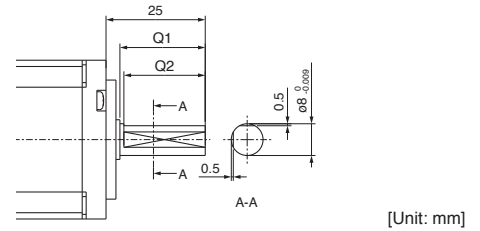


### K: Keyed shaft (with a double round-ended key) (Note 1)

| Model         | Variable dimensions |    |      |   |    |    |                    |     |   |       |  |
|---------------|---------------------|----|------|---|----|----|--------------------|-----|---|-------|--|
|               | S                   | LR | Q    | W | QK | QL | U                  | R   | T | Y     |  |
| HK-MT053(V)WK | $8^{0}_{-0.009}$    | 25 | 21.5 | 3 | 14 | 5  | $6.2^{0}_{-0.085}$ | 1.5 | 3 | M3×8  |  |
| HK-MT13(V)WK  |                     |    |      |   |    |    |                    |     |   |       |  |
| HK-MT1M3(V)WK |                     |    |      |   |    |    |                    |     |   |       |  |
| HK-MT23(V)WK  | $14^{0}_{-0.011}$   | 30 | 26   | 5 | 20 | 3  | $11^{0}_{-0.085}$  | 2.5 | 5 | M4×15 |  |
| HK-MT43(V)WK  |                     |    |      |   |    |    |                    |     |   |       |  |
| HK-MT63(V)WK  |                     |    |      |   |    |    |                    |     |   |       |  |
| HK-MT7M3(V)WK | $19^{0}_{-0.013}$   | 40 | 36   | 6 | 25 | 5  | $15.5^{0}_{-0.1}$  | 3   | 6 | M5×20 |  |
| HK-MT103(V)WK |                     |    |      |   |    |    |                    |     |   |       |  |

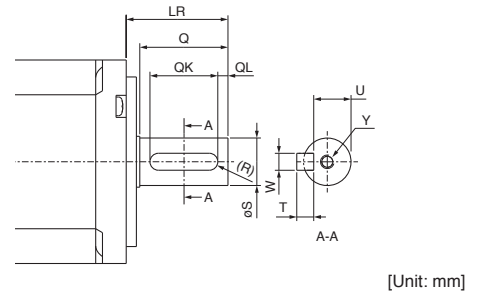

### N: Keyed shaft (without a key) (Note 1, 2)

| Model         | Variable dimensions |    |      |                  |    |    |                    |     |       |
|---------------|---------------------|----|------|------------------|----|----|--------------------|-----|-------|
|               | S                   | LR | Q    | W                | QK | QL | U                  | R   | Y     |
| HK-MT053(V)WN | $8^{0}_{-0.009}$    | 25 | 21.5 | $3^{0}_{-0.029}$ | 14 | 5  | $6.2^{0}_{-0.085}$ | 1.5 | M3×8  |
| HK-MT13(V)WN  |                     |    |      |                  |    |    |                    |     |       |
| HK-MT1M3(V)WN |                     |    |      |                  |    |    |                    |     |       |
| HK-MT23(V)WN  | $14^{0}_{-0.011}$   | 30 | 26   | $5^{0}_{-0.03}$  | 20 | 3  | $11^{0}_{-0.085}$  | 2.5 | M4×15 |
| HK-MT43(V)WN  |                     |    |      |                  |    |    |                    |     |       |
| HK-MT63(V)WN  |                     |    |      |                  |    |    |                    |     |       |
| HK-MT7M3(V)WN | $19^{0}_{-0.013}$   | 40 | 36   | $6^{0}_{-0.03}$  | 25 | 5  | $15.5^{0}_{-0.1}$  | 3   | M5×20 |
| HK-MT103(V)WN |                     |    |      |                  |    |    |                    |     |       |

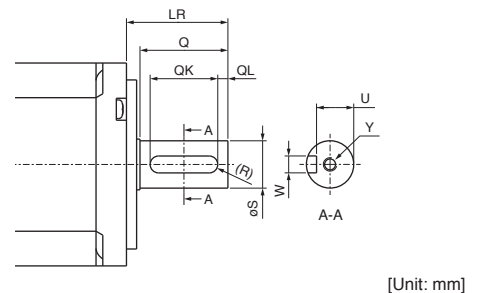

- Notes: 1. Do not use the servo motors with a D-cut shaft, an L-cut shaft, or a keyed shaft for frequent start/stop applications as this may cause the damage to the shaft.  
2. The servo motor is supplied without a key. The user needs to prepare a key.

# Rotary Servo Motors

## HK-ST\_W (Medium Inertia, Medium Capacity)

Specifications when connected with a 200 V servo amplifier

|  |                               |   |                              |                  |                  |                |                |
|--|-------------------------------|---|------------------------------|------------------|------------------|----------------|----------------|
| Flange size  |                               | [mm]  | 130 × 130                    |                  |                  |                |                |
| Rotary servo motor model                                       |                               | HK-ST   | 52W                          | 102W             | 172W             | 202AW          | 302W           |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]  | 0.5                          | 1.0              | 1.75             | 2.0            | 3.0            |
|  | Rated torque (Note 3, 5)      | [N·m]   | 2.4<br>(3.2)                 | 4.8<br>(6.4)     | 8.4              | 9.5<br>(11.6)  | 14.3           |
| Maximum torque (Note 3)  |                               | [N·m]   | 7.2<br>(12.7)                | 14.3<br>(19.1)   | 25.1             | 28.6<br>(34.7) | 43.0<br>(50.1) |
| Rated speed (Note 3, 4)  |                               | [r/min]   | 2000<br>(1500)               | 2000<br>(1500)   | 2000             | 2000<br>(1650) | 2000           |
| Maximum speed (Note 4)   |                               | [r/min]   | 4000                         |                  |                  |                | 2500           |
| Power rate at continuous rated torque<br>(Note 3)<br>[kW/s]    | Without electromagnetic brake |   | 9.7<br>(17.2)                | 26.3<br>(46.8)   | 61.2             | 53.9<br>(79.2) | 91.5           |
|  | With electromagnetic brake    |   | 7.0<br>(12.4)                | 20.9<br>(37.2)   | 51.1             | 47.8<br>(70.3) | 83.6           |
| Rated current (Note 3)   |                               | [A]   | 3.0<br>(4.0)                 | 5.3<br>(7.0)     | 9.3              | 11<br>(13)     | 11             |
| Maximum current (Note 3)                                       |                               | [A]   | 11<br>(19)                   | 18<br>(24)       | 32               | 34<br>(42)     | 34<br>(40)     |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |   | 5.90                         | 8.65             | 11.4             | 16.9           | 22.4           |
|  | With electromagnetic brake    |   | 8.15                         | 10.9             | 13.7             | 19.1           | 24.5           |
| Recommended load to motor inertia ratio (Note 1)               |                               |   | 15 times or less<br>(Note 6) | 23 times or less | 24 times or less |                |                |
| Speed/position detector  |                               | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                              |                  |                  |                |                |
| Type   |                               | Permanent magnet synchronous motor  |                              |                  |                  |                |                |
| Oil seal   |                               | None (Servo motors with an oil seal are available.)                                 |                              |                  |                  |                |                |
| Electromagnetic brake  |                               | None (Servo motors with an electromagnetic brake are available.)                    |                              |                  |                  |                |                |
| Thermistor   |                               | None  |                              |                  |                  |                |                |
| Insulation class   |                               | 155 (F)   |                              |                  |                  |                |                |
| Structure  |                               | Totally enclosed, natural cooling (IP rating: IP67) (Note 2)                        |                              |                  |                  |                |                |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ]   | X: 24.5, Y: 49               |                  |                  |                |                |
| Vibration rank   |                               | V10 *3  |                              |                  |                  |                |                |
| Permissible load for the shaft *2                              | L                             | [mm]  | 55                           |                  |                  |                |                |
|  | Radial                        | [N]   | 980                          |                  |                  |                |                |
|  | Thrust                        | [N]   | 490                          |                  |                  |                |                |
| Mass [kg]  | Without electromagnetic brake |   | 5.0                          | 6.0              | 7.1              | 9.1            | 11             |
|  | With electromagnetic brake    |   | 6.8                          | 7.8              | 8.8              | 11             | 13             |

- Notes:
1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.
  2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.
  3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.
  4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.
  5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.
  6. When the speed is 3000 r/min or less, the recommended load to motor inertia ratio is 19 times or less.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

## Electromagnetic brake specifications (Note 1)

|  |                         |                                   |               |       |       |              |       |
|--|-------------------------|-----------------------------------|---------------|-------|-------|--------------|-------|
| Model  |                         | HK-ST                             | 52WB          | 102WB | 172WB | 202AWB       | 302WB |
| Type   |                         | Spring actuated type safety brake |               |       |       |              |       |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |               |       |       |              |       |
| Power consumption                            |                         | [W] at 20 °C                      | 20            |       |       | 23           |       |
| Electromagnetic brake static friction torque |                         | [N·m]                             | 8.5 or higher |       |       | 16 or higher |       |
| Permissible braking work                     | Per braking             | [J]                               | 400           |       |       |              |       |
|  | Per hour                | [J]                               | 4000          |       |       |              |       |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 20000         |       |       | 5000         |       |
|  | Work per braking        | [J]                               | 200           |       |       | 400          |       |

- Notes:
1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.
  2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

## HK-ST\_W (Medium Inertia, Medium Capacity)

Specifications when connected with a 200 V servo amplifier

|  |                               |   |                  |                |                           |                           |                           |                          |
|--|-------------------------------|---|------------------|----------------|---------------------------|---------------------------|---------------------------|--------------------------|
| Flange size  |                               | [mm]  | 176 × 176        |                |                           |                           |                           |                          |
| Rotary servo motor model                                       |                               | HK-ST   | 7M2UW            | 172UW          | 202W                      | 352W                      | 502W                      | 702W                     |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]  | 0.75             | 1.75           | 2.0                       | 3.5                       | 5.0                       | 7.0                      |
|  | Rated torque (Note 3, 5)      | [N·m]   | 3.6              | 8.4            | 9.5<br>(12.7)             | 16.7<br>(20.3)            | 23.9<br>(28.9)            | 33.4                     |
| Maximum torque (Note 3)  |                               | [N·m]   | 10.7<br>(12.5)   | 25.1<br>(29.2) | 28.6<br>(38.2)            | 50.1<br>(60.8)            | 71.6<br>(86.8)            | 100                      |
| Rated speed (Note 3, 4)  |                               | [r/min]   | 2000             |                | 2000<br>(1500)            | 2000<br>(1650)            | 2000<br>(1650)            | 2000                     |
| Maximum speed (Note 4)   |                               | [r/min]   | 3000             |                | 4000                      | 3500                      | 4000                      | 3000                     |
| Power rate at continuous rated torque<br>(Note 3)<br>[kW/s]    | Without electromagnetic brake |   | 12.2             | 36.6           | 25.1<br>(44.6)            | 52.1<br>(76.5)            | 80.4<br>(118)             | 106                      |
|  | With electromagnetic brake    |   | 10.4             | 33.4           | 22.0<br>(39.2)            | 47.7<br>(70.0)            | 75.2<br>(110)             | 101                      |
| Rated current (Note 3)   |                               | [A]   | 4.6              | 9.0            | 10<br>(14)                | 16<br>(19)                | 27<br>(32)                | 28                       |
| Maximum current (Note 3)                                       |                               | [A]   | 18<br>(24)       | 34<br>(40)     | 32<br>(45)                | 52<br>(66)                | 90<br>(110)               | 102                      |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |   | 10.5             | 19.1           | 36.4                      | 53.6                      | 70.8                      | 105                      |
|  | With electromagnetic brake    |   | 12.3             | 20.9           | 41.4                      | 58.6                      | 75.8                      | 110                      |
| Recommended load to motor inertia ratio (Note 1)               |                               |   | 19 times or less |                | 15 times or less (Note 6) | 12 times or less (Note 7) | 10 times or less (Note 8) | 8 times or less (Note 8) |
| Speed/position detector  |                               | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                  |                |                           |                           |                           |                          |
| Type   |                               | Permanent magnet synchronous motor  |                  |                |                           |                           |                           |                          |
| Oil seal   |                               | None (Servo motors with an oil seal are available.)                                 |                  |                |                           |                           |                           |                          |
| Electromagnetic brake  |                               | None (Servo motors with an electromagnetic brake are available.)                    |                  |                |                           |                           |                           |                          |
| Thermistor   |                               | None  |                  |                |                           |                           |                           |                          |
| Insulation class   |                               | 155 (F)   |                  |                |                           |                           |                           |                          |
| Structure  |                               | Totally enclosed, natural cooling (IP rating: IP67) (Note 2)                        |                  |                |                           |                           |                           |                          |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ]   | X:24.5, Y:24.5   |                | X: 24.5, Y: 49            |                           | X: 24.5, Y: 29.4          |                          |
| Vibration rank   |                               | V10 <sup>-3</sup>   |                  |                |                           |                           |                           |                          |
| Permissible load for the shaft *2                              | L                             | [mm]  | 55               |                | 79                        |                           |                           |                          |
|  | Radial                        | [N]   | 980              |                | 2058                      |                           |                           |                          |
|  | Thrust                        | [N]   | 490              |                | 980                       |                           |                           |                          |
| Mass [kg]  | Without electromagnetic brake |   | 7.5              | 9.2            | 13                        | 16                        | 20                        | 27                       |
|  | With electromagnetic brake    |   | 9.5              | 11             | 18                        | 21                        | 25                        | 31                       |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
6. When the speed is 3000 r/min or less, the recommended load to motor inertia ratio is 20 times or less.  
7. When the speed is 3000 r/min or less, the recommended load to motor inertia ratio is 22 times or less.  
8. When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 22 times or less.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

|  |                         |                                   |               |        |              |       |       |       |
|--|-------------------------|-----------------------------------|---------------|--------|--------------|-------|-------|-------|
| Model  |                         | HK-ST                             | 7M2UWB        | 172UWB | 202WB        | 352WB | 502WB | 702WB |
| Type   |                         | Spring actuated type safety brake |               |        |              |       |       |       |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |               |        |              |       |       |       |
| Power consumption                            |                         | [W] at 20 °C                      | 20            |        | 34           |       |       |       |
| Electromagnetic brake static friction torque |                         | [N·m]                             | 8.5 or higher |        | 44 or higher |       |       |       |
| Permissible braking work                     | Per braking             | [J]                               | 400           |        | 4500         |       |       |       |
|  | Per hour                | [J]                               | 4000          |        | 45000        |       |       |       |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 20000         |        | 20000        |       |       |       |
|  | Work per braking        | [J]                               | 200           |        | 1000         |       |       |       |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

# Rotary Servo Motors

## HK-ST\_W (Medium Inertia, Medium Capacity)

Specifications when connected with a 200 V servo amplifier

|  |                               |                     |   |
|--|-------------------------------|---------------------|---|
| Flange size  |                               | [mm]                | 130 × 130   |
| Rotary servo motor model                                       |                               | HK-ST               | 353W 503W   |
| Continuous running duty<br>(Note 4)                            | Rated output (Note 3)         | [kW]                | 2.6<br>(3.5) 5.0  |
|  | Rated torque (Note 3, 5)      | [N·m]               | 8.3<br>(11.1) 15.9  |
| Maximum torque (Note 3)  |                               | [N·m]               | 24.8<br>(44.6) 47.8<br>(63.7)   |
| Rated speed (Note 4)   |                               | [r/min]             | 3000  |
| Maximum speed (Note 4)   |                               | [r/min]             | 6700 6000   |
| Power rate at continuous rated torque<br>(Note 3)<br>[kW/s]    | Without electromagnetic brake |                     | 40.5<br>(73.4) 91.5   |
|  | With electromagnetic brake    |                     | 35.9<br>(65.0) 84.7   |
| Rated current (Note 3)   |                               | [A]                 | 14<br>(19) 23   |
| Maximum current (Note 3)                                       |                               | [A]                 | 43<br>(83) 73<br>(100)  |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 16.9 27.7   |
|  | With electromagnetic brake    |                     | 19.1 29.9   |
| Recommended load to motor inertia ratio (Note 1)               |                               |                     | 10 times or less  |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |
| Type   |                               |                     | Permanent magnet synchronous motor  |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |
| Thermistor   |                               |                     | None  |
| Insulation class   |                               |                     | 155 (F)   |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2)                        |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 24.5, Y: 49  |
| Vibration rank   |                               |                     | V10 *3  |
| Permissible load for the shaft *2                              | L                             | [mm]                | 55  |
|  | Radial                        | [N]                 | 980   |
|  | Thrust                        | [N]                 | 490   |
| Mass [kg]  | Without electromagnetic brake |                     | 9.1 13  |
|  | With electromagnetic brake    |                     | 11 15   |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
 3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
 4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
 5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

## Electromagnetic brake specifications (Note 1)

|  |                         |              |                                   |
|--|-------------------------|--------------|-----------------------------------|
| Model  |                         | HK-ST        | 353WB 503WB                       |
| Type   |                         |              | Spring actuated type safety brake |
| Rated voltage                                |                         |              | 24 V DC (-10 % to 0 %)            |
| Power consumption                            |                         | [W] at 20 °C | 23                                |
| Electromagnetic brake static friction torque |                         | [N·m]        | 16 or higher                      |
| Permissible braking work                     | Per braking             | [J]          | 400                               |
|  | Per hour                | [J]          | 4000                              |
| Electromagnetic brake life (Note 2)          | Number of braking times |              | 5000                              |
|  | Work per braking        | [J]          | 400                               |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
 2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

### HK-ST\_4\_W (Medium Inertia, Medium Capacity)

Specifications when connected with a 200 V servo amplifier

|  |                               |                     |   |                  |       |                  |                  |
|--|-------------------------------|---------------------|---|------------------|-------|------------------|------------------|
| Flange size  |                               | [mm]                | 130 × 130   |                  |       |                  |                  |
| Rotary servo motor model                                       |                               | HK-ST               | 524W  | 1024W            | 1724W | 2024AW           | 3024W            |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 0.3   | 0.6              | 0.85  | 1.0              | 1.5              |
|  | Rated torque (Note 5)         | [N·m]               | 2.9   | 5.7              | 8.1   | 9.5              | 14.3             |
| Maximum torque (Note 3)  |                               | [N·m]               | 11.5  | 17.2<br>(20.1)   | 24.4  | 33.4             | 43.0             |
| Rated speed (Note 4)   |                               | [r/min]             | 1000  |                  |       |                  |                  |
| Maximum speed (Note 4)   |                               | [r/min]             | 2000  |                  |       |                  | 1200             |
| Power rate at continuous rated torque<br>[kW/s]                | Without electromagnetic brake |                     | 13.9  | 37.9             | 57.8  | 53.9             | 91.5             |
|  | With electromagnetic brake    |                     | 10.1  | 30.1             | 48.3  | 47.8             | 83.6             |
| Rated current  |                               | [A]                 | 1.8   | 3.2              | 4.5   | 5.2              | 5.1              |
| Maximum current (Note 3)                                       |                               | [A]                 | 8.3   | 11<br>(13)       | 17    | 20               | 17               |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 5.90  | 8.65             | 11.4  | 16.9             | 22.4             |
|  | With electromagnetic brake    |                     | 8.15  | 10.9             | 13.7  | 19.1             | 24.5             |
| Recommended load to motor inertia ratio (Note 1)               |                               |                     | 15 times or less  | 24 times or less |       | 20 times or less | 24 times or less |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                  |       |                  |                  |
| Type   |                               |                     | Permanent magnet synchronous motor  |                  |       |                  |                  |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |                  |       |                  |                  |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |                  |       |                  |                  |
| Thermistor   |                               |                     | None  |                  |       |                  |                  |
| Insulation class   |                               |                     | 155 (F)   |                  |       |                  |                  |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2)                        |                  |       |                  |                  |
| Vibration resistance <sup>1</sup>                              |                               | [m/s <sup>2</sup> ] | X: 24.5, Y: 49  |                  |       |                  |                  |
| Vibration rank   |                               |                     | V10 <sup>-3</sup>   |                  |       |                  |                  |
| Permissible load for the shaft <sup>2</sup>                    | L                             | [mm]                | 55  |                  |       |                  |                  |
|  | Radial                        | [N]                 | 980   |                  |       |                  |                  |
|  | Thrust                        | [N]                 | 490   |                  |       |                  |                  |
| Mass [kg]  | Without electromagnetic brake |                     | 5.0   | 6.0              | 7.1   | 9.1              | 11               |
|  | With electromagnetic brake    |                     | 6.8   | 7.8              | 8.8   | 11               | 13               |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
 3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
 4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
 5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

|  |                         |                                   |               |        |        |              |        |
|--|-------------------------|-----------------------------------|---------------|--------|--------|--------------|--------|
| Model  |                         | HK-ST                             | 524WB         | 1024WB | 1724WB | 2024AWB      | 3024WB |
| Type   |                         | Spring actuated type safety brake |               |        |        |              |        |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |               |        |        |              |        |
| Power consumption                            |                         | [W] at 20 °C                      | 20            |        |        | 23           |        |
| Electromagnetic brake static friction torque |                         | [N·m]                             | 8.5 or higher |        |        | 16 or higher |        |
| Permissible braking work                     | Per braking             | [J]                               | 400           |        |        |              |        |
|  | Per hour                | [J]                               | 4000          |        |        |              |        |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 20000         |        |        | 5000         |        |
|  | Work per braking        | [J]                               | 200           |        |        | 400          |        |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
 2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Rotary Servo Motors

## HK-ST\_4\_W (Medium Inertia, Medium Capacity)

Specifications when connected with a 200 V servo amplifier

|  |                               |                     |   |                |                  |                  |
|--|-------------------------------|---------------------|---|----------------|------------------|------------------|
| Flange size  |                               | [mm]                | 176 × 176   |                |                  |                  |
| Rotary servo motor model                                       |                               | HK-ST               | 2024W   | 3524W          | 5024W            | 7024W            |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 1.2   | 2.0            | 3.0              | 4.2              |
|  | Rated torque (Note 5)         | [N·m]               | 11.5  | 19.1           | 28.6             | 40.1             |
| Maximum torque (Note 3)  |                               | [N·m]               | 40.1  | 57.3<br>(66.8) | 85.9             | 120              |
| Rated speed (Note 4)   |                               | [r/min]             | 1000  |                |                  |                  |
| Maximum speed (Note 4)   |                               | [r/min]             | 2000  | 1500           | 2000             | 1500             |
| Power rate at continuous rated torque [kW/s]                   | Without electromagnetic brake |                     | 36.1  | 68.0           | 116              | 153              |
|  | With electromagnetic brake    |                     | 31.7  | 62.3           | 108              | 146              |
| Rated current  |                               | [A]                 | 6.0   | 9.0            | 16               | 17               |
| Maximum current (Note 3)                                       |                               | [A]                 | 24  | 32<br>(37)     | 52               | 60               |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 36.4  | 53.6           | 70.8             | 105              |
|  | With electromagnetic brake    |                     | 41.4  | 58.6           | 75.8             | 110              |
| Recommended load to motor inertia ratio (Note 1)               |                               |                     | 23 times or less  |                |                  | 22 times or less |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                |                  |                  |
| Type   |                               |                     | Permanent magnet synchronous motor  |                |                  |                  |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |                |                  |                  |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |                |                  |                  |
| Thermistor   |                               |                     | None  |                |                  |                  |
| Insulation class   |                               |                     | 155 (F)   |                |                  |                  |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2)                        |                |                  |                  |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 24.5, Y: 49  |                | X: 24.5, Y: 29.4 |                  |
| Vibration rank   |                               |                     | V10 *3  |                |                  |                  |
| Permissible load for the shaft *2                              | L                             | [mm]                | 79  |                |                  |                  |
|  | Radial                        | [N]                 | 2058  |                |                  |                  |
|  | Thrust                        | [N]                 | 980   |                |                  |                  |
| Mass [kg]  | Without electromagnetic brake |                     | 13  | 16             | 20               | 27               |
|  | With electromagnetic brake    |                     | 18  | 21             | 25               | 31               |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

## Electromagnetic brake specifications (Note 1)

|  |                                   |              |        |        |        |
|--|-----------------------------------|--------------|--------|--------|--------|
| Model  | HK-ST                             | 2024WB       | 3524WB | 5024WB | 7024WB |
| Type   | Spring actuated type safety brake |              |        |        |        |
| Rated voltage                                | 24 V DC (-10 % to 0 %)            |              |        |        |        |
| Power consumption                            | [W] at 20 °C                      | 34           |        |        |        |
| Electromagnetic brake static friction torque | [N·m]                             | 44 or higher |        |        |        |
| Permissible braking work                     | Per braking                       | [J]          | 4500   |        |        |
|  | Per hour                          | [J]          | 45000  |        |        |
| Electromagnetic brake life (Note 2)          | Number of braking times           |              | 20000  |        |        |
|  | Work per braking                  | [J]          | 1000   |        |        |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.



## HK-ST\_4\_W (Medium Inertia, Medium Capacity)

Specifications when connected with a 400 V servo amplifier

|  |                               |                     |   |                          |                          |                          |                  |
|--|-------------------------------|---------------------|---|--------------------------|--------------------------|--------------------------|------------------|
| Flange size  |                               | [mm]                | 130 × 130   |                          |                          |                          |                  |
| Rotary servo motor model                                       |                               | HK-ST               | 524W  | 1024W                    | 1724W                    | 2024AW                   | 3024W            |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 0.5   | 1.0                      | 1.75                     | 2.0                      | 3.0              |
|  | Rated torque (Note 3, 5)      | [N·m]               | 2.4<br>(3.2)  | 4.8<br>(6.4)             | 8.4                      | 9.5<br>(11.6)            | 14.3             |
| Maximum torque (Note 3)  |                               | [N·m]               | 7.2<br>(12.7)   | 14.3<br>(19.1)           | 25.1                     | 28.6<br>(34.7)           | 43.0<br>(50.1)   |
| Rated speed (Note 3, 4)  |                               | [r/min]             | 2000<br>(1500)  | 2000<br>(1500)           | 2000                     | 2000<br>(1650)           | 2000             |
| Maximum speed (Note 4)   |                               | [r/min]             | 4000  |                          |                          |                          | 2500             |
| Power rate at continuous rated torque<br>(Note 3)<br>[kW/s]    | Without electromagnetic brake |                     | 9.7<br>(17.2)   | 26.3<br>(46.8)           | 61.2                     | 53.9<br>(79.2)           | 91.5             |
|  | With electromagnetic brake    |                     | 7.0<br>(12.4)   | 20.9<br>(37.2)           | 51.1                     | 47.8<br>(70.3)           | 83.6             |
| Rated current (Note 3)   |                               | [A]                 | 1.5<br>(2.0)  | 2.7<br>(3.5)             | 4.7                      | 5.2<br>(6.3)             | 5.1              |
| Maximum current (Note 3)                                       |                               | [A]                 | 5.1<br>(9.3)  | 8.8<br>(12)              | 16                       | 17<br>(21)               | 17<br>(20)       |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 5.90  | 8.65                     | 11.4                     | 16.9                     | 22.4             |
|  | With electromagnetic brake    |                     | 8.15  | 10.9                     | 13.7                     | 19.1                     | 24.5             |
| Recommended load to motor inertia ratio (Note 1)               | MR-J5                         |                     | 4 times or less (Note 6)  | 4 times or less (Note 7) | 4 times or less (Note 8) | 8 times or less (Note 8) | 24 times or less |
|  | MR-J5D                        |                     | 19 times or less  | 16 times or less         | 11 times or less         | 7 times or less (Note 8) | 24 times or less |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                          |                          |                          |                  |
| Type   |                               |                     | Permanent magnet synchronous motor  |                          |                          |                          |                  |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |                          |                          |                          |                  |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |                          |                          |                          |                  |
| Thermistor   |                               |                     | None  |                          |                          |                          |                  |
| Insulation class   |                               |                     | 155 (F)   |                          |                          |                          |                  |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2)                        |                          |                          |                          |                  |
| Vibration resistance <sup>*1</sup>                             |                               | [m/s <sup>2</sup> ] | X: 24.5, Y: 49  |                          |                          |                          |                  |
| Vibration rank   |                               |                     | V10 <sup>-3</sup>   |                          |                          |                          |                  |
| Permissible load for the shaft <sup>*2</sup>                   | L                             | [mm]                | 55  |                          |                          |                          |                  |
|  | Radial                        | [N]                 | 980   |                          |                          |                          |                  |
|  | Thrust                        | [N]                 | 490   |                          |                          |                          |                  |
| Mass [kg]  | Without electromagnetic brake |                     | 5.0   | 6.0                      | 7.1                      | 9.1                      | 11               |
|  | With electromagnetic brake    |                     | 6.8   | 7.8                      | 8.8                      | 11                       | 13               |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
 3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
 4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
 5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
 6. When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 19 times or less.  
 7. When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 23 times or less.  
 8. When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 24 times or less.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

|  |                         |              |                                   |        |        |              |        |
|--|-------------------------|--------------|-----------------------------------|--------|--------|--------------|--------|
| Model  |                         | HK-ST        | 524WB                             | 1024WB | 1724WB | 2024AWB      | 3024WB |
| Type   |                         |              | Spring actuated type safety brake |        |        |              |        |
| Rated voltage                                |                         |              | 24 V DC (-10 % to 0 %)            |        |        |              |        |
| Power consumption                            |                         | [W] at 20 °C | 20                                |        |        | 23           |        |
| Electromagnetic brake static friction torque |                         | [N·m]        | 8.5 or higher                     |        |        | 16 or higher |        |
| Permissible braking work                     | Per braking             | [J]          | 400                               |        |        |              |        |
|  | Per hour                | [J]          | 4000                              |        |        |              |        |
| Electromagnetic brake life (Note 2)          | Number of braking times |              | 20000                             |        |        | 5000         |        |
|  | Work per braking        | [J]          | 200                               |        |        | 400          |        |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
 2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

# Rotary Servo Motors

## HK-ST\_4\_W (Medium Inertia, Medium Capacity)

Specifications when connected with a 400 V servo amplifier

|  |                               |                     |   |                          |                           |                           |
|--|-------------------------------|---------------------|---|--------------------------|---------------------------|---------------------------|
| Flange size  |                               | [mm]                | 176 × 176   |                          |                           |                           |
| Rotary servo motor model                                       |                               | HK-ST               | 2024W   | 3524W                    | 5024W                     | 7024W                     |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 2.0   | 3.5                      | 5.0                       | 7.0                       |
|  | Rated torque (Note 3, 5)      | [N·m]               | 9.5<br>(12.7)   | 16.7<br>(20.3)           | 23.9<br>(28.9)            | 33.4                      |
| Maximum torque (Note 3)  |                               | [N·m]               | 28.6<br>(38.2)  | 50.1<br>(60.8)           | 71.6<br>(86.8)            | 100                       |
| Rated speed (Note 3, 4)  |                               | [r/min]             | 2000<br>(1500)  | 2000<br>(1650)           | 2000<br>(1650)            | 2000                      |
| Maximum speed (Note 4)   |                               | [r/min]             | 4000  | 3500                     | 4000                      | 3000                      |
| Power rate at continuous rated torque<br>(Note 3)<br>[kW/s]    | Without electromagnetic brake |                     | 25.1<br>(44.6)  | 52.1<br>(76.5)           | 80.4<br>(118)             | 106                       |
|  | With electromagnetic brake    |                     | 22.0<br>(39.2)  | 47.7<br>(70.0)           | 75.2<br>(110)             | 101                       |
| Rated current (Note 3)   |                               | [A]                 | 5.0<br>(6.7)  | 7.9<br>(9.5)             | 14<br>(16)                | 14                        |
| Maximum current (Note 3)                                       |                               | [A]                 | 16<br>(23)  | 26<br>(33)               | 45<br>(55)                | 59                        |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 36.4  | 53.6                     | 70.8                      | 105                       |
|  | With electromagnetic brake    |                     | 41.4  | 58.6                     | 75.8                      | 110                       |
| Recommended load to motor inertia ratio (Note 1)               | MR-J5                         |                     | 4 times or less (Note 6)  | 5 times or less (Note 7) | 4 times or less (Note 7)  | 8 times or less (Note 7)  |
|  | MR-J5D                        |                     | 2 times or less (Note 8)  | 4 times or less (Note 9) | 2 times or less (Note 10) | 2 times or less (Note 11) |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                          |                           |                           |
| Type   |                               |                     | Permanent magnet synchronous motor  |                          |                           |                           |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |                          |                           |                           |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |                          |                           |                           |
| Thermistor   |                               |                     | None  |                          |                           |                           |
| Insulation class   |                               |                     | 155 (F)   |                          |                           |                           |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2)                        |                          |                           |                           |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 24.5, Y: 49  |                          |                           | X: 24.5, Y: 29.4          |
| Vibration rank   |                               |                     | V10 *3  |                          |                           |                           |
| Permissible load for the shaft *2                              | L                             | [mm]                | 79  |                          |                           |                           |
|  | Radial                        | [N]                 | 2058  |                          |                           |                           |
|  | Thrust                        | [N]                 | 980   |                          |                           |                           |
| Mass [kg]  | Without electromagnetic brake |                     | 13  | 16                       | 20                        | 27                        |
|  | With electromagnetic brake    |                     | 18  | 21                       | 25                        | 31                        |

- Notes:
- Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.
  - The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.
  - The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.
  - The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.
  - When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.
  - When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 20 times or less.
  - When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 22 times or less.
  - When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 12 times or less.
  - When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 14 times or less.
  - When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 10 times or less.
  - When the speed is 2000 r/min or less, the recommended load to motor inertia ratio is 7 times or less.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

|  |                         |                                   |              |        |        |
|--|-------------------------|-----------------------------------|--------------|--------|--------|
| Model  | HK-ST                   | 2024WB                            | 3524WB       | 5024WB | 7024WB |
| Type   |                         | Spring actuated type safety brake |              |        |        |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |              |        |        |
| Power consumption                            |                         | [W] at 20 °C                      | 34           |        |        |
| Electromagnetic brake static friction torque |                         | [N·m]                             | 44 or higher |        |        |
| Permissible braking work                     | Per braking             | [J]                               | 4500         |        |        |
|  | Per hour                | [J]                               | 45000        |        |        |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 20000        |        |        |
|  | Work per braking        | [J]                               | 1000         |        |        |

- Notes:
- The electromagnetic brake is for holding. It cannot be used for deceleration applications.
  - Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

## HK-ST\_4\_W (Medium Inertia, Medium Capacity)

Specifications when connected with a 400 V servo amplifier

|  |                               |                     |   |                          |
|--|-------------------------------|---------------------|---|--------------------------|
| Flange size  |                               | [mm]                | 130 × 130   |                          |
| Rotary servo motor model                                       |                               | HK-ST               | 3534W   | 5034W                    |
| Continuous running duty (Note 4)                               | Rated output (Note 3)         | [kW]                | 2.6<br>(3.5)  | 5.0                      |
|  | Rated torque (Note 3, 5)      | [N·m]               | 8.3<br>(11.1)   | 15.9                     |
| Maximum torque (Note 3)  |                               | [N·m]               | 24.8<br>(44.6)  | 47.8<br>(63.7)           |
| Rated speed (Note 4)   |                               | [r/min]             | 3000  |                          |
| Maximum speed (Note 4)   |                               | [r/min]             | 6700  | 6000                     |
| Power rate at continuous rated torque (Note 3)<br>[kW/s]       | Without electromagnetic brake |                     | 40.5<br>(73.4)  | 91.5                     |
|  | With electromagnetic brake    |                     | 35.9<br>(65.0)  | 84.7                     |
| Rated current (Note 3)   |                               | [A]                 | 6.9<br>(9.2)  | 12                       |
| Maximum current (Note 3)                                       |                               | [A]                 | 22<br>(42)  | 37<br>(52)               |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 16.9  | 27.7                     |
|  | With electromagnetic brake    |                     | 19.1  | 29.9                     |
| Recommended load to motor inertia ratio (Note 1)               | MR-J5                         |                     | 10 times or less  | 7 times or less          |
|  | MR-J5D                        |                     | 3 times or less (Note 6)  | 2 times or less (Note 7) |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                          |
| Type   |                               |                     | Permanent magnet synchronous motor  |                          |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |                          |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |                          |
| Thermistor   |                               |                     | None  |                          |
| Insulation class   |                               |                     | 155 (F)   |                          |
| Structure  |                               |                     | Totally enclosed, natural cooling (IP rating: IP67) (Note 2)                        |                          |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 24.5, Y: 49  |                          |
| Vibration rank   |                               |                     | V10 <sup>-3</sup>   |                          |
| Permissible load for the shaft *2                              | L                             | [mm]                | 55  |                          |
|  | Radial                        | [N]                 | 980   |                          |
|  | Thrust                        | [N]                 | 490   |                          |
| Mass [kg]  | Without electromagnetic brake |                     | 9.1   | 13                       |
|  | With electromagnetic brake    |                     | 11  | 15                       |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
 3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
 4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
 5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
 6. When the speed is 3000 r/min or less, the recommended load to motor inertia ratio is 20 times or less.  
 7. When the speed is 3000 r/min or less, the recommended load to motor inertia ratio is 12 times or less.

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

|  |                         |              |                                   |        |
|--|-------------------------|--------------|-----------------------------------|--------|
| Model  |                         | HK-ST        | 3534WB                            | 5034WB |
| Type   |                         |              | Spring actuated type safety brake |        |
| Rated voltage                                |                         |              | 24 V DC (-10 % to 0 %)            |        |
| Power consumption                            |                         | [W] at 20 °C | 23                                |        |
| Electromagnetic brake static friction torque |                         | [N·m]        | 16 or higher                      |        |
| Permissible braking work                     | Per braking             | [J]          | 400                               |        |
|  | Per hour                | [J]          | 4000                              |        |
| Electromagnetic brake life (Note 2)          | Number of braking times |              | 5000                              |        |
|  | Work per braking        | [J]          | 400                               |        |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
 2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

# Rotary Servo Motors


## HK-ST\_W Torque Characteristics (Note 1)

When connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


### HK-ST52W

Standard torque




### HK-ST52W

Torque increased




### HK-ST102W (Note 2)

Standard torque




### HK-ST102W (Note 2)

Torque increased




### HK-ST172W (Note 2)

Standard torque




### HK-ST202AW (Note 2)

Standard torque




### HK-ST202AW

Torque increased




### HK-ST302W

Standard torque



### HK-ST302W

Torque increased




Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

## HK-ST\_W Torque Characteristics (Note 1)


When connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


**HK-ST7M2UW**  
Standard torque




**HK-ST7M2UW**  
Torque increased




**HK-ST172UW (Note 2)**  
Standard torque




**HK-ST172UW**  
Torque increased




**HK-ST202W (Note 2)**  
Standard torque




**HK-ST202W**  
Torque increased




**HK-ST352W**  
Standard torque




**HK-ST352W**  
Torque increased




**HK-ST502W**  
Standard torque




**HK-ST502W**  
Torque increased




**HK-ST702W**  
Standard torque




**HK-ST353W**  
Standard torque




**HK-ST353W**  
Torque increased



**HK-ST503W**  
Standard torque



**HK-ST503W**  
Torque increased



Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

# Rotary Servo Motors


## HK-ST\_4\_W Torque Characteristics (Note 1)

When connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


### HK-ST524W

Standard torque




### HK-ST1024W

Standard torque




### HK-ST1024W

Torque increased




### HK-ST1724W (Note 2)

Standard torque




### HK-ST2024AW (Note 2)

Standard torque




### HK-ST3024W (Note 2)

Standard torque



### HK-ST2024W (Note 2)

Standard torque



Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.


### HK-ST\_4\_W Torque Characteristics (Note 1)

When connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


#### HK-ST3524W (Note 2)

Standard torque




#### HK-ST3524W

Torque increased




#### HK-ST5024W

Standard torque



#### HK-ST7024W

Standard torque



- Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - - : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LV/S/Wires
- Product List
- Precautions
- Support

# Rotary Servo Motors


## HK-ST\_4\_W Torque Characteristics (Note 1)

When connected with a 400 V servo amplifier

— : For 3-phase 400 V AC  
 — : For 3-phase 380 V AC


### HK-ST524W

Standard torque




### HK-ST524W

Torque increased




### HK-ST1024W

Standard torque




### HK-ST1024W

Torque increased




### HK-ST1724W

Standard torque




### HK-ST2024AW

Standard torque




### HK-ST2024AW

Torque increased




### HK-ST3024W

Standard torque



### HK-ST3024W

Torque increased



Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - - : A rough indication of the possible continuous running range for 3-phase 323 V AC




## HK-ST\_4\_W Torque Characteristics (Note 1)

When connected with a 400 V servo amplifier

— : For 3-phase 400 V AC  
 — : For 3-phase 380 V AC


### HK-ST2024W

Standard torque




### HK-ST2024W

Torque increased




### HK-ST3524W

Standard torque




### HK-ST3524W

Torque increased




### HK-ST5024W

Standard torque




### HK-ST5024W

Torque increased




### HK-ST7024W

Standard torque




### HK-ST3534W

Standard torque




### HK-ST3534W

Torque increased




### HK-ST5034W

Standard torque



### HK-ST5034W

Torque increased




Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - : A rough indication of the possible continuous running range for 3-phase 323 V AC

# Rotary Servo Motors


## HK-ST Series Dimensions (Note 3, 4, 6)

HK-ST52W(B), HK-ST102W(B), HK-ST172W(B), HK-ST202AW(B), HK-ST302W(B),  
 HK-ST524W(B), HK-ST1024W(B), HK-ST1724W(B), HK-ST2024AW(B), HK-ST3024W(B)

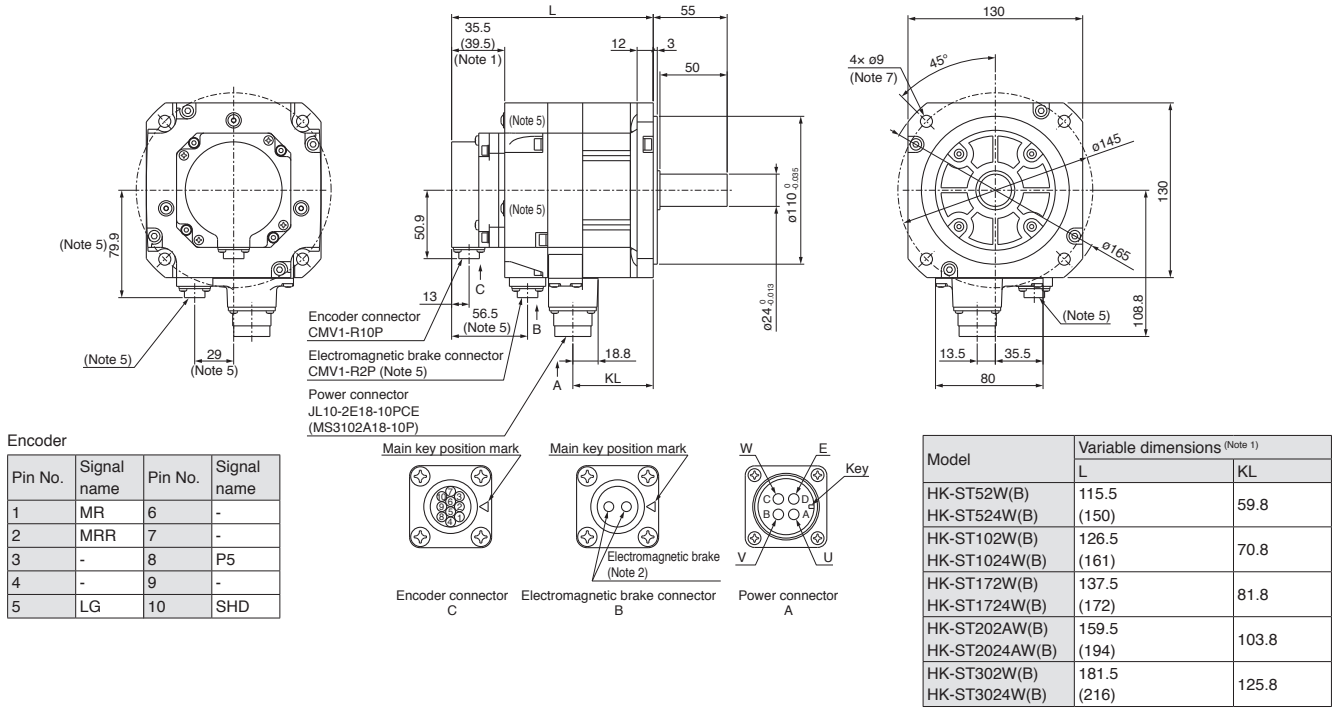

[Unit: mm]

## HK-ST7M2UW(B), HK-ST172UW(B)

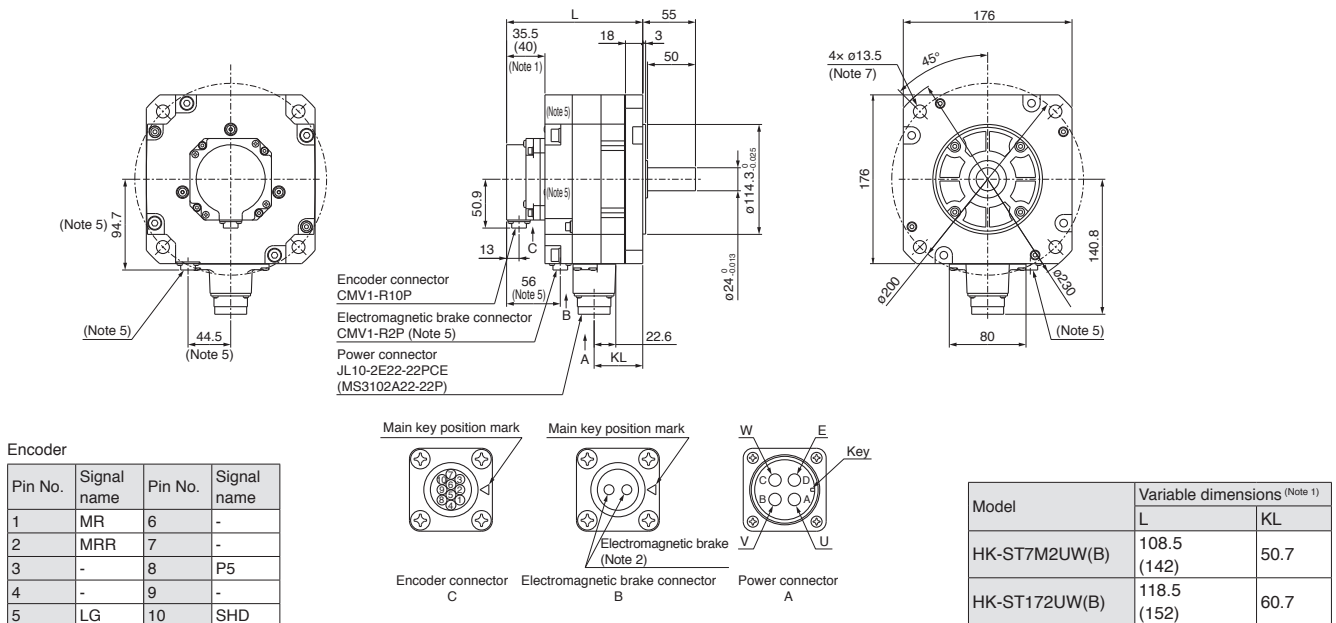


[Unit: mm]


- Notes:
- The dimensions in brackets are for the models with an electromagnetic brake.
  - The electromagnetic brake terminals do not have polarity.
  - The dimensions are the same regardless of whether or not an oil seal is installed.
  - Use a friction coupling to fasten a load.
  - Only for the models with an electromagnetic brake.
  - The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  - Use hexagonal cap head bolts when mounting the servo motor.

**HK-ST Series Dimensions** (Note 3, 4, 7)

HK-ST202W(B), HK-ST352W(B), HK-ST502W(B), HK-ST702W(B),  
 HK-ST2024W(B), HK-ST3524W(B), HK-ST5024W(B), HK-ST7024W(B)

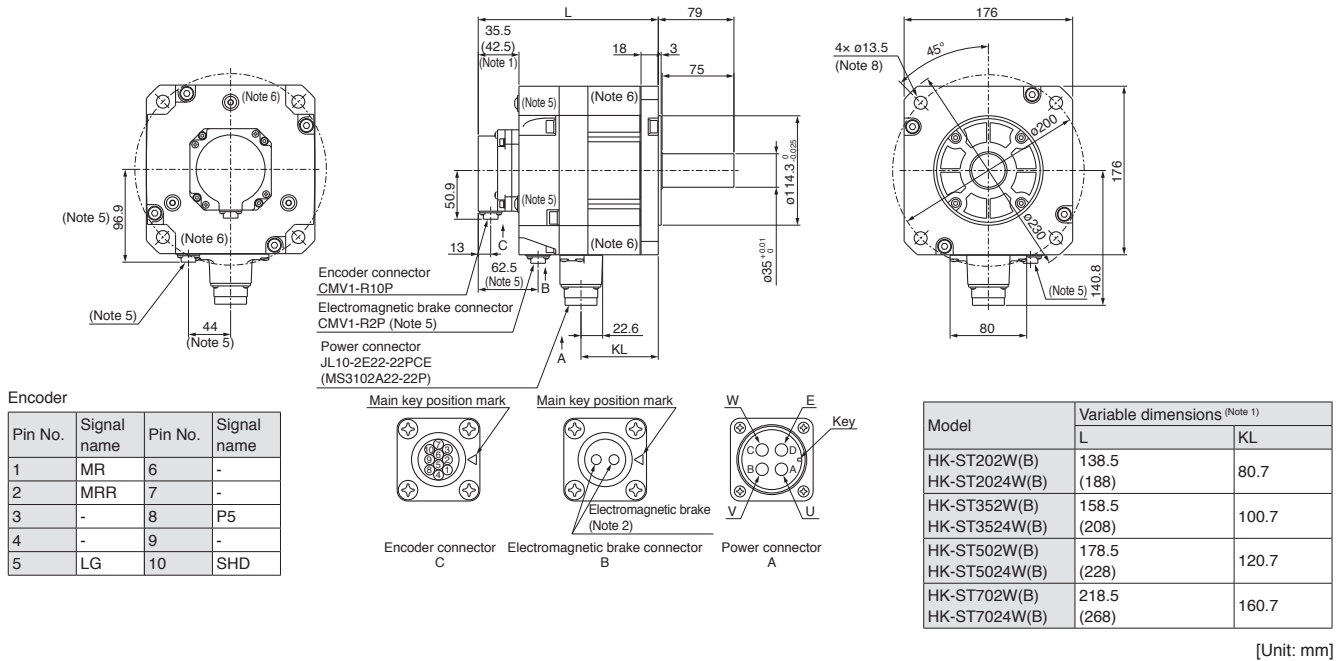

HK-ST353W(B), HK-ST503W(B),  
 HK-ST3534W(B), HK-ST5034W(B)

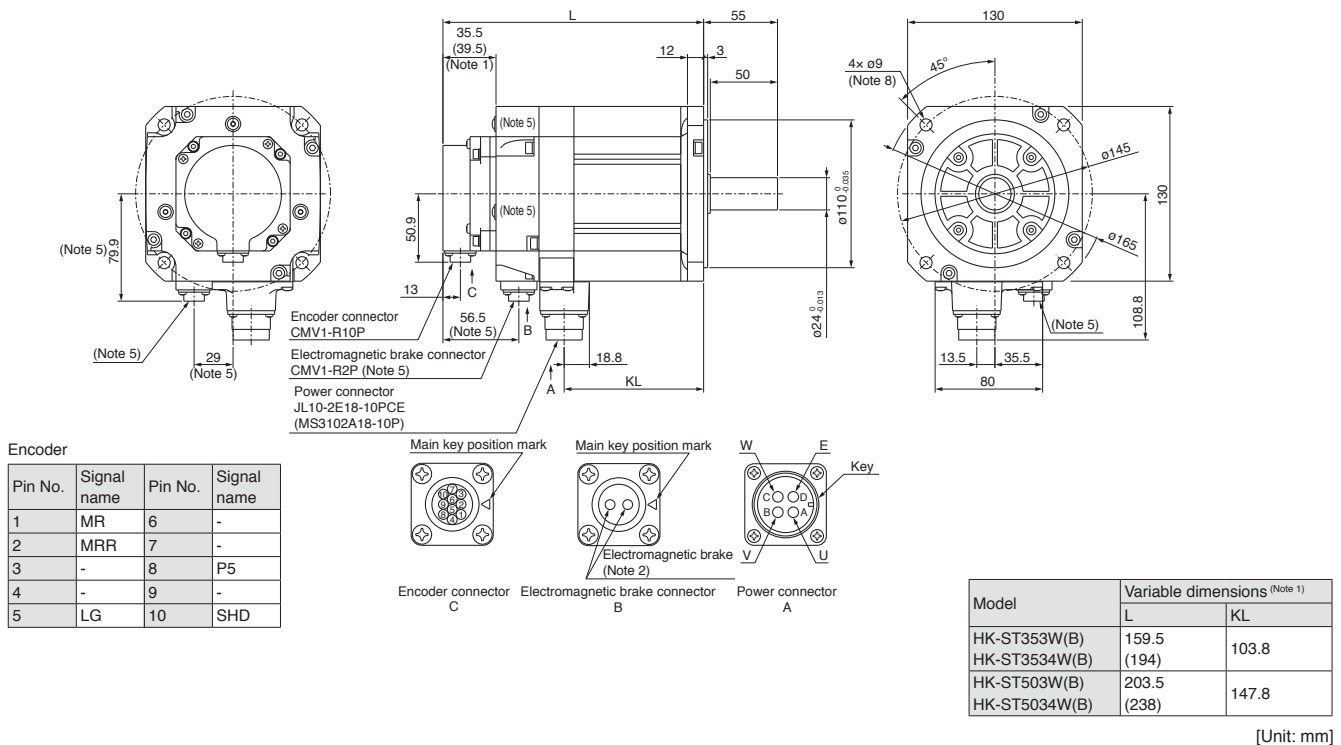

- Notes:
1. The dimensions in brackets are for the models with an electromagnetic brake.
  2. The electromagnetic brake terminals do not have polarity.
  3. The dimensions are the same regardless of whether or not an oil seal is installed.
  4. Use a friction coupling to fasten a load.
  5. Only for the models with an electromagnetic brake.
  6. HK-ST352W(B), HK-ST3524W(B), HK-ST502W(B), HK-ST5024W(B), HK-ST702W(B), and HK-ST7024W(B) have screw holes (M8) for eyebolts.
  7. The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  8. Use hexagonal cap head bolts when mounting the servo motor.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/SWires  
 Product List  
 Precautions  
 Support


# Rotary Servo Motors

## HK-ST Series with Special Shaft Dimensions

Servo motors with the following specifications are also available.

K: Keyed shaft (with a double round-ended key) (Note 1)


| Model   | Variable dimensions               |    |    |    |    |    |                                  |   |   |       |
|---|-----------------------------------|----|----|----|----|----|----------------------------------|---|---|-------|
|   | S                                 | LR | Q  | W  | QK | QL | U                                | R | T | Y     |
| HK-ST52(4)WK<br>HK-ST102(4)WK<br>HK-ST172(4)WK<br>HK-ST202(4)AWK<br>HK-ST302(4)WK<br>HK-ST353(4)WK<br>HK-ST503(4)WK<br>HK-ST7M2UWK<br>HK-ST172UWK | 24 <sup>0</sup> <sub>-0.013</sub> | 55 | 50 | 8  | 36 | 5  | 20 <sup>0</sup> <sub>-0.1</sub>  | 4 | 7 | M8×20 |
| HK-ST202(4)WK<br>HK-ST352(4)WK<br>HK-ST502(4)WK<br>HK-ST702(4)WK  | 35 <sup>+0.010</sup> <sub>0</sub> | 79 | 75 | 10 | 55 | 5  | 30 <sup>0</sup> <sub>-0.12</sub> | 5 | 8 | M8×20 |

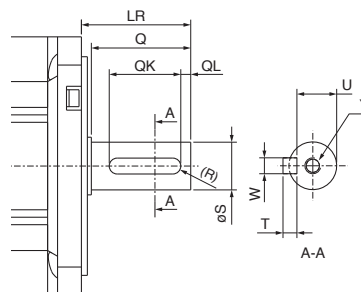

[Unit: mm]

N: Keyed shaft (without a key) (Note 1, 2)

| Model   | Variable dimensions               |    |    |                                   |    |    |                                  |   |   |       |
|---|-----------------------------------|----|----|-----------------------------------|----|----|----------------------------------|---|---|-------|
|   | S                                 | LR | Q  | W                                 | QK | QL | U                                | R | Y |       |
| HK-ST52(4)WN<br>HK-ST102(4)WN<br>HK-ST172(4)WN<br>HK-ST202(4)AWN<br>HK-ST302(4)WN<br>HK-ST353(4)WN<br>HK-ST503(4)WN<br>HK-ST7M2UWN<br>HK-ST172UWN | 24 <sup>0</sup> <sub>-0.013</sub> | 55 | 50 | 8 <sup>0</sup> <sub>-0.036</sub>  | 36 | 5  | 20 <sup>0</sup> <sub>-0.1</sub>  | 4 |   | M8×20 |
| HK-ST202(4)WN<br>HK-ST352(4)WN<br>HK-ST502(4)WN<br>HK-ST702(4)WN  | 35 <sup>+0.010</sup> <sub>0</sub> | 79 | 75 | 10 <sup>0</sup> <sub>-0.036</sub> | 55 | 5  | 30 <sup>0</sup> <sub>-0.12</sub> | 5 |   | M8×20 |

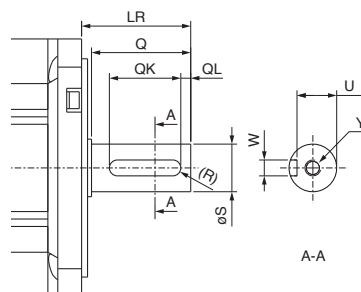

[Unit: mm]

- Notes:
1. Do not use the servo motors with a keyed shaft for frequent start/stop applications as this may cause the damage to the shaft.
  2. The servo motor is supplied without a key. The user needs to prepare a key.

HK-ST Series Geared Servo Motor Specifications

With a gear reducer for general industrial machines, flange mounting: G1

| Model<br>HK-ST              | Output<br>[kW] | Reduction<br>ratio | Moment of inertia J<br>[ $\times 10^{-4}$ kg·m <sup>2</sup> ] (Note 1) |                                       | Permissible load to<br>motor inertia ratio (Note 2)<br>(when converted into<br>the servo motor shaft) | Permissible load for<br>the shaft <sup>1</sup> |               |               | Mass [kg]                                |                                       | Lubrication<br>method<br>(Note 5) | Mounting<br>direction           |
|-----------------------------|----------------|--------------------|--|---------------------------------------|---|--|---------------|---------------|--|---------------------------------------|-----------------------------------|---------------------------------|
|                             |                |                    | Without<br>electro-<br>magnetic<br>brake                               | With<br>electro-<br>magnetic<br>brake |   | Q<br>[mm]                                      | Radial<br>[N] | Thrust<br>[N] | Without<br>electro-<br>magnetic<br>brake | With<br>electro-<br>magnetic<br>brake |                                   |                                 |
| 52G1<br>524G1               | 0.5            | 1/6                | 6.72   | 8.97                                  | 4 times or less   | 35   | 2058          | 1470          | 17                                       | 19                                    | Grease<br>(filled)                | Any<br>direction                |
|                             |                | 1/11               | 6.29   | 8.54                                  |   | 35   | 2391          | 1470          | 17                                       | 19                                    |                                   |                                 |
|                             |                | 1/17               | 6.17   | 8.42                                  |   | 35   | 2832          | 1470          | 17                                       | 19                                    |                                   |                                 |
|                             |                | 1/29               | 6.11   | 8.36                                  |   | 35   | 3273          | 1470          | 17                                       | 19                                    |                                   |                                 |
|                             |                | 1/35               | 6.90   | 9.15                                  |   | 55   | 5253          | 2940          | 27                                       | 29                                    |                                   |                                 |
|                             |                | 1/43               | 6.86   | 9.11                                  |   | 55   | 5253          | 2940          | 27                                       | 29                                    |                                   |                                 |
| 102G1<br>1024G1             | 1.0            | 1/6                | 11.9   | 14.1                                  | 4 times or less   | 55   | 2842          | 2352          | 29                                       | 31                                    | Grease<br>(filled)                | Any<br>direction                |
|                             |                | 1/11               | 10.4   | 12.6                                  |   | 55   | 3273          | 2764          | 29                                       | 31                                    |                                   |                                 |
|                             |                | 1/17               | 9.95   | 12.2                                  |   | 55   | 3646          | 2940          | 29                                       | 31                                    |                                   |                                 |
|                             |                | 1/29               | 9.65   | 11.9                                  |   | 55   | 4410          | 2940          | 29                                       | 31                                    |                                   |                                 |
|                             |                | 1/35               | 9.65   | 11.9                                  |   | 55   | 5253          | 2940          | 29                                       | 31                                    |                                   |                                 |
|                             |                | 1/43               | 10.9   | 13.1                                  |   | 70   | 6047          | 3920          | 48                                       | 50                                    |                                   |                                 |
| 152G1<br>1524G1<br>(Note 6) | 1.5            | 1/6                | 14.6   | 16.9                                  | 4 times or less   | 55   | 2842          | 2352          | 30                                       | 32                                    | Grease<br>(filled)                | Any<br>direction                |
|                             |                | 1/11               | 13.1   | 15.4                                  |   | 55   | 3273          | 2764          | 30                                       | 32                                    |                                   |                                 |
|                             |                | 1/17               | 12.7   | 15.0                                  |   | 55   | 3646          | 2940          | 30                                       | 32                                    |                                   |                                 |
|                             |                | 1/29               | 13.8   | 16.1                                  |   | 70   | 5135          | 3920          | 49                                       | 51                                    |                                   |                                 |
|                             |                | 1/35               | 13.7   | 16.0                                  |   | 70   | 6047          | 3920          | 49                                       | 51                                    |                                   |                                 |
|                             |                | 1/43               | 19.0   | 21.3                                  |   | 90   | 8555          | 6860          | 81                                       | 83                                    |                                   |                                 |
| 202G1<br>2024G1             | 2.0            | 1/6                | 39.6   | 44.6                                  | 4 times or less   | 55   | 2842          | 2352          | 37                                       | 42                                    | Grease<br>(filled)                | Any<br>direction                |
|                             |                | 1/11               | 38.0   | 43.0                                  |   | 55   | 3273          | 2764          | 37                                       | 42                                    |                                   |                                 |
|                             |                | 1/17               | 37.7   | 42.7                                  |   | 55   | 3646          | 2940          | 37                                       | 42                                    |                                   |                                 |
|                             |                | 1/29               | 44.4   | 49.4                                  |   | 90   | 7291          | 6860          | 88                                       | 93                                    |                                   |                                 |
|                             |                | 1/35               | 44.1   | 49.1                                  |   | 90   | 8555          | 6860          | 88                                       | 93                                    |                                   |                                 |
|                             |                | 1/43               | 43.9   | 48.9                                  |   | 90   | 8555          | 6860          | 88                                       | 93                                    |                                   |                                 |
| 352G1<br>3524G1             | 3.5            | 1/6                | 62.1   | 67.1                                  | 4 times or less   | 70   | 3332          | 3920          | 59                                       | 63                                    | Oil (Note 3)                      | Shaft<br>horizontal<br>(Note 4) |
|                             |                | 1/11               | 57.8   | 62.8                                  |   | 70   | 3871          | 3920          | 59                                       | 63                                    |                                   |                                 |
|                             |                | 1/17               | 56.5   | 61.5                                  |   | 70   | 4420          | 3920          | 59                                       | 63                                    |                                   |                                 |
|                             |                | 1/29               | 61.6   | 66.6                                  |   | 90   | 7291          | 6860          | 91                                       | 96                                    |                                   |                                 |
|                             |                | 1/35               | 61.3   | 66.3                                  |   | 90   | 8555          | 6860          | 91                                       | 96                                    |                                   |                                 |
|                             |                | 1/43               | 80.0   | 85.0                                  |   | 90   | 11662         | 9800          | 135                                      | 140                                   |                                   |                                 |
| 502G1<br>5024G1             | 5.0            | 1/6                | 97.1   | 102                                   | 4 times or less   | 90   | 5448          | 5000          | 94                                       | 99                                    | Oil                               | Shaft<br>horizontal<br>(Note 4) |
|                             |                | 1/11               | 85.1   | 90.1                                  |   | 90   | 5488          | 6292          | 94                                       | 99                                    |                                   |                                 |
|                             |                | 1/17               | 81.1   | 86.1                                  |   | 90   | 6468          | 6860          | 94                                       | 99                                    |                                   |                                 |
|                             |                | 1/29               | 112  | 117                                   |   | 110  | 13426         | 13720         | 165                                      | 170                                   |                                   |                                 |
|                             |                | 1/35               | 111  | 116                                   |   | 110  | 16072         | 13720         | 165                                      | 170                                   |                                   |                                 |
|                             |                | 1/43               | 110  | 115                                   |   | 110  | 16072         | 13720         | 165                                      | 170                                   |                                   |                                 |
| 702G1<br>7024G1             | 7.0            | 1/6                | 131  | 136                                   | 4 times or less   | 90   | 7526          | 5000          | 100                                      | 105                                   | Oil                               | Shaft<br>horizontal<br>(Note 4) |
|                             |                | 1/11               | 144  | 149                                   |   | 90   | 7526          | 8085          | 145                                      | 150                                   |                                   |                                 |
|                             |                | 1/17               | 136  | 141                                   |   | 90   | 8683          | 9673          | 145                                      | 150                                   |                                   |                                 |
|                             |                | 1/29               | 146  | 151                                   |   | 110  | 13426         | 13720         | 170                                      | 175                                   |                                   |                                 |
|                             |                | 1/35               | 146  | 151                                   |   | 110  | 16072         | 13720         | 170                                      | 175                                   |                                   |                                 |
|                             |                | 1/43               | 221  | 226                                   |   | 135  | 22540         | 19600         | 240                                      | 245                                   |                                   |                                 |
| 1/59                        | 220            | 225                | 135  | 22540                                 | 19600   | 240  | 245           |               |  |                                       |                                   |                                 |

- Notes: 1. The moments of inertia in the table are the values that are converted into the shaft of the servo motor with a gear reducer (and with an electromagnetic brake).  
 2. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 3. The oil lubricated servo motor cannot be used for applications where the servo motor moves. In that case, order a grease lubricated servo motor (special specification). The maximum speed of the grease lubricated servo motor is the same as that of the oil lubricated.  
 4. Do not mount the servo motor in a way that the servo motor is tilted to the shaft direction or to the shaft rotation direction. Refer to the asterisk 2 of "Annotations for Geared Servo Motor Specifications" on p. 4-79 in this catalog. Servo motors with special specifications may be available to be mounted with other than the shaft horizontal. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for the available models.  
 5. The lubricant oil is removed from the gear reducer before shipment, and thus please purchase the required lubricant oil and fill the oil into the gear reducer.  
 6. The torque characteristics of HK-ST152(4) are equivalent to those of HK-ST172(4)W that are derated by the output ratio of HK-ST172(4)W (1.75 kW) to HK-ST152(4) (1.5 kW). (The rated torque of HK-ST152(4) is 7.2 N·m.) Refer to p. 4-58 in this catalog for the torque characteristics. The moment of inertia and electromagnetic brake specifications of HK-ST152(4) are the same as those of HK-ST172(4)W.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LVSWires  
Product List  
Precautions  
Support

# Rotary Servo Motors

## HK-ST Series Geared Servo Motor Specifications

With a gear reducer for general industrial machines, flange mounting: G1

| Item  | Specifications  |
|---|---|
| Mounting method   | Flange mounting   |
| Output shaft rotation direction                           | Opposite from the servo motor output shaft direction  |
| Backlash <sup>(Note 3)</sup>                              | 40 minutes to 2° at gear reducer output shaft <sup>(Note 2)</sup>   |
| Maximum torque (at servo motor shaft) <sup>(Note 4)</sup> | Three times of the rated torque<br>(Refer to HK-ST series specifications in this catalog for the rated torque.) <sup>(Note 5)</sup> |
| Maximum speed (at servo motor shaft)                      | Grease lubricated: 3000 r/min<br>Oil lubricated: 2000 r/min   |
| IP rating (gear reducer part)                             | Equivalent to IP44  |
| Gear reducer efficiency <sup>(Note 1)</sup>               | 85 % to 94 %  |


- Notes:
- The gear reducer efficiency varies depending on the reduction ratio and the conditions of use such as an output torque, speed, and temperature. The values in the table are not guaranteed as they are representative values at the rated torque and speed at a temperature of 20 °C.
  - This is a designed value, not guaranteed value.
  - The backlash can be converted: 1 minute = 0.0167°
  - The torques of the geared servo motors do not increase even when these servo motors are combined with larger capacity servo amplifiers.
  - The torque characteristics of HK-ST152(4) are equivalent to those of HK-ST172(4)W that are derated by the output ratio of HK-ST172(4)W (1.75 kW) to HK-ST152(4) (1.5 kW). (The rated torque of HK-ST152(4) is 7.2 N·m.) Refer to the torque characteristics on this page. The moment of inertia and electromagnetic brake specifications of HK-ST152(4) are the same as those of HK-ST172(4)W.

## HK-ST152/HK-ST1524 Torque Characteristics <sup>(Note 1)</sup>

— : For 3-phase 200 V AC  
— : For 1-phase 200 V AC

### HK-ST152 <sup>(Note 2)</sup>


Standard torque



— : For 3-phase 400 V AC  
— : For 3-phase 380 V AC

### HK-ST1524

Standard torque



- Notes:
- Torque drops when the power supply voltage is below the specified value.
  - When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

HK-ST Series Geared Servo Motor Specifications

With a gear reducer for general industrial machines, foot mounting: G1H

| Model<br>HK-ST                | Output<br>[kW] | Reduction<br>ratio | Moment of inertia J<br>[ $\times 10^{-4}$ kg·m <sup>2</sup> ] (Note 1) |                                       | Permissible load to<br>motor inertia ratio (Note 2)<br>(when converted into<br>the servo motor shaft) | Permissible load for<br>the shaft <sup>1</sup> |               |               | Mass [kg]                                |                                       | Lubrication<br>method<br>(Note 5) | Mounting<br>direction           |
|-------------------------------|----------------|--------------------|--|---------------------------------------|---|--|---------------|---------------|--|---------------------------------------|-----------------------------------|---------------------------------|
|                               |                |                    | Without<br>electro-<br>magnetic<br>brake                               | With<br>electro-<br>magnetic<br>brake |   | Q<br>[mm]                                      | Radial<br>[N] | Thrust<br>[N] | Without<br>electro-<br>magnetic<br>brake | With<br>electro-<br>magnetic<br>brake |                                   |                                 |
| 52G1H<br>524G1H               | 0.5            | 1/6                | 6.72   | 8.97                                  | 4 times or less   | 35   | 2058          | 1470          | 20                                       | 22                                    | Grease<br>(filled)                | Any<br>direction                |
|                               |                | 1/11               | 6.29   | 8.54                                  |   | 35   | 2391          | 1470          | 20                                       | 22                                    |                                   |                                 |
|                               |                | 1/17               | 6.17   | 8.42                                  |   | 35   | 2832          | 1470          | 20                                       | 22                                    |                                   |                                 |
|                               |                | 1/29               | 6.11   | 8.36                                  |   | 35   | 3273          | 1470          | 20                                       | 22                                    |                                   |                                 |
|                               |                | 1/35               | 6.90   | 9.15                                  |   | 55   | 5253          | 2940          | 28                                       | 30                                    |                                   |                                 |
|                               |                | 1/43               | 6.86   | 9.11                                  |   | 55   | 5253          | 2940          | 28                                       | 30                                    |                                   |                                 |
| 102G1H<br>1024G1H             | 1.0            | 1/6                | 11.9   | 14.1                                  | 4 times or less   | 55   | 2842          | 2352          | 30                                       | 32                                    | Grease<br>(filled)                | Any<br>direction                |
|                               |                | 1/11               | 10.4   | 12.6                                  |   | 55   | 3273          | 2764          | 30                                       | 32                                    |                                   |                                 |
|                               |                | 1/17               | 9.95   | 12.2                                  |   | 55   | 3646          | 2940          | 30                                       | 32                                    |                                   |                                 |
|                               |                | 1/29               | 9.65   | 11.9                                  |   | 55   | 4410          | 2940          | 30                                       | 32                                    |                                   |                                 |
|                               |                | 1/35               | 9.65   | 11.9                                  |   | 55   | 5253          | 2940          | 30                                       | 32                                    |                                   |                                 |
|                               |                | 1/43               | 10.9   | 13.1                                  |   | 70   | 6047          | 3920          | 49                                       | 51                                    |                                   |                                 |
| 152G1H<br>1524G1H<br>(Note 6) | 1.5            | 1/6                | 14.6   | 16.9                                  | 4 times or less   | 55   | 2842          | 2352          | 31                                       | 33                                    | Grease<br>(filled)                | Any<br>direction                |
|                               |                | 1/11               | 13.1   | 15.4                                  |   | 55   | 3273          | 2764          | 31                                       | 33                                    |                                   |                                 |
|                               |                | 1/17               | 12.7   | 15.0                                  |   | 55   | 3646          | 2940          | 31                                       | 33                                    |                                   |                                 |
|                               |                | 1/29               | 13.8   | 16.1                                  |   | 70   | 5135          | 3920          | 50                                       | 52                                    |                                   |                                 |
|                               |                | 1/35               | 13.7   | 16.0                                  |   | 70   | 6047          | 3920          | 50                                       | 52                                    |                                   |                                 |
|                               |                | 1/43               | 19.0   | 21.3                                  |   | 90   | 8555          | 6860          | 86                                       | 88                                    |                                   |                                 |
| 202G1H<br>2024G1H             | 2.0            | 1/6                | 39.6   | 44.6                                  | 4 times or less   | 55   | 2842          | 2352          | 38                                       | 43                                    | Grease<br>(filled)                | Any<br>direction                |
|                               |                | 1/11               | 38.0   | 43.0                                  |   | 55   | 3273          | 2764          | 38                                       | 43                                    |                                   |                                 |
|                               |                | 1/17               | 37.7   | 42.7                                  |   | 55   | 3646          | 2940          | 38                                       | 43                                    |                                   |                                 |
|                               |                | 1/29               | 44.4   | 49.4                                  |   | 90   | 7291          | 6860          | 93                                       | 98                                    |                                   |                                 |
|                               |                | 1/35               | 44.1   | 49.1                                  |   | 90   | 8555          | 6860          | 93                                       | 98                                    |                                   |                                 |
|                               |                | 1/43               | 43.9   | 48.9                                  |   | 90   | 8555          | 6860          | 93                                       | 98                                    |                                   |                                 |
| 352G1H<br>3524G1H             | 3.5            | 1/6                | 62.1   | 67.1                                  | 4 times or less   | 70   | 3332          | 3920          | 60                                       | 64                                    | Oil (Note 3)                      | Shaft<br>horizontal<br>(Note 4) |
|                               |                | 1/11               | 57.8   | 62.8                                  |   | 70   | 3871          | 3920          | 60                                       | 64                                    |                                   |                                 |
|                               |                | 1/17               | 56.5   | 61.5                                  |   | 70   | 4420          | 3920          | 60                                       | 64                                    |                                   |                                 |
|                               |                | 1/29               | 61.6   | 66.6                                  |   | 90   | 7291          | 6860          | 96                                       | 105                                   |                                   |                                 |
|                               |                | 1/35               | 61.3   | 66.3                                  |   | 90   | 8555          | 6860          | 96                                       | 105                                   |                                   |                                 |
|                               |                | 1/43               | 80.0   | 85.0                                  |   | 90   | 11662         | 9800          | 140                                      | 145                                   |                                   |                                 |
| 502G1H<br>5024G1H             | 5.0            | 1/6                | 97.1   | 102                                   | 4 times or less   | 90   | 5448          | 5000          | 99                                       | 105                                   | Oil                               | Shaft<br>horizontal<br>(Note 4) |
|                               |                | 1/11               | 85.1   | 90.1                                  |   | 90   | 5488          | 6292          | 99                                       | 105                                   |                                   |                                 |
|                               |                | 1/17               | 81.1   | 86.1                                  |   | 90   | 6468          | 6860          | 99                                       | 105                                   |                                   |                                 |
|                               |                | 1/29               | 112  | 117                                   |   | 110  | 13426         | 13720         | 180                                      | 185                                   |                                   |                                 |
|                               |                | 1/35               | 111  | 116                                   |   | 110  | 16072         | 13720         | 180                                      | 185                                   |                                   |                                 |
|                               |                | 1/43               | 110  | 115                                   |   | 110  | 16072         | 13720         | 180                                      | 185                                   |                                   |                                 |
| 702G1H<br>7024G1H             | 7.0            | 1/6                | 131  | 136                                   | 4 times or less   | 90   | 7526          | 5000          | 105                                      | 110                                   | Oil                               | Shaft<br>horizontal<br>(Note 4) |
|                               |                | 1/11               | 144  | 149                                   |   | 90   | 7526          | 8085          | 145                                      | 150                                   |                                   |                                 |
|                               |                | 1/17               | 136  | 141                                   |   | 90   | 8683          | 9673          | 145                                      | 150                                   |                                   |                                 |
|                               |                | 1/29               | 146  | 151                                   |   | 110  | 13426         | 13720         | 185                                      | 190                                   |                                   |                                 |
|                               |                | 1/35               | 146  | 151                                   |   | 110  | 16072         | 13720         | 185                                      | 190                                   |                                   |                                 |
|                               |                | 1/43               | 221  | 226                                   |   | 135  | 22540         | 19600         | 255                                      | 260                                   |                                   |                                 |
| 1/59                          | 220            | 225                | 135  | 22540                                 | 19600   | 255  | 260           |               |  |                                       |                                   |                                 |

- Notes: 1. The moments of inertia in the table are the values that are converted into the shaft of the servo motor with a gear reducer (and with an electromagnetic brake).  
 2. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 3. The oil lubricated servo motor cannot be used for applications where the servo motor moves. In that case, order a grease lubricated servo motor (special specification). The maximum speed of the grease lubricated servo motor is the same as that of the oil lubricated.  
 4. Do not mount the servo motor in a way that the servo motor is tilted to the shaft direction or to the shaft rotation direction. Refer to the asterisk 2 of "Annotations for Geared Servo Motor Specifications" on p. 4-79 in this catalog. Servo motors with special specifications may be available to be mounted with other than the shaft horizontal. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for the available models.  
 5. The lubricant oil is removed from the gear reducer before shipment, and thus please purchase the required lubricant oil and fill the oil into the gear reducer.  
 6. The torque characteristics of HK-ST152(4) are equivalent to those of HK-ST172(4)W that are derated by the output ratio of HK-ST172(4)W (1.75 kW) to HK-ST152(4) (1.5 kW). (The rated torque of HK-ST152(4) is 7.2 N·m.) Refer to p. 4-58 in this catalog for the torque characteristics. The moment of inertia and electromagnetic brake specifications of HK-ST152(4) are the same as those of HK-ST172(4)W.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Rotary Servo Motors

## HK-ST Series Geared Servo Motor Specifications

With a gear reducer for general industrial machines, foot mounting: G1H

| Item  | Specifications  |
|---|---|
| Mounting method   | Foot mounting   |
| Output shaft rotation direction                           | Opposite from the servo motor output shaft direction  |
| Backlash <sup>(Note 3)</sup>                              | 40 minutes to 2° at gear reducer output shaft <sup>(Note 2)</sup>   |
| Maximum torque (at servo motor shaft) <sup>(Note 4)</sup> | Three times of the rated torque<br>(Refer to HK-ST series specifications in this catalog for the rated torque.) <sup>(Note 5)</sup> |
| Maximum speed (at servo motor shaft)                      | Grease lubricated: 3000 r/min<br>Oil lubricated: 2000 r/min   |
| IP rating (gear reducer part)                             | Equivalent to IP44  |
| Gear reducer efficiency <sup>(Note 1)</sup>               | 85 % to 94 %  |

- Notes:
1. The gear reducer efficiency varies depending on the reduction ratio and the conditions of use such as an output torque, speed, and temperature. The values in the table are not guaranteed as they are representative values at the rated torque and speed at a temperature of 20 °C.
  2. This is a designed value, not guaranteed value.
  3. The backlash can be converted: 1 minute = 0.0167°
  4. The torques of the geared servo motors do not increase even when these servo motors are combined with larger capacity servo amplifiers.
  5. The torque characteristics of HK-ST152(4) are equivalent to those of HK-ST172(4)W that are derated by the output ratio of HK-ST172(4)W (1.75 kW) to HK-ST152(4) (1.5 kW). (The rated torque of HK-ST152(4) is 7.2 N·m.) Refer to p. 4-58 in this catalog for the torque characteristics. The moment of inertia and electromagnetic brake specifications of HK-ST152(4) are the same as those of HK-ST172(4)W.



## HK-ST Series Geared Servo Motor Specifications

With a flange-output type gear reducer for high precision applications, flange mounting: G5

| Model<br>HK-ST              | Output<br>[kW] | Reduction<br>ratio | Moment of inertia J<br>[ $\times 10^{-4}$ kg·m <sup>2</sup> ] (Note 1) |                                       | Permissible load to<br>motor inertia ratio (Note 2)<br>(when converted into<br>the servo motor shaft) | Permissible load for<br>the shaft <sup>1</sup> |               |               | Mass [kg]                                |                                       | Lubrication<br>method | Mounting<br>direction |
|-----------------------------|----------------|--------------------|--|---------------------------------------|---|--|---------------|---------------|--|---------------------------------------|-----------------------|-----------------------|
|                             |                |                    | Without<br>electro-<br>magnetic<br>brake                               | With<br>electro-<br>magnetic<br>brake |   | L<br>[mm]                                      | Radial<br>[N] | Thrust<br>[N] | Without<br>electro-<br>magnetic<br>brake | With<br>electro-<br>magnetic<br>brake |                       |                       |
| 52G5<br>524G5               | 0.5            | 1/5                | 6.55   | 8.80                                  | 10 times or less  | 32   | 416           | 1465          | 7.1                                      | 8.8                                   | Grease<br>(filled)    | Any<br>direction      |
|                             |                | 1/11               | 6.46   | 8.71                                  |   | 32   | 527           | 1856          | 7.5                                      | 9.2                                   |                       |                       |
|                             |                | 1/21               | 8.80   | 11.1                                  |   | 57   | 1094          | 4359          | 11                                       | 13                                    |                       |                       |
|                             |                | 1/33               | 8.60   | 10.9                                  |   | 57   | 1252          | 4992          | 11                                       | 13                                    |                       |                       |
|                             |                | 1/45               | 8.60   | 10.9                                  |   | 57   | 1374          | 5478          | 11                                       | 13                                    |                       |                       |
| 102G5<br>1024G5             | 1.0            | 1/5                | 9.30   | 11.6                                  | 10 times or less  | 32   | 416           | 1465          | 8.0                                      | 9.7                                   |                       |                       |
|                             |                | 1/11               | 12.0   | 14.2                                  |   | 57   | 901           | 3590          | 12                                       | 14                                    |                       |                       |
|                             |                | 1/21               | 11.6   | 13.8                                  |   | 57   | 1094          | 4359          | 12                                       | 14                                    |                       |                       |
|                             |                | 1/33               | 13.4   | 15.6                                  |   | 62   | 2929          | 10130         | 22                                       | 23                                    |                       |                       |
|                             |                | 1/45               | 13.3   | 15.5                                  |   | 62   | 3215          | 11117         | 22                                       | 23                                    |                       |                       |
| 152G5<br>1524G5<br>(Note 3) | 1.5            | 1/5                | 12.1   | 14.4                                  | 10 times or less  | 32   | 416           | 1465          | 9.0                                      | 11                                    |                       |                       |
|                             |                | 1/11               | 14.7   | 17.0                                  |   | 57   | 901           | 3590          | 13                                       | 15                                    |                       |                       |
|                             |                | 1/21               | 17.1   | 19.4                                  |   | 62   | 2558          | 8845          | 23                                       | 24                                    |                       |                       |
|                             |                | 1/33               | 16.1   | 18.4                                  |   | 62   | 2929          | 10130         | 23                                       | 24                                    |                       |                       |
|                             |                | 1/45               | 16.0   | 18.3                                  |   | 62   | 3215          | 11117         | 23                                       | 24                                    |                       |                       |
| 202G5<br>2024G5             | 2.0            | 1/5                | 41.0   | 46.0                                  | 10 times or less  | 57   | 711           | 2834          | 20                                       | 25                                    |                       |                       |
|                             |                | 1/11               | 40.8   | 45.8                                  |   | 57   | 901           | 3590          | 20                                       | 25                                    |                       |                       |
|                             |                | 1/21               | 42.8   | 47.8                                  |   | 62   | 2558          | 8845          | 30                                       | 35                                    |                       |                       |
|                             |                | 1/33               | 41.8   | 46.8                                  |   | 62   | 2929          | 10130         | 30                                       | 35                                    |                       |                       |
|                             |                | 1/45               | 41.8   | 46.8                                  |   | 62   | 3215          | 11117         | 30                                       | 35                                    |                       |                       |
| 352G5<br>3524G5             | 3.5            | 1/5                | 58.2   | 63.2                                  | 10 times or less  | 57   | 711           | 2834          | 23                                       | 28                                    |                       |                       |
|                             |                | 1/11               | 61.7   | 66.7                                  |   | 62   | 2107          | 7285          | 33                                       | 38                                    |                       |                       |
|                             |                | 1/21               | 60.0   | 65.0                                  |   | 62   | 2558          | 8845          | 33                                       | 38                                    |                       |                       |
| 502G5<br>5024G5             | 5.0            | 1/5                | 80.9   | 85.9                                  | 10 times or less  | 62   | 1663          | 5751          | 34                                       | 39                                    |                       |                       |
|                             |                | 1/11               | 78.9   | 83.9                                  |   | 62   | 2107          | 7285          | 36                                       | 41                                    |                       |                       |
| 702G5<br>7024G5             | 7.0            | 1/5                | 115  | 120                                   | 10 times or less  | 62   | 1663          | 5751          | 40                                       | 45                                    |                       |                       |

| Item  | Specifications   |
|---|--|
| Mounting method                                   | Flange mounting  |
| Output shaft rotation direction                   | Same as the servo motor output shaft direction   |
| Backlash (Note 5)                                 | 3 minutes or less at gear reducer output shaft   |
| Maximum torque (at servo motor shaft)<br>(Note 6) | Three times of the rated torque<br>(Refer to HK-ST series specifications in this catalog for the rated torque.) (Note 3) |
| Maximum speed (at servo motor shaft)              | 3000 r/min   |
| IP rating (gear reducer part)                     | Equivalent to IP44   |
| Gear reducer efficiency (Note 4)                  | 77 % to 92 %   |

- Notes: 1. The moments of inertia in the table are the values that are converted into the shaft of the servo motor with a gear reducer (and with an electromagnetic brake).  
 2. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 3. The torque characteristics of HK-ST152(4) are equivalent to those of HK-ST172(4)W that are derated by the output ratio of HK-ST172(4)W (1.75 kW) to HK-ST152(4) (1.5 kW). (The rated torque of HK-ST152(4) is 7.2 N·m.) Refer to p. 4-58 in this catalog for the torque characteristics. The moment of inertia and electromagnetic brake specifications of HK-ST152(4) are the same as those of HK-ST172(4)W.  
 4. The gear reducer efficiency varies depending on the reduction ratio and the conditions of use such as an output torque, speed, and temperature. The values in the table are not guaranteed as they are representative values at the rated torque and speed at a temperature of 20 °C.  
 5. The backlash can be converted: 1 minute = 0.0167°  
 6. The torques of the geared servo motors do not increase even when these servo motors are combined with larger capacity servo amplifiers.

Refer to "Annotations for Geared Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Rotary Servo Motors

## HK-ST Series Geared Servo Motor Specifications

With a shaft-output type gear reducer for high precision applications, flange mounting: G7

| Model<br>HK-ST              | Output<br>[kW] | Reduction<br>ratio | Moment of inertia J<br>[ $\times 10^{-4}$ kg·m <sup>2</sup> ] (Note 1) |                                    | Permissible load to<br>motor inertia ratio (Note 2)<br>(when converted into<br>the servo motor shaft) | Permissible load for<br>the shaft <sup>1</sup> |               |               | Mass [kg]                             |                                    | Lubrication<br>method | Mounting<br>direction |
|-----------------------------|----------------|--------------------|--|------------------------------------|---|--|---------------|---------------|---------------------------------------|------------------------------------|-----------------------|-----------------------|
|                             |                |                    | Without electro-<br>magnetic<br>brake                                  | With electro-<br>magnetic<br>brake |   | Q<br>[mm]                                      | Radial<br>[N] | Thrust<br>[N] | Without electro-<br>magnetic<br>brake | With electro-<br>magnetic<br>brake |                       |                       |
| 52G7<br>524G7               | 0.5            | 1/5                | 6.59   | 8.84                               | 10 times or less  | 32   | 416           | 1465          | 7.5                                   | 9.2                                | Grease<br>(filled)    | Any<br>direction      |
|                             |                | 1/11               | 6.46   | 8.71                               |   | 32   | 527           | 1856          | 7.7                                   | 9.4                                |                       |                       |
|                             |                | 1/21               | 8.80   | 11.1                               |   | 57   | 1094          | 4359          | 13                                    | 14                                 |                       |                       |
|                             |                | 1/33               | 8.60   | 10.9                               |   | 57   | 1252          | 4992          | 13                                    | 14                                 |                       |                       |
|                             |                | 1/45               | 8.60   | 10.9                               |   | 57   | 1374          | 5478          | 13                                    | 14                                 |                       |                       |
| 102G7<br>1024G7             | 1.0            | 1/5                | 9.34   | 11.6                               | 10 times or less  | 32   | 416           | 1465          | 8.4                                   | 11                                 |                       |                       |
|                             |                | 1/11               | 12.1   | 14.3                               |   | 57   | 901           | 3590          | 14                                    | 15                                 |                       |                       |
|                             |                | 1/21               | 11.6   | 13.8                               |   | 57   | 1094          | 4359          | 14                                    | 15                                 |                       |                       |
|                             |                | 1/33               | 13.4   | 15.6                               |   | 62   | 2929          | 10130         | 25                                    | 26                                 |                       |                       |
|                             |                | 1/45               | 13.4   | 15.6                               |   | 62   | 3215          | 11117         | 25                                    | 26                                 |                       |                       |
| 152G7<br>1524G7<br>(Note 3) | 1.5            | 1/5                | 12.1   | 14.4                               | 10 times or less  | 32   | 416           | 1465          | 9.4                                   | 11                                 |                       |                       |
|                             |                | 1/11               | 14.8   | 17.1                               |   | 57   | 901           | 3590          | 15                                    | 16                                 |                       |                       |
|                             |                | 1/21               | 17.1   | 19.4                               |   | 62   | 2558          | 8845          | 26                                    | 27                                 |                       |                       |
|                             |                | 1/33               | 16.1   | 18.4                               |   | 62   | 2929          | 10130         | 26                                    | 27                                 |                       |                       |
|                             |                | 1/45               | 16.1   | 18.4                               |   | 62   | 3215          | 11117         | 26                                    | 27                                 |                       |                       |
| 202G7<br>2024G7             | 2.0            | 1/5                | 41.3   | 46.3                               | 10 times or less  | 57   | 711           | 2834          | 21                                    | 26                                 |                       |                       |
|                             |                | 1/11               | 40.9   | 45.9                               |   | 57   | 901           | 3590          | 22                                    | 27                                 |                       |                       |
|                             |                | 1/21               | 42.9   | 47.9                               |   | 62   | 2558          | 8845          | 33                                    | 38                                 |                       |                       |
|                             |                | 1/33               | 41.8   | 46.8                               |   | 62   | 2929          | 10130         | 33                                    | 38                                 |                       |                       |
|                             |                | 1/45               | 41.8   | 46.8                               |   | 62   | 3215          | 11117         | 33                                    | 38                                 |                       |                       |
| 352G7<br>3524G7             | 3.5            | 1/5                | 58.5   | 63.5                               | 10 times or less  | 57   | 711           | 2834          | 24                                    | 29                                 |                       |                       |
|                             |                | 1/11               | 62.0   | 67.0                               |   | 62   | 2107          | 7285          | 36                                    | 41                                 |                       |                       |
|                             |                | 1/21               | 60.1   | 65.1                               |   | 62   | 2558          | 8845          | 36                                    | 41                                 |                       |                       |
| 502G7<br>5024G7             | 5.0            | 1/5                | 82.3   | 87.3                               | 10 times or less  | 62   | 1663          | 5751          | 37                                    | 42                                 |                       |                       |
|                             |                | 1/11               | 79.2   | 84.2                               |   | 62   | 2107          | 7285          | 39                                    | 44                                 |                       |                       |
| 702G7<br>7024G7             | 7.0            | 1/5                | 117  | 122                                | 10 times or less  | 62   | 1663          | 5751          | 43                                    | 48                                 |                       |                       |

| Item  | Specifications   |
|---|--|
| Mounting method                                   | Flange mounting  |
| Output shaft rotation direction                   | Same as the servo motor output shaft direction   |
| Backlash (Note 5)                                 | 3 minutes or less at gear reducer output shaft   |
| Maximum torque (at servo motor shaft)<br>(Note 6) | Three times of the rated torque<br>(Refer to HK-ST series specifications in this catalog for the rated torque.) (Note 3) |
| Maximum speed (at servo motor shaft)              | 3000 r/min   |
| IP rating (gear reducer part)                     | Equivalent to IP44   |
| Gear reducer efficiency (Note 4)                  | 77 % to 92 %   |

- Notes:
- The moments of inertia in the table are the values that are converted into the shaft of the servo motor with a gear reducer (and with an electromagnetic brake).
  - Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.
  - The torque characteristics of HK-ST152(4) are equivalent to those of HK-ST172(4)W that are derated by the output ratio of HK-ST172(4)W (1.75 kW) to HK-ST152(4) (1.5 kW). (The rated torque of HK-ST152(4) is 7.2 N·m.) Refer to p. 4-58 in this catalog for the torque characteristics. The moment of inertia and electromagnetic brake specifications of HK-ST152(4) are the same as those of HK-ST172(4)W.
  - The gear reducer efficiency varies depending on the reduction ratio and the conditions of use such as an output torque, speed, and temperature. The values in the table are not guaranteed as they are representative values at the rated torque and speed at a temperature of 20 °C.
  - The backlash can be converted: 1 minute = 0.0167°
  - The torques of the geared servo motors do not increase even when these servo motors are combined with larger capacity servo amplifiers.


Refer to "Annotations for Geared Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1.

## HK-ST Series Geared Servo Motor Dimensions (Note 1, 5)

With a gear reducer for general industrial machines, flange mounting

### HK-ST\_G1 (Note 6)

The drawing is schematic only. The actual shapes of the servo motors and the location of the mounting screws and the oil cap may differ from the drawing.

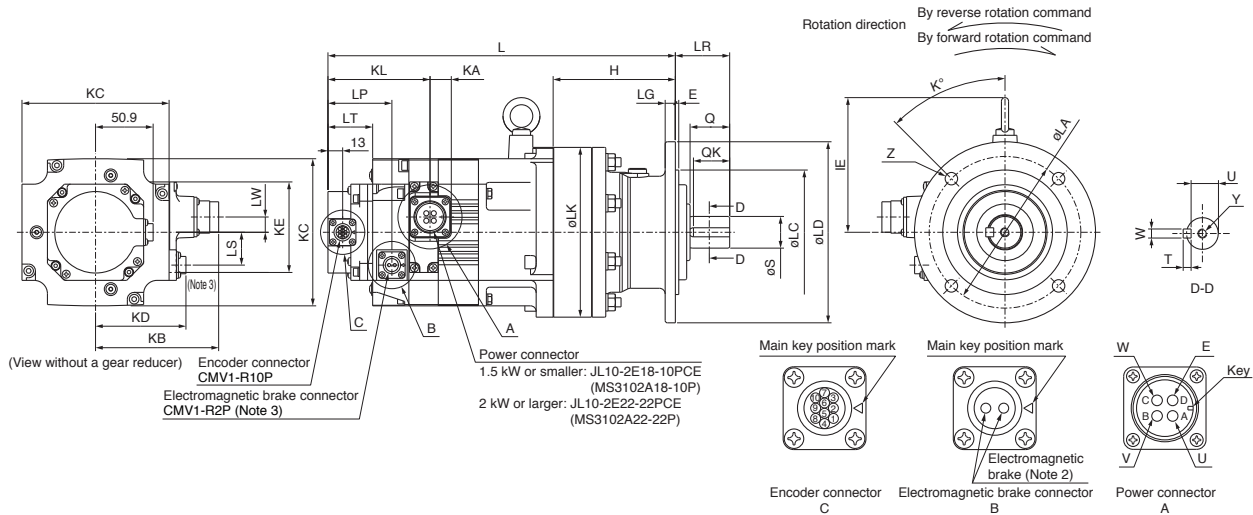

[Unit: mm]

| Model<br>HK-ST        | Reduction ratio | Variable dimensions (Note 4) |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|-----------------------|-----------------|------------------------------|-----|---|-----|----|-----|-----|-----|------|------|--------|------|------|------|----|---------|------|---|-----|-------|--------|-----|-----|-----|----------------------|----|------|----|--------|--|--|
|                       |                 | L                            | LA  | LC                                      | LD  | LG | LK  | LR  | IE  | KL   | KA   | LP     | LT   | LW   | LS   | KE | Z       | K    | E | H   | KB    | KD     | KC  | Q   | QK  | S                    | T  | U    | W  | Y      |  |  |
| 52(B)G1<br>524(B)G1   | 1/6             |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/11            | 272.5                        | 134 | 110 <sup>+0.036</sup> <sub>-0.040</sub> | 160 | 9  | 150 | 48  | 119 | 55.7 | 18.8 | (56.5) | 35.5 | 13.5 | (29) | 80 | 4x φ11  | 45   | 3 | 108 | 108.8 | (79.9) | 130 | 35  | 32  | 28 <sup>+0.013</sup> | 7  | 24   | 8  | M8x20  |  |  |
|                       | 1/17            | (307)                        |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/29            |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/35            |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
| 102(B)G1<br>1024(B)G1 | 1/6             |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/11            | 276                          | 180 | 140 <sup>+0.043</sup> <sub>-0.046</sub> | 210 | 13 | 204 | 69  | 132 | 55.7 | 18.8 | (56.5) | 35.5 | 13.5 | (29) | 80 | 6x φ11  | 30   | 4 | 117 | 108.8 | (79.9) | 130 | 55  | 50  | 38 <sup>+0.016</sup> | 8  | 33   | 10 | M8x20  |  |  |
|                       | 1/17            | (310.5)                      |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/29            |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/35            |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
| 152(B)G1<br>1524(B)G1 | 1/6             |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/11            | 287                          | 180 | 140 <sup>+0.043</sup> <sub>-0.046</sub> | 210 | 13 | 204 | 69  | 132 | 55.7 | 18.8 | (56.5) | 35.5 | 13.5 | (29) | 80 | 6x φ11  | 30   | 4 | 117 | 108.8 | (79.9) | 130 | 55  | 50  | 38 <sup>+0.016</sup> | 8  | 33   | 10 | M8x20  |  |  |
|                       | 1/17            | (321.5)                      |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/29            | 332.5                        | 230 | 200 <sup>+0.050</sup> <sub>-0.053</sub> | 260 | 15 | 230 | 76  | 145 | 55.7 | 18.8 | (56.5) | 35.5 | 13.5 | (29) | 80 | 6x φ11  | 60   | 4 | 164 | 108.8 | (79.9) | 130 | 70  | 56  | 50 <sup>+0.016</sup> | 9  | 44.5 | 14 | M10x18 |  |  |
|                       | 1/35            | (367)                        |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
| 202(B)G1<br>2024(B)G1 | 1/6             |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/11            | 306                          | 180 | 140 <sup>+0.043</sup> <sub>-0.046</sub> | 210 | 13 | 204 | 69  | 142 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 6x φ11  | 30   | 4 | 117 | 140.8 | (96.9) | 176 | 55  | 50  | 38 <sup>+0.016</sup> | 8  | 33   | 10 | M8x20  |  |  |
|                       | 1/17            | (355.5)                      |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/29            | 403                          | 310 | 270 <sup>+0.056</sup> <sub>-0.059</sub> | 340 | 20 | 300 | 89  | 181 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 6x φ11  | 60   | 4 | 219 | 140.8 | (96.9) | 176 | 90  | 80  | 60 <sup>+0.019</sup> | 11 | 53   | 18 | M10x18 |  |  |
|                       | 1/35            | (452.5)                      |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
| 352(B)G1<br>3524(B)G1 | 1/6             |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/11            | 368.5                        | 230 | 200 <sup>+0.056</sup> <sub>-0.059</sub> | 260 | 15 | 230 | 76  | 145 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 6x φ11  | 60   | 4 | 164 | 140.8 | (96.9) | 176 | 70  | 56  | 50 <sup>+0.016</sup> | 9  | 44.5 | 14 | M10x18 |  |  |
|                       | 1/17            | (418)                        |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/29            | 423                          | 310 | 270 <sup>+0.056</sup> <sub>-0.059</sub> | 340 | 20 | 300 | 89  | 181 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 6x φ11  | 60   | 4 | 219 | 140.8 | (96.9) | 176 | 90  | 80  | 60 <sup>+0.019</sup> | 11 | 53   | 18 | M10x18 |  |  |
|                       | 1/35            | (472.5)                      |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
| 502(B)G1<br>5024(B)G1 | 1/6             |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/11            | 443                          | 310 | 270 <sup>+0.056</sup> <sub>-0.059</sub> | 340 | 20 | 300 | 89  | 181 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 6x φ11  | 60   | 4 | 219 | 140.8 | (96.9) | 176 | 90  | 80  | 60 <sup>+0.019</sup> | 11 | 53   | 18 | M10x18 |  |  |
|                       | 1/17            | (492.5)                      |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/29            | 506.5                        | 390 | 345 <sup>+0.062</sup> <sub>-0.065</sub> | 430 | 22 | 370 | 110 | 176 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 8x φ18  | 22.5 | 5 | 279 | 140.8 | (96.9) | 176 | 110 | 100 | 80 <sup>+0.019</sup> | 14 | 71   | 22 | M12x24 |  |  |
|                       | 1/35            | (556)                        |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
| 702(B)G1<br>7024(B)G1 | 1/6             |                              |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/11            | 483                          | 310 | 270 <sup>+0.056</sup> <sub>-0.059</sub> | 340 | 20 | 300 | 89  | 181 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 6x φ11  | 60   | 4 | 219 | 140.8 | (96.9) | 176 | 90  | 80  | 60 <sup>+0.019</sup> | 11 | 53   | 18 | M10x18 |  |  |
|                       | 1/17            | (532.5)                      |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/29            | 522.5                        | 360 | 316 <sup>+0.062</sup> <sub>-0.065</sub> | 400 | 22 | 340 | 94  | 181 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 8x φ14  | 22.5 | 5 | 258 | 140.8 | (96.9) | 176 | 90  | 80  | 70 <sup>+0.019</sup> | 12 | 62.5 | 20 | M12x24 |  |  |
|                       | 1/35            | (572)                        |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
| 702(B)G1<br>7024(B)G1 | 1/29            | 546.5                        | 390 | 345 <sup>+0.062</sup> <sub>-0.065</sub> | 430 | 22 | 370 | 110 | 176 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 8x φ18  | 22.5 | 5 | 279 | 140.8 | (96.9) | 176 | 110 | 100 | 80 <sup>+0.019</sup> | 14 | 71   | 22 | M12x24 |  |  |
|                       | 1/35            | (596)                        |     |   |     |    |     |     |     |      |      |        |      |      |      |    |         |      |   |     |       |        |     |     |     |                      |    |      |    |        |  |  |
|                       | 1/43            | 602.5                        | 450 | 400 <sup>+0.062</sup> <sub>-0.065</sub> | 490 | 30 | 430 | 145 | 210 | 57.8 | 22.6 | (62.5) | 35.5 | 0    | (44) | 80 | 12x φ18 | 15   | 6 | 320 | 140.8 | (96.9) | 176 | 135 | 125 | 95 <sup>+0.022</sup> | 14 | 86   | 25 | M20x34 |  |  |

- Notes:
- The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  - The electromagnetic brake terminals do not have polarity.
  - Only for the models with an electromagnetic brake.
  - The dimensions in brackets are for the models with an electromagnetic brake.
  - The lubricant oil is removed from the gear reducer before shipment, and thus please purchase the required lubricant oil and fill the oil into the gear reducer.
  - This geared servo motor has a keyed shaft (with a key).


# Rotary Servo Motors

## HK-ST Series Geared Servo Motor Dimensions (Note 1, 5)

With a gear reducer for general industrial machines, foot mounting

### HK-ST\_G1H (Note 6)

The drawing is schematic only. The actual shapes of the servo motors and the location of the mounting screws and the oil cap may differ from the drawing.

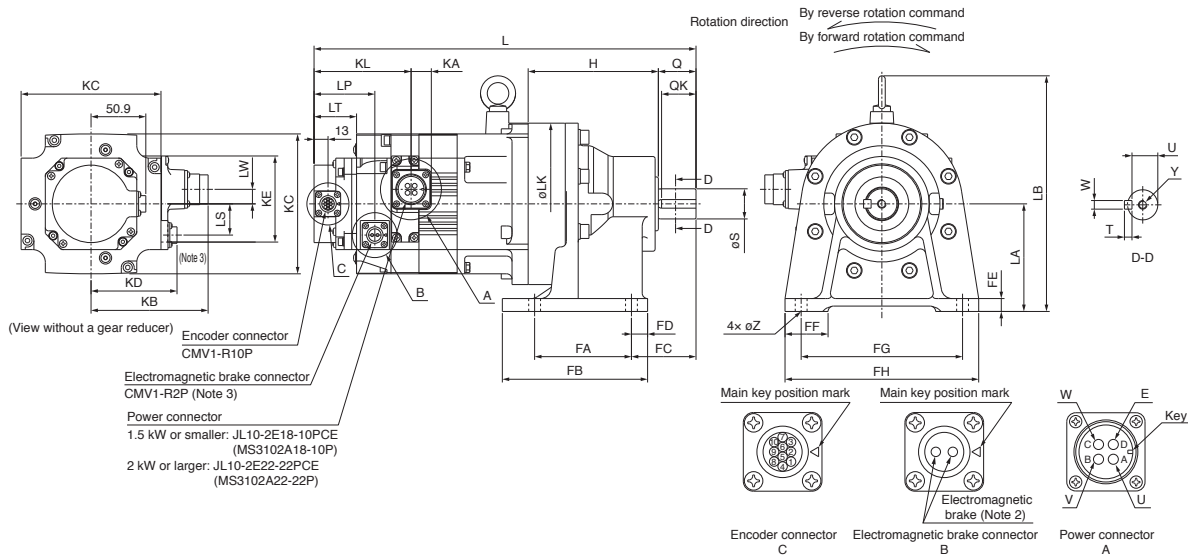

[Unit: mm]

| Model                   | Reduction ratio | Variable dimensions (Note 4) |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|-------------------------|-----------------|------------------------------|-----|-----|-----|------|------|--------|------|-----|------|------|-------|--------|-----|----|----|-----|-----|-----|----|----|----|-----|-----|-----|-----|----------------------------------|----|------|----|---|--|--|--|--|--|--|--|--|--|
|                         |                 | L                            | LA  | LB  | LK  | LS   | LT   | LP     | LW   | H   | KL   | KA   | KB    | KD     | KC  | KE | Z  | FA  | FB  | FC  | FD | FE | FF | FG  | FH  | Q   | QK  | S                                | T  | U    | W  | Y |  |  |  |  |  |  |  |  |  |
| 52(B)G1H<br>524(B)G1H   | 1/6             |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/11            | 320.5                        | 100 | 219 | 150 | (29) | 35.5 | (56.5) | 13.5 | 121 | 55.7 | 18.8 | 108.8 | (79.9) | 130 | 80 | 11 | 90  | 135 | 60  | 15 | 12 | 40 | 150 | 180 | 35  | 32  | 28 <sup>0</sup> <sub>0.013</sub> | 7  | 24   | 8  |   |  |  |  |  |  |  |  |  |  |
|                         | 1/17            | (355)                        |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/29            |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/35            | 334                          | 120 | 252 | 204 | (29) | 35.5 | (56.5) | 13.5 | 131 | 55.7 | 18.8 | 108.8 | (79.9) | 130 | 80 | 14 | 115 | 155 | 82  | 20 | 15 | 55 | 190 | 230 | 55  | 50  | 38 <sup>0</sup> <sub>0.016</sub> | 8  | 33   | 10 |   |  |  |  |  |  |  |  |  |  |
| 102(B)G1H<br>1024(B)G1H | 1/43            | (368.5)                      |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/59            |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/6             |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/11            | 345                          | 120 | 252 | 204 | (29) | 35.5 | (56.5) | 13.5 | 131 | 55.7 | 18.8 | 108.8 | (79.9) | 130 | 80 | 14 | 115 | 155 | 82  | 20 | 15 | 55 | 190 | 230 | 55  | 50  | 38 <sup>0</sup> <sub>0.016</sub> | 8  | 33   | 10 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/17            | (379.5)                      |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
| 152(B)G1H<br>1524(B)G1H | 1/29            |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/35            | 408.5                        | 150 | 295 | 230 | (29) | 35.5 | (56.5) | 13.5 | 170 | 55.7 | 18.8 | 108.8 | (79.9) | 130 | 80 | 18 | 145 | 195 | 100 | 25 | 22 | 65 | 290 | 330 | 70  | 56  | 50 <sup>0</sup> <sub>0.016</sub> | 9  | 44.5 | 14 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/43            | (443)                        |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/43            | 479                          | 160 | 352 | 300 | (29) | 35.5 | (56.5) | 13.5 | 218 | 55.7 | 18.8 | 108.8 | (79.9) | 130 | 80 | 18 | 150 | 238 | 139 | 44 | 25 | 75 | 370 | 410 | 90  | 80  | 60 <sup>0</sup> <sub>0.019</sub> | 11 | 53   | 18 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/59            | (513.5)                      |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
| 202(B)G1H<br>2024(B)G1H | 1/6             |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/11            | 375                          | 120 | 262 | 204 | (44) | 35.5 | (62.5) | 0    | 131 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 14 | 115 | 155 | 82  | 20 | 15 | 55 | 190 | 230 | 55  | 50  | 38 <sup>0</sup> <sub>0.016</sub> | 8  | 33   | 10 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/17            | (424.5)                      |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/29            |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/35            | 492                          | 160 | 341 | 300 | (44) | 35.5 | (62.5) | 0    | 218 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 18 | 150 | 238 | 139 | 44 | 25 | 75 | 370 | 410 | 90  | 80  | 60 <sup>0</sup> <sub>0.019</sub> | 11 | 53   | 18 |   |  |  |  |  |  |  |  |  |  |
| 352(B)G1H<br>3524(B)G1H | 1/43            | (541.5)                      |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/59            |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/6             |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/11            | 444.5                        | 150 | 295 | 230 | (44) | 35.5 | (62.5) | 0    | 170 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 18 | 145 | 195 | 100 | 25 | 22 | 65 | 290 | 330 | 70  | 56  | 50 <sup>0</sup> <sub>0.016</sub> | 9  | 44.5 | 14 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/17            | (494)                        |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
| 502(B)G1H<br>5024(B)G1H | 1/29            |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/35            | 512                          | 160 | 341 | 300 | (44) | 35.5 | (62.5) | 0    | 218 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 18 | 150 | 238 | 139 | 44 | 25 | 75 | 370 | 410 | 90  | 80  | 60 <sup>0</sup> <sub>0.019</sub> | 11 | 53   | 18 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/43            | (561.5)                      |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/43            | 556.5                        | 200 | 381 | 340 | (44) | 35.5 | (62.5) | 0    | 262 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 22 | 275 | 335 | 125 | 30 | 30 | 80 | 380 | 430 | 90  | 80  | 70 <sup>0</sup> <sub>0.019</sub> | 12 | 62.5 | 20 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/59            | (606)                        |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
| 702(B)G1H<br>7024(B)G1H | 1/6             |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/11            | 532                          | 160 | 341 | 300 | (44) | 35.5 | (62.5) | 0    | 218 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 18 | 150 | 238 | 139 | 44 | 25 | 75 | 370 | 410 | 90  | 80  | 60 <sup>0</sup> <sub>0.019</sub> | 11 | 53   | 18 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/17            | (581.5)                      |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/29            |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/35            | 616.5                        | 220 | 405 | 370 | (44) | 35.5 | (62.5) | 0    | 279 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 22 | 320 | 380 | 145 | 30 | 30 | 85 | 420 | 470 | 110 | 100 | 80 <sup>0</sup> <sub>0.019</sub> | 14 | 71   | 22 |   |  |  |  |  |  |  |  |  |  |
| 702(B)G1H<br>7024(B)G1H | 1/43            | (666)                        |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/43            | 572                          | 160 | 341 | 300 | (44) | 35.5 | (62.5) | 0    | 218 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 18 | 150 | 238 | 139 | 44 | 25 | 75 | 370 | 410 | 90  | 80  | 60 <sup>0</sup> <sub>0.019</sub> | 11 | 53   | 18 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/59            | (621.5)                      |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/59            | 616.5                        | 200 | 381 | 340 | (44) | 35.5 | (62.5) | 0    | 262 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 22 | 275 | 335 | 125 | 30 | 30 | 80 | 380 | 430 | 90  | 80  | 70 <sup>0</sup> <sub>0.019</sub> | 12 | 62.5 | 20 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/59            | (666)                        |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
| 702(B)G1H<br>7024(B)G1H | 1/29            |                              |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/35            | 656.5                        | 220 | 405 | 370 | (44) | 35.5 | (62.5) | 0    | 279 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 22 | 320 | 380 | 145 | 30 | 30 | 85 | 420 | 470 | 110 | 100 | 80 <sup>0</sup> <sub>0.019</sub> | 14 | 71   | 22 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/43            | (706)                        |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |
|                         | 1/43            | 747.5                        | 250 | 465 | 430 | (44) | 35.5 | (62.5) | 0    | 330 | 57.8 | 22.6 | 140.8 | (96.9) | 176 | 80 | 26 | 380 | 440 | 170 | 30 | 35 | 90 | 480 | 530 | 135 | 125 | 95 <sup>0</sup> <sub>0.022</sub> | 14 | 86   | 25 |   |  |  |  |  |  |  |  |  |  |
|                         | 1/59            | (797)                        |     |     |     |      |      |        |      |     |      |      |       |        |     |    |    |     |     |     |    |    |    |     |     |     |     |                                  |    |      |    |   |  |  |  |  |  |  |  |  |  |


- Notes: 1. The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
2. The electromagnetic brake terminals do not have polarity.
3. Only for the models with an electromagnetic brake.
4. The dimensions in brackets are for the models with an electromagnetic brake.
5. The lubricant oil is removed from the gear reducer before shipment, and thus please purchase the required lubricant oil and fill the oil into the gear reducer.
6. This geared servo motor has a keyed shaft (with a key).

### HK-ST Series Geared Servo Motor Dimensions (Note 1)

With a flange-output type gear reducer for high precision applications, flange mounting

HK-ST\_G5

The drawing is schematic only. The actual shapes of the servo motors and the location of the mounting screws may differ from the drawing.

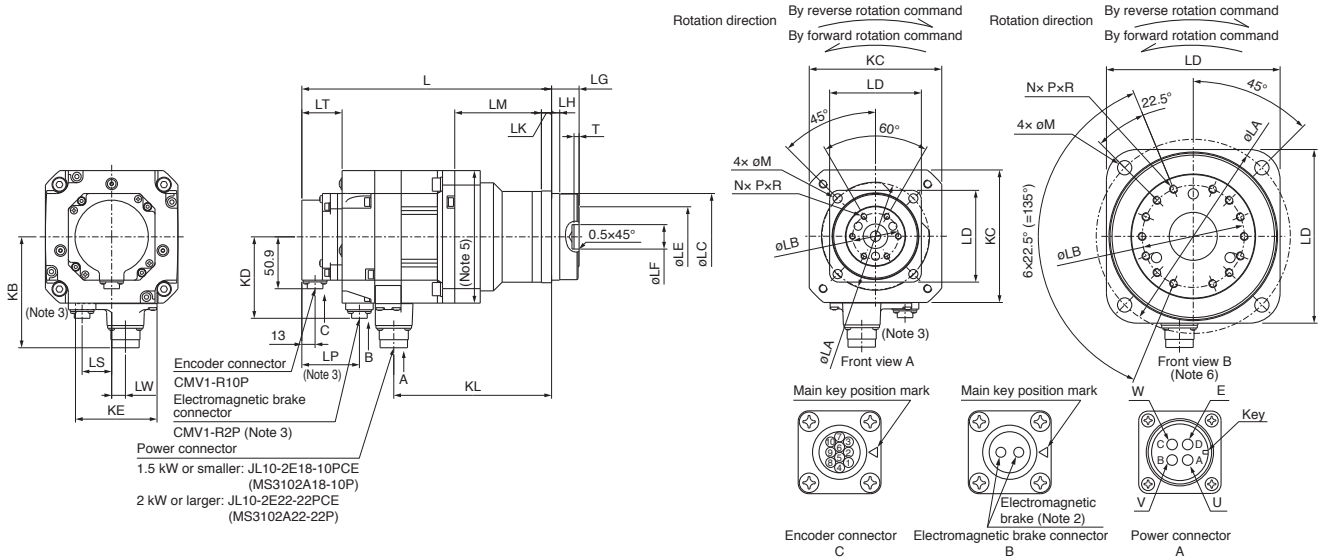

[Unit: mm]

| Model<br>HK-ST        | Reduction ratio | Variable dimensions (Note 4) |     |     |                       |     |     |                            |                             |    |    |     |                |       |        |      |      |   |    |    |    |    |       |        |     |    | Front view |
|-----------------------|-----------------|------------------------------|-----|-----|-----------------------|-----|-----|----------------------------|-----------------------------|----|----|-----|----------------|-------|--------|------|------|---|----|----|----|----|-------|--------|-----|----|------------|
|                       |                 | L                            | LA  | LB  | LC                    | LD  | LE  | LF                         | LG                          | LH | LK | LM  | LT             | KL    | LP     | LW   | LS   | T | N  | P  | R  | M  | KB    | KD     | KC  | KE |            |
| 52(B)G5<br>524(B)G5   | 1/5             | 210.5<br>(245)               | 105 | 45  | 85 <sup>±0.025</sup>  | 90  | 59  | 24 <sup>+0.021<br/>0</sup> | 27 <sup>+0.4<br/>-0.5</sup> | 8  | 10 | 85  | 35.5<br>(39.5) | 154.8 | (56.5) | 13.5 | (29) | 5 | 6  | M6 | 10 | 9  | 108.8 | (79.9) | 130 | 80 | A          |
|                       | 1/11            |                              |     |     |                       |     |     |                            |                             |    |    |     |                |       |        |      |      |   |    |    |    |    |       |        |     |    |            |
|                       | 1/21            |                              |     |     |                       |     |     |                            |                             |    |    |     |                |       |        |      |      |   |    |    |    |    |       |        |     |    |            |
|                       | 1/33<br>1/45    | 222.5<br>(257)               | 135 | 60  | 115 <sup>±0.025</sup> | 120 | 84  | 32 <sup>+0.025<br/>0</sup> | 35 <sup>+0.4<br/>-0.5</sup> | 13 | 13 | 94  | 35.5<br>(39.5) | 166.8 | (56.5) | 13.5 | (29) | 5 | 6  | M8 | 12 | 11 | 108.8 | (79.9) | 130 | 80 | A          |
| 102(B)G5<br>1024(B)G5 | 1/5             | 221.5<br>(256)               | 105 | 45  | 85 <sup>±0.025</sup>  | 90  | 59  | 24 <sup>+0.021<br/>0</sup> | 27 <sup>+0.4<br/>-0.5</sup> | 8  | 10 | 85  | 35.5<br>(39.5) | 165.8 | (56.5) | 13.5 | (29) | 5 | 6  | M6 | 10 | 9  | 108.8 | (79.9) | 130 | 80 | A          |
|                       | 1/11            |                              |     |     |                       |     |     |                            |                             |    |    |     |                |       |        |      |      |   |    |    |    |    |       |        |     |    |            |
|                       | 1/21            | 233.5<br>(268)               | 135 | 60  | 115 <sup>±0.025</sup> | 120 | 84  | 32 <sup>+0.025<br/>0</sup> | 35 <sup>+0.4<br/>-0.5</sup> | 13 | 13 | 94  | 35.5<br>(39.5) | 177.8 | (56.5) | 13.5 | (29) | 5 | 6  | M8 | 12 | 11 | 108.8 | (79.9) | 130 | 80 | A          |
|                       | 1/33<br>1/45    | 249.5<br>(284)               | 190 | 100 | 165 <sup>±0.025</sup> | 170 | 122 | 47 <sup>+0.025<br/>0</sup> | 53 <sup>+0.5<br/>-0.8</sup> | 13 | 16 | 107 | 35.5<br>(39.5) | 193.8 | (56.5) | 13.5 | (29) | 7 | 14 | M8 | 12 | 14 | 108.8 | (79.9) | 130 | 80 | B          |
| 152(B)G5<br>1524(B)G5 | 1/5             | 232.5<br>(267)               | 105 | 45  | 85 <sup>±0.025</sup>  | 90  | 59  | 24 <sup>+0.021<br/>0</sup> | 27 <sup>+0.4<br/>-0.5</sup> | 8  | 10 | 85  | 35.5<br>(39.5) | 176.8 | (56.5) | 13.5 | (29) | 5 | 6  | M6 | 10 | 9  | 108.8 | (79.9) | 130 | 80 | A          |
|                       | 1/11            |                              |     |     |                       |     |     |                            |                             |    |    |     |                |       |        |      |      |   |    |    |    |    |       |        |     |    |            |
|                       | 1/21            | 244.5<br>(279)               | 135 | 60  | 115 <sup>±0.025</sup> | 120 | 84  | 32 <sup>+0.025<br/>0</sup> | 35 <sup>+0.4<br/>-0.5</sup> | 13 | 13 | 94  | 35.5<br>(39.5) | 188.8 | (56.5) | 13.5 | (29) | 5 | 6  | M8 | 12 | 11 | 108.8 | (79.9) | 130 | 80 | A          |
|                       | 1/33<br>1/45    | 260.5<br>(295)               | 190 | 100 | 165 <sup>±0.025</sup> | 170 | 122 | 47 <sup>+0.025<br/>0</sup> | 53 <sup>+0.5<br/>-0.8</sup> | 13 | 16 | 107 | 35.5<br>(39.5) | 204.8 | (56.5) | 13.5 | (29) | 7 | 14 | M8 | 12 | 14 | 108.8 | (79.9) | 130 | 80 | B          |
| 202(B)G5<br>2024(B)G5 | 1/5             | 267.5<br>(317)               | 135 | 60  | 115 <sup>±0.025</sup> | 120 | 84  | 32 <sup>+0.025<br/>0</sup> | 35 <sup>+0.4<br/>-0.5</sup> | 13 | 13 | 116 | 35.5<br>(42.5) | 209.7 | (62.5) | 0    | (44) | 5 | 6  | M8 | 12 | 11 | 140.8 | (96.9) | 176 | 80 | A          |
|                       | 1/11            |                              |     |     |                       |     |     |                            |                             |    |    |     |                |       |        |      |      |   |    |    |    |    |       |        |     |    |            |
|                       | 1/21            | 287.5<br>(337)               | 190 | 100 | 165 <sup>±0.025</sup> | 170 | 122 | 47 <sup>+0.025<br/>0</sup> | 53 <sup>+0.5<br/>-0.8</sup> | 13 | 16 | 133 | 35.5<br>(42.5) | 229.7 | (62.5) | 0    | (44) | 7 | 14 | M8 | 12 | 14 | 140.8 | (96.9) | 176 | 80 | B          |
|                       | 1/33<br>1/45    |                              |     |     |                       |     |     |                            |                             |    |    |     |                |       |        |      |      |   |    |    |    |    |       |        |     |    |            |
| 352(B)G5<br>3524(B)G5 | 1/5             | 287.5<br>(337)               | 135 | 60  | 115 <sup>±0.025</sup> | 120 | 84  | 32 <sup>+0.025<br/>0</sup> | 35 <sup>+0.4<br/>-0.5</sup> | 13 | 13 | 116 | 35.5<br>(42.5) | 229.7 | (62.5) | 0    | (44) | 5 | 6  | M8 | 12 | 11 | 140.8 | (96.9) | 176 | 80 | A          |
|                       | 1/11            |                              |     |     |                       |     |     |                            |                             |    |    |     |                |       |        |      |      |   |    |    |    |    |       |        |     |    |            |
|                       | 1/21            | 307.5<br>(357)               | 190 | 100 | 165 <sup>±0.025</sup> | 170 | 122 | 47 <sup>+0.025<br/>0</sup> | 53 <sup>+0.5<br/>-0.8</sup> | 13 | 16 | 133 | 35.5<br>(42.5) | 249.7 | (62.5) | 0    | (44) | 7 | 14 | M8 | 12 | 14 | 140.8 | (96.9) | 176 | 80 | B          |
| 502(B)G5<br>5024(B)G5 | 1/5             | 327.5<br>(377)               | 190 | 100 | 165 <sup>±0.025</sup> | 170 | 122 | 47 <sup>+0.025<br/>0</sup> | 53 <sup>+0.5<br/>-0.8</sup> | 13 | 16 | 133 | 35.5<br>(42.5) | 269.7 | (62.5) | 0    | (44) | 7 | 14 | M8 | 12 | 14 | 140.8 | (96.9) | 176 | 80 | B          |
|                       | 1/11            |                              |     |     |                       |     |     |                            |                             |    |    |     |                |       |        |      |      |   |    |    |    |    |       |        |     |    |            |
|                       | 1/5             | 367.5<br>(417)               | 190 | 100 | 165 <sup>±0.025</sup> | 170 | 122 | 47 <sup>+0.025<br/>0</sup> | 53 <sup>+0.5<br/>-0.8</sup> | 13 | 16 | 133 | 35.5<br>(42.5) | 309.7 | (62.5) | 0    | (44) | 7 | 14 | M8 | 12 | 14 | 140.8 | (96.9) | 176 | 80 | B          |

- Notes:
- The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  - The electromagnetic brake terminals do not have polarity.
  - Only for the models with an electromagnetic brake.
  - The dimensions in brackets are for the models with an electromagnetic brake.
  - HK-ST202(B)G5 to HK-ST702(B)G5 and HK-ST2024(B)G5 to HK-ST7024(B)G5 have the maximum dimensions of 180 mm x 180 mm in this part.
  - For the front view B, the screws are not placed at equal intervals.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support


# Rotary Servo Motors

## HK-ST Series Geared Servo Motor Dimensions (Note 1, 5)

With a shaft-output type gear reducer for high precision applications, flange mounting

HK-ST\_G7 (Note 7)

The drawing is schematic only. The actual shapes of the servo motors and the location of the mounting screws may differ from the drawing.

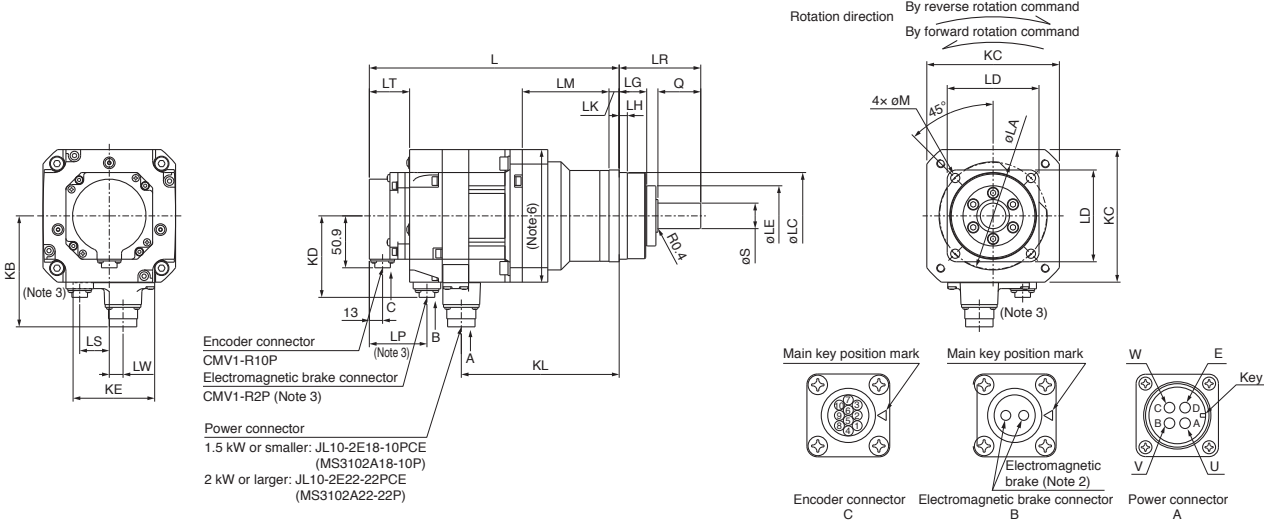

[Unit: mm]

| Model<br>HK-ST        | Reduction ratio | Variable dimensions (Note 4) |     |                                    |     |     |                                   |    |    |    |     |    |     |                |       |        |      |      |    |       |        |     |    |
|-----------------------|-----------------|------------------------------|-----|------------------------------------|-----|-----|-----------------------------------|----|----|----|-----|----|-----|----------------|-------|--------|------|------|----|-------|--------|-----|----|
|                       |                 | L                            | LA  | LC                                 | LD  | LE  | S                                 | LG | LH | Q  | LR  | LK | LM  | LT             | KL    | LP     | LW   | LS   | M  | KB    | KD     | KC  | KE |
| 52(B)G7<br>524(B)G7   | 1/5             | 210.5<br>(245)               | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59  | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8  | 42 | 80  | 10 | 85  | 35.5<br>(39.5) | 154.8 | (56.5) | 13.5 | (29) | 9  | 108.8 | (79.9) | 130 | 80 |
|                       | 1/21            | 222.5<br>(257)               | 135 | 115 <sup>0</sup> <sub>-0.035</sub> | 120 | 84  | 40 <sup>0</sup> <sub>-0.025</sub> | 35 | 13 | 82 | 133 | 13 | 94  | 35.5<br>(39.5) | 166.8 | (56.5) | 13.5 | (29) | 11 | 108.8 | (79.9) | 130 | 80 |
|                       | 1/33            | 249.5<br>(284)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 107 | 35.5<br>(39.5) | 193.8 | (56.5) | 13.5 | (29) | 14 | 108.8 | (79.9) | 130 | 80 |
|                       | 1/45            | 267.5<br>(317)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 133 | 35.5<br>(42.5) | 229.7 | (62.5) | 0    | (44) | 14 | 140.8 | (96.9) | 176 | 80 |
| 102(B)G7<br>1024(B)G7 | 1/5             | 221.5<br>(256)               | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59  | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8  | 42 | 80  | 10 | 85  | 35.5<br>(39.5) | 165.8 | (56.5) | 13.5 | (29) | 9  | 108.8 | (79.9) | 130 | 80 |
|                       | 1/11            | 233.5<br>(268)               | 135 | 115 <sup>0</sup> <sub>-0.035</sub> | 120 | 84  | 40 <sup>0</sup> <sub>-0.025</sub> | 35 | 13 | 82 | 133 | 13 | 94  | 35.5<br>(39.5) | 177.8 | (56.5) | 13.5 | (29) | 11 | 108.8 | (79.9) | 130 | 80 |
|                       | 1/21            | 249.5<br>(284)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 107 | 35.5<br>(39.5) | 193.8 | (56.5) | 13.5 | (29) | 14 | 108.8 | (79.9) | 130 | 80 |
|                       | 1/33            | 267.5<br>(295)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 107 | 35.5<br>(39.5) | 204.8 | (56.5) | 13.5 | (29) | 14 | 108.8 | (79.9) | 130 | 80 |
| 152(B)G7<br>1524(B)G7 | 1/5             | 232.5<br>(267)               | 105 | 85 <sup>0</sup> <sub>-0.035</sub>  | 90  | 59  | 25 <sup>0</sup> <sub>-0.021</sub> | 27 | 8  | 42 | 80  | 10 | 85  | 35.5<br>(39.5) | 176.8 | (56.5) | 13.5 | (29) | 9  | 108.8 | (79.9) | 130 | 80 |
|                       | 1/11            | 244.5<br>(279)               | 135 | 115 <sup>0</sup> <sub>-0.035</sub> | 120 | 84  | 40 <sup>0</sup> <sub>-0.025</sub> | 35 | 13 | 82 | 133 | 13 | 94  | 35.5<br>(39.5) | 188.8 | (56.5) | 13.5 | (29) | 11 | 108.8 | (79.9) | 130 | 80 |
|                       | 1/21            | 260.5<br>(295)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 107 | 35.5<br>(39.5) | 204.8 | (56.5) | 13.5 | (29) | 14 | 108.8 | (79.9) | 130 | 80 |
|                       | 1/33            | 267.5<br>(317)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 133 | 35.5<br>(42.5) | 229.7 | (62.5) | 0    | (44) | 14 | 140.8 | (96.9) | 176 | 80 |
| 202(B)G7<br>2024(B)G7 | 1/5             | 267.5<br>(317)               | 135 | 115 <sup>0</sup> <sub>-0.035</sub> | 120 | 84  | 40 <sup>0</sup> <sub>-0.025</sub> | 35 | 13 | 82 | 133 | 13 | 116 | 35.5<br>(42.5) | 209.7 | (62.5) | 0    | (44) | 11 | 140.8 | (96.9) | 176 | 80 |
|                       | 1/11            | 287.5<br>(337)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 133 | 35.5<br>(42.5) | 229.7 | (62.5) | 0    | (44) | 14 | 140.8 | (96.9) | 176 | 80 |
|                       | 1/21            | 307.5<br>(357)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 133 | 35.5<br>(42.5) | 249.7 | (62.5) | 0    | (44) | 14 | 140.8 | (96.9) | 176 | 80 |
|                       | 1/33            | 327.5<br>(377)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 133 | 35.5<br>(42.5) | 269.7 | (62.5) | 0    | (44) | 14 | 140.8 | (96.9) | 176 | 80 |
| 352(B)G7<br>3524(B)G7 | 1/5             | 287.5<br>(337)               | 135 | 115 <sup>0</sup> <sub>-0.035</sub> | 120 | 84  | 40 <sup>0</sup> <sub>-0.025</sub> | 35 | 13 | 82 | 133 | 13 | 116 | 35.5<br>(42.5) | 229.7 | (62.5) | 0    | (44) | 11 | 140.8 | (96.9) | 176 | 80 |
|                       | 1/11            | 307.5<br>(357)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 133 | 35.5<br>(42.5) | 249.7 | (62.5) | 0    | (44) | 14 | 140.8 | (96.9) | 176 | 80 |
| 502(B)G7<br>5024(B)G7 | 1/5             | 327.5<br>(377)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 133 | 35.5<br>(42.5) | 269.7 | (62.5) | 0    | (44) | 14 | 140.8 | (96.9) | 176 | 80 |
|                       | 1/11            | 367.5<br>(417)               | 190 | 165 <sup>0</sup> <sub>-0.063</sub> | 170 | 122 | 50 <sup>0</sup> <sub>-0.025</sub> | 53 | 13 | 82 | 156 | 16 | 133 | 35.5<br>(42.5) | 309.7 | (62.5) | 0    | (44) | 14 | 140.8 | (96.9) | 176 | 80 |

- Notes:
- The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  - The electromagnetic brake terminals do not have polarity.
  - Only for the models with an electromagnetic brake.
  - The dimensions in brackets are for the models with an electromagnetic brake.
  - Use a friction coupling to fasten a load.
  - HK-ST202(B)G7 to HK-ST702(B)G7 and HK-ST2024(B)G7 to HK-ST7024(B)G7 have the maximum dimensions of 180 mm x 180 mm in this part.
  - HK-ST\_G7K, a geared servo motor with a keyed shaft (with a key), is also available. Refer to "HK-ST Series Geared Servo Motor Special Shaft Dimensions" in this catalog for details.


## HK-ST Series Geared Servo Motor Special Shaft Dimensions

The standard HK-ST\_G7 (with a shaft-output type gear reducer for high precision applications, flange mounting) has a straight shaft. Note that this motor is also available with a keyed shaft (with a key) as HK-ST\_G7K.

HK-ST\_G7K (Note 1, 2)

Keyed shaft (with a single pointed key)

| Model                             | Reduction ratio | Variable dimensions |    |    |      |      |        |        |
|-----------------------------------|-----------------|---------------------|----|----|------|------|--------|--------|
|                                   |                 | S                   | Q  | W  | QK   | U    | T      | Y      |
| HK-ST52(B)G7K<br>HK-ST524(B)G7K   | 1/5             | 25                  | 42 | 8  | 36   | 21   | 7      | M6×12  |
|                                   | 1/11            |                     |    |    |      |      |        |        |
|                                   | 1/21            | 40                  | 82 | 12 | 70   | 35   | 8      | M10×20 |
|                                   | 1/33            |                     |    |    |      |      |        |        |
| 1/45                              |                 |                     |    |    |      |      |        |        |
| HK-ST102(B)G7K<br>HK-ST1024(B)G7K | 1/5             | 25                  | 42 | 8  | 36   | 21   | 7      | M6×12  |
|                                   | 1/11            |                     |    |    |      |      |        |        |
|                                   | 1/21            | 40                  | 82 | 12 | 70   | 35   | 8      | M10×20 |
|                                   | 1/33            |                     |    |    |      |      |        |        |
| 1/45                              | 50              | 82                  | 14 | 70 | 44.5 | 9    | M10×20 |        |
| HK-ST152(B)G7K<br>HK-ST1524(B)G7K | 1/5             | 25                  | 42 | 8  | 36   | 21   | 7      | M6×12  |
|                                   | 1/11            |                     |    |    |      |      |        |        |
|                                   | 1/21            | 40                  | 82 | 12 | 70   | 35   | 8      | M10×20 |
|                                   | 1/33            |                     |    |    |      |      |        |        |
| 1/45                              | 50              | 82                  | 14 | 70 | 44.5 | 9    | M10×20 |        |
| HK-ST202(B)G7K<br>HK-ST2024(B)G7K | 1/5             | 40                  | 82 | 12 | 70   | 35   | 8      | M10×20 |
|                                   | 1/11            |                     |    |    |      |      |        |        |
|                                   | 1/21            | 50                  | 82 | 14 | 70   | 44.5 | 9      | M10×20 |
|                                   | 1/33            |                     |    |    |      |      |        |        |
| 1/45                              |                 |                     |    |    |      |      |        |        |
| HK-ST352(B)G7K<br>HK-ST3524(B)G7K | 1/5             | 40                  | 82 | 12 | 70   | 35   | 8      | M10×20 |
|                                   | 1/11            |                     |    |    |      |      |        |        |
|                                   | 1/21            |                     |    |    |      |      |        |        |
| HK-ST502(B)G7K<br>HK-ST5024(B)G7K | 1/5             | 50                  | 82 | 14 | 70   | 44.5 | 9      | M10×20 |
|                                   | 1/11            |                     |    |    |      |      |        |        |
| HK-ST702(B)G7K<br>HK-ST7024(B)G7K | 1/5             |                     |    |    |      |      |        |        |

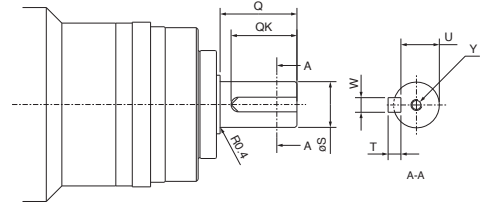

[Unit: mm]

- Notes: 1. Do not use the servo motors with a keyed shaft for frequent start/stop applications as this may cause the damage to the shaft.  
 2. Dimensions not shown in the tables are the same as those of HK-ST\_G7 with a straight shaft. Refer to "HK-ST\_G7" of "HK-ST Series Geared Servo Motor Dimensions" in this catalog.

# Rotary Servo Motors

## HK-RT\_W (Ultra-Low Inertia, Medium Capacity)

Specifications when connected with a 200 V servo amplifier

|  |                               |   |                |                |                |   |                |      |  |
|--|-------------------------------|---|----------------|----------------|----------------|---|----------------|------|--|
| Flange size  |                               | [mm]  | 90 × 90        |                |                | 130 × 130   |                |      |  |
| Rotary servo motor model                                       |                               | HK-RT   | 103W           | 153W           | 203W           | 353W  | 503W           | 703W |  |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]  | 1.0            | 1.5            | 2.0            | 3.5   | 5.0            | 7.0  |  |
|  | Rated torque (Note 5)         | [N·m]   | 3.2            | 4.8            | 6.4            | 11.1  | 15.9           | 22.3 |  |
| Maximum torque (Note 3)  |                               | [N·m]   | 8.0<br>(9.5)   | 11.9<br>(12.9) | 15.9<br>(19.1) | 27.9<br>(33.4)  | 47.7<br>(55.7) | 66.8 |  |
| Rated speed (Note 4)   |                               | [r/min]   | 3000           |                |                |   |                |      |  |
| Maximum speed (Note 4)   |                               | [r/min]   | 6700           |                |                | 6000  |                | 5000 |  |
| Power rate at continuous rated torque [kW/s]                   | Without electromagnetic brake |   | 141            | 251            | 317            | 280   | 403            | 655  |  |
|  | With electromagnetic brake    |   | 95.6           | 182            | 249            | 189   | 301            | 512  |  |
| Rated current  |                               | [A]   | 5.2            | 11             | 9.5            | 16  | 25             | 28   |  |
| Maximum current (Note 3)                                       |                               | [A]   | 17<br>(21)     | 34<br>(42)     | 30<br>(37)     | 51<br>(62)  | 90<br>(110)    | 102  |  |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |   | 0.721          | 0.909          | 1.28           | 4.44  | 6.29           | 7.58 |  |
|  | With electromagnetic brake    |   | 1.06           | 1.25           | 1.63           | 6.57  | 8.41           | 9.70 |  |
| Recommended load to motor inertia ratio (Note 1)               |                               |   |                |                |                | 11 times or less  |                |      |  |
| Speed/position detector  |                               | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                |                |                |   |                |      |  |
| Type   |                               | Permanent magnet synchronous motor  |                |                |                |   |                |      |  |
| Oil seal   |                               | None (Servo motors with an oil seal are available.)                                 |                |                |                |   |                |      |  |
| Electromagnetic brake  |                               | None (Servo motors with an electromagnetic brake are available.)                    |                |                |                |   |                |      |  |
| Thermistor   |                               | None  |                |                |                |   |                |      |  |
| Insulation class   |                               | 155 (F)   |                |                |                |   |                |      |  |
| Structure  |                               | Totally enclosed, natural cooling<br>(IP rating: IP67) (Note 2, 6)                  |                |                |                | Totally enclosed, natural cooling<br>(IP rating: IP67) (Note 2) |                |      |  |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ]   | X: 24.5, Y: 49 |                |                | X: 24.5, Y: 24.5  |                |      |  |
| Vibration rank   |                               | V10 <sup>-3</sup>   |                |                |                |   |                |      |  |
| Permissible load for the shaft *2                              | L                             | [mm]  | 40             |                |                | 55  |                |      |  |
|  | Radial                        | [N]   | 686            |                |                | 980   |                |      |  |
|  | Thrust                        | [N]   | 196            |                |                | 490   |                |      |  |
| Mass [kg]  | Without electromagnetic brake |   | 3.6            | 4.4            | 5.9            | 13  | 17             | 20   |  |
|  | With electromagnetic brake    |   | 4.7            | 5.5            | 7.0            | 15  | 19             | 23   |  |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
6. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

## Electromagnetic brake specifications (Note 1)

|  |                         |                                   |               |       |       |              |       |
|--|-------------------------|-----------------------------------|---------------|-------|-------|--------------|-------|
| Model  | HK-RT                   | 103WB                             | 153WB         | 203WB | 353WB | 503WB        | 703WB |
| Type   |                         | Spring actuated type safety brake |               |       |       |              |       |
| Rated voltage                                |                         | 24 V DC (-10 % to 0 %)            |               |       |       |              |       |
| Power consumption                            |                         | [W] at 20 °C                      | 13.8          |       |       | 23           |       |
| Electromagnetic brake static friction torque |                         | [N·m]                             | 9.5 or higher |       |       | 16 or higher |       |
| Permissible braking work                     | Per braking             | [J]                               | 64            |       |       | 400          |       |
|  | Per hour                | [J]                               | 640           |       |       | 4000         |       |
| Electromagnetic brake life (Note 2)          | Number of braking times |                                   | 5000          |       |       |              |       |
|  | Work per braking        | [J]                               | 64            |       |       | 400          |       |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.



## HK-RT\_4W (Ultra-Low Inertia, Medium Capacity)

Specifications when connected with a 400 V servo amplifier

|  |                               |                     |   |                |                |   |                |       |
|--|-------------------------------|---------------------|---|----------------|----------------|---|----------------|-------|
| Flange size  |                               | [mm]                | 90 × 90   |                |                | 130 × 130   |                |       |
| Rotary servo motor model                                       |                               | HK-RT               | 1034W   | 1534W          | 2034W          | 3534W   | 5034W          | 7034W |
| Continuous running duty<br>(Note 4)                            | Rated output                  | [kW]                | 1.0   | 1.5            | 2.0            | 3.5   | 5.0            | 7.0   |
|  | Rated torque (Note 5)         | [N·m]               | 3.2   | 4.8            | 6.4            | 11.1  | 15.9           | 22.3  |
| Maximum torque (Note 3)  |                               | [N·m]               | 8.0<br>(9.5)  | 11.9<br>(12.9) | 15.9<br>(19.1) | 27.9<br>(33.4)  | 47.7<br>(55.7) | 66.8  |
| Rated speed (Note 4)   |                               | [r/min]             | 3000  |                |                |   |                |       |
| Maximum speed (Note 4)   |                               | [r/min]             | 6700  |                |                | 6000  |                | 5000  |
| Power rate at continuous rated torque [kW/s]                   | Without electromagnetic brake |                     | 141   | 251            | 317            | 280   | 403            | 655   |
|  | With electromagnetic brake    |                     | 95.6  | 182            | 249            | 189   | 301            | 512   |
| Rated current  |                               | [A]                 | 2.6   | 5.3            | 4.7            | 7.8   | 13             | 14    |
| Maximum current (Note 3)                                       |                               | [A]                 | 8.5<br>(11)   | 18<br>(20)     | 15<br>(19)     | 26<br>(31)  | 45<br>(55)     | 51    |
| Moment of inertia J<br>[× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | Without electromagnetic brake |                     | 0.721   | 0.909          | 1.28           | 4.44  | 6.29           | 7.58  |
|  | With electromagnetic brake    |                     | 1.06  | 1.25           | 1.63           | 6.57  | 8.41           | 9.70  |
| Recommended load to motor inertia ratio (Note 1)               |                               | MR-J5               | 11 times or less  |                |                | 10 times or less  |                |       |
|  |                               | MR-J5D              | 11 times or less  |                |                | 10 times or less  |                |       |
| Speed/position detector  |                               |                     | Batteryless absolute/incremental 26-bit encoder (resolution: 67,108,864 pulses/rev) |                |                |   |                |       |
| Type   |                               |                     | Permanent magnet synchronous motor  |                |                |   |                |       |
| Oil seal   |                               |                     | None (Servo motors with an oil seal are available.)                                 |                |                |   |                |       |
| Electromagnetic brake  |                               |                     | None (Servo motors with an electromagnetic brake are available.)                    |                |                |   |                |       |
| Thermistor   |                               |                     | None  |                |                |   |                |       |
| Insulation class   |                               |                     | 155 (F)   |                |                |   |                |       |
| Structure  |                               |                     | Totally enclosed, natural cooling<br>(IP rating: IP67) (Note 2, 6)                  |                |                | Totally enclosed, natural cooling<br>(IP rating: IP67) (Note 2) |                |       |
| Vibration resistance *1  |                               | [m/s <sup>2</sup> ] | X: 24.5, Y: 49  |                |                | X: 24.5, Y: 24.5  |                |       |
| Vibration rank   |                               |                     | V10 <sup>-3</sup>   |                |                |   |                |       |
| Permissible load for the shaft *2                              | L                             | [mm]                | 40  |                |                | 55  |                |       |
|  | Radial                        | [N]                 | 686   |                |                | 980   |                |       |
|  | Thrust                        | [N]                 | 196   |                |                | 490   |                |       |
| Mass [kg]  | Without electromagnetic brake |                     | 3.6   | 4.4            | 5.9            | 13  | 17             | 20    |
|  | With electromagnetic brake    |                     | 4.7   | 5.5            | 7.0            | 15  | 19             | 23    |

- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
 2. The shaft-through portion is excluded. Refer to the asterisk 4 of "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for the shaft-through portion.  
 3. The values in brackets are applicable when the torque is increased by combining a larger-capacity servo amplifier. Refer to "Combinations of Rotary Servo Motors and Servo Amplifiers" in this catalog for the available combinations.  
 4. The continuous running duty and the speed are not guaranteed when the power supply voltage is dropped.  
 5. When unbalanced torque is generated, such as in a vertical lift machine, keep the unbalanced torque of the machine under 70 % of the servo motor rated torque.  
 6. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

Refer to "Annotations for Rotary Servo Motor Specifications" on p. 4-79 in this catalog for details about asterisks 1 to 3.

### Electromagnetic brake specifications (Note 1)

|  |                         |              |                                   |        |        |              |        |        |
|--|-------------------------|--------------|-----------------------------------|--------|--------|--------------|--------|--------|
| Model  |                         | HK-RT        | 1034WB                            | 1534WB | 2034WB | 3534WB       | 5034WB | 7034WB |
| Type   |                         |              | Spring actuated type safety brake |        |        |              |        |        |
| Rated voltage                                |                         |              | 24 V DC (-10 % to 0 %)            |        |        |              |        |        |
| Power consumption                            |                         | [W] at 20 °C | 13.8                              |        |        | 23           |        |        |
| Electromagnetic brake static friction torque |                         | [N·m]        | 9.5 or higher                     |        |        | 16 or higher |        |        |
| Permissible braking work                     | Per braking             | [J]          | 64                                |        |        | 400          |        |        |
|  | Per hour                | [J]          | 640                               |        |        | 4000         |        |        |
| Electromagnetic brake life (Note 2)          | Number of braking times |              | 5000                              |        |        |              |        |        |
|  | Work per braking        | [J]          | 64                                |        |        | 400          |        |        |

- Notes: 1. The electromagnetic brake is for holding. It cannot be used for deceleration applications.  
 2. Brake gap is not adjustable. Electromagnetic brake life is defined as the time period until readjustment is needed.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Rotary Servo Motors


## HK-RT\_W Torque Characteristics (Note 1)

When connected with a 200 V servo amplifier

— : For 3-phase 200 V AC  
 — : For 1-phase 200 V AC


### HK-RT103W (Note 2)

Standard torque




### HK-RT103W (Note 2)

Torque increased




### HK-RT153W (Note 2)

Standard torque




### HK-RT153W

Torque increased




### HK-RT203W (Note 2)

Standard torque




### HK-RT203W

Torque increased




### HK-RT353W

Standard torque




### HK-RT353W

Torque increased




### HK-RT503W

Standard torque




### HK-RT503W

Torque increased



### HK-RT703W

Standard torque




- Notes: 1. Torque drops when the power supply voltage is below the specified value. --- : A rough indication of the possible continuous running range for 3-phase 170 V AC  
 2. When using a combination of the servo motors of over 750 W and MR-J5-100\_ or MR-J5-200\_ with a 1-phase power supply, use the servo amplifiers at 75 % or less of the effective load ratio.

## HK-RT\_4W Torque Characteristics (Note 1)


When connected with a 400 V servo amplifier

— : For 3-phase 400 V AC  
 — : For 3-phase 380 V AC


**HK-RT1034W**  
Standard torque




**HK-RT1034W**  
Torque increased




**HK-RT1534W**  
Standard torque




**HK-RT1534W**  
Torque increased




**HK-RT2034W**  
Standard torque




**HK-RT2034W**  
Torque increased




**HK-RT3534W**  
Standard torque




**HK-RT3534W**  
Torque increased




**HK-RT5034W**  
Standard torque



**HK-RT5034W**  
Torque increased



**HK-RT7034W**  
Standard torque




Notes: 1. Torque drops when the power supply voltage is below the specified value. - - - : A rough indication of the possible continuous running range for 3-phase 323 V AC

# Rotary Servo Motors


## HK-RT Series Dimensions (Note 3, 4, 5)

HK-RT103W(B), HK-RT153W(B), HK-RT203W(B)  
 HK-RT1034W(B), HK-RT1534W(B), HK-RT2034W(B)

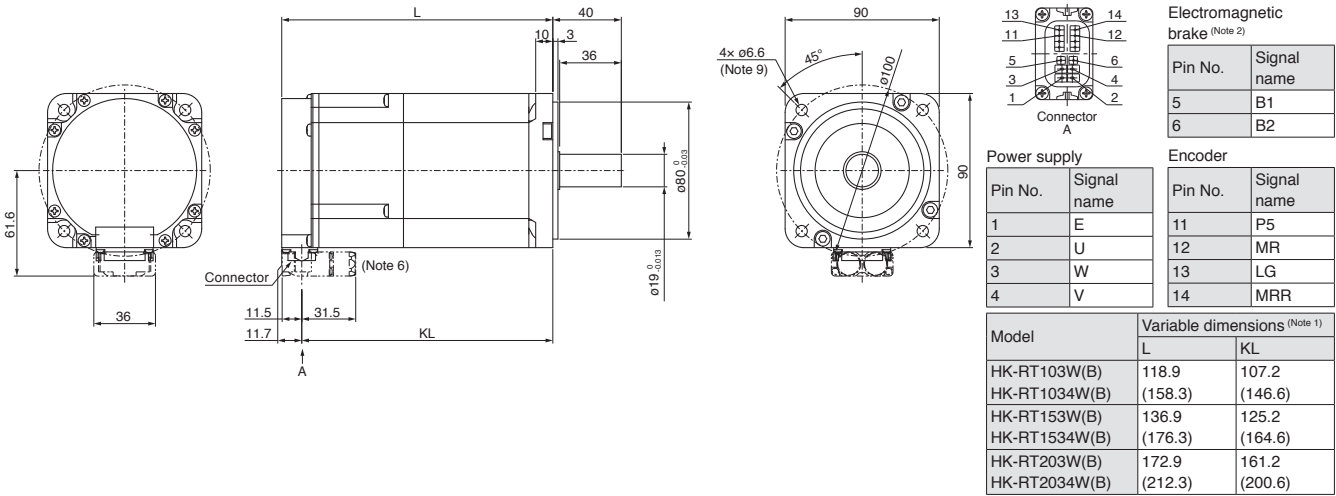

[Unit: mm]

HK-RT353W(B), HK-RT503W(B), HK-RT703W(B)  
 HK-RT3534W(B), HK-RT5034W(B), HK-RT7034W(B)

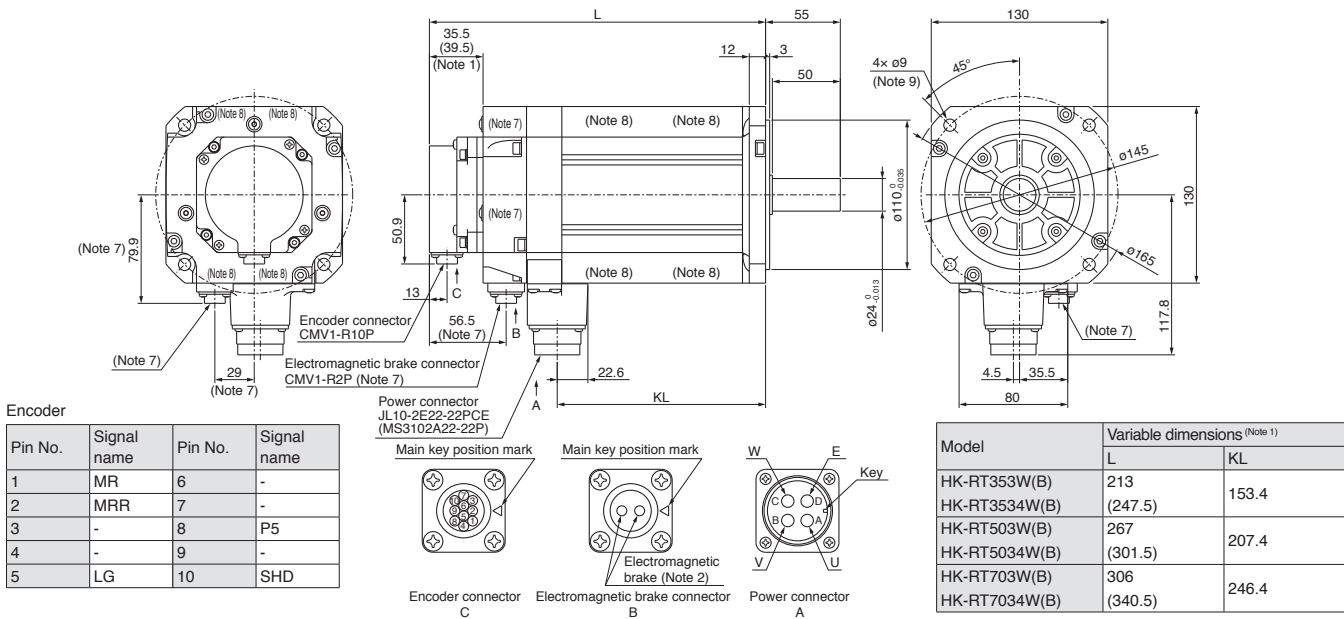




[Unit: mm]

- Notes:
1. The dimensions in brackets are for the models with an electromagnetic brake.
  2. The electromagnetic brake terminals do not have polarity.
  3. The dimensions are the same regardless of whether or not an oil seal is installed.
  4. Use a friction coupling to fasten a load.
  5. The actual dimensions may be up to 3 mm larger than those shown in the drawing because of shifting and variance of parts that occur during the assembly and manufacture of the rotary servo motors. The dimensions and tolerances shown are applicable at a temperature of 20 °C and may vary depending on the ambient temperature. Design the machine to allow for sufficient space.
  6. The dimensions are applicable when a dual type motor cable is led to the load side. Refer to "HK-RT Series Connector Dimensions" in this catalog for the dimensions when leading the cable to the opposite to the load side or leading vertically and when using a single type motor cable.
  7. Only for the models with an electromagnetic brake.
  8. HK-RT703W(B) and HK-RT7034W(B) have screw holes (M6×10.5) for eyebolts. When using eyebolts, use a washer of ø14 mm or larger. Tighten the bolt until the washer is closely attached to the servo motor's surface.
  9. Use hexagonal cap head bolts when mounting the servo motor.

## HK-RT Series Connector Dimensions

Cable direction: load side/opposite to load side

| Model  | Variable dimensions |    |      |      |                   |    |      |    |
|--|---------------------|----|------|------|-------------------|----|------|----|
|  | Dual cable type     |    |      |      | Single cable type |    |      |    |
|  | A                   | B  | C    | D    | A                 | B  | C    | D  |
| HK-RT103(4)W<br>HK-RT153(4)W<br>HK-RT203(4)W | 61.6                | 36 | 11.7 | 31.5 | 64.4              | 32 | 11.7 | 40 |





\* The drawing shows a dual cable type as an example.

[Unit: mm]

Cable direction: vertical

| Model  | Variable dimensions |    |      |                   |    |      |
|--|---------------------|----|------|-------------------|----|------|
|  | Dual cable type     |    |      | Single cable type |    |      |
|  | A                   | B  | C    | A                 | B  | C    |
| HK-RT103(4)W<br>HK-RT153(4)W<br>HK-RT203(4)W | 88.2                | 36 | 11.7 | 96.7              | 32 | 11.7 |



\* The drawing shows a dual cable type as an example.


[Unit: mm]

## HK-RT Series with Special Shaft Dimensions

Servo motors with the following specifications are also available.

**K: Keyed shaft (with a double round-ended key)** (Note 1)


| Model   | Variable dimensions               |    |    |   |    |    |                                   |   |   |       |
|---|-----------------------------------|----|----|---|----|----|-----------------------------------|---|---|-------|
|   | S                                 | LR | Q  | W | QK | QL | U                                 | R | T | Y     |
| HK-RT103(4)WK<br>HK-RT153(4)WK<br>HK-RT203(4)WK | 19 <sup>0</sup> <sub>-0.013</sub> | 40 | 36 | 6 | 25 | 5  | 15.5 <sup>0</sup> <sub>-0.1</sub> | 3 | 6 | M5×20 |
| HK-RT353(4)WK<br>HK-RT503(4)WK<br>HK-RT703(4)WK | 24 <sup>0</sup> <sub>-0.013</sub> | 55 | 50 | 8 | 36 | 5  | 20 <sup>0</sup> <sub>-0.1</sub>   | 4 | 7 | M8×20 |

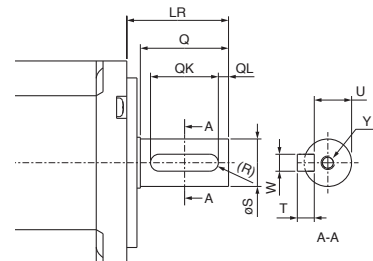

[Unit: mm]

**N: Keyed shaft (without a key)** (Note 1, 2)

| Model   | Variable dimensions               |    |    |                                  |    |    |                                   |   |       |
|---|-----------------------------------|----|----|----------------------------------|----|----|-----------------------------------|---|-------|
|   | S                                 | LR | Q  | W                                | QK | QL | U                                 | R | Y     |
| HK-RT103(4)WN<br>HK-RT153(4)WN<br>HK-RT203(4)WN | 19 <sup>0</sup> <sub>-0.013</sub> | 40 | 36 | 6 <sup>0</sup> <sub>-0.03</sub>  | 25 | 5  | 15.5 <sup>0</sup> <sub>-0.1</sub> | 3 | M5×20 |
| HK-RT353(4)WN<br>HK-RT503(4)WN<br>HK-RT703(4)WN | 24 <sup>0</sup> <sub>-0.013</sub> | 55 | 50 | 8 <sup>0</sup> <sub>-0.036</sub> | 36 | 5  | 20 <sup>0</sup> <sub>-0.1</sub>   | 4 | M8×20 |

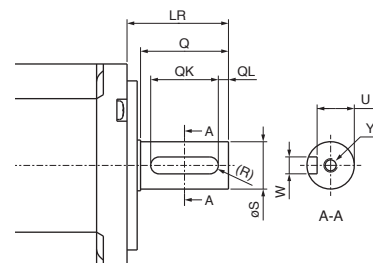

[Unit: mm]

Notes: 1. Do not use the servo motors with a keyed shaft for frequent start/stop applications as this may cause the damage to the shaft.  
2. The servo motor is supplied without a key. The user needs to prepare a key.

# Rotary Servo Motors

## Power Supply Capacity

1-axis servo amplifiers (200 V)

| Rotary servo motor | Servo amplifier<br>(Note 2) | Power supply capacity [kVA] (Note 1) |     |
|--------------------|-----------------------------|--------------------------------------|-----|
| HK-KT_W            | HK-KT053W                   | MR-J5-10G/B/A                        | 0.3 |
|                    |                             | MR-J5-20G/B/A                        | 0.3 |
|                    |                             | MR-J5-40G/B/A                        | 0.3 |
|                    | HK-KT13W                    | MR-J5-10G/B/A                        | 0.3 |
|                    |                             | MR-J5-20G/B/A                        | 0.3 |
|                    |                             | MR-J5-40G/B/A                        | 0.3 |
|                    | HK-KT1M3W                   | MR-J5-20G/B/A                        | 0.5 |
|                    |                             | MR-J5-40G/B/A                        | 0.5 |
|                    |                             | MR-J5-60G/B/A                        | 0.5 |
|                    | HK-KT13UW                   | MR-J5-10G/B/A                        | 0.3 |
|                    |                             | MR-J5-20G/B/A                        | 0.3 |
|                    | HK-KT23W                    | MR-J5-20G/B/A                        | 0.5 |
|                    |                             | MR-J5-40G/B/A                        | 0.5 |
|                    |                             | MR-J5-60G/B/A                        | 0.5 |
|                    | HK-KT43W                    | MR-J5-40G/B/A                        | 0.9 |
|                    |                             | MR-J5-60G/B/A                        | 0.9 |
|                    |                             | MR-J5-70G/B/A                        | 0.9 |
|                    | HK-KT63W                    | MR-J5-70G/B/A                        | 1.3 |
|                    |                             | MR-J5-100G/B/A                       | 1.3 |
|                    |                             | MR-J5-200G/B/A                       | 1.3 |
|                    | HK-KT23UW                   | MR-J5-20G/B/A                        | 0.5 |
|                    |                             | MR-J5-40G/B/A                        | 0.5 |
|                    |                             | MR-J5-60G/B/A                        | 0.5 |
|                    | HK-KT43UW                   | MR-J5-40G/B/A                        | 0.8 |
|                    |                             | MR-J5-60G/B/A                        | 0.8 |
|                    |                             | MR-J5-70G/B/A                        | 0.8 |
|                    | HK-KT7M3W                   | MR-J5-70G/B/A                        | 1.3 |
|                    |                             | MR-J5-100G/B/A                       | 1.3 |
|                    |                             | MR-J5-200G/B/A                       | 1.3 |
|                    | HK-KT103W                   | MR-J5-100G/B/A                       | 1.9 |
|                    |                             | MR-J5-200G/B/A                       | 1.9 |
|                    |                             | MR-J5-350G/B/A                       | 2.0 |
|                    | HK-KT63UW                   | MR-J5-60G/B/A                        | 1.3 |
|                    |                             | MR-J5-70G/B/A                        | 1.3 |
|                    |                             | MR-J5-100G/B/A                       | 1.1 |
|                    | HK-KT7M3UW                  | MR-J5-70G/B/A                        | 1.3 |
| MR-J5-100G/B/A     |                             | 1.3                                  |     |
| MR-J5-200G/B/A     |                             | 1.3                                  |     |
| HK-KT103UW         | MR-J5-100G/B/A              | 1.8                                  |     |
|                    | MR-J5-200G/B/A              | 1.8                                  |     |
|                    | MR-J5-350G/B/A              | 1.8                                  |     |
| HK-KT153W          | MR-J5-200G/B/A              | 2.6                                  |     |
|                    | MR-J5-350G/B/A              | 2.8                                  |     |
| HK-KT203W          | MR-J5-200G/B/A              | 3.2                                  |     |
|                    | MR-J5-350G/B/A              | 3.6                                  |     |
| HK-KT202W          | MR-J5-200G/B/A              | 3.3                                  |     |
|                    | MR-J5-350G/B/A              | 3.6                                  |     |

| Rotary servo motor | Servo amplifier<br>(Note 2) | Power supply capacity [kVA] (Note 1) |     |
|--------------------|-----------------------------|--------------------------------------|-----|
| HK-KT_4_W          | HK-KT434W                   | MR-J5-20G/B/A                        | 0.6 |
|                    |                             | MR-J5-40G/B/A                        | 0.6 |
|                    |                             | MR-J5-60G/B/A                        | 0.6 |
|                    | HK-KT634W                   | MR-J5-40G/B/A                        | 0.8 |
|                    |                             | MR-J5-60G/B/A                        | 0.8 |
|                    |                             | MR-J5-70G/B/A                        | 0.8 |
|                    | HK-KT7M34W                  | MR-J5-40G/B/A                        | 0.9 |
|                    |                             | MR-J5-60G/B/A                        | 0.9 |
|                    |                             | MR-J5-70G/B/A                        | 0.9 |
|                    | HK-KT1034W                  | MR-J5-60G/B/A                        | 1.1 |
|                    |                             | MR-J5-70G/B/A                        | 1.1 |
|                    |                             | MR-J5-100G/B/A                       | 1.1 |
|                    |                             | MR-J5-70G/B/A                        | 1.5 |
|                    |                             | MR-J5-100G/B/A                       | 1.5 |
|                    |                             | MR-J5-200G/B/A                       | 1.5 |
|                    | HK-KT2034W                  | MR-J5-100G/B/A                       | 1.9 |
|                    |                             | MR-J5-200G/B/A                       | 1.9 |
|                    |                             | MR-J5-350G/B/A                       | 2.0 |
| HK-KT2024W         | MR-J5-100G/B/A              | 1.9                                  |     |
|                    | MR-J5-200G/B/A              | 1.9                                  |     |
|                    | MR-J5-350G/B/A              | 2.1                                  |     |
| HK-MT_W            | HK-MT053W                   | MR-J5-10G/B/A                        | 0.3 |
|                    |                             | MR-J5-20G/B/A                        | 0.3 |
|                    |                             | MR-J5-40G/B/A                        | 0.3 |
|                    | HK-MT13W                    | MR-J5-10G/B/A                        | 0.3 |
|                    |                             | MR-J5-20G/B/A                        | 0.4 |
|                    |                             | MR-J5-40G/B/A                        | 0.4 |
|                    | HK-MT1M3W                   | MR-J5-20G/B/A                        | 0.5 |
|                    |                             | MR-J5-40G/B/A                        | 0.5 |
|                    |                             | MR-J5-20G/B/A                        | 0.5 |
|                    | HK-MT23W                    | MR-J5-20G/B/A                        | 0.5 |
|                    |                             | MR-J5-40G/B/A                        | 0.6 |
|                    |                             | MR-J5-40G/B/A                        | 0.9 |
| HK-MT43W           | MR-J5-70G/B/A               | 0.9                                  |     |
|                    | MR-J5-70G/B/A               | 1.2                                  |     |
|                    | MR-J5-200G/B/A              | 1.2                                  |     |
| HK-MT63W           | MR-J5-70G/B/A               | 1.3                                  |     |
|                    | MR-J5-70G/B/A               | 1.3                                  |     |
|                    | MR-J5-200G/B/A              | 1.6                                  |     |
| HK-MT7M3W          | MR-J5-70G/B/A               | 1.3                                  |     |
|                    | MR-J5-200G/B/A              | 1.6                                  |     |
|                    | MR-J5-100G/B/A              | 1.8                                  |     |
| HK-MT103W          | MR-J5-100G/B/A              | 1.8                                  |     |
|                    | MR-J5-200G/B/A              | 2.0                                  |     |
|                    | MR-J5-200G/B/A              | 2.0                                  |     |
| HK-MT_VW           | HK-MT053VW                  | MR-J5-10G/B/A                        | 0.3 |
|                    |                             | MR-J5-20G/B/A                        | 0.3 |
|                    |                             | MR-J5-40G/B/A                        | 0.3 |
|                    | HK-MT13VW                   | MR-J5-10G/B/A                        | 0.3 |
|                    |                             | MR-J5-20G/B/A                        | 0.4 |
|                    |                             | MR-J5-40G/B/A                        | 0.4 |
|                    | HK-MT1M3VW                  | MR-J5-20G/B/A                        | 0.5 |
|                    |                             | MR-J5-40G/B/A                        | 0.5 |
|                    |                             | MR-J5-20G/B/A                        | 0.5 |
|                    | HK-MT23VW                   | MR-J5-20G/B/A                        | 0.5 |
|                    |                             | MR-J5-40G/B/A                        | 0.6 |
|                    |                             | MR-J5-40G/B/A                        | 0.6 |
|                    | HK-MT43VW                   | MR-J5-60G/B/A                        | 0.9 |
|                    |                             | MR-J5-70G/B/A                        | 0.9 |
|                    |                             | MR-J5-70G/B/A                        | 1.2 |
|                    | HK-MT63VW                   | MR-J5-200G/B/A                       | 1.2 |
|                    |                             | MR-J5-200G/B/A                       | 1.2 |
|                    |                             | MR-J5-70G/B/A                        | 1.3 |
| HK-MT7M3VW         | MR-J5-70G/B/A               | 1.3                                  |     |
|                    | MR-J5-200G/B/A              | 1.6                                  |     |
|                    | MR-J5-200G/B/A              | 2.0                                  |     |
| HK-MT103VW         | MR-J5-200G/B/A              | 2.0                                  |     |
|                    | MR-J5-200G/B/A              | 2.0                                  |     |
|                    | MR-J5-350G/B/A              | 2.0                                  |     |

Notes: 1. The power supply capacity varies depending on the power supply impedance.

2. Note that the power supply capacity for servo amplifiers with special specifications is the same as that for standard servo amplifiers. Refer to the servo amplifiers with the same rated output.

## Power Supply Capacity

1-axis servo amplifiers (200 V)

| Rotary servo motor  |                | Servo amplifier<br>(Note 2) | Power supply capacity [kVA] (Note 1) |
|---------------------|----------------|-----------------------------|--------------------------------------|
| HK-ST_W<br>(Note 3) | HK-ST52W       | MR-J5-60G/B/A               | 1.0                                  |
|                     |                | MR-J5-70G/B/A               | 1.0                                  |
|                     |                | MR-J5-100G/B/A              | 1.0                                  |
|                     | HK-ST102W      | MR-J5-100G/B/A              | 1.7                                  |
|                     |                | MR-J5-200G/B/A              | 1.7                                  |
|                     |                | MR-J5-350G/B/A              | 1.8                                  |
|                     | HK-ST172W      | MR-J5-200G/B/A              | 3.0                                  |
|                     |                | MR-J5-350G/B/A              | 3.2                                  |
|                     | HK-ST202AW     | MR-J5-200G/B/A              | 3.5                                  |
|                     |                | MR-J5-350G/B/A              | 3.5                                  |
|                     | HK-ST302W      | MR-J5-350G/B/A              | 4.9                                  |
|                     |                | MR-J5-500G/B/A              | 4.9                                  |
|                     | HK-ST353W      | MR-J5-350G/B/A              | 5.5                                  |
|                     |                | MR-J5-500G/B/A              | 7.4                                  |
|                     | HK-ST503W      | MR-J5-500G/B/A              | 7.5                                  |
|                     |                | MR-J5-700G/B/A              | 10                                   |
|                     | HK-ST7M2UW     | MR-J5-70G/B/A               | 1.3                                  |
|                     |                | MR-J5-100G/B/A              | 1.3                                  |
|                     | HK-ST172UW     | MR-J5-200G/B/A              | 1.3                                  |
|                     |                | MR-J5-350G/B/A              | 3.2                                  |
| HK-ST202W           | MR-J5-200G/B/A | 3.5                         |                                      |
|                     | MR-J5-350G/B/A | 3.5                         |                                      |
| HK-ST352W           | MR-J5-350G/B/A | 5.5                         |                                      |
|                     | MR-J5-500G/B/A | 5.5                         |                                      |
| HK-ST502W           | MR-J5-500G/B/A | 7.5                         |                                      |
|                     | MR-J5-700G/B/A | 7.8                         |                                      |
| HK-ST702W           | MR-J5-700G/B/A | 10                          |                                      |
|                     | HK-ST524W      | MR-J5-40G/B/A               | 0.7                                  |
| MR-J5-60G/B/A       |                | 0.7                         |                                      |
| MR-J5-70G/B/A       |                | 0.7                         |                                      |
| HK-ST1024W          | MR-J5-60G/B/A  | 1.3                         |                                      |
|                     | MR-J5-70G/B/A  | 1.3                         |                                      |
|                     | MR-J5-100G/B/A | 1.3                         |                                      |
| HK-ST1724W          | MR-J5-100G/B/A | 1.7                         |                                      |
|                     | MR-J5-200G/B/A | 1.7                         |                                      |
|                     | MR-J5-350G/B/A | 1.8                         |                                      |
| HK-ST2024AW         | MR-J5-100G/B/A | 1.9                         |                                      |
|                     | MR-J5-200G/B/A | 1.9                         |                                      |
| HK-ST3024W          | MR-J5-350G/B/A | 2.0                         |                                      |
|                     | MR-J5-200G/B/A | 2.6                         |                                      |
| HK-ST2024W          | MR-J5-350G/B/A | 2.8                         |                                      |
|                     | MR-J5-200G/B/A | 2.1                         |                                      |
| HK-ST3524W          | MR-J5-350G/B/A | 2.2                         |                                      |
|                     | MR-J5-200G/B/A | 3.2                         |                                      |
| HK-ST5024W          | MR-J5-350G/B/A | 3.5                         |                                      |
|                     | MR-J5-500G/B/A | 4.9                         |                                      |
| HK-ST7024W          | MR-J5-500G/B/A | 5.0                         |                                      |
|                     | MR-J5-700G/B/A | 6.6                         |                                      |
|                     |                | MR-J5-700G/B/A              | 6.9                                  |

| Rotary servo motor |                | Servo amplifier<br>(Note 2) | Power supply capacity [kVA] (Note 1) |
|--------------------|----------------|-----------------------------|--------------------------------------|
| HK-RT_W            | HK-RT103W      | MR-J5-100G/B/A              | 1.7                                  |
|                    |                | MR-J5-200G/B/A              | 1.7                                  |
|                    | HK-RT153W      | MR-J5-200G/B/A              | 2.5                                  |
|                    |                | MR-J5-500G/B/A              | 3.1                                  |
|                    | HK-RT203W      | MR-J5-200G/B/A              | 3.5                                  |
|                    |                | MR-J5-350G/B/A              | 3.5                                  |
|                    | HK-RT353W      | MR-J5-350G/B/A              | 5.5                                  |
|                    |                | MR-J5-500G/B/A              | 6.4                                  |
| HK-RT503W          | MR-J5-500G/B/A | 7.5                         |                                      |
|                    | MR-J5-700G/B/A | 8.8                         |                                      |
| HK-RT703W          | MR-J5-700G/B/A | 13                          |                                      |

Notes: 1. The power supply capacity varies depending on the power supply impedance.

2. Note that the power supply capacity for servo amplifiers with special specifications is the same as that for standard servo amplifiers. Refer to the servo amplifiers with the same rated output.

3. A power supply capacity for HK-ST152G\_ is 2.5 kVA.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/5Wires  
Product List  
Precautions  
Support

# Rotary Servo Motors

## Power Supply Capacity

1-axis servo amplifiers (400 V)

| Rotary servo motor |             | Servo amplifier<br>(Note 2) | Power supply capacity [kVA]<br>(Note 1) |
|--------------------|-------------|-----------------------------|---|
| HK-KT_W            | HK-KT053W   | MR-J5-60G4/B4/A4            | 0.3                                     |
|                    |             | MR-J5-100G4/B4/A4           | 0.3                                     |
|                    | HK-KT13W    | MR-J5-60G4/B4/A4            | 0.5                                     |
|                    |             | MR-J5-100G4/B4/A4           | 0.4                                     |
|                    | HK-KT1M3W   | MR-J5-60G4/B4/A4            | 0.6                                     |
|                    |             | MR-J5-100G4/B4/A4           | 0.6                                     |
| HK-KT_4_W          | HK-KT434W   | MR-J5-60G4/B4/A4            | 1.2                                     |
|                    |             | MR-J5-100G4/B4/A4           | 1.1                                     |
|                    |             | MR-J5-200G4/B4/A4           | 1.1                                     |
|                    | HK-KT634W   | MR-J5-100G4/B4/A4           | 1.5                                     |
|                    |             | MR-J5-200G4/B4/A4           | 1.6                                     |
|                    |             | MR-J5-350G4/B4/A4           | 1.6                                     |
|                    | HK-KT7M34W  | MR-J5-100G4/B4/A4           | 1.8                                     |
|                    |             | MR-J5-200G4/B4/A4           | 1.8                                     |
|                    |             | MR-J5-350G4/B4/A4           | 1.7                                     |
|                    | HK-KT1034W  | MR-J5-100G4/B4/A4           | 2.3                                     |
|                    |             | MR-J5-200G4/B4/A4           | 2.3                                     |
|                    |             | MR-J5-350G4/B4/A4           | 2.3                                     |
|                    | HK-KT634UW  | MR-J5-60G4/B4/A4            | 1.3                                     |
|                    |             | MR-J5-200G4/B4/A4           | 1.5                                     |
|                    | HK-KT1034UW | MR-J5-100G4/B4/A4           | 1.7                                     |
|                    |             | MR-J5-200G4/B4/A4           | 2.3                                     |
|                    |             | MR-J5-350G4/B4/A4           | 2.3                                     |
|                    | HK-KT1534W  | MR-J5-200G4/B4/A4           | 3.1                                     |
|                    |             | MR-J5-350G4/B4/A4           | 3.1                                     |
|                    | HK-KT2034W  | MR-J5-200G4/B4/A4           | 4.0                                     |
|                    |             | MR-J5-350G4/B4/A4           | 4.0                                     |
|                    |             | MR-J5-200G4/B4/A4           | 4.0                                     |
|                    | HK-KT2024W  | MR-J5-350G4/B4/A4           | 4.0                                     |

| Rotary servo motor    |                    | Servo amplifier<br>(Note 2) | Power supply capacity [kVA]<br>(Note 1) |
|-----------------------|--------------------|-----------------------------|---|
| HK-ST_4_W<br>(Note 3) | HK-ST524W          | MR-J5-60G4/B4/A4            | 1.0                                     |
|                       |                    | MR-J5-100G4/B4/A4           | 1.0                                     |
|                       |                    | MR-J5-200G4/B4/A4           | 1.0                                     |
|                       | HK-ST1024W         | MR-J5-100G4/B4/A4           | 1.7                                     |
|                       |                    | MR-J5-200G4/B4/A4           | 1.7                                     |
|                       |                    | MR-J5-350G4/B4/A4           | 1.7                                     |
|                       | HK-ST1724W         | MR-J5-200G4/B4/A4           | 3.2                                     |
|                       |                    | MR-J5-350G4/B4/A4           | 3.2                                     |
|                       |                    | MR-J5-500G4/B4/A4           | 3.2                                     |
|                       | HK-ST2024AW        | MR-J5-200G4/B4/A4           | 3.5                                     |
|                       |                    | MR-J5-350G4/B4/A4           | 3.5                                     |
|                       |                    | MR-J5-500G4/B4/A4           | 3.5                                     |
| HK-ST3024W            | MR-J5-350G4/B4/A4  | 4.9                         |   |
|                       | MR-J5-500G4/B4/A4  | 4.9                         |   |
|                       | MR-J5-700G4/B4/A4  | 4.9                         |   |
| HK-ST3534W            | MR-J5-350G4/B4/A4  | 5.5                         |   |
|                       | MR-J5-500G4/B4/A4  | 5.5                         |   |
|                       | MR-J5-700G4/B4/A4  | 5.5                         |   |
| HK-ST5034W            | MR-J5-500G4/B4/A4  | 7.5                         |   |
|                       | MR-J5-700G4/B4/A4  | 7.5                         |   |
|                       | MR-J5-1000G4/B4/A4 | 7.5                         |   |
| HK-ST2024W            | MR-J5-200G4/B4/A4  | 3.5                         |   |
|                       | MR-J5-350G4/B4/A4  | 3.5                         |   |
|                       | MR-J5-500G4/B4/A4  | 3.5                         |   |
| HK-ST3524W            | MR-J5-350G4/B4/A4  | 5.5                         |   |
|                       | MR-J5-500G4/B4/A4  | 5.5                         |   |
|                       | MR-J5-700G4/B4/A4  | 5.9                         |   |
| HK-ST5024W            | MR-J5-500G4/B4/A4  | 7.5                         |   |
|                       | MR-J5-700G4/B4/A4  | 7.5                         |   |
|                       | MR-J5-1000G4/B4/A4 | 7.5                         |   |
| HK-ST7024W            | MR-J5-700G4/B4/A4  | 10                          |   |
|                       | MR-J5-1000G4/B4/A4 | 10                          |   |
|                       | MR-J5-1500G4/B4/A4 | 10                          |   |
| HK-RT_4W              | HK-RT1034W         | MR-J5-100G4/B4/A4           | 2.2                                     |
|                       |                    | MR-J5-200G4/B4/A4           | 2.2                                     |
|                       | HK-RT1534W         | MR-J5-200G4/B4/A4           | 3.1                                     |
|                       |                    | MR-J5-500G4/B4/A4           | 2.7                                     |
|                       | HK-RT2034W         | MR-J5-200G4/B4/A4           | 3.9                                     |
|                       |                    | MR-J5-350G4/B4/A4           | 3.9                                     |
|                       | HK-RT3534W         | MR-J5-350G4/B4/A4           | 6.2                                     |
|                       |                    | MR-J5-500G4/B4/A4           | 5.4                                     |
| HK-RT5034W            | MR-J5-500G4/B4/A4  | 7.3                         |   |
|                       | MR-J5-700G4/B4/A4  | 7.9                         |   |
| HK-RT7034W            | MR-J5-700G4/B4/A4  | 10                          |   |

- Notes:
1. The power supply capacity varies depending on the power supply impedance.
  2. Note that the power supply capacity for servo amplifiers with special specifications is the same as that for standard servo amplifiers. Refer to the servo amplifiers with the same rated output.
  3. A power supply capacity for HK-ST1524G\_ is 2.5 kVA.



## Power Supply Capacity

Multi-axis servo amplifiers (200 V)

| Rotary servo motor |                 | Servo amplifier <sup>(Note 3)</sup> | Power supply capacity [kVA] <sup>(Note 1, 2)</sup> |
|--------------------|-----------------|-------------------------------------|--|
| HK-KT_W            | HK-KT053W       | MR-J5W2-22G/B                       | 0.3  |
|                    |                 | MR-J5W2-44G/B                       | 0.3  |
|                    |                 | MR-J5W3-222G/B                      | 0.3  |
|                    |                 | MR-J5W3-444G/B                      | 0.3  |
|                    | HK-KT13W        | MR-J5W2-22G/B                       | 0.3  |
|                    |                 | MR-J5W2-44G/B                       | 0.3  |
|                    |                 | MR-J5W3-222G/B                      | 0.3  |
|                    |                 | MR-J5W3-444G/B                      | 0.3  |
|                    | HK-KT1M3W       | MR-J5W2-22G/B                       | 0.5  |
|                    |                 | MR-J5W2-44G/B                       | 0.5  |
|                    |                 | MR-J5W3-222G/B                      | 0.5  |
|                    |                 | MR-J5W3-444G/B                      | 0.5  |
|                    | HK-KT13UW       | MR-J5W2-22G/B                       | 0.3  |
|                    |                 | MR-J5W2-44G/B                       | 0.3  |
|                    |                 | MR-J5W3-222G/B                      | 0.3  |
|                    |                 | MR-J5W3-444G/B                      | 0.3  |
|                    | HK-KT23W        | MR-J5W2-22G/B                       | 0.5  |
|                    |                 | MR-J5W2-44G/B                       | 0.5  |
|                    |                 | MR-J5W3-222G/B                      | 0.5  |
|                    |                 | MR-J5W3-444G/B                      | 0.5  |
|                    | HK-KT43W        | MR-J5W2-44G/B                       | 0.9  |
|                    |                 | MR-J5W2-77G/B                       | 0.9  |
|                    |                 | MR-J5W2-1010G/B                     | 0.9  |
|                    |                 | MR-J5W3-444G/B                      | 0.9  |
|                    | HK-KT63W        | MR-J5W2-77G/B                       | 1.3  |
|                    |                 | MR-J5W2-1010G/B                     | 1.3  |
|                    | HK-KT23UW       | MR-J5W2-22G/B                       | 0.5  |
|                    |                 | MR-J5W2-44G/B                       | 0.5  |
| MR-J5W3-222G/B     |                 | 0.5                                 |  |
| MR-J5W3-444G/B     |                 | 0.5                                 |  |
| MR-J5W3-444G/B     |                 | 0.5                                 |  |
| HK-KT43UW          | MR-J5W2-44G/B   | 0.8                                 |  |
|                    | MR-J5W2-77G/B   | 0.8                                 |  |
|                    | MR-J5W2-1010G/B | 0.8                                 |  |
| HK-KT7M3W          | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.3                                 |  |
| HK-KT103W          | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.3                                 |  |
| HK-KT63UW          | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.3                                 |  |
| HK-KT7M3UW         | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.3                                 |  |
| HK-KT103UW         | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.3                                 |  |
| HK-KT_4_W          | HK-KT434W       | MR-J5W2-22G/B                       | 0.6  |
|                    |                 | MR-J5W2-44G/B                       | 0.6  |
|                    |                 | MR-J5W3-222G/B                      | 0.6  |
|                    |                 | MR-J5W3-444G/B                      | 0.6  |
|                    | HK-KT634W       | MR-J5W2-44G/B                       | 0.8  |
|                    |                 | MR-J5W2-77G/B                       | 0.8  |
|                    |                 | MR-J5W2-1010G/B                     | 0.8  |
|                    | HK-KT7M34W      | MR-J5W2-44G/B                       | 0.9  |
|                    |                 | MR-J5W2-77G/B                       | 0.9  |
|                    |                 | MR-J5W2-1010G/B                     | 0.9  |
|                    | HK-KT1034W      | MR-J5W2-77G/B                       | 1.1  |
|                    |                 | MR-J5W2-1010G/B                     | 1.1  |
|                    | HK-KT1534W      | MR-J5W2-77G/B                       | 1.5  |
|                    |                 | MR-J5W2-1010G/B                     | 1.5  |
|                    | HK-KT2034W      | MR-J5W2-77G/B                       | 1.9  |
|                    |                 | MR-J5W2-1010G/B                     | 1.9  |
| HK-KT2024W         | MR-J5W2-77G/B   | 1.9                                 |  |
|                    | MR-J5W2-1010G/B | 1.9                                 |  |

| Rotary servo motor |                 | Servo amplifier <sup>(Note 3)</sup> | Power supply capacity [kVA] <sup>(Note 1, 2)</sup> |
|--------------------|-----------------|-------------------------------------|--|
| HK-MT_W            | HK-MT053W       | MR-J5W2-22G/B                       | 0.3  |
|                    |                 | MR-J5W2-44G/B                       | 0.3  |
|                    |                 | MR-J5W3-222G/B                      | 0.3  |
|                    |                 | MR-J5W3-444G/B                      | 0.3  |
|                    | HK-MT13W        | MR-J5W2-22G/B                       | 0.4  |
|                    |                 | MR-J5W2-44G/B                       | 0.4  |
|                    |                 | MR-J5W3-222G/B                      | 0.4  |
|                    |                 | MR-J5W3-444G/B                      | 0.4  |
|                    | HK-MT1M3W       | MR-J5W2-22G/B                       | 0.5  |
|                    |                 | MR-J5W2-44G/B                       | 0.5  |
|                    |                 | MR-J5W3-222G/B                      | 0.5  |
|                    |                 | MR-J5W3-444G/B                      | 0.5  |
| HK-MT23W           | MR-J5W2-22G/B   | 0.5                                 |  |
|                    | MR-J5W2-44G/B   | 0.5                                 |  |
|                    | MR-J5W3-222G/B  | 0.5                                 |  |
|                    | MR-J5W3-444G/B  | 0.5                                 |  |
| HK-MT43W           | MR-J5W2-44G/B   | 0.9                                 |  |
|                    | MR-J5W2-77G/B   | 0.9                                 |  |
|                    | MR-J5W2-1010G/B | 0.9                                 |  |
|                    | MR-J5W3-444G/B  | 0.9                                 |  |
| HK-MT63W           | MR-J5W2-77G/B   | 1.2                                 |  |
|                    | MR-J5W2-1010G/B | 1.2                                 |  |
| HK-MT7M3W          | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.3                                 |  |
| HK-MT103W          | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.8                                 |  |
| HK-MT_VW           | HK-MT053VW      | MR-J5W2-22G/B                       | 0.3  |
|                    |                 | MR-J5W2-44G/B                       | 0.3  |
|                    |                 | MR-J5W3-222G/B                      | 0.3  |
|                    |                 | MR-J5W3-444G/B                      | 0.3  |
|                    | HK-MT13VW       | MR-J5W2-22G/B                       | 0.4  |
|                    |                 | MR-J5W2-44G/B                       | 0.4  |
|                    |                 | MR-J5W3-222G/B                      | 0.4  |
|                    |                 | MR-J5W3-444G/B                      | 0.4  |
|                    | HK-MT1M3VW      | MR-J5W2-22G/B                       | 0.5  |
|                    |                 | MR-J5W2-44G/B                       | 0.5  |
|                    |                 | MR-J5W3-222G/B                      | 0.5  |
|                    |                 | MR-J5W3-444G/B                      | 0.5  |
| HK-MT23VW          | MR-J5W2-22G/B   | 0.5                                 |  |
|                    | MR-J5W2-44G/B   | 0.5                                 |  |
|                    | MR-J5W3-222G/B  | 0.5                                 |  |
|                    | MR-J5W3-444G/B  | 0.5                                 |  |
| HK-MT43VW          | MR-J5W2-77G/B   | 0.9                                 |  |
|                    | MR-J5W2-1010G/B | 0.9                                 |  |
|                    | MR-J5W2-77G/B   | 1.2                                 |  |
|                    | MR-J5W2-1010G/B | 1.2                                 |  |
| HK-MT63VW          | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.3                                 |  |
| HK-MT7M3VW         | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.3                                 |  |
| HK-ST_W            | HK-ST52W        | MR-J5W2-22G/B                       | 1.0  |
|                    |                 | MR-J5W2-44G/B                       | 1.0  |
|                    |                 | MR-J5W2-1010G/B                     | 1.0  |
|                    |                 | MR-J5W2-1010G/B                     | 1.0  |
|                    | HK-ST102W       | MR-J5W2-22G/B                       | 1.7  |
|                    |                 | MR-J5W2-44G/B                       | 1.7  |
|                    |                 | MR-J5W2-1010G/B                     | 1.7  |
|                    |                 | MR-J5W2-1010G/B                     | 1.7  |
|                    | HK-ST7M2UW      | MR-J5W2-77G/B                       | 1.3  |
|                    |                 | MR-J5W2-1010G/B                     | 1.3  |
|                    |                 | MR-J5W2-77G/B                       | 1.3  |
|                    |                 | MR-J5W2-1010G/B                     | 1.3  |
| HK-ST524W          | MR-J5W2-44G/B   | 0.7                                 |  |
|                    | MR-J5W2-77G/B   | 0.7                                 |  |
|                    | MR-J5W3-444G/B  | 0.7                                 |  |
|                    | MR-J5W3-444G/B  | 0.7                                 |  |
| HK-ST1024W         | MR-J5W2-77G/B   | 1.3                                 |  |
|                    | MR-J5W2-1010G/B | 1.3                                 |  |
|                    | MR-J5W2-77G/B   | 1.7                                 |  |
|                    | MR-J5W2-1010G/B | 1.7                                 |  |
| HK-ST1724W         | MR-J5W2-77G/B   | 1.7                                 |  |
|                    | MR-J5W2-1010G/B | 1.7                                 |  |
| HK-ST2024AW        | MR-J5W2-77G/B   | 1.9                                 |  |
|                    | MR-J5W2-1010G/B | 1.9                                 |  |
| HK-RT_W            | HK-RT103W       | MR-J5W2-1010G/B                     | 1.7  |

Notes: 1. The power supply capacity varies depending on the power supply impedance.

2. The listed values are the power supply capacity for one servo motor. For the multi-axis servo amplifiers, calculate the power supply capacity with the equation below:  
Power supply capacity [kVA] = Sum of power supply capacity [kVA] of the connected servo motors

3. Note that the power supply capacity for servo amplifiers with special specifications is the same as that for standard servo amplifiers.  
Refer to the servo amplifiers with the same rated output.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LVSWires  
Product List  
Precautions  
Support

# Rotary Servo Motors

## Power Supply Capacity

Drive unit (400 V)


Select power supply capacity on the basis of the capacity of the power regeneration converter unit.

| Power regeneration converter unit | Power supply capacity [kVA] <sup>(Note 1, 2)</sup> |
|-----------------------------------|--|
| MR-CV11K4                         | 16   |
| MR-CV18K4                         | 27   |
| MR-CV30K4                         | 43   |
| MR-CV37K4                         | 53   |
| MR-CV45K4                         | 64   |
| MR-CV55K4                         | 78   |
| MR-CV75K4                         | 107  |


- Notes:
1. Select power supply capacity on the basis of the capacity of the power regeneration converter unit even when multiple drive units are connected to the converter unit. Calculate the total output wattage of the servo motors driven by the drive units which are connected to the power regeneration converter unit. If this wattage is smaller than the capacity of the converter unit, the power supply capacity can be lower than the value in the table.
  2. An acceleration of the servo motor requires a current of 2 to 2.5 times the rated current. Secure the voltage of the main circuit power supply terminals (L1/L2/L3) of the power regeneration converter unit within the permissible voltage fluctuation. The power supply capacity varies depending on the power supply impedance.

### Annotations for Rotary Servo Motor Specifications


- \*1. The vibration direction is shown in the diagram below. The numerical value indicates the maximum value of the component (commonly the bracket in the opposite direction of the load side).  
Fretting tends to occur on the bearing when the servo motor stops. Thus, maintain vibration level at approximately one-half of the allowable value.




- \*2. Refer to the diagram below for the permissible load for the shaft. Ensure that loads applied on the shaft do not exceed the values specified in the table. The values in the table are applicable when each load is applied singly.

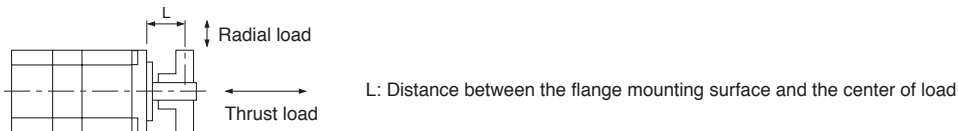

- \*3. V10 indicates that the amplitude of the servo motor itself is 10 μm or less. The following shows mounting orientation and measuring position of the servo motor during the measurement:

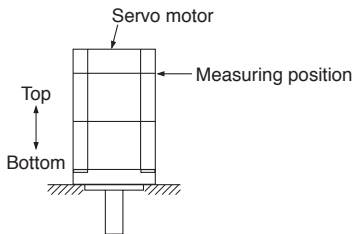


- \*4. Refer to the diagram below for the shaft-through portion.




### Annotations for Geared Servo Motor Specifications

- \*1. Refer to the diagram below for the permissible load for the shaft. Ensure that loads applied on the shaft do not exceed the values specified in the table. The values in the table are applicable when each load is applied singly.




With a gear reducer for general industrial machines (G1/G1H)  
With a shaft-output type gear reducer for high precision applications, flange mounting (G7)



With a flange-output type gear reducer for high precision applications, flange mounting (G5)

- \*2. Do not mount the following servo motor in a way that the servo motor is tilted to the shaft direction or to the shaft rotation direction.

- HK-ST102(4)G1/G1H 1/43, 1/59
- HK-ST152(4)G1/G1H 1/29, 1/35, 1/43, 1/59
- HK-ST202(4)G1/G1H 1/29, 1/35, 1/43, 1/59
- HK-ST352(4)G1/G1H all reduction ratios
- HK-ST502(4)G1/G1H all reduction ratios
- HK-ST702(4)G1/G1H all reduction ratios

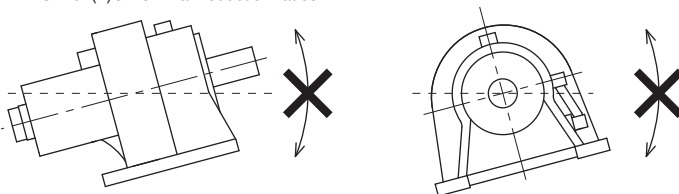

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

## Rotary Servo Motors

MEMO



# 5

## Linear Servo Motors

|   |      |
|---|------|
| Model Designation.....  | 5-2  |
| Specifications  |      |
| LM-H3 series.....   | 5-8  |
| LM-AJ series.....   | 5-10 |
| LM-F series.....  | 5-12 |
| LM-K2 series.....   | 5-14 |
| LM-U2 series.....   | 5-16 |
| LM-AU series.....   | 5-18 |
| Power Supply Capacity.....  | 5-20 |
| Dimensions  |      |
| LM-H3 series.....   | 5-22 |
| LM-AJ series.....   | 5-24 |
| LM-F series.....  | 5-28 |
| LM-K2 series.....   | 5-30 |
| LM-U2 series.....   | 5-32 |
| LM-AU series.....   | 5-34 |
| List of Linear Encoders.....                                      | 5-39 |
| Determining the Number of the Secondary-Side (Magnet) Blocks..... | 5-41 |

\* Refer to p. 7-78 in this catalog for conversion of units.


\* The characteristics and numerical values without tolerances mentioned in this catalog are representative values.

# Linear Servo Motors


## Model Designation (Note 1)

● LM-H3 series

LM - H 3 P 2 A - 0 7 P - (Primary side: coil)

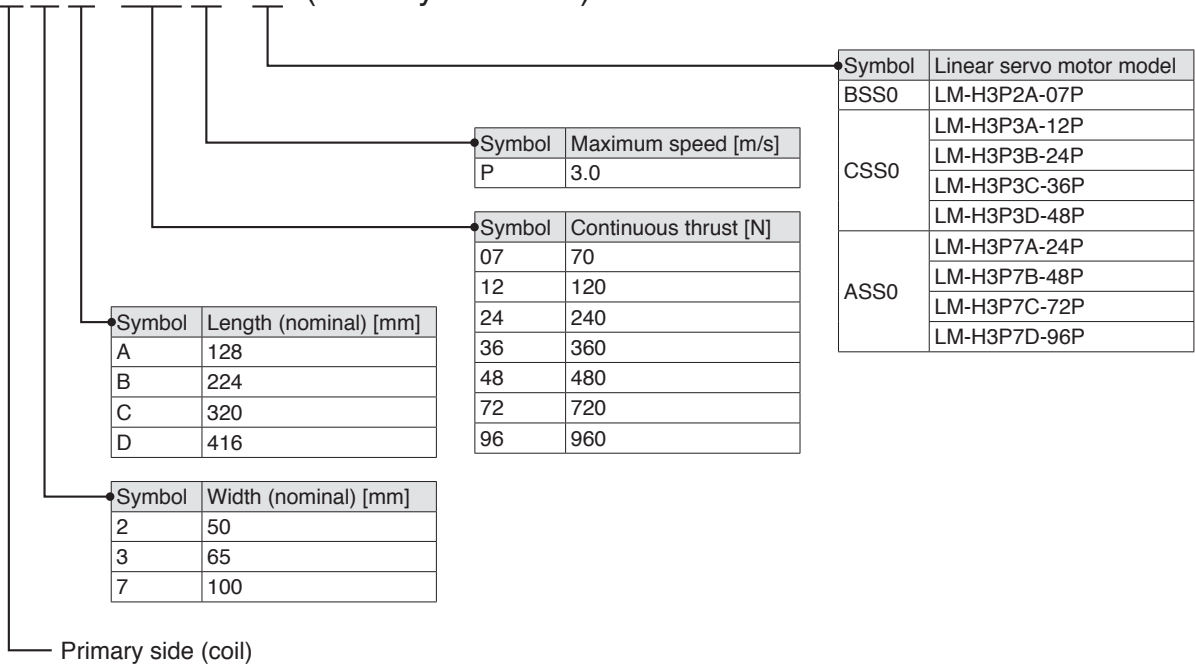

LM - H 3 S 2 0 - 2 8 8 - (Secondary side: magnet)

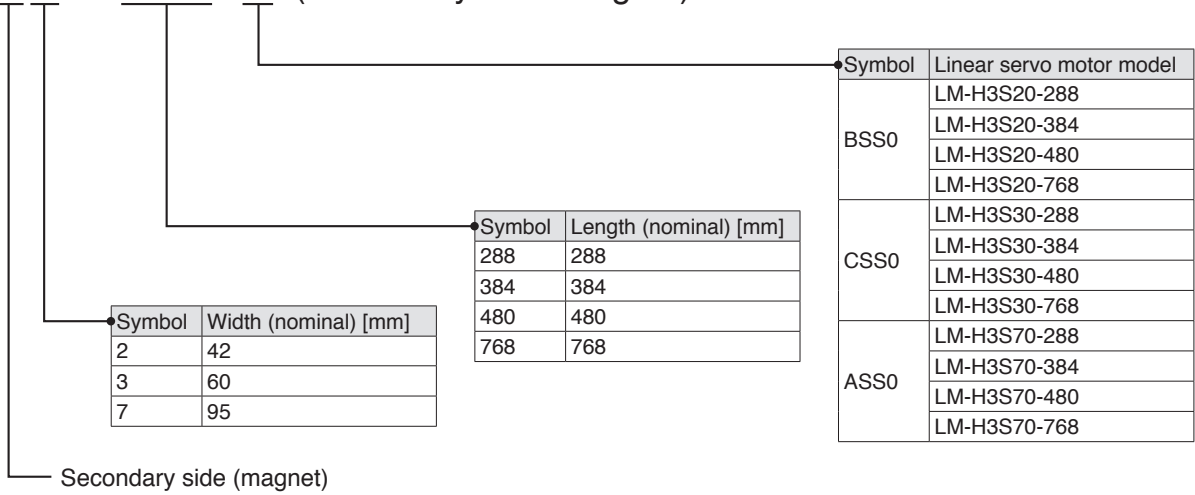


Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.


**Model Designation** (Note 1)

● LM-AJ series

LM - A J P 1 B - 0 7 K - (Primary side: coil)

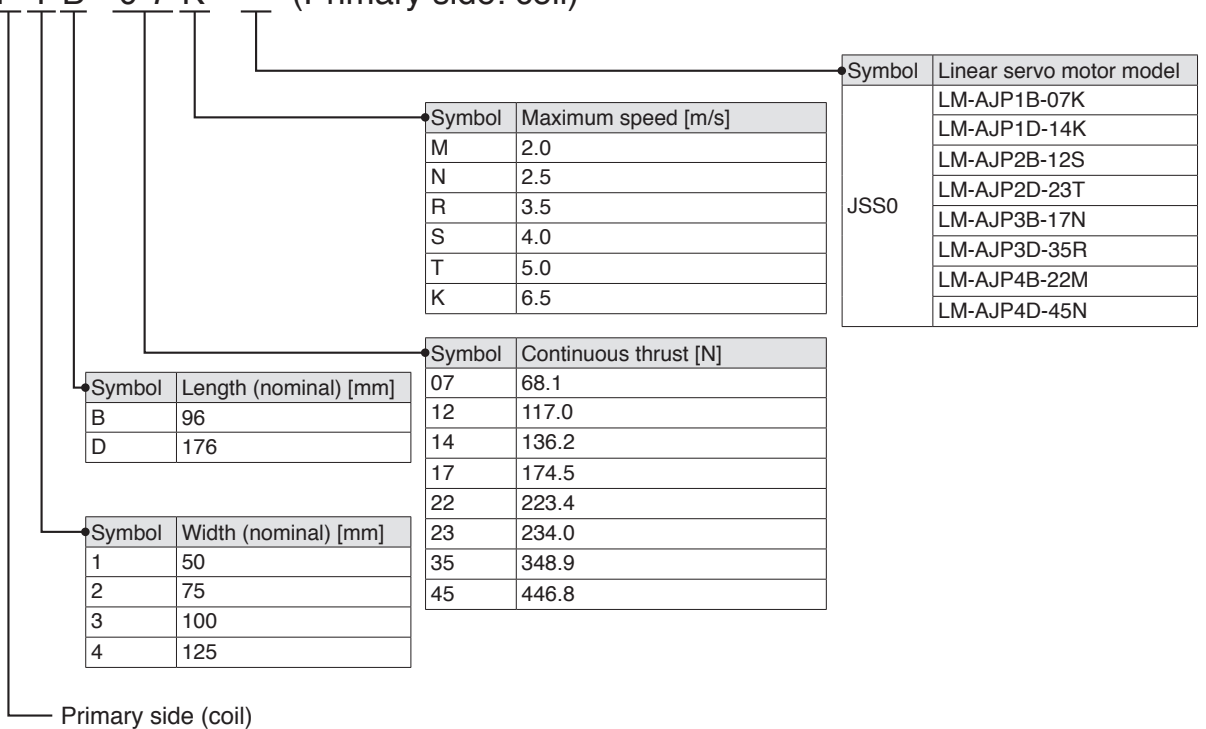

LM - A J S 1 0 - 0 8 0 - (Secondary side: magnet)

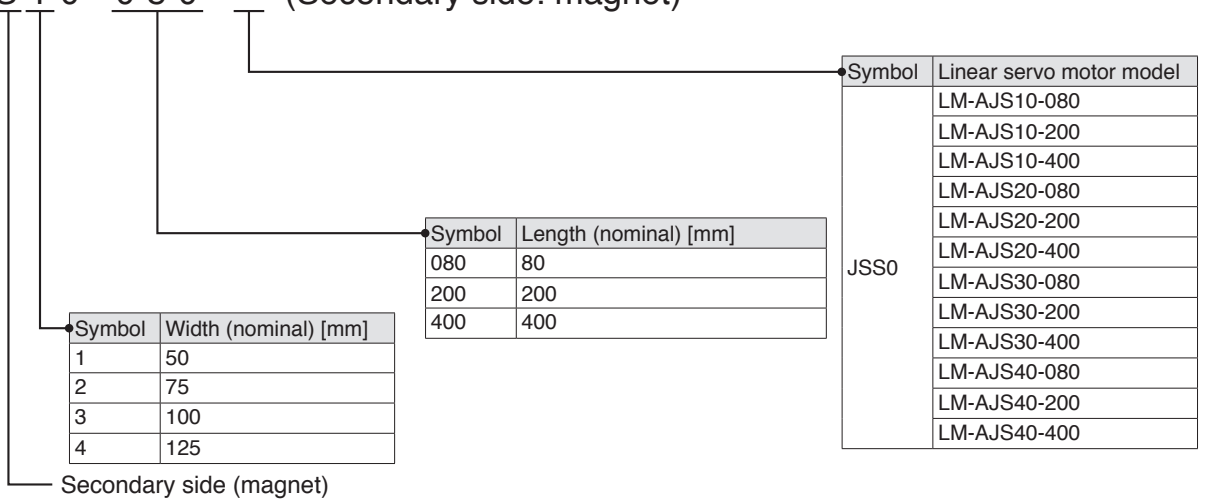


Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.

# Linear Servo Motors


## Model Designation (Note 1)

● LM-F series

LM - FP 2 B - 0 6 M - (Primary side: coil)

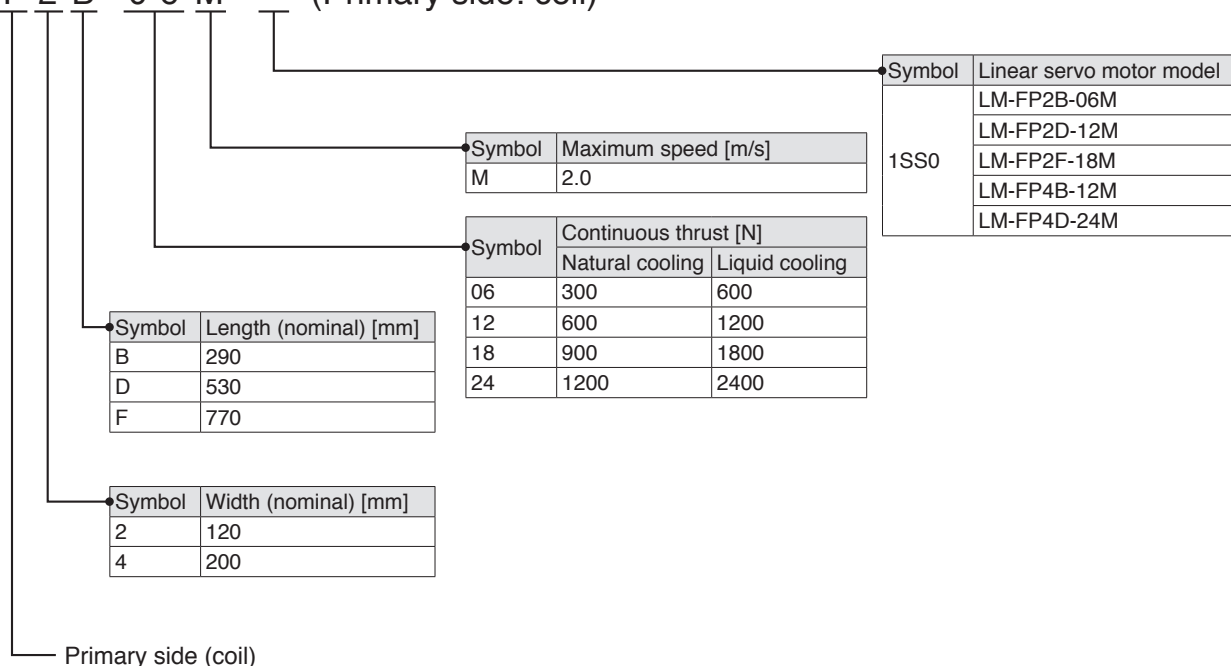

LM - FS 2 0 - 4 8 0 - (Secondary side: magnet)

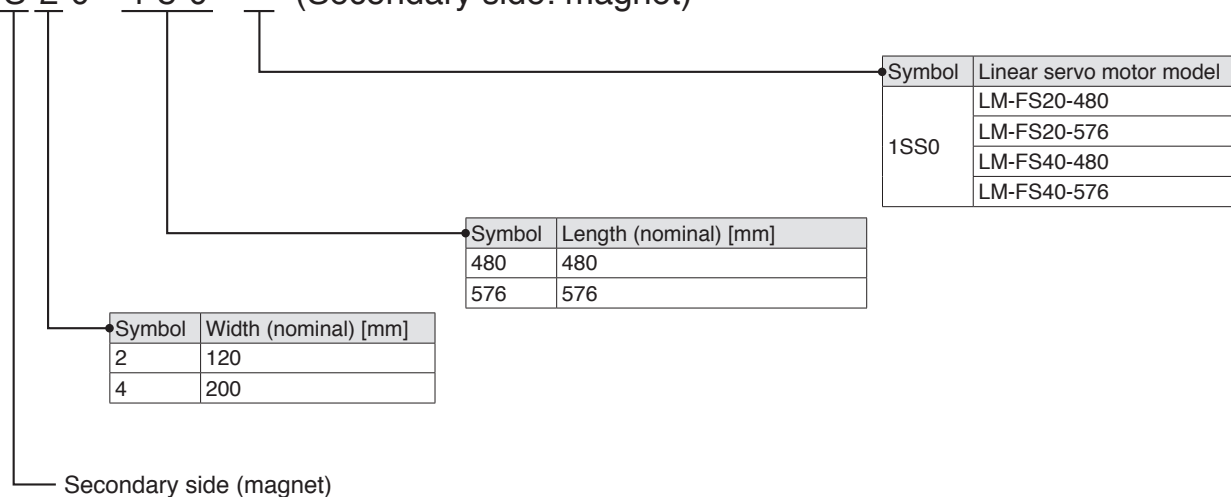


Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.




**Model Designation** (Note 1)

● LM-K2 series

LM - K 2 P 1 A - 0 1 M - (Primary side: coil)

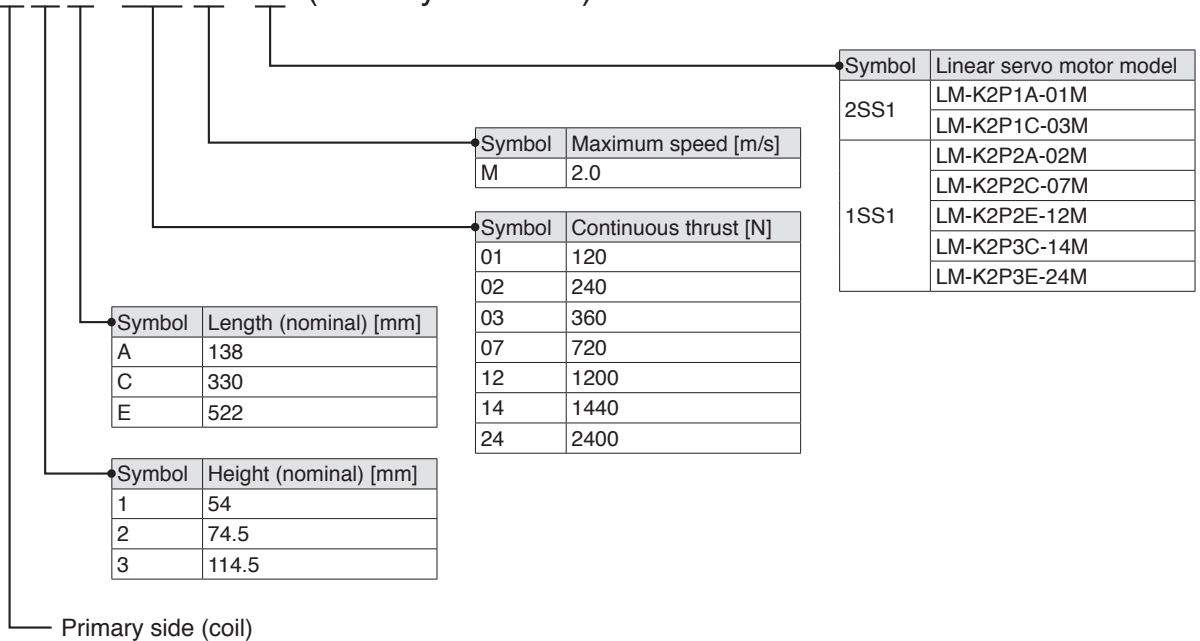

LM - K 2 S 1 0 - 2 8 8 - (Secondary side: magnet)

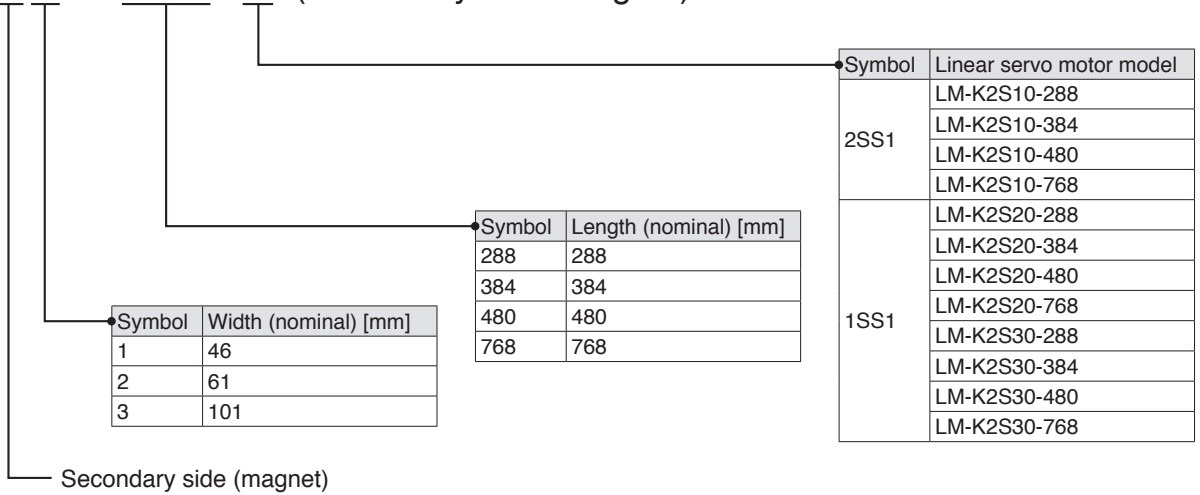


Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.

# Linear Servo Motors


## Model Designation (Note 1)

### ●LM-U2 (medium thrust) series

LM - U 2 P A B - 0 5 M - (Primary side: coil)

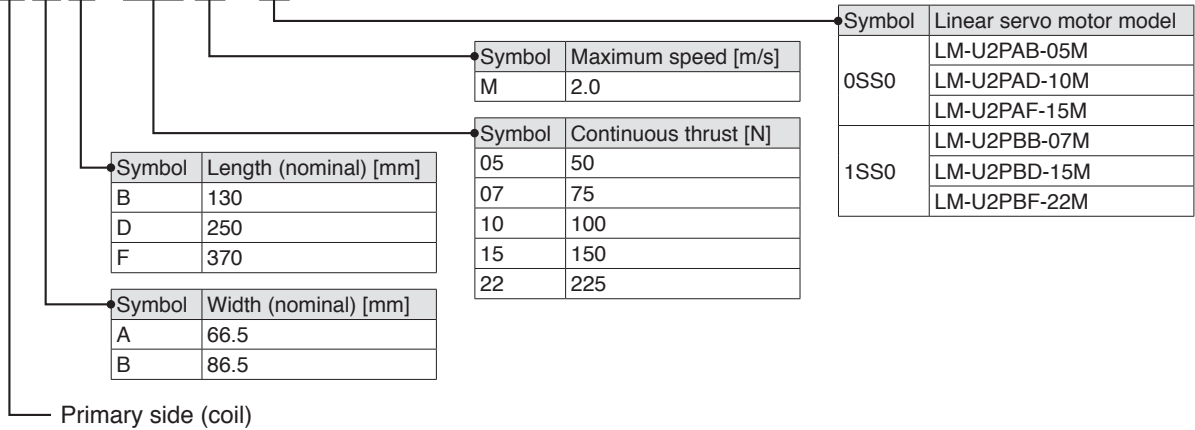


LM - U 2 S A 0 - 2 4 0 - (Secondary side: magnet)

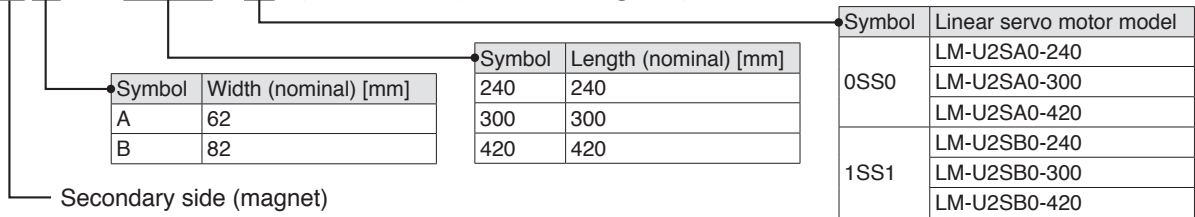


### ●LM-U2 (large thrust) series

LM - U 2 P 2 B - 4 0 M - (Primary side: coil)

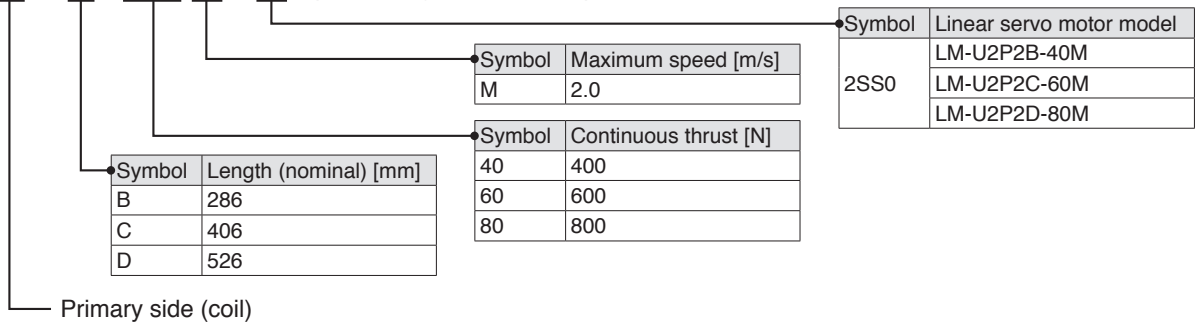

LM - U 2 S 2 0 - 3 0 0 - (Secondary side: magnet)

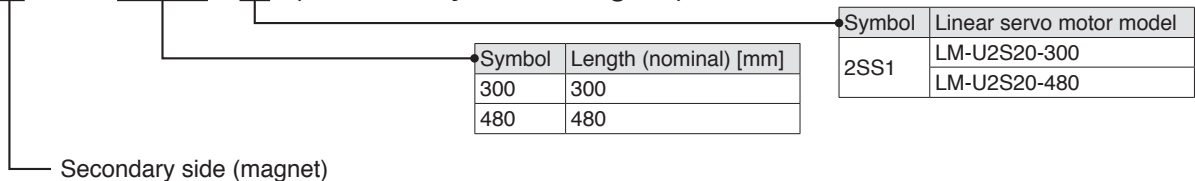


Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.


**Model Designation** (Note 1)

● LM-AU series

LM - A U P 3 A - 0 3 V - (Primary side: coil)

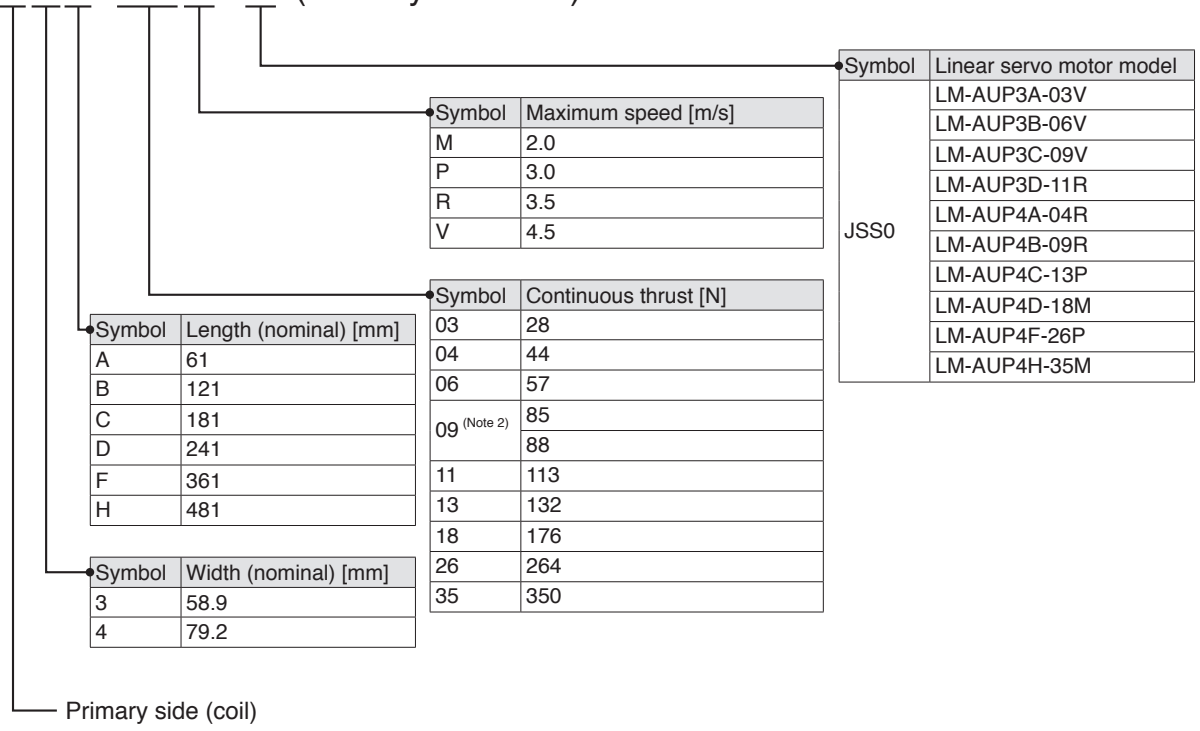

LM - A U S 3 0 - 1 2 0 - (Secondary side: magnet)

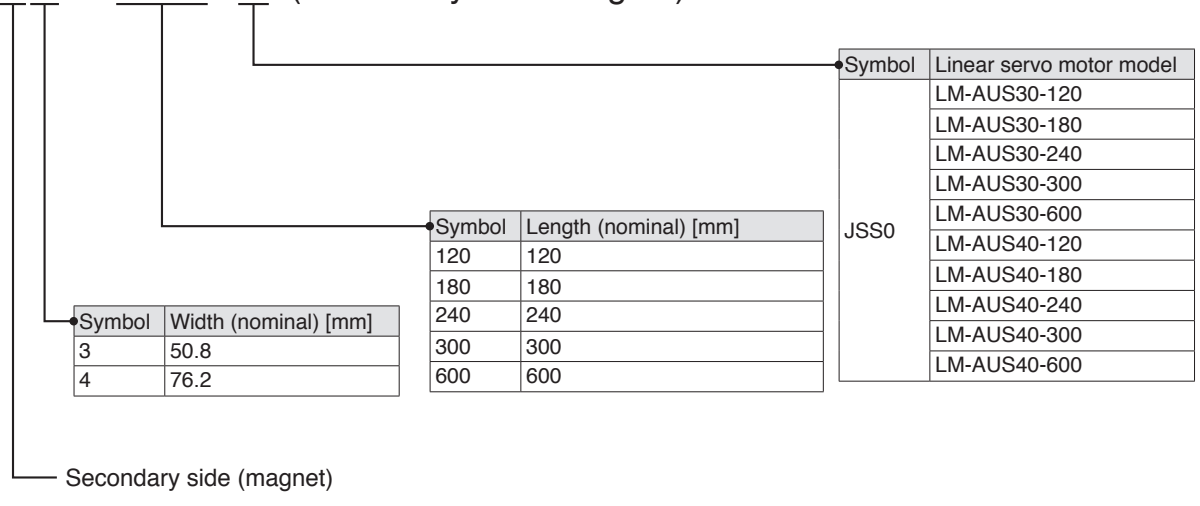

Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.  
 2. The continuous thrust for LM-AUP3C-09V-JSS0 is 85 N.  
 The continuous thrust for LM-AUP4B-09R-JSS0 is 88 N.

# Linear Servo Motors


## LM-H3 Series Specifications

| Linear servo motor model<br>Primary side (coil)             | LM-H3                              | P2A-07P-BSS0   | P3A-12P-CSS0   | P3B-24P-CSS0   | P3C-36P-CSS0 | P3D-48P-CSS0 | P7A-24P-ASS0   | P7B-48P-ASS0   | P7C-72P-ASS0 | P7D-96P-ASS0 |      |
|---|------------------------------------|--|--|--|--------------|--------------|--|--|--------------|--------------|------|
| Linear servo motor model<br>Secondary side (magnet)         | LM-H3                              | S20-288-BSS0<br>S20-384-BSS0<br>S20-480-BSS0<br>S20-768-BSS0 | S30-288-CSS0<br>S30-384-CSS0<br>S30-480-CSS0<br>S30-768-CSS0         |  |              |              | S70-288-ASS0<br>S70-384-ASS0<br>S70-480-ASS0<br>S70-768-ASS0 |  |              |              |      |
| Cooling method  | Natural cooling                    |  |  |  |              |              |  |  |              |              |      |
| Thrust  | Continuous <sup>(Note 2)</sup>     | [N]  | 70   | 120  | 240          | 360          | 480  | 240  | 480          | 720          | 960  |
|   | Maximum                            | [N]  | 175  | 300  | 600          | 900          | 1200   | 600  | 1200         | 1800         | 2400 |
| Maximum speed <sup>(Note 1)</sup>                           | [m/s]                              | 3.0  |  |  |              |              |  |  |              |              |      |
| Magnetic attraction force                                   | [N]                                | 630  | 1100   | 2200   | 3300         | 4400         | 2200   | 4400   | 6600         | 8800         |      |
| Rated current   | [A]                                | 1.8  | 1.7  | 3.4  | 5.1          | 6.8          | 3.4  | 6.8  | 10.2         | 13.6         |      |
| Maximum current   | [A]                                | 5.8  | 5.0  | 9.9  | 14.9         | 19.8         | 9.6  | 19.1   | 28.6         | 38.1         |      |
| Recommended load to motor mass ratio<br><sup>(Note 3)</sup> | 35 times or less                   |  |  |  |              |              |  |  |              |              |      |
| Type  | Permanent magnet synchronous motor |  |  |  |              |              |  |  |              |              |      |
| Thermistor  | Built-in                           |  |  |  |              |              |  |  |              |              |      |
| Insulation class  | 155 (F)                            |  |  |  |              |              |  |  |              |              |      |
| Structure   | Open (IP rating: IP00)             |  |  |  |              |              |  |  |              |              |      |
| Vibration resistance  | [m/s <sup>2</sup> ]                | 49   |  |  |              |              |  |  |              |              |      |
| Mass  | Primary side (coil)                | [kg]   | 0.9  | 1.3  | 2.3          | 3.3          | 4.3  | 2.2  | 3.9          | 5.6          | 7.3  |
|   | Secondary side (magnet)            | [kg]   | 288 mm/pc: 0.7<br>384 mm/pc: 0.9<br>480 mm/pc: 1.1<br>768 mm/pc: 1.8 | 288 mm/pc: 1.0<br>384 mm/pc: 1.4<br>480 mm/pc: 1.7<br>768 mm/pc: 2.7 |              |              |  | 288 mm/pc: 2.8<br>384 mm/pc: 3.7<br>480 mm/pc: 4.7<br>768 mm/pc: 7.4 |              |              |      |


- Notes: 1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.  
2. Use the linear servo motor at 70 % or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.  
3. This is the ratio of the load to the linear servo motor primary side mass. Contact your local sales office if the load to motor mass ratio exceeds the value in the table.

**LM-H3 Series Thrust Characteristics**


LM-H3P2A-07P-BSS0 (Note 1, 2, 3)




LM-H3P3A-12P-CSS0 (Note 1, 2, 3)




LM-H3P3B-24P-CSS0 (Note 1, 2, 3)




LM-H3P3C-36P-CSS0 (Note 1, 2, 3)




LM-H3P3D-48P-CSS0 (Note 1, 2, 3)




LM-H3P7A-24P-ASS0 (Note 1, 2, 3)




LM-H3P7B-48P-ASS0 (Note 1, 2, 3)



LM-H3P7C-72P-ASS0 (Note 1, 2, 3)



LM-H3P7D-96P-ASS0 (Note 1, 3)



- Notes: 1. — : For 3-phase 200 V AC  
 2. - - - : For 1-phase 200 V AC  
 3. Thrust drops when the power supply voltage is below the specified value.

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LV/S/Wires
- Product List
- Precautions
- Support

# Linear Servo Motors


## LM-AJ Series Specifications

| Linear servo motor model<br>Primary side (coil)                 | LM-AJ                              | P1B-<br>07K-JSS0                             | P1D-<br>14K-JSS0                                     | P2B-<br>12S-JSS0                             | P2D-<br>23T-JSS0                                     | P3B-<br>17N-JSS0                             | P3D-<br>35R-JSS0                                     | P4B-<br>22M-JSS0                             | P4D-<br>45N-JSS0                                     |        |
|---|------------------------------------|--|--|--|--|--|--|--|--|--------|
| Linear servo motor model<br>Secondary side (magnet)             | LM-AJ                              | S10-080-JSS0<br>S10-200-JSS0<br>S10-400-JSS0 |  | S20-080-JSS0<br>S20-200-JSS0<br>S20-400-JSS0 |  | S30-080-JSS0<br>S30-200-JSS0<br>S30-400-JSS0 |  | S40-080-JSS0<br>S40-200-JSS0<br>S40-400-JSS0 |  |        |
| Cooling method  | Natural cooling                    |  |  |  |  |  |  |  |  |        |
| Thrust  | Continuous <sup>(Note 2)</sup>     | [N]  | 68.1   | 136.2  | 117.0  | 234.0  | 174.5  | 348.9  | 223.4  | 446.8  |
|   | Maximum                            | [N]  | 214.7  | 429.4  | 369.0  | 738.1  | 550.2  | 1100.4                                       | 704.5  | 1409.1 |
| Maximum speed <sup>(Note 1)</sup>                               | [m/s]                              | 6.5  |  | 4.0  | 5.0  | 2.5  | 3.5  | 2.0  | 2.5  |        |
| Magnetic attraction force                                       | [N]                                | 378.8  | 757.6  | 651.1  | 1302.1   | 970.7  | 1941.4   | 1242.9                                       | 2485.9   |        |
| Rated current   | [A]                                | 2.3  | 4.6  | 2.3  | 4.6  | 2.3  | 4.6  | 2.3  | 4.6  |        |
| Maximum current   | [A]                                | 9.0  | 18.0   | 9.0  | 18.0   | 9.0  | 18.0   | 9.0  | 18.0   |        |
| Recommended load to motor mass ratio<br><small>(Note 3)</small> |                                    | 10 times or less                             | 25 times or less                                     | 20 times or less                             | 25 times or less                                     | 30 times or less                             |  |  |  |        |
| Type  | Permanent magnet synchronous motor |  |  |  |  |  |  |  |  |        |
| Thermistor  | None                               |  |  |  |  |  |  |  |  |        |
| Thermal protector   | Built-in                           |  |  |  |  |  |  |  |  |        |
| Insulation class  | 105 (A)                            |  |  |  |  |  |  |  |  |        |
| Structure   | Open (IP rating: IP00)             |  |  |  |  |  |  |  |  |        |
| Vibration resistance  | [m/s <sup>2</sup> ]                | 49   |  |  |  |  |  |  |  |        |
| Mass  | Primary side (coil)                | [kg]   | 0.6  | 1.1  | 0.9  | 1.7  | 1.2  | 2.3  | 1.5  | 2.9    |
|   | Secondary side (magnet)            | [kg]   | 80 mm/pc: 0.26<br>200 mm/pc: 0.65<br>400 mm/pc: 1.30 |  | 80 mm/pc: 0.40<br>200 mm/pc: 1.00<br>400 mm/pc: 2.00 |  | 80 mm/pc: 0.56<br>200 mm/pc: 1.40<br>400 mm/pc: 2.80 |  | 80 mm/pc: 0.70<br>200 mm/pc: 1.70<br>400 mm/pc: 3.50 |        |


- Notes: 1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.  
2. Use the linear servo motor at 70 % or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.  
3. This is the ratio of the load to the linear servo motor primary side mass. Contact your local sales office if the load to motor mass ratio exceeds the value in the table.

LM-AJ Series Thrust Characteristics


LM-AJP1B-07K-JSS0 (Note 1, 2, 3)




LM-AJP1D-14K-JSS0 (Note 1, 2, 3)




LM-AJP2B-12S-JSS0 (Note 1, 2, 3)




LM-AJP2D-23T-JSS0 (Note 1, 2, 3)




LM-AJP3B-17N-JSS0 (Note 1, 2, 3)




LM-AJP3D-35R-JSS0 (Note 1, 2, 3)



LM-AJP4B-22M-JSS0 (Note 1, 2, 3)



LM-AJP4D-45N-JSS0 (Note 1, 2, 3)



- Notes: 1. : For 3-phase 200 V AC  
 2. Contact your local sales office for the thrust characteristics for 1-phase 200 V AC.  
 3. Thrust drops when the power supply voltage is below the specified value.

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LVSWires
- Product List
- Precautions
- Support

# Linear Servo Motors

## LM-F Series Specifications


|   |   |                                    |                                  |              |              |                                |              |
|---|---|------------------------------------|----------------------------------|--------------|--------------|--------------------------------|--------------|
| Linear servo motor model<br>Primary side (coil)                 |   | LM-F                               | P2B-06M-1SS0                     | P2D-12M-1SS0 | P2F-18M-1SS0 | P4B-12M-1SS0                   | P4D-24M-1SS0 |
| Linear servo motor model<br>Secondary side (magnet)             |   | LM-F                               | S20-480-1SS0<br>S20-576-1SS0     |              |              | S40-480-1SS0<br>S40-576-1SS0   |              |
| Cooling method  |   | Natural cooling or liquid cooling  |                                  |              |              |                                |              |
| Thrust  | Continuous<br>(natural cooling) <small>(Note 2)</small> | [N]                                | 300                              | 600          | 900          | 600                            | 1200         |
|   | Continuous<br>(liquid cooling) <small>(Note 2)</small>  | [N]                                | 600                              | 1200         | 1800         | 1200                           | 2400         |
|   | Maximum   | [N]                                | 1800                             | 3600         | 5400         | 3600                           | 7200         |
| Maximum speed <small>(Note 1)</small>                           |   | [m/s]                              | 2.0                              |              |              |                                |              |
| Magnetic attraction force                                       |   | [N]                                | 4500                             | 9000         | 13500        | 9000                           | 18000        |
| Rated current   | Natural cooling   | [A]                                | 4.0                              | 7.8          | 12           | 7.8                            | 15           |
|   | Liquid cooling  | [A]                                | 7.8                              | 16           | 23           | 17                             | 31           |
| Maximum current   |   | [A]                                | 30                               | 58           | 87           | 57                             | 109          |
| Recommended load to motor mass ratio<br><small>(Note 3)</small> |   | 15 times or less                   |                                  |              |              |                                |              |
| Type  |   | Permanent magnet synchronous motor |                                  |              |              |                                |              |
| Thermistor  |   | Built-in                           |                                  |              |              |                                |              |
| Insulation class  |   | 155 (F)                            |                                  |              |              |                                |              |
| Structure   |   | Open (IP rating: IP00)             |                                  |              |              |                                |              |
| Vibration resistance  |   | [m/s <sup>2</sup> ]                | 49                               |              |              |                                |              |
| Mass  | Primary side (coil)                                     | [kg]                               | 9.0                              | 18           | 27           | 14                             | 28           |
|   | Secondary side (magnet)                                 | [kg]                               | 480 mm/pc: 7.0<br>576 mm/pc: 9.0 |              |              | 480 mm/pc: 12<br>576 mm/pc: 15 |              |

- Notes:
1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.
  2. Use the linear servo motor at 70 % or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.
  3. This is the ratio of the load to the linear servo motor primary side mass. Contact your local sales office if the load to motor mass ratio exceeds the value in the table.




**LM-F Series Thrust Characteristics**


LM-FP2B-06M-1SS0 (Note 1, 2, 3)




LM-FP2D-12M-1SS0 (Note 1, 3)




LM-FP2F-18M-1SS0 (Note 1, 3)



LM-FP4B-12M-1SS0 (Note 1, 3)



LM-FP4D-24M-1SS0 (Note 1, 3)



- Notes:
1. : For 3-phase 200 V AC
  2. : For 1-phase 200 V AC
  3. Thrust drops when the power supply voltage is below the specified value.
  4. Continuous running range (liquid cooling)
  5. Continuous running range (natural cooling)

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LV/S/Wires
- Product List
- Precautions
- Support

# Linear Servo Motors


## LM-K2 Series Specifications

|   |                                    |  |  |  |  |  |   |                  |      |
|---|------------------------------------|--|--|--|--|--|---|------------------|------|
| Linear servo motor model<br>Primary side (coil)                         | LM-K2                              | P1A-01M-<br>2SS1   | P1C-03M-<br>2SS1   | P2A-02M-<br>1SS1   | P2C-07M-<br>1SS1   | P2E-12M-<br>1SS1   | P3C-14M-<br>1SS1  | P3E-24M-<br>1SS1 |      |
| Linear servo motor model<br>Secondary side (magnet) <sup>(Note 2)</sup> | LM-K2                              | S10-288-2SS1<br>S10-384-2SS1<br>S10-480-2SS1<br>S10-768-2SS1 |  | S20-288-1SS1<br>S20-384-1SS1<br>S20-480-1SS1<br>S20-768-1SS1 |  | S30-288-1SS1<br>S30-384-1SS1<br>S30-480-1SS1<br>S30-768-1SS1 |   |                  |      |
| Cooling method  | Natural cooling                    |  |  |  |  |  |   |                  |      |
| Thrust  | Continuous <sup>(Note 3)</sup>     | [N]  | 120  | 360  | 240  | 720  | 1200  | 1440             | 2400 |
|   | Maximum                            | [N]  | 300  | 900  | 600  | 1800   | 3000  | 3600             | 6000 |
| Maximum speed <sup>(Note 1)</sup>                                       | [m/s]                              | 2.0  |  |  |  |  |   |                  |      |
| Magnetic attraction force <sup>(Note 4)</sup>                           | [N]                                | 0  |  |  |  |  |   |                  |      |
| Magnetic attraction force<br>(one side) <sup>(Note 5)</sup>             | [N]                                | 800  | 2400   | 1100   | 3200   | 5300   | 6400  | 10700            |      |
| Rated current   | [A]                                | 2.3  | 6.8  | 3.7  | 12   | 19   | 15  | 25               |      |
| Maximum current   | [A]                                | 7.6  | 23   | 13   | 39   | 65   | 47  | 79               |      |
| Recommended load to motor mass ratio<br><sup>(Note 6)</sup>             | 30 times or less                   |  |  |  |  |  |   |                  |      |
| Type  | Permanent magnet synchronous motor |  |  |  |  |  |   |                  |      |
| Thermistor  | Built-in                           |  |  |  |  |  |   |                  |      |
| Insulation class  | 155 (F)                            |  |  |  |  |  |   |                  |      |
| Structure   | Open (IP rating: IP00)             |  |  |  |  |  |   |                  |      |
| Vibration resistance  | [m/s <sup>2</sup> ]                | 49   |  |  |  |  |   |                  |      |
| Mass  | Primary side (coil)                | [kg]   | 2.5  | 6.5  | 4.0  | 10   | 16  | 18               | 27   |
|   | Secondary side (magnet)            | [kg]   | 288 mm/pc: 1.5<br>384 mm/pc: 2.0<br>480 mm/pc: 2.5<br>768 mm/pc: 3.9 |  | 288 mm/pc: 1.9<br>384 mm/pc: 2.5<br>480 mm/pc: 3.2<br>768 mm/pc: 5.0 |  | 288 mm/pc: 5.5<br>384 mm/pc: 7.3<br>480 mm/pc: 9.2<br>768 mm/pc: 14.6 |                  |      |


- Notes:
1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.
  2. LM-K2 series has a structure of magnetic attraction counter-force and requires at least two blocks of identical secondary side (magnet).
  3. Use the linear servo motor at 70 % or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.
  4. Magnetic attraction force is caused by assembly precision, etc.
  5. Magnetic attraction force which occurs on one side of the secondary side is shown.
  6. This is the ratio of the load to the linear servo motor primary side mass. Contact your local sales office if the load to motor mass ratio exceeds the value in the table.

LM-K2 Series Thrust Characteristics


LM-K2P1A-01M-2SS1 (Note 1, 4)




LM-K2P1C-03M-2SS1 (Note 2, 3, 4)




LM-K2P2A-02M-1SS1 (Note 1, 4)




LM-K2P2C-07M-1SS1 (Note 2, 4)




LM-K2P2E-12M-1SS1 (Note 2, 4)



LM-K2P3C-14M-1SS1 (Note 2, 4)



LM-K2P3E-24M-1SS1 (Note 2, 4)



- Notes: 1. : For 3-phase 200 V AC or 1-phase 200 V AC  
 2. : For 3-phase 200 V AC  
 3. : For 1-phase 200 V AC  
 4. Thrust drops when the power supply voltage is below the specified value.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Linear Servo Motors


## LM-U2 Series Specifications

|  |                                    |  |  |              |  |  |              |                              |                                   |              |      |
|--|------------------------------------|--|--|--------------|--|--|--------------|------------------------------|-----------------------------------|--------------|------|
| Linear servo motor model<br>Primary side (coil)          | LM-U2                              | PAB-05M-0SS0                                 | PAD-10M-0SS0                                       | PAF-15M-0SS0 | PBB-07M-1SS0                                 | PBD-15M-1SS0                                       | PBF-22M-1SS0 | P2B-40M-2SS0                 | P2C-60M-2SS0                      | P2D-80M-2SS0 |      |
| Linear servo motor model<br>Secondary side (magnet)      | LM-U2                              | SA0-240-0SS0<br>SA0-300-0SS0<br>SA0-420-0SS0 |  |              | SB0-240-1SS1<br>SB0-300-1SS1<br>SB0-420-1SS1 |  |              | S20-300-2SS1<br>S20-480-2SS1 |                                   |              |      |
| Cooling method   | Natural cooling                    |  |  |              |  |  |              |                              |                                   |              |      |
| Thrust   | Continuous <sup>(Note 2)</sup>     | [N]  | 50   | 100          | 150  | 75   | 150          | 225                          | 400                               | 600          | 800  |
|  | Maximum                            | [N]  | 150  | 300          | 450  | 225  | 450          | 675                          | 1600                              | 2400         | 3200 |
| Maximum speed <sup>(Note 1)</sup>                        | [m/s]                              | 2.0  |  |              |  |  |              |                              |                                   |              |      |
| Magnetic attraction force                                | [N]                                | 0  |  |              |  |  |              |                              |                                   |              |      |
| Rated current  | [A]                                | 0.9  | 1.9  | 2.7          | 1.5  | 3.0  | 4.6          | 6.6                          | 9.8                               | 13.1         |      |
| Maximum current  | [A]                                | 2.7  | 5.5  | 8.3          | 4.5  | 8.9  | 13.7         | 26.7                         | 40.3                              | 53.7         |      |
| Recommended load to motor mass ratio <sup>(Note 3)</sup> | 30 times or less                   |  |  |              |  |  |              |                              |                                   |              |      |
| Type   | Permanent magnet synchronous motor |  |  |              |  |  |              |                              |                                   |              |      |
| Thermistor   | Built-in                           |  |  |              |  |  |              |                              |                                   |              |      |
| Insulation class   | 155 (F)                            |  |  |              |  |  |              |                              |                                   |              |      |
| Structure  | Open (IP rating: IP00)             |  |  |              |  |  |              |                              |                                   |              |      |
| Vibration resistance                                     | [m/s <sup>2</sup> ]                | 49   |  |              |  |  |              |                              |                                   |              |      |
| Mass   | Primary side (coil)                | [kg]   | 0.3  | 0.6          | 0.8  | 0.4  | 0.8          | 1.1                          | 2.9                               | 4.2          | 5.5  |
|  | Secondary side (magnet)            | [kg]   | 240 mm/pc: 2.0<br>300 mm/pc: 2.5<br>420 mm/pc: 3.5 |              |  | 240 mm/pc: 2.6<br>300 mm/pc: 3.2<br>420 mm/pc: 4.5 |              |                              | 300 mm/pc: 9.6<br>480 mm/pc: 15.3 |              |      |


- Notes: 1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.  
2. Use the linear servo motor at 70 % or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.  
3. This is the ratio of the load to the linear servo motor primary side mass. Contact your local sales office if the load to motor mass ratio exceeds the value in the table.

LM-U2 Series Thrust Characteristics


LM-U2PAB-05M-0SS0 (Note 1, 4)




LM-U2PAD-10M-0SS0 (Note 1, 4)




LM-U2PAF-15M-0SS0 (Note 1, 4)




LM-U2PBB-07M-1SS0 (Note 1, 4)




LM-U2PBD-15M-1SS0 (Note 1, 4)




LM-U2PBF-22M-1SS0 (Note 1, 4)




LM-U2P2B-40M-2SS0 (Note 2, 3, 4)



LM-U2P2C-60M-2SS0 (Note 2, 4)



LM-U2P2D-80M-2SS0 (Note 2, 4)



- Notes: 1. : For 3-phase 200 V AC or 1-phase 200 V AC  
 2. : For 3-phase 200 V AC  
 3. : For 1-phase 200 V AC  
 4. Thrust drops when the power supply voltage is below the specified value.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List

Precautions

Support

# Linear Servo Motors

## LM-AU Series Specifications


|   |                                    |  |  |              |                  |
|---|------------------------------------|--|--|--------------|------------------|
| Linear servo motor model<br>Primary side (coil)             | LM-AU                              | P3A-03V-JSS0   | P3B-06V-JSS0   | P3C-09V-JSS0 | P3D-11R-JSS0     |
| Linear servo motor model<br>Secondary side (magnet)         | LM-AU                              | S30-120-JSS0<br>S30-180-JSS0<br>S30-240-JSS0<br>S30-300-JSS0<br>S30-600-JSS0 |  |              |                  |
| Cooling method  | Natural cooling                    |  |  |              |                  |
| Thrust  | Continuous <sup>(Note 2)</sup>     | [N] 28   | 57   | 85           | 113              |
|   | Maximum                            | [N] 122  | 274  | 411          | 549              |
| Maximum speed <sup>(Note 1)</sup>                           | [m/s]                              | 4.5  |  |              | 3.5              |
| Magnetic attraction force                                   | [N]                                | 0  |  |              |                  |
| Rated current   | [A]                                | 1.8  |  |              |                  |
| Maximum current   | [A]                                | 9.2  |  |              |                  |
| Recommended load to motor mass ratio<br><sup>(Note 3)</sup> | 35 times or less                   |  | 25 times or less   |              | 20 times or less |
| Type  | Permanent magnet synchronous motor |  |  |              |                  |
| Thermistor  | None                               |  |  |              |                  |
| Thermal protector   | Built-in                           |  |  |              |                  |
| Insulation class  | 105 (A)                            |  |  |              |                  |
| Structure   | Open (IP rating: IP00)             |  |  |              |                  |
| Vibration resistance  | [m/s <sup>2</sup> ]                | 49   |  |              |                  |
| Mass  | Primary side (coil)                | [kg] 0.22  | 0.45   | 0.68         | 0.91             |
|   | Secondary side (magnet)            | [kg]   | 120 mm/pc: 1.0<br>180 mm/pc: 1.5<br>240 mm/pc: 2.0<br>300 mm/pc: 2.5<br>600 mm/pc: 5.0 |              |                  |

|   |                                    |  |  |              |              |              |              |
|---|------------------------------------|--|--|--------------|--------------|--------------|--------------|
| Linear servo motor model<br>Primary side (coil)             | LM-AU                              | P4A-04R-JSS0   | P4B-09R-JSS0   | P4C-13P-JSS0 | P4D-18M-JSS0 | P4F-26P-JSS0 | P4H-35M-JSS0 |
| Linear servo motor model<br>Secondary side (magnet)         | LM-AU                              | S40-120-JSS0<br>S40-180-JSS0<br>S40-240-JSS0<br>S40-300-JSS0<br>S40-600-JSS0 |  |              |              |              |              |
| Cooling method  | Natural cooling                    |  |  |              |              |              |              |
| Thrust  | Continuous <sup>(Note 2)</sup>     | [N] 44   | 88   | 132          | 176          | 264          | 350          |
|   | Maximum                            | [N] 280  | 561  | 842          | 970          | 1684         | 1764         |
| Maximum speed <sup>(Note 1)</sup>                           | [m/s]                              | 3.5  |  | 3.0          | 2.0          | 3.0          | 2.0          |
| Magnetic attraction force                                   | [N]                                | 0  |  |              |              |              |              |
| Rated current   | [A]                                | 1.9  |  |              |              | 3.7          |              |
| Maximum current   | [A]                                | 13.0   |  |              |              | 26.0         |              |
| Recommended load to motor mass ratio<br><sup>(Note 3)</sup> | 35 times or less                   |  |  |              |              |              |              |
| Type  | Permanent magnet synchronous motor |  |  |              |              |              |              |
| Thermistor  | None                               |  |  |              |              |              |              |
| Thermal protector   | Built-in                           |  |  |              |              |              |              |
| Insulation class  | 105 (A)                            |  |  |              |              |              |              |
| Structure   | Open (IP rating: IP00)             |  |  |              |              |              |              |
| Vibration resistance  | [m/s <sup>2</sup> ]                | 49   |  |              |              |              |              |
| Mass  | Primary side (coil)                | [kg] 0.28  | 0.56   | 0.89         | 1.2          | 1.8          | 2.4          |
|   | Secondary side (magnet)            | [kg]   | 120 mm/pc: 1.8<br>180 mm/pc: 2.7<br>240 mm/pc: 3.6<br>300 mm/pc: 4.5<br>600 mm/pc: 8.9 |              |              |              |              |


- Notes: 1. The maximum speed of the linear servo motor or the rated speed of the linear encoder, whichever is smaller, is the upper limit of the linear servo motor speed.  
2. Use the linear servo motor at 70 % or less of the effective load ratio when it is in the servo lock state or in a small reciprocating motion.  
3. This is the ratio of the load to the linear servo motor primary side mass. Contact your local sales office if the load to motor mass ratio exceeds the value in the table.

LM-AU Series Thrust Characteristics


LM-AUP3A-03V-JSS0 (Note 1, 2, 3)




LM-AUP3B-06V-JSS0 (Note 1, 2, 3)




LM-AUP3C-09V-JSS0 (Note 1, 2, 3)




LM-AUP3D-11R-JSS0 (Note 1, 2, 3)




LM-AUP4A-04R-JSS0 (Note 1, 2, 3)




LM-AUP4B-09R-JSS0 (Note 1, 2, 3)




LM-AUP4C-13P-JSS0 (Note 1, 2, 3)




LM-AUP4D-18M-JSS0 (Note 1, 2, 3)



LM-AUP4F-26P-JSS0 (Note 1, 2, 3)



LM-AUP4H-35M-JSS0 (Note 1, 2, 3)



- Notes: 1. : For 3-phase 200 V AC  
 2. Contact your local sales office for the thrust characteristics for 1-phase 200 V AC.  
 3. Thrust drops when the power supply voltage is below the specified value.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List

Precautions

Support

# Linear Servo Motors

## Power Supply Capacity

| Linear servo motors (primary side) |                   | Servo amplifier <sup>(Note 3)</sup>                                      | Power supply capacity [kVA] <sup>(Note 1, 2)</sup> |
|------------------------------------|-------------------|--|--|
| LM-H3 series                       | LM-H3P2A-07P-BSS0 | MR-J5-40G/B/A<br>MR-J5W2-44G/B, MR-J5W2-77G/B                            | 0.9  |
|                                    | LM-H3P3A-12P-CSS0 | MR-J5W2-1010G/B<br>MR-J5W3-444G/B  |  |
|                                    | LM-H3P3B-24P-CSS0 | MR-J5-70G/B/A  | 1.3  |
|                                    | LM-H3P3C-36P-CSS0 | MR-J5W2-77G/B, MR-J5W2-1010G/B   | 1.9  |
|                                    | LM-H3P3D-48P-CSS0 | MR-J5-200G/B/A   | 3.5  |
|                                    | LM-H3P7A-24P-ASS0 | MR-J5-70G/B/A<br>MR-J5W2-77G/B, MR-J5W2-1010G/B                          | 1.3  |
|                                    | LM-H3P7B-48P-ASS0 | MR-J5-200G/B/A   | 3.5  |
|                                    | LM-H3P7C-72P-ASS0 |  | 3.8  |
| LM-H3P7D-96P-ASS0                  | MR-J5-350G/B/A    | 5.5  |  |
| LM-AJ series                       | LM-AJP1B-07K-JSS0 | MR-J5-40G/A<br>MR-J5W2-44G, MR-J5W2-77G<br>MR-J5W2-1010G<br>MR-J5W3-444G | 0.9  |
|                                    | LM-AJP1D-14K-JSS0 | MR-J5-70G/A<br>MR-J5W2-77G, MR-J5W2-1010G                                | 1.3  |
|                                    | LM-AJP2B-12S-JSS0 | MR-J5-40G/A<br>MR-J5W2-44G, MR-J5W2-77G<br>MR-J5W2-1010G<br>MR-J5W3-444G | 0.9  |
|                                    | LM-AJP2D-23T-JSS0 | MR-J5-70G/A<br>MR-J5W2-77G, MR-J5W2-1010G                                | 1.3  |
|                                    | LM-AJP3B-17N-JSS0 | MR-J5-40G/A<br>MR-J5W2-44G, MR-J5W2-77G<br>MR-J5W2-1010G<br>MR-J5W3-444G | 0.9  |
|                                    | LM-AJP3D-35R-JSS0 | MR-J5-70G/A<br>MR-J5W2-77G, MR-J5W2-1010G                                | 1.3  |
|                                    | LM-AJP4B-22M-JSS0 | MR-J5-40G/A<br>MR-J5W2-44G, MR-J5W2-77G<br>MR-J5W2-1010G<br>MR-J5W3-444G | 0.9  |
|                                    | LM-AJP4D-45N-JSS0 | MR-J5-70G/A<br>MR-J5W2-77G, MR-J5W2-1010G                                | 1.3  |

Notes: 1. The power supply capacity varies depending on the power supply impedance.

2. The listed values are the power supply capacity for one servo motor. For the multi-axis servo amplifiers, calculate the power supply capacity with the equation below:  
Power supply capacity [kVA] = Sum of power supply capacity [kVA] of the connected servo motors

3. Note that the power supply capacity for servo amplifiers with special specifications is the same as that for standard servo amplifiers. Refer to the servo amplifiers with the same rated output.



Power Supply Capacity

| Linear servo motors (primary side) |                   | Servo amplifier <sup>(Note 3)</sup>  | Power supply capacity [kVA] <sup>(Note 1, 2)</sup> |
|------------------------------------|-------------------|--|--|
| LM-F series                        | LM-FP2B-06M-1SS0  | MR-J5-200G/B/A   | 3.5  |
|                                    | LM-FP2D-12M-1SS0  | MR-J5-500G/B/A   | 7.5  |
|                                    | LM-FP2F-18M-1SS0  | MR-J5-700G/B/A   | 10   |
|                                    | LM-FP4B-12M-1SS0  | MR-J5-500G/B/A   | 7.5  |
|                                    | LM-FP4D-24M-1SS0  | MR-J5-700G/B/A   | 10   |
| LM-K2 series                       | LM-K2P1A-01M-2SS1 | MR-J5-40G/B/A<br>MR-J5W2-44G/B, MR-J5W2-77G/B<br>MR-J5W2-1010G/B<br>MR-J5W3-444G/B | 0.9  |
|                                    | LM-K2P1C-03M-2SS1 | MR-J5-200G/B/A   | 3.5  |
|                                    | LM-K2P2A-02M-1SS1 | MR-J5-70G/B/A<br>MR-J5W2-77G/B, MR-J5W2-1010G/B                                    | 1.3  |
|                                    | LM-K2P2C-07M-1SS1 | MR-J5-350G/B/A   | 5.5  |
|                                    | LM-K2P2E-12M-1SS1 | MR-J5-500G/B/A   | 7.5  |
|                                    | LM-K2P3C-14M-1SS1 | MR-J5-350G/B/A   | 5.5  |
|                                    | LM-K2P3E-24M-1SS1 | MR-J5-500G/B/A   | 7.5  |
| LM-U2 series                       | LM-U2PAB-05M-0SS0 | MR-J5-20G/B/A<br>MR-J5W2-22G/B, MR-J5W2-44G/B<br>MR-J5W3-222G/B, MR-J5W3-444G/B    | 0.5  |
|                                    | LM-U2PAD-10M-0SS0 | MR-J5-40G/B/A<br>MR-J5W2-44G/B, MR-J5W2-77G/B<br>MR-J5W2-1010G/B<br>MR-J5W3-444G/B | 0.9  |
|                                    | LM-U2PAF-15M-0SS0 | MR-J5-20G/B/A<br>MR-J5W2-22G/B, MR-J5W2-44G/B<br>MR-J5W3-222G/B, MR-J5W3-444G/B    | 0.5  |
|                                    | LM-U2PBB-07M-1SS0 | MR-J5-60G/B/A<br>MR-J5W2-77G/B, MR-J5W2-1010G/B                                    | 1.0  |
|                                    | LM-U2PBD-15M-1SS0 | MR-J5-70G/B/A<br>MR-J5W2-77G/B, MR-J5W2-1010G/B                                    | 1.3  |
|                                    | LM-U2P2B-40M-2SS0 | MR-J5-200G/B/A   | 3.5  |
|                                    | LM-U2P2C-60M-2SS0 | MR-J5-350G/B/A   | 5.5  |
|                                    | LM-U2P2D-80M-2SS0 | MR-J5-500G/B/A   | 7.5  |
|                                    | LM-AU series      | LM-AUP3A-03V-JSS0  | MR-J5-40G/A  |
| LM-AUP3B-06V-JSS0                  |                   | MR-J5W2-44G, MR-J5W2-77G   |  |
| LM-AUP3C-09V-JSS0                  |                   | MR-J5W2-1010G  | 1.2  |
| LM-AUP3D-11R-JSS0                  |                   | MR-J5W3-444G   |  |
| LM-AUP4A-04R-JSS0                  |                   | MR-J5-70G/A<br>MR-J5W2-77G, MR-J5W2-1010G  | 1.3  |
| LM-AUP4B-09R-JSS0                  |                   |  |  |
| LM-AUP4C-13P-JSS0                  |                   |  |  |
| LM-AUP4D-18M-JSS0                  |                   |  |  |
| LM-AUP4F-26P-JSS0                  |                   | MR-J5-200G/A   | 3.5  |
| LM-AUP4H-35M-JSS0                  |                   |  |  |


- Notes: 1. The power supply capacity varies depending on the power supply impedance.  
 2. The listed values are the power supply capacity for one servo motor. For the multi-axis servo amplifiers, calculate the power supply capacity with the equation below:  
 Power supply capacity [kVA] = Sum of power supply capacity [kVA] of the connected servo motors  
 3. Note that the power supply capacity for servo amplifiers with special specifications is the same as that for standard servo amplifiers. Refer to the servo amplifiers with the same rated output.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Linear Servo Motors

## LM-H3 Series Primary Side (Coil) Dimensions (Note 1, 2)

### ●LM-H3P2A-07P-BSS0

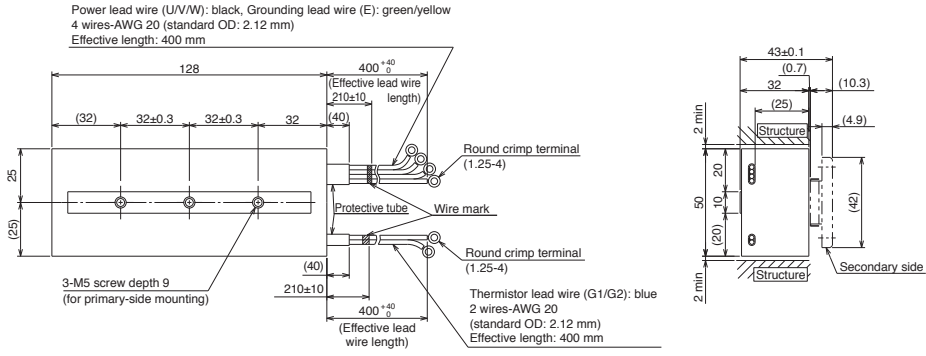


[Unit: mm]

### ●LM-H3P3A-12P-CSS0

### ●LM-H3P3B-24P-CSS0

### ●LM-H3P3C-36P-CSS0

### ●LM-H3P3D-48P-CSS0

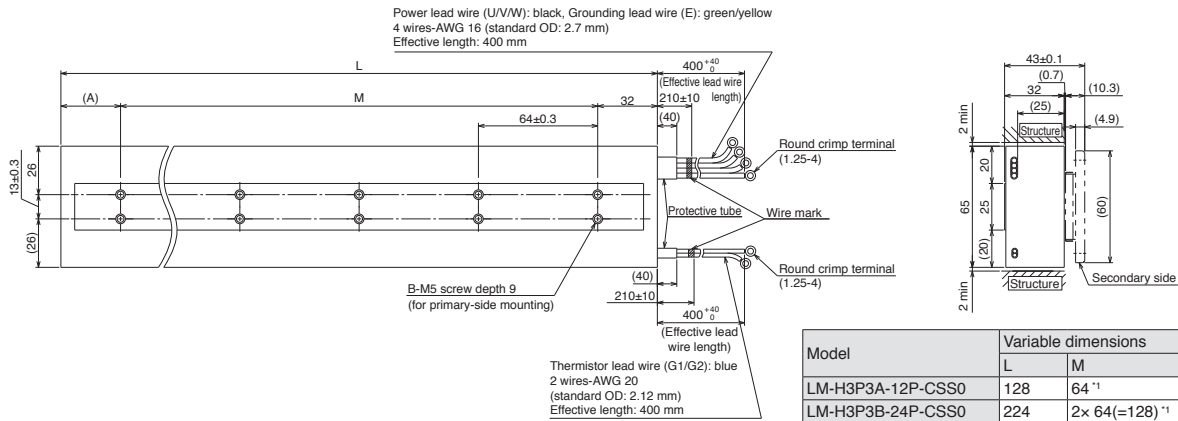

| Model             | Variable dimensions |                           |    |    |
|-------------------|---------------------|---------------------------|----|----|
|                   | L                   | M                         | A  | B  |
| LM-H3P3A-12P-CSS0 | 128                 | 64 <sup>*1</sup>          | 32 | 4  |
| LM-H3P3B-24P-CSS0 | 224                 | 2× 64(=128) <sup>*1</sup> | 64 | 6  |
| LM-H3P3C-36P-CSS0 | 320                 | 4× 64(=256) <sup>*1</sup> | 32 | 10 |
| LM-H3P3D-48P-CSS0 | 416                 | 5× 64(=320) <sup>*1</sup> | 64 | 12 |


\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

### ●LM-H3P7A-24P-ASS0

### ●LM-H3P7B-48P-ASS0

### ●LM-H3P7C-72P-ASS0

### ●LM-H3P7D-96P-ASS0

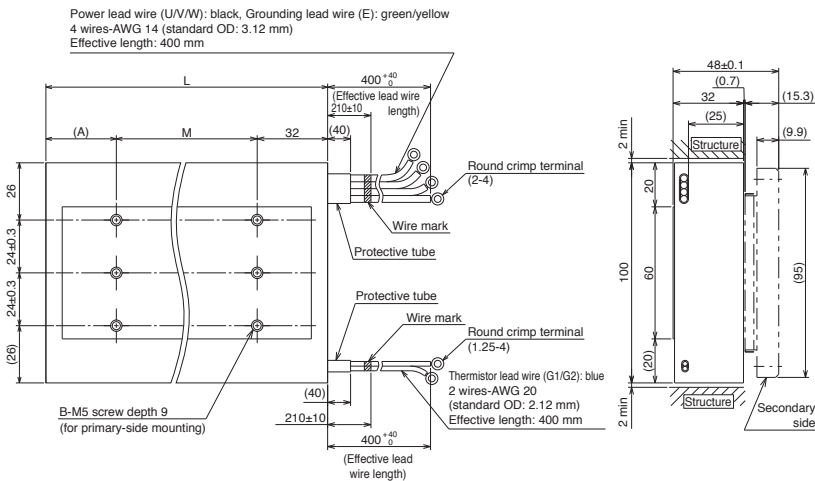

| Model             | Variable dimensions |                           |    |    |
|-------------------|---------------------|---------------------------|----|----|
|                   | L                   | M                         | A  | B  |
| LM-H3P7A-24P-ASS0 | 128                 | 64 <sup>*1</sup>          | 32 | 6  |
| LM-H3P7B-48P-ASS0 | 224                 | 2× 64(=128) <sup>*1</sup> | 64 | 9  |
| LM-H3P7C-72P-ASS0 | 320                 | 4× 64(=256) <sup>*1</sup> | 32 | 15 |
| LM-H3P7D-96P-ASS0 | 416                 | 5× 64(=320) <sup>*1</sup> | 64 | 18 |


\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

Notes: 1. Power, grounding, and thermistor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.

5-22 2. Minimum bending radius of the lead wire equals to six times the standard overall diameter of the lead wire.

LM-H3 Series Secondary Side (Magnet) Dimensions


- LM-H3S20-288-BSS0
- LM-H3S20-384-BSS0
- LM-H3S20-480-BSS0
- LM-H3S20-768-BSS0

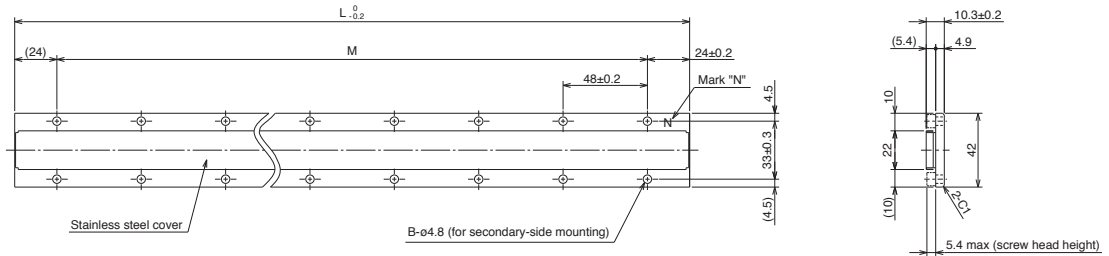

| Model             | Variable dimensions |                  |    |
|-------------------|---------------------|------------------|----|
|                   | L                   | M                | B  |
| LM-H3S20-288-BSS0 | 288                 | 5 × 48(=240) *1  | 12 |
| LM-H3S20-384-BSS0 | 384                 | 7 × 48(=336) *1  | 16 |
| LM-H3S20-480-BSS0 | 480                 | 9 × 48(=432) *1  | 20 |
| LM-H3S20-768-BSS0 | 768                 | 15 × 48(=720) *1 | 32 |

\*1. Pitch tolerance between holes at both ends:  $\pm 0.2$  [Unit: mm]


- LM-H3S30-288-CSS0
- LM-H3S30-384-CSS0
- LM-H3S30-480-CSS0
- LM-H3S30-768-CSS0

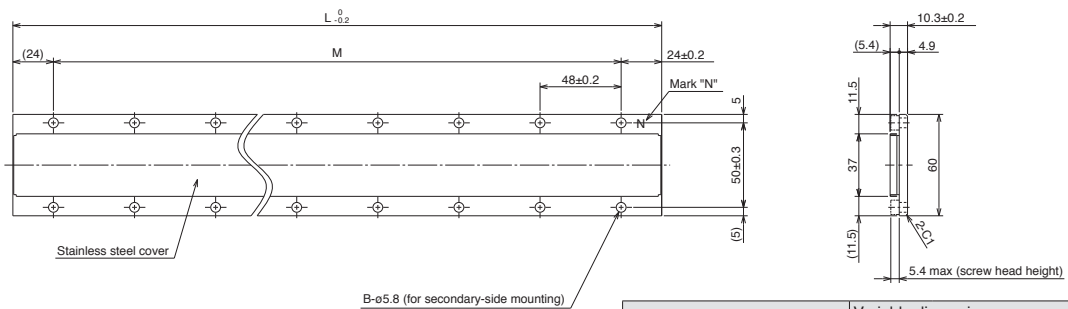

| Model             | Variable dimensions |                  |    |
|-------------------|---------------------|------------------|----|
|                   | L                   | M                | B  |
| LM-H3S30-288-CSS0 | 288                 | 5 × 48(=240) *1  | 12 |
| LM-H3S30-384-CSS0 | 384                 | 7 × 48(=336) *1  | 16 |
| LM-H3S30-480-CSS0 | 480                 | 9 × 48(=432) *1  | 20 |
| LM-H3S30-768-CSS0 | 768                 | 15 × 48(=720) *1 | 32 |

\*1. Pitch tolerance between holes at both ends:  $\pm 0.2$  [Unit: mm]

- LM-H3S70-288-ASS0
- LM-H3S70-384-ASS0
- LM-H3S70-480-ASS0
- LM-H3S70-768-ASS0

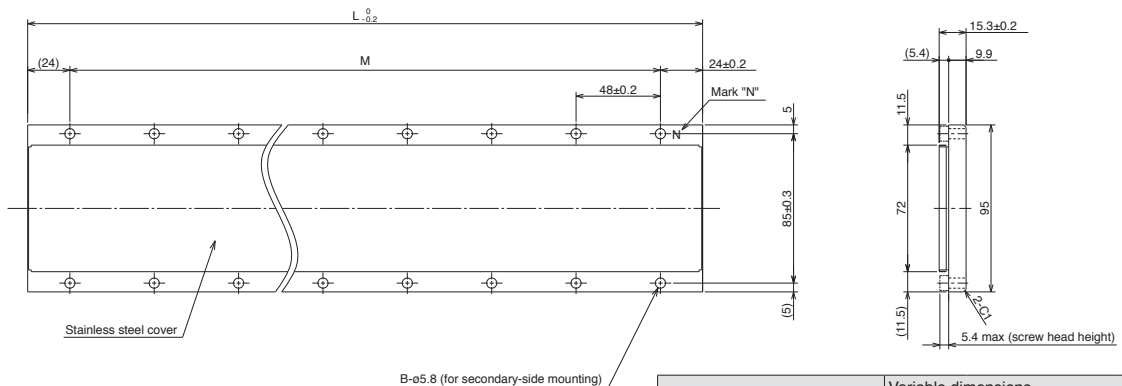


| Model             | Variable dimensions |                  |    |
|-------------------|---------------------|------------------|----|
|                   | L                   | M                | B  |
| LM-H3S70-288-ASS0 | 288                 | 5 × 48(=240) *1  | 12 |
| LM-H3S70-384-ASS0 | 384                 | 7 × 48(=336) *1  | 16 |
| LM-H3S70-480-ASS0 | 480                 | 9 × 48(=432) *1  | 20 |
| LM-H3S70-768-ASS0 | 768                 | 15 × 48(=720) *1 | 32 |

\*1. Pitch tolerance between holes at both ends:  $\pm 0.2$  [Unit: mm]

# Linear Servo Motors


## LM-AJ Series Primary Side (Coil) Dimensions (Note 1, 2)

### ●LM-AJP1B-07K-JSS0

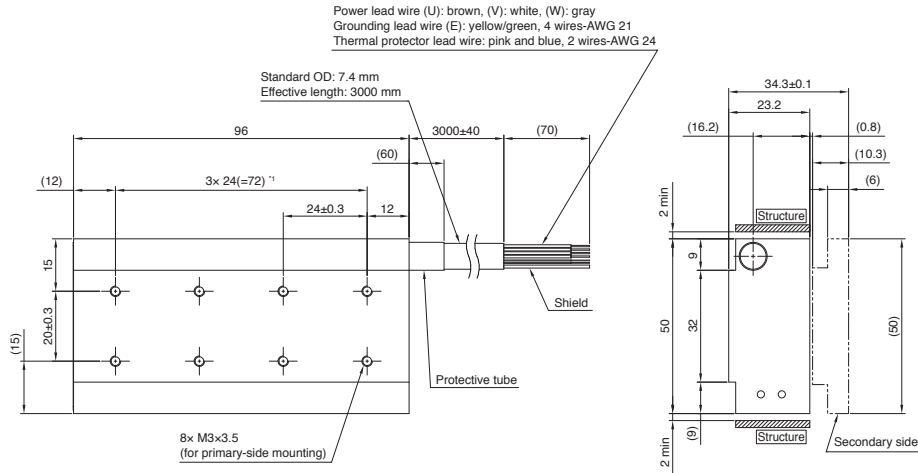

\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

### ●LM-AJP1D-14K-JSS0

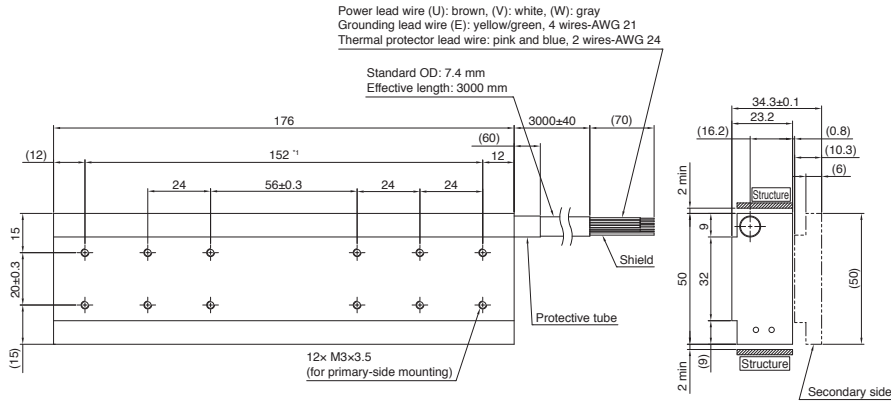


\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

## LM-AJ Series Secondary Side (Magnet) Dimensions

### ●LM-AJS10-080-JSS0

### ●LM-AJS10-200-JSS0

### ●LM-AJS10-400-JSS0

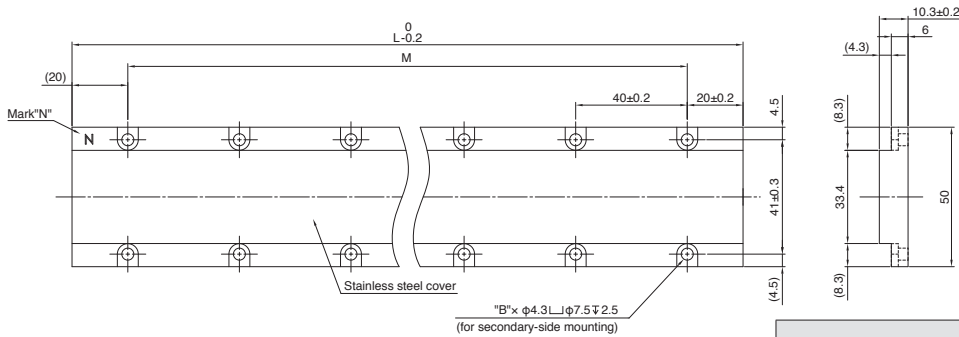


| Model             | Variable dimensions |                           |    |
|-------------------|---------------------|---------------------------|----|
|                   | L                   | M                         | B  |
| LM-AJS10-080-JSS0 | 80                  | 1x 40(=40) <sup>*1</sup>  | 4  |
| LM-AJS10-200-JSS0 | 200                 | 4x 40(=160) <sup>*1</sup> | 10 |
| LM-AJS10-400-JSS0 | 400                 | 9x 40(=360) <sup>*1</sup> | 20 |

\*1. Pitch tolerance between holes at both ends: ±0.2 [Unit: mm]

Notes: 1. Power, grounding, and thermal protector lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.  
 2. Minimum bending radius of the lead wire equals to 10 times the standard overall diameter of the lead wire.


**LM-AJ Series Primary Side (Coil) Dimensions** (Note 1, 2)

●LM-AJP2B-12S-JSS0

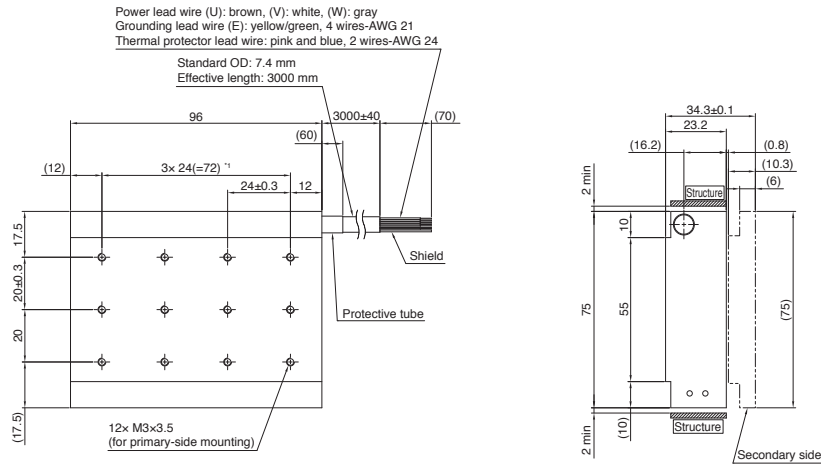

\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

●LM-AJP2D-23T-JSS0

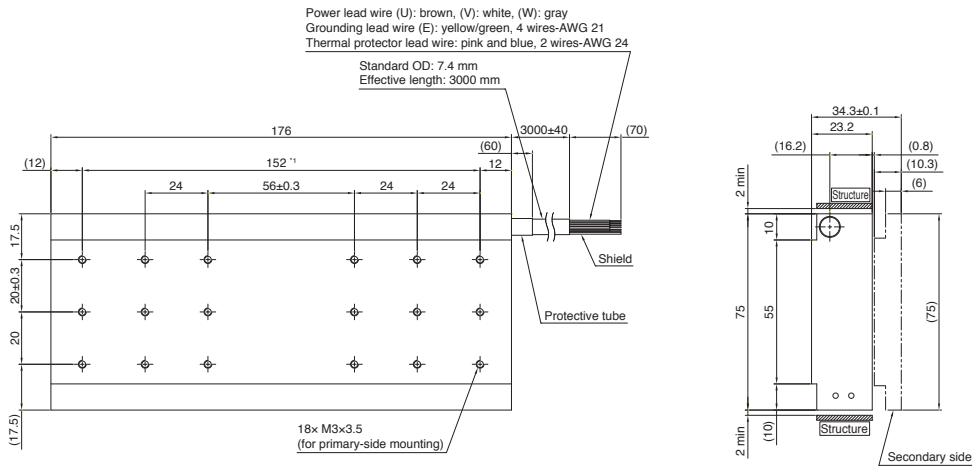


\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

**LM-AJ Series Secondary Side (Magnet) Dimensions**

●LM-AJS20-080-JSS0

●LM-AJS20-200-JSS0

●LM-AJS20-400-JSS0

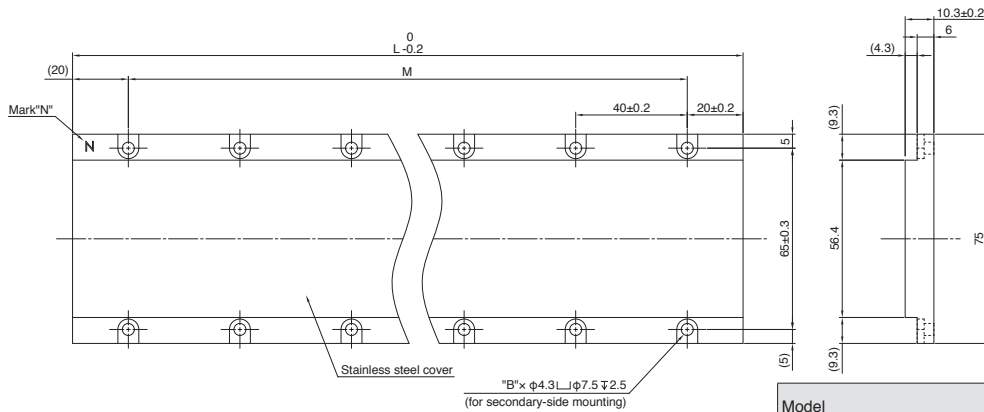

| Model             | Variable dimensions |                            |    |
|-------------------|---------------------|----------------------------|----|
|                   | L                   | M                          | B  |
| LM-AJS20-080-JSS0 | 80                  | 1 × 40(=40) <sup>11</sup>  | 4  |
| LM-AJS20-200-JSS0 | 200                 | 4 × 40(=160) <sup>11</sup> | 10 |
| LM-AJS20-400-JSS0 | 400                 | 9 × 40(=360) <sup>11</sup> | 20 |

\*1. Pitch tolerance between holes at both ends: ±0.2 [Unit: mm]


Notes: 1. Power, grounding, and thermal protector lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.  
 2. Minimum bending radius of the lead wire equals to 10 times the standard overall diameter of the lead wire.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Linear Servo Motors


## LM-AJ Series Primary Side (Coil) Dimensions (Note 1, 2)

### ●LM-AJP3B-17N-JSS0

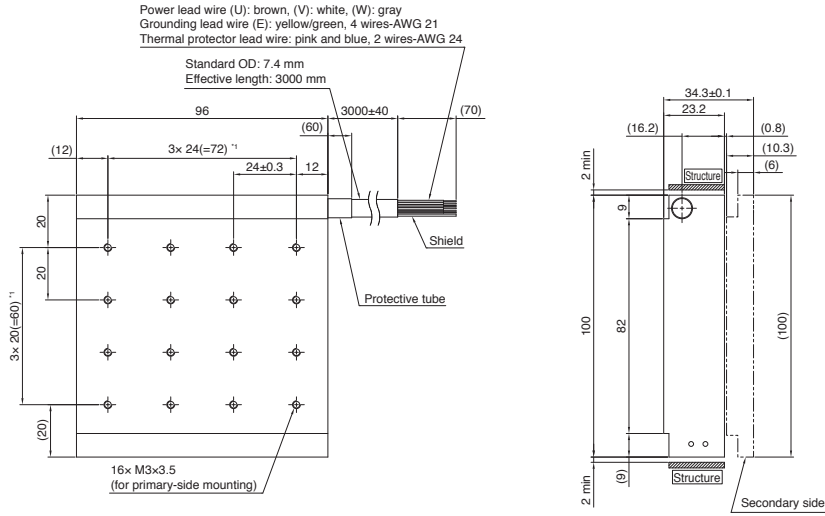

\*1. Pitch tolerance between holes at both ends:  $\pm 0.3$  [Unit: mm]

### ●LM-AJP3D-35R-JSS0

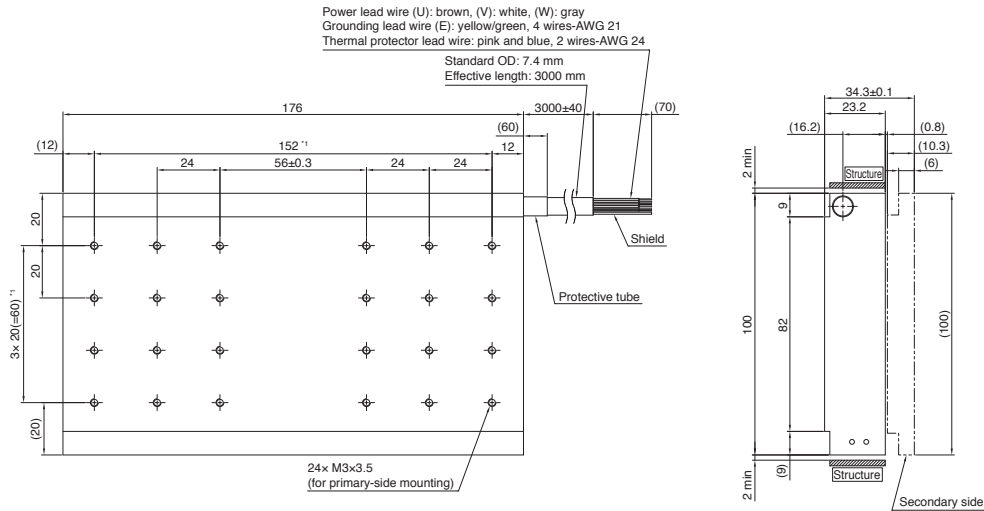


\*1. Pitch tolerance between holes at both ends:  $\pm 0.3$  [Unit: mm]

## LM-AJ Series Secondary Side (Magnet) Dimensions

### ●LM-AJS30-080-JSS0

### ●LM-AJS30-200-JSS0

### ●LM-AJS30-400-JSS0

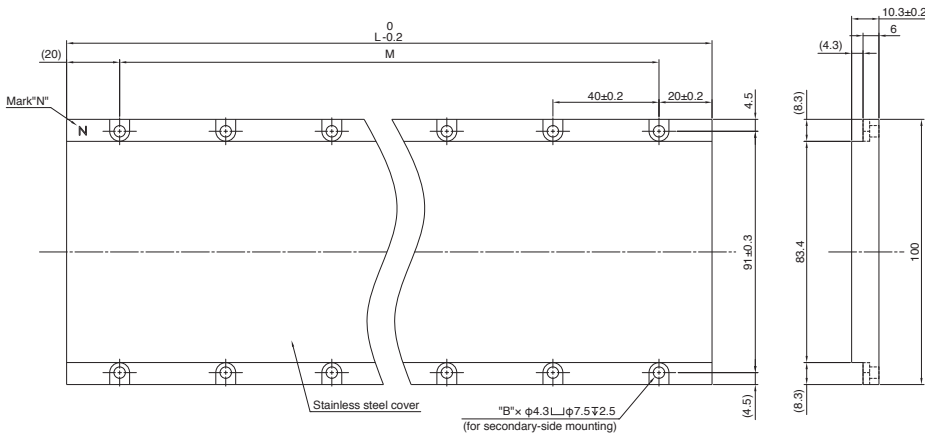


| Model             | Variable dimensions |                           |    |
|-------------------|---------------------|---------------------------|----|
|                   | L                   | M                         | B  |
| LM-AJS30-080-JSS0 | 80                  | 1x 40(=40) <sup>*1</sup>  | 4  |
| LM-AJS30-200-JSS0 | 200                 | 4x 40(=160) <sup>*1</sup> | 10 |
| LM-AJS30-400-JSS0 | 400                 | 9x 40(=360) <sup>*1</sup> | 20 |

\*1. Pitch tolerance between holes at both ends:  $\pm 0.2$  [Unit: mm]

- Notes: 1. Power, grounding, and thermal protector lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.  
 2. Minimum bending radius of the lead wire equals to 10 times the standard overall diameter of the lead wire.


**LM-AJ Series Primary Side (Coil) Dimensions (Note 1, 2)**

● **LM-AJP4B-22M-JSS0**

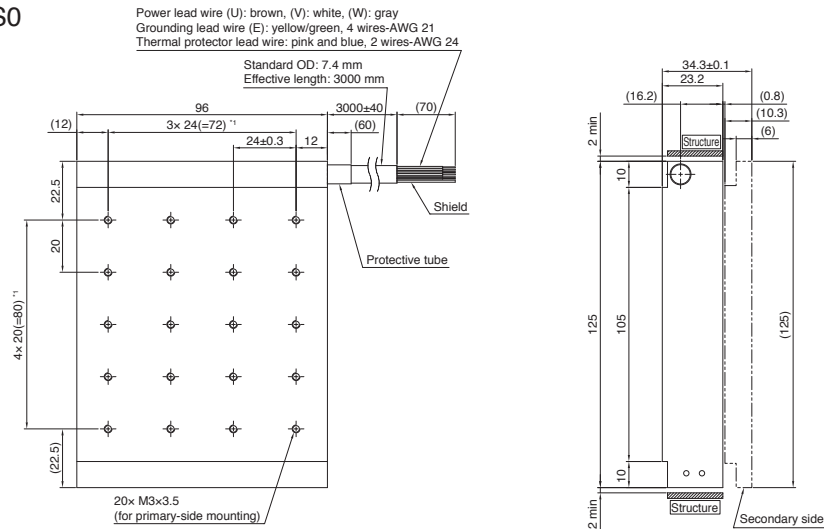

\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

● **LM-AJP4D-45N-JSS0**

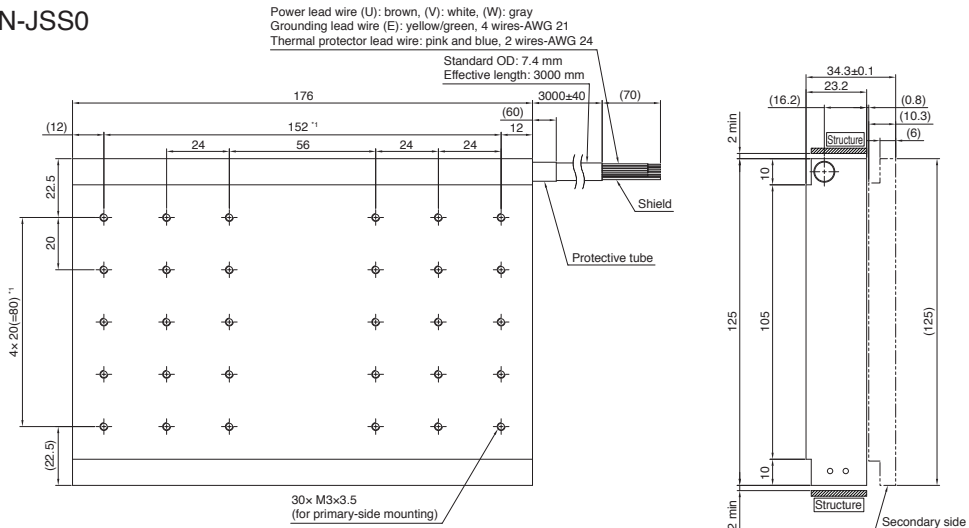


\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

**LM-AJ Series Secondary Side (Magnet) Dimensions**

● **LM-AJS40-080-JSS0**

● **LM-AJS40-200-JSS0**

● **LM-AJS40-400-JSS0**

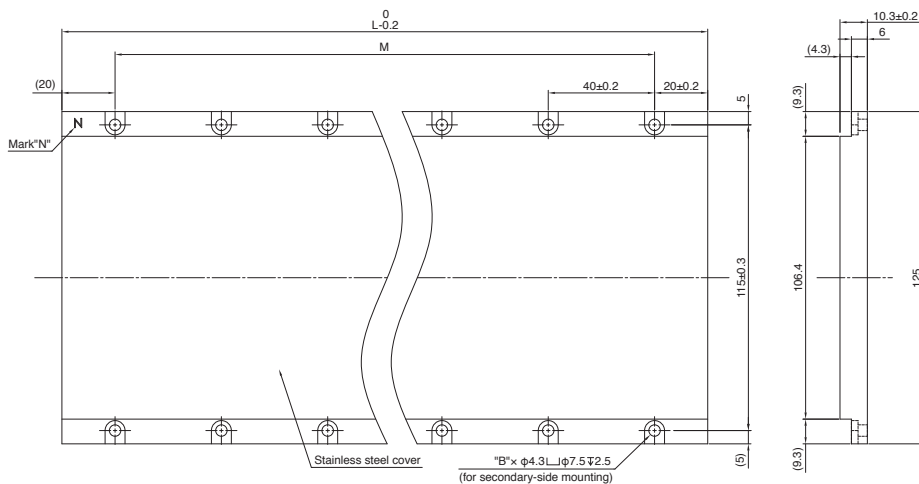

| Model             | Variable dimensions |                            |    |
|-------------------|---------------------|----------------------------|----|
|                   | L                   | M                          | B  |
| LM-AJS40-080-JSS0 | 80                  | 1 x 40(=40) <sup>*1</sup>  | 4  |
| LM-AJS40-200-JSS0 | 200                 | 4 x 40(=160) <sup>*1</sup> | 10 |
| LM-AJS40-400-JSS0 | 400                 | 9 x 40(=360) <sup>*1</sup> | 20 |

\*1. Pitch tolerance between holes at both ends: ±0.2 [Unit: mm]

Notes: 1. Power, grounding, and thermal protector lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.  
 2. Minimum bending radius of the lead wire equals to 10 times the standard overall diameter of the lead wire.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support





# Linear Servo Motors

## LM-F Series Primary Side (Coil) Dimensions (Note 1, 2)

● LM-FP2B-06M-1SS0

● LM-FP2D-12M-1SS0

● LM-FP2F-18M-1SS0




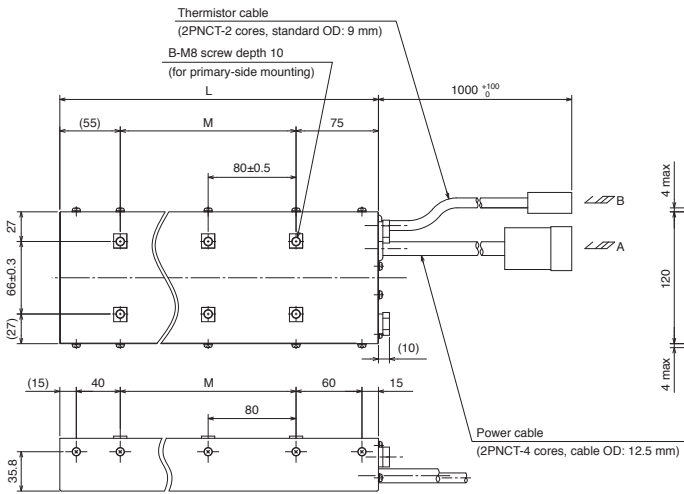


| Model            | Variable dimensions |                           |    |
|------------------|---------------------|---------------------------|----|
|                  | L                   | M                         | B  |
| LM-FP2B-06M-1SS0 | 290                 | 2x 80(=160) <sup>*1</sup> | 6  |
| LM-FP2D-12M-1SS0 | 530                 | 5x 80(=400) <sup>*1</sup> | 12 |
| LM-FP2F-18M-1SS0 | 770                 | 8x 80(=640) <sup>*1</sup> | 18 |

\*1. Pitch tolerance between holes at both ends: ±0.5 [Unit: mm]

● LM-FP4B-12M-1SS0

● LM-FP4D-24M-1SS0

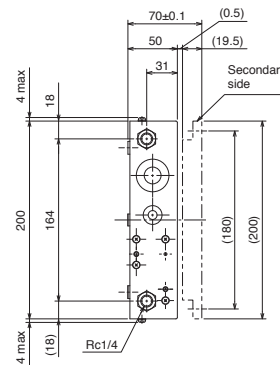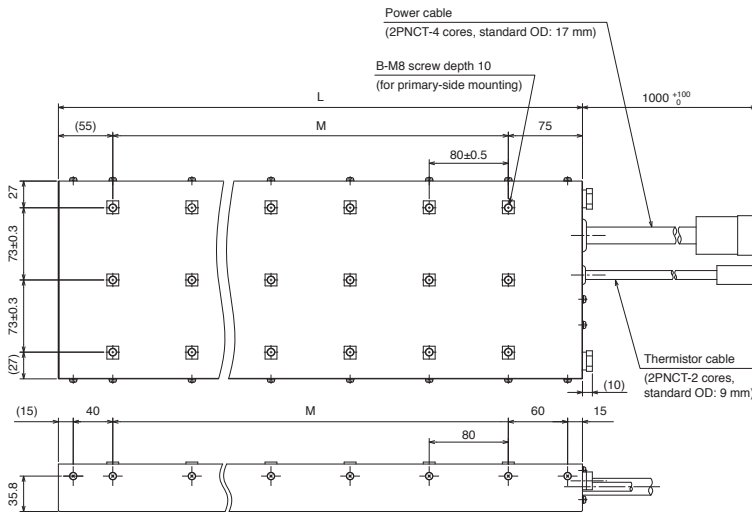

| Model            | Variable dimensions |                           |    |
|------------------|---------------------|---------------------------|----|
|                  | L                   | M                         | B  |
| LM-FP4B-12M-1SS0 | 290                 | 2x 80(=160) <sup>*1</sup> | 9  |
| LM-FP4D-24M-1SS0 | 530                 | 5x 80(=400) <sup>*1</sup> | 18 |

\*1. Pitch tolerance between holes at both ends: ±0.5 [Unit: mm]


Notes: 1. Power and thermistor cables do not have a long bending life. Fix the cables led from the primary side (coil) to a moving part to prevent the cables from repetitive bending.  
2. Minimum bending radius of the cable equals to six times the standard overall diameter of the cable.



**LM-F Series Secondary Side (Magnet) Dimensions**

● LM-FS20-480-1SS0

● LM-FS20-576-1SS0

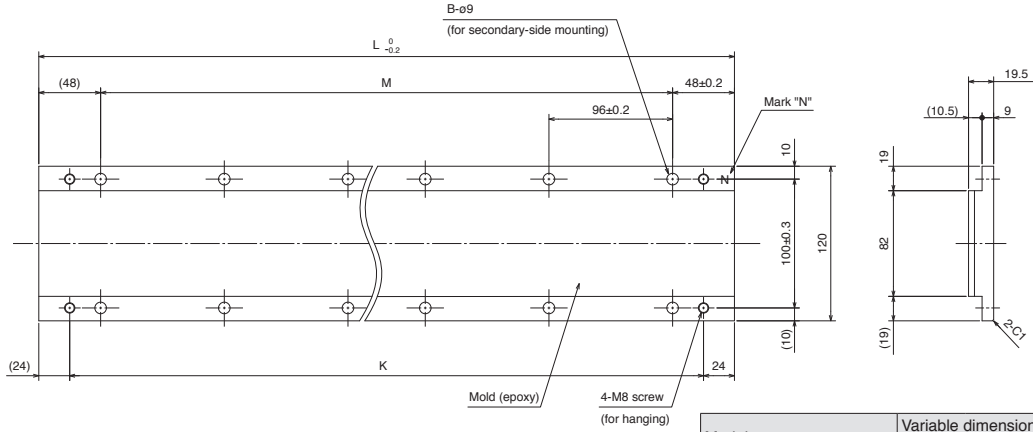


| Model            | Variable dimensions |                           |    |     |
|------------------|---------------------|---------------------------|----|-----|
|                  | L                   | M                         | B  | K   |
| LM-FS20-480-1SS0 | 480                 | 4× 96(=384) <sup>*1</sup> | 10 | 432 |
| LM-FS20-576-1SS0 | 576                 | 5× 96(=480) <sup>*1</sup> | 12 | 528 |

\*1. Pitch tolerance between holes at both ends: ±0.2 [Unit: mm]

● LM-FS40-480-1SS0

● LM-FS40-576-1SS0

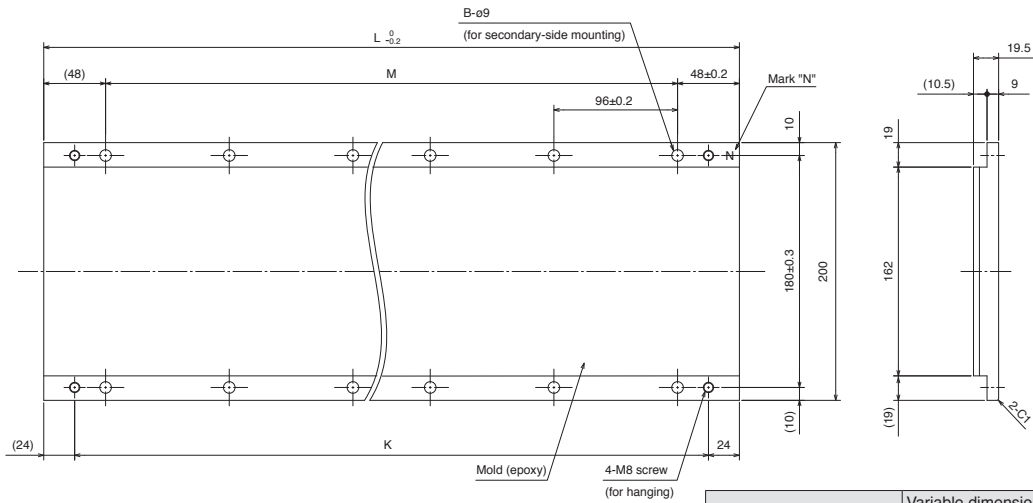

| Model            | Variable dimensions |                           |    |     |
|------------------|---------------------|---------------------------|----|-----|
|                  | L                   | M                         | B  | K   |
| LM-FS40-480-1SS0 | 480                 | 4× 96(=384) <sup>*1</sup> | 10 | 432 |
| LM-FS40-576-1SS0 | 576                 | 5× 96(=480) <sup>*1</sup> | 12 | 528 |

\*1. Pitch tolerance between holes at both ends: ±0.2 [Unit: mm]

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LVSWires
- Product List
- Precautions
- Support


# Linear Servo Motors

## LM-K2 Series Primary Side (Coil) Dimensions (Note 1, 2)

### ●LM-K2P1A-01M-2SS1

### ●LM-K2P1C-03M-2SS1

Power lead wire (U/V/W): black, Grounding lead wire (E): green/yellow  
Effective length: 300 mm

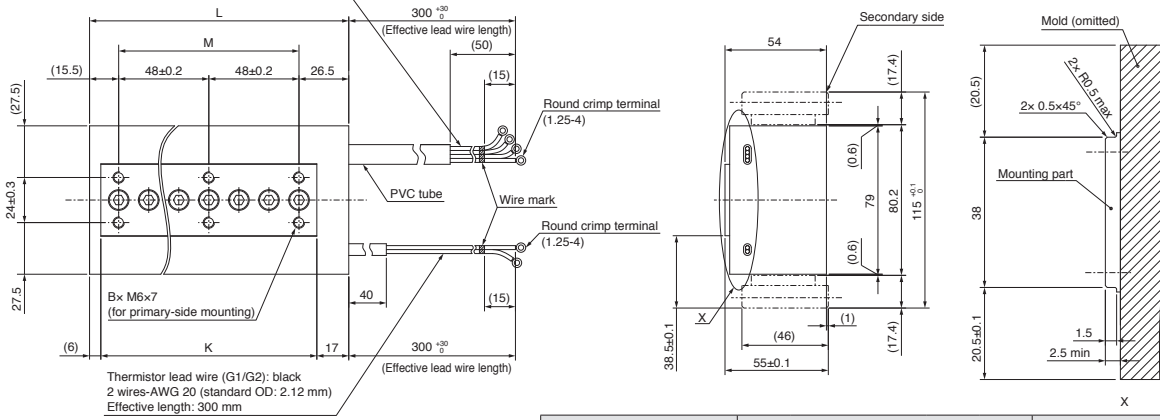

| Model             | Variable dimensions |                           |     |    | Power/grounding lead wire |             |
|-------------------|---------------------|---------------------------|-----|----|---------------------------|-------------|
|                   | L                   | M                         | K   | B  | Size                      | Standard OD |
| LM-K2P1A-01M-2SS1 | 138                 | 2x 48(=96) <sup>*1</sup>  | 115 | 6  | 4 wires-AWG 20            | 2.12        |
| LM-K2P1C-03M-2SS1 | 330                 | 6x 48(=288) <sup>*1</sup> | 307 | 14 | 4 wires-AWG 16            | 2.7         |

\*1. Pitch tolerance between holes at both ends: ±0.3


[Unit: mm]

### ●LM-K2P2A-02M-1SS1

### ●LM-K2P2C-07M-1SS1

### ●LM-K2P2E-12M-1SS1

Power lead wire (U/V/W): black, Grounding lead wire (E): green/yellow  
Effective length: 300 mm

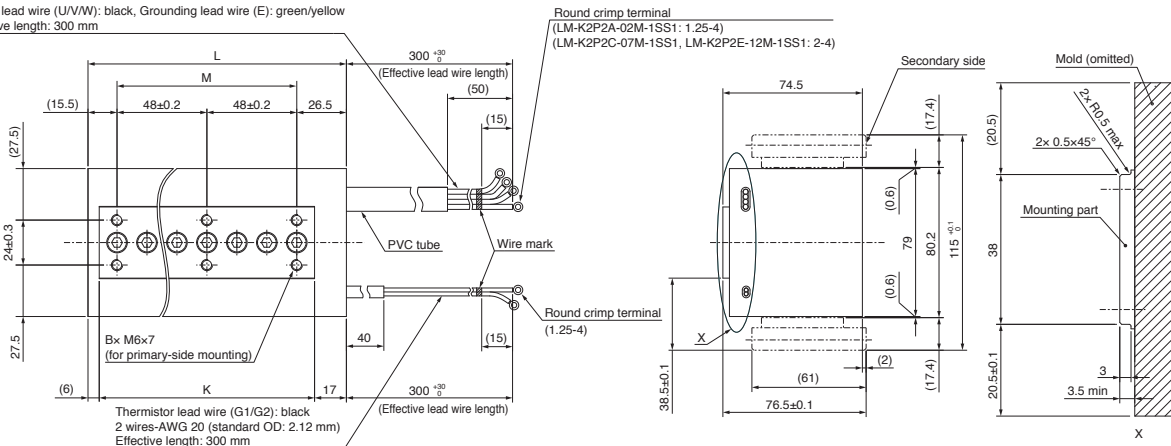

| Model             | Variable dimensions |                            |     |    | Power/grounding lead wire |             |
|-------------------|---------------------|----------------------------|-----|----|---------------------------|-------------|
|                   | L                   | M                          | K   | B  | Size                      | Standard OD |
| LM-K2P2A-02M-1SS1 | 138                 | 2x 48(=96) <sup>*1</sup>   | 115 | 6  | 4 wires-AWG 16            | 2.7         |
| LM-K2P2C-07M-1SS1 | 330                 | 6x 48(=288) <sup>*1</sup>  | 307 | 14 | 4 wires-AWG 14            | 3.12        |
| LM-K2P2E-12M-1SS1 | 522                 | 10x 48(=480) <sup>*1</sup> | 499 | 22 | 4 wires-AWG 14            | 3.12        |


\*1. Pitch tolerance between holes at both ends: ±0.3

[Unit: mm]

### ●LM-K2P3C-14M-1SS1

### ●LM-K2P3E-24M-1SS1

Power lead wire (U/V/W): black, Grounding lead wire (E): green/yellow  
Effective length: 300 mm

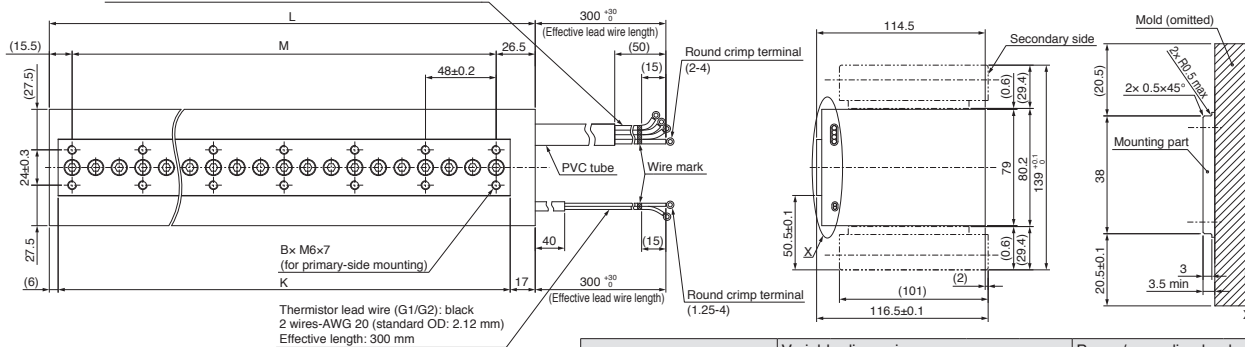

| Model             | Variable dimensions |                            |     |    | Power/grounding lead wire |             |
|-------------------|---------------------|----------------------------|-----|----|---------------------------|-------------|
|                   | L                   | M                          | K   | B  | Size                      | Standard OD |
| LM-K2P3C-14M-1SS1 | 330                 | 6x 48(=288) <sup>*1</sup>  | 307 | 14 | 4 wires-AWG 14            | 3.12        |
| LM-K2P3E-24M-1SS1 | 522                 | 10x 48(=480) <sup>*1</sup> | 499 | 22 | 4 wires-AWG 14            | 3.12        |


\*1. Pitch tolerance between holes at both ends: ±0.3

[Unit: mm]

- Notes: 1. Power, grounding, and thermistor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.  
2. Minimum bending radius of the lead wire equals to six times the standard overall diameter of the lead wire.


**LM-K2 Series Secondary Side (Magnet) Dimensions**

- LM-K2S10-288-2SS1
- LM-K2S10-384-2SS1
- LM-K2S10-480-2SS1
- LM-K2S10-768-2SS1

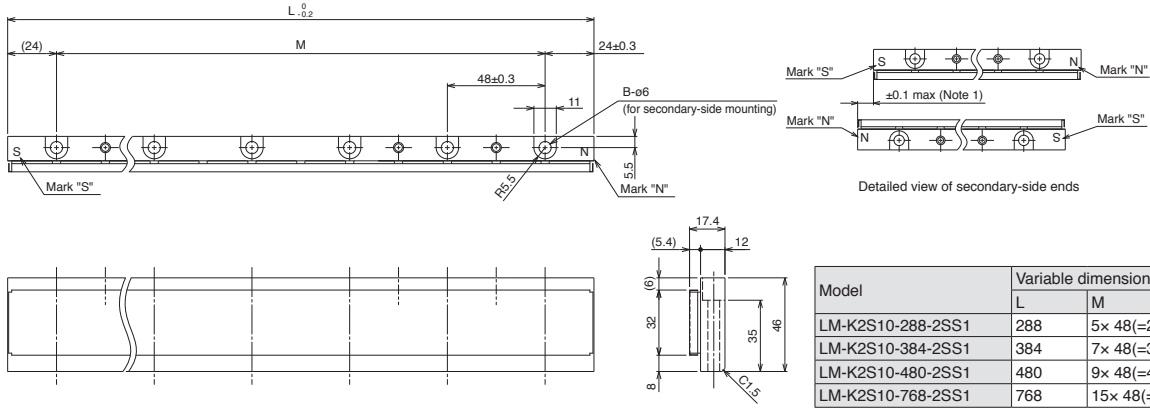


\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

- LM-K2S20-288-1SS1
- LM-K2S20-384-1SS1
- LM-K2S20-480-1SS1
- LM-K2S20-768-1SS1

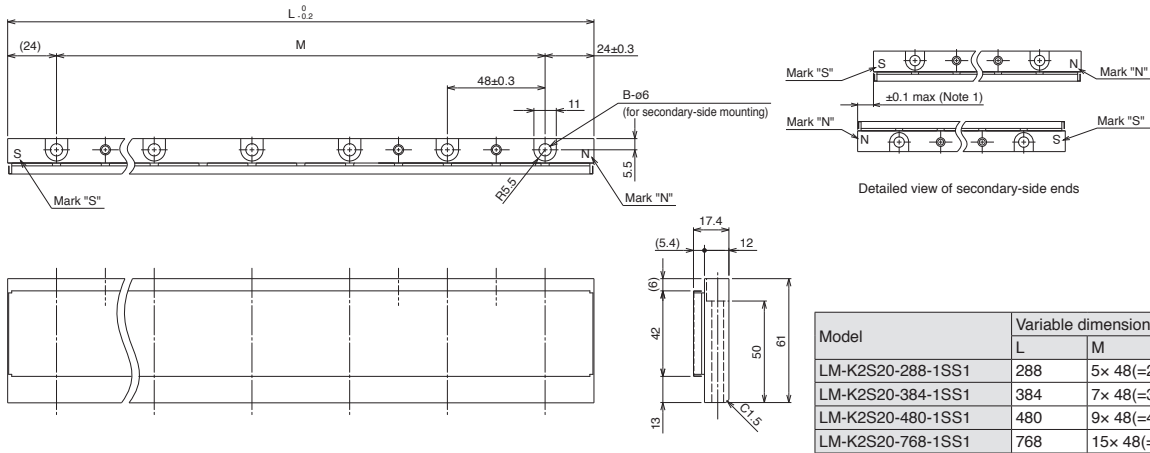

\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

- LM-K2S30-288-1SS1
- LM-K2S30-384-1SS1
- LM-K2S30-480-1SS1
- LM-K2S30-768-1SS1

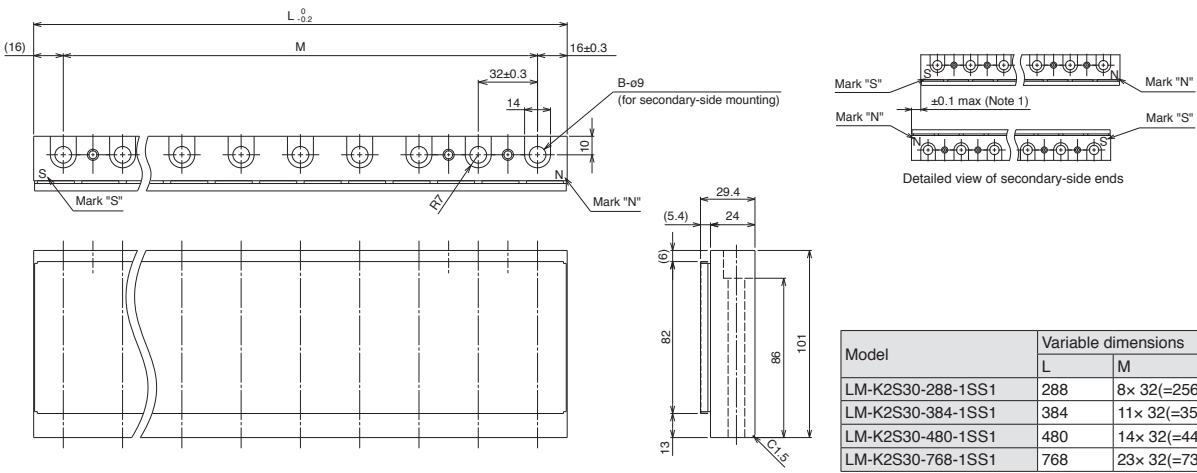

\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

Notes: 1. Longitudinal deviation of the secondary side must be within ±0.1 mm.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support


# Linear Servo Motors

## LM-U2 Series Primary Side (Coil) Dimensions (Note 1, 2)

●LM-U2PAB-05M-0SS0

●LM-U2PAD-10M-0SS0

●LM-U2PAF-15M-0SS0

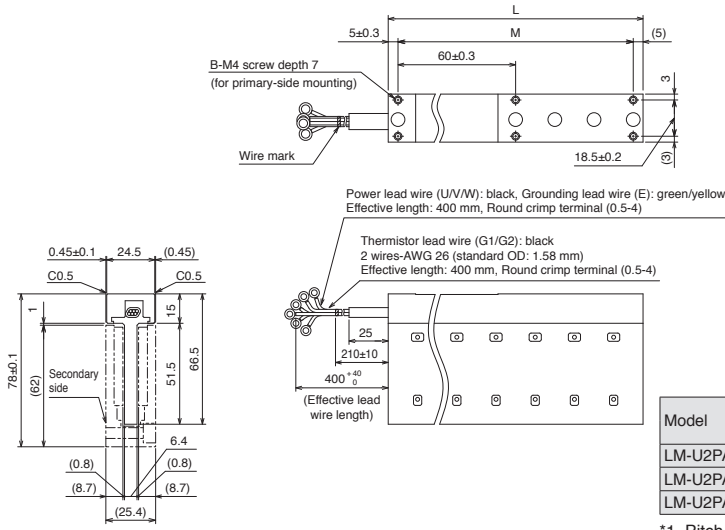

| Model             | Variable dimensions |                           |    | Power/grounding lead wire |             |
|-------------------|---------------------|---------------------------|----|---------------------------|-------------|
|                   | L                   | M                         | B  | Size                      | Standard OD |
| LM-U2PAB-05M-0SS0 | 130                 | 2x 60(=120) <sup>*1</sup> | 6  | AWG 26                    | 1.58        |
| LM-U2PAD-10M-0SS0 | 250                 | 4x 60(=240) <sup>*1</sup> | 10 |                           |             |
| LM-U2PAF-15M-0SS0 | 370                 | 6x 60(=360) <sup>*1</sup> | 14 |                           |             |


\*1. Pitch tolerance between holes at both ends: ±0.3

[Unit: mm]

●LM-U2PBB-07M-1SS0

●LM-U2PBD-15M-1SS0

●LM-U2PBF-22M-1SS0

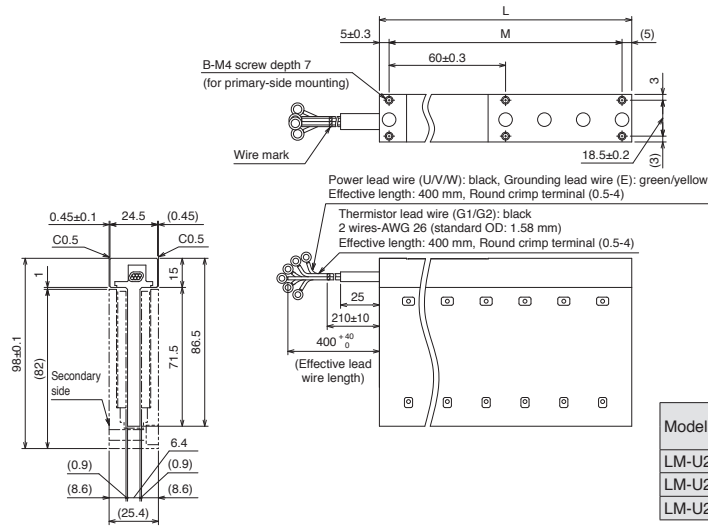

| Model             | Variable dimensions |                           |    | Power/grounding lead wire |             |
|-------------------|---------------------|---------------------------|----|---------------------------|-------------|
|                   | L                   | M                         | B  | Size                      | Standard OD |
| LM-U2PBB-07M-1SS0 | 130                 | 2x 60(=120) <sup>*1</sup> | 6  | AWG 26                    | 1.58        |
| LM-U2PBD-15M-1SS0 | 250                 | 4x 60(=240) <sup>*1</sup> | 10 |                           |             |
| LM-U2PBF-22M-1SS0 | 370                 | 6x 60(=360) <sup>*1</sup> | 14 |                           |             |


\*1. Pitch tolerance between holes at both ends: ±0.3

[Unit: mm]

●LM-U2P2B-40M-2SS0

●LM-U2P2C-60M-2SS0

●LM-U2P2D-80M-2SS0

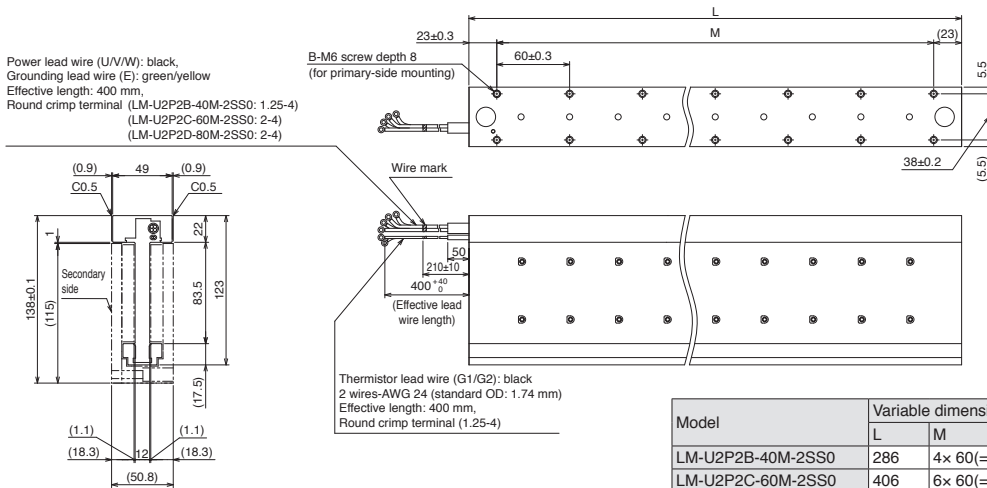

| Model             | Variable dimensions |                           |    | Power/grounding lead wire |             |
|-------------------|---------------------|---------------------------|----|---------------------------|-------------|
|                   | L                   | M                         | B  | Size                      | Standard OD |
| LM-U2P2B-40M-2SS0 | 286                 | 4x 60(=240) <sup>*1</sup> | 10 | AWG 16                    | 2.7         |
| LM-U2P2C-60M-2SS0 | 406                 | 6x 60(=360) <sup>*1</sup> | 14 | AWG 14                    | 3.12        |
| LM-U2P2D-80M-2SS0 | 526                 | 8x 60(=480) <sup>*1</sup> | 18 |                           |             |

\*1. Pitch tolerance between holes at both ends: ±0.3

[Unit: mm]

Notes: 1. Power, grounding, and thermistor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.


5-32 2. Minimum bending radius of the lead wire equals to six times the standard overall diameter of the lead wire.

LM-U2 Series Secondary Side (Magnet) Dimensions

●LM-U2SA0-240-0SS0

●LM-U2SA0-300-0SS0

●LM-U2SA0-420-0SS0

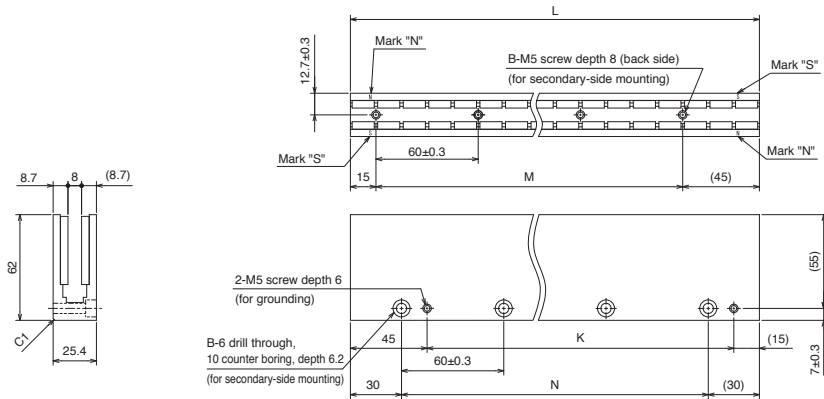

| Model             | Variable dimensions |                           |   |     |                           |
|-------------------|---------------------|---------------------------|---|-----|---------------------------|
|                   | L                   | M                         | B | K   | N                         |
| LM-U2SA0-240-0SS0 | 240                 | 3x 60(=180) <sup>*1</sup> | 4 | 180 | 3x 60(=180) <sup>*1</sup> |
| LM-U2SA0-300-0SS0 | 300                 | 4x 60(=240) <sup>*1</sup> | 5 | 240 | 4x 60(=240) <sup>*1</sup> |
| LM-U2SA0-420-0SS0 | 420                 | 6x 60(=360) <sup>*1</sup> | 7 | 360 | 6x 60(=360) <sup>*1</sup> |


\*1. Pitch tolerance between holes at both ends:  $\pm 0.3$

[Unit: mm]

●LM-U2SB0-240-1SS1

●LM-U2SB0-300-1SS1

●LM-U2SB0-420-1SS1

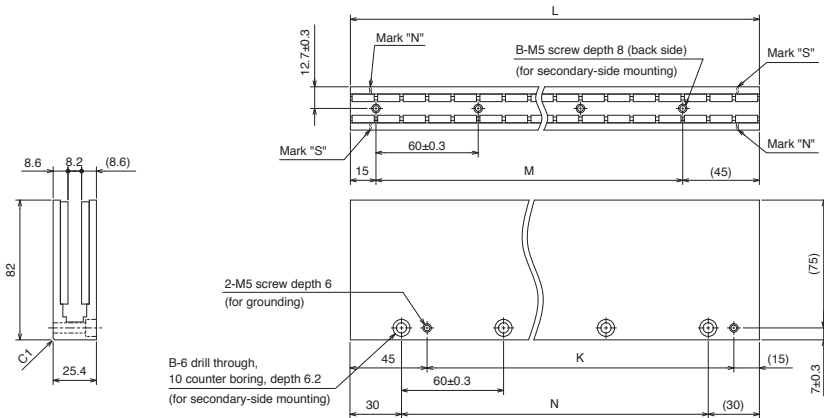


| Model             | Variable dimensions |                           |   |     |                           |
|-------------------|---------------------|---------------------------|---|-----|---------------------------|
|                   | L                   | M                         | B | K   | N                         |
| LM-U2SB0-240-1SS1 | 240                 | 3x 60(=180) <sup>*1</sup> | 4 | 180 | 3x 60(=180) <sup>*1</sup> |
| LM-U2SB0-300-1SS1 | 300                 | 4x 60(=240) <sup>*1</sup> | 5 | 240 | 4x 60(=240) <sup>*1</sup> |
| LM-U2SB0-420-1SS1 | 420                 | 6x 60(=360) <sup>*1</sup> | 7 | 360 | 6x 60(=360) <sup>*1</sup> |

\*1. Pitch tolerance between holes at both ends:  $\pm 0.3$

[Unit: mm]

●LM-U2S20-300-2SS1

●LM-U2S20-480-2SS1

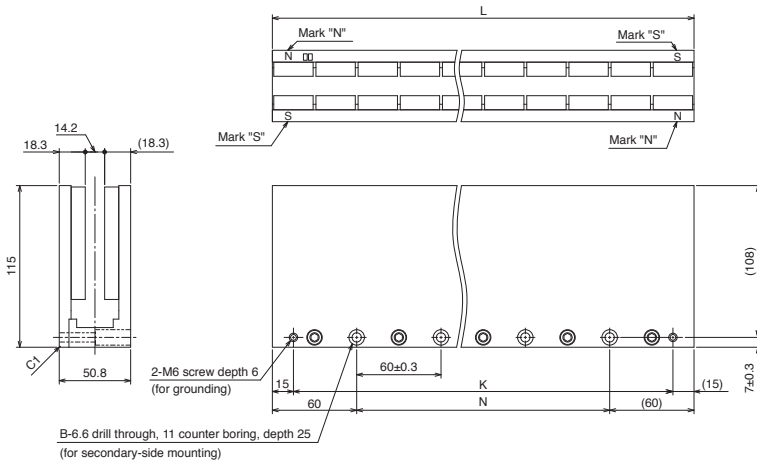

| Model             | Variable dimensions |                           |   |     |
|-------------------|---------------------|---------------------------|---|-----|
|                   | L                   | N                         | B | K   |
| LM-U2S20-300-2SS1 | 300                 | 3x 60(=180) <sup>*1</sup> | 4 | 270 |
| LM-U2S20-480-2SS1 | 480                 | 6x 60(=360) <sup>*1</sup> | 7 | 450 |

\*1. Pitch tolerance between holes at both ends:  $\pm 0.3$


[Unit: mm]

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/SWires  
Product List  
Precautions  
Support


# Linear Servo Motors

## LM-AU Series Primary Side (Coil) Dimensions (Note 1, 2)


### ●LM-AUP3A-03V-JSS0

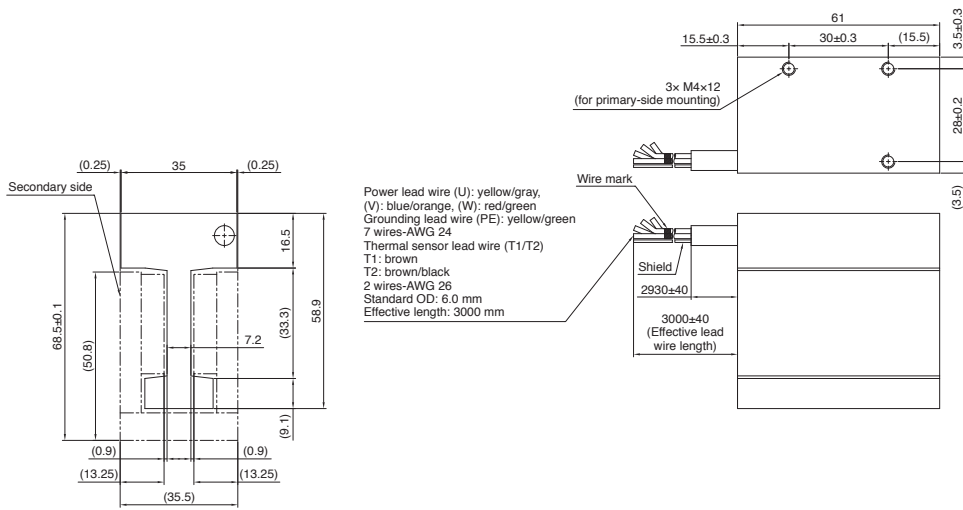

### ●LM-AUP3B-06V-JSS0

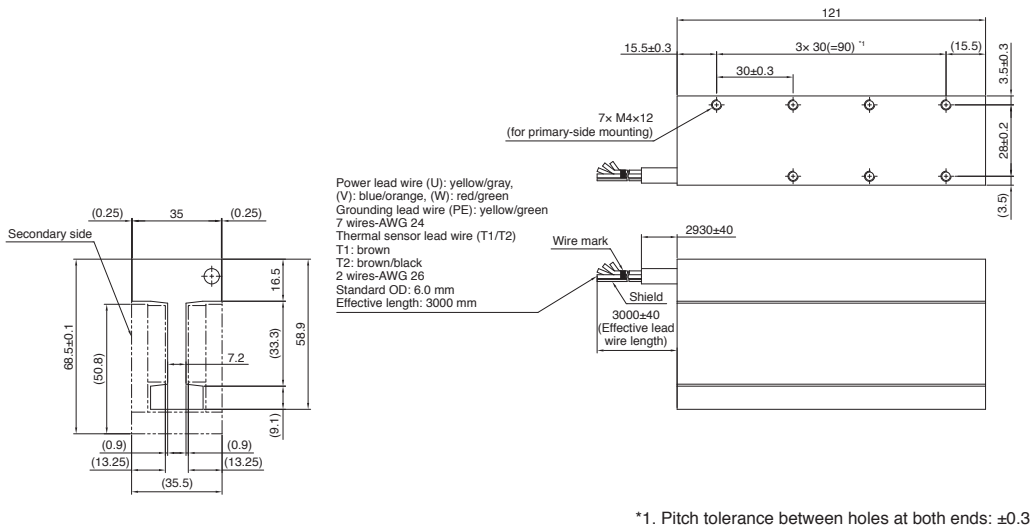

### ●LM-AUP3C-09V-JSS0

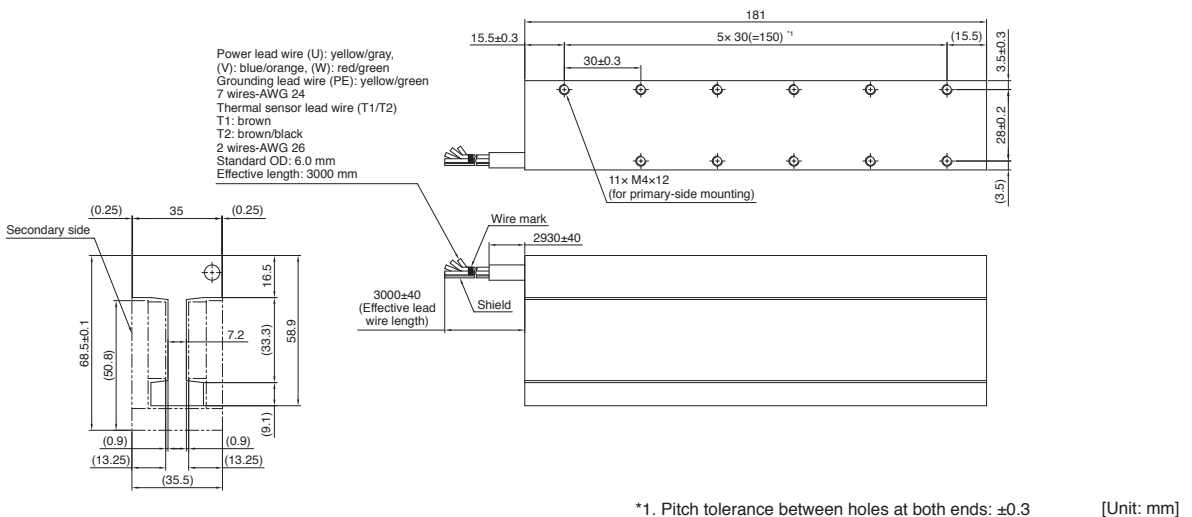


Notes: 1. Power, grounding, and thermal sensor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.  
2. Minimum bending radius of the lead wire equals to 10 times the standard overall diameter of the lead wire.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

**LM-AU Series Primary Side (Coil) Dimensions (Note 1, 2)**

●LM-AUP3D-11R-JSS0

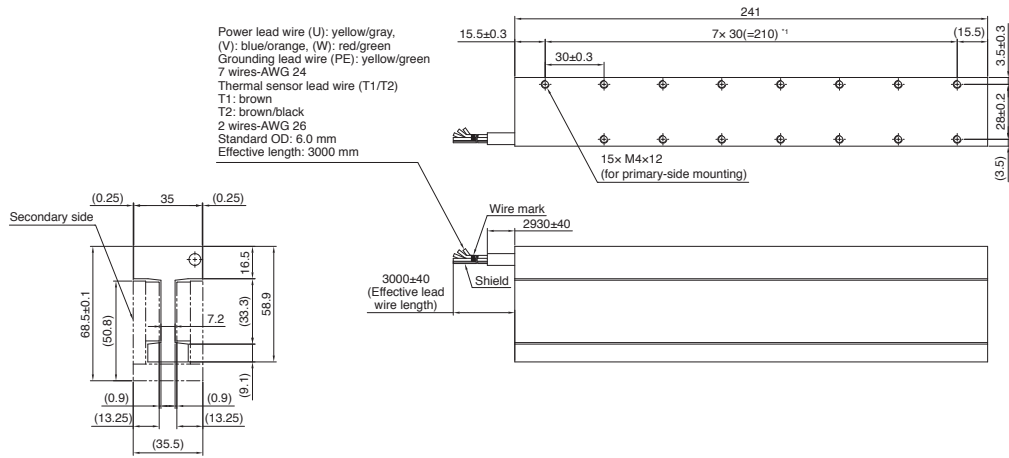

\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

**LM-AU Series Secondary Side (Magnet) Dimensions**


●LM-AUS30-120-JSS0

●LM-AUS30-180-JSS0

●LM-AUS30-240-JSS0

●LM-AUS30-300-JSS0

●LM-AUS30-600-JSS0

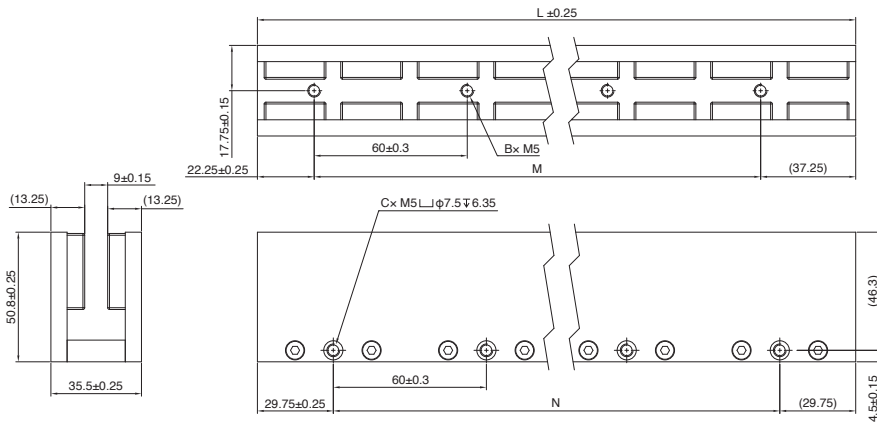

| Model             | Variable dimensions |                           |                           |    |    |
|-------------------|---------------------|---------------------------|---------------------------|----|----|
|                   | L                   | M                         | N                         | B  | C  |
| LM-AUS30-120-JSS0 | 119.5               | 60 <sup>*1</sup>          | 60 <sup>*1</sup>          | 2  | 2  |
| LM-AUS30-180-JSS0 | 179.5               | 2x 60(=120) <sup>*1</sup> | 2x 60(=120) <sup>*1</sup> | 3  | 3  |
| LM-AUS30-240-JSS0 | 239.5               | 3x 60(=180) <sup>*1</sup> | 3x 60(=180) <sup>*1</sup> | 4  | 4  |
| LM-AUS30-300-JSS0 | 299.5               | 4x 60(=240) <sup>*1</sup> | 4x 60(=240) <sup>*1</sup> | 5  | 5  |
| LM-AUS30-600-JSS0 | 599.5               | 9x 60(=540) <sup>*1</sup> | 9x 60(=540) <sup>*1</sup> | 10 | 10 |


\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

Notes: 1. Power, grounding, and thermal sensor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.  
 2. Minimum bending radius of the lead wire equals to 10 times the standard overall diameter of the lead wire.

# Linear Servo Motors


## LM-AU Series Primary Side (Coil) Dimensions (Note 1, 2)

### ●LM-AUP4A-04R-JSS0

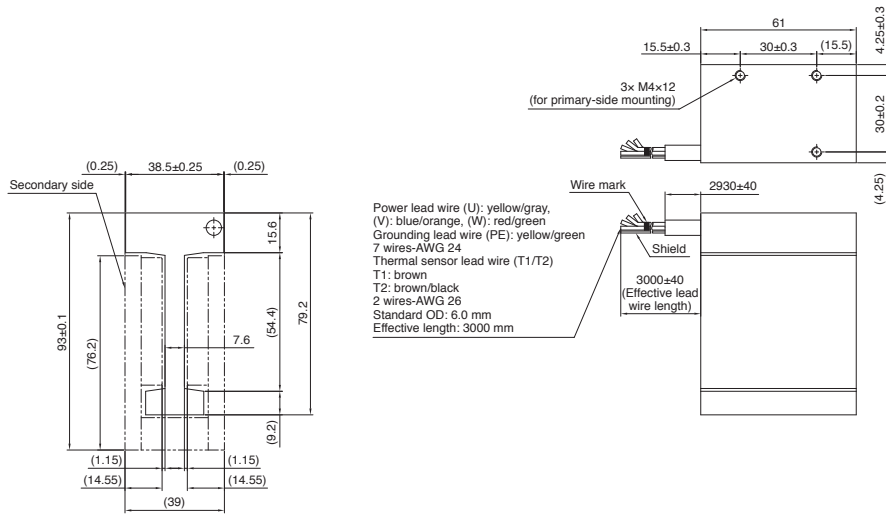

[Unit: mm]


### ●LM-AUP4B-09R-JSS0

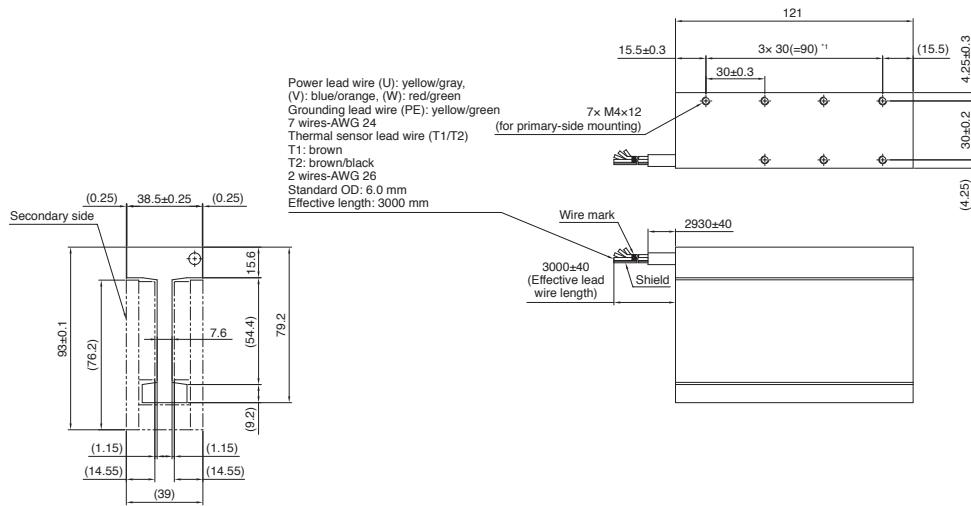

\*1. Pitch tolerance between holes at both ends: ±0.3

[Unit: mm]

### ●LM-AUP4C-13P-JSS0

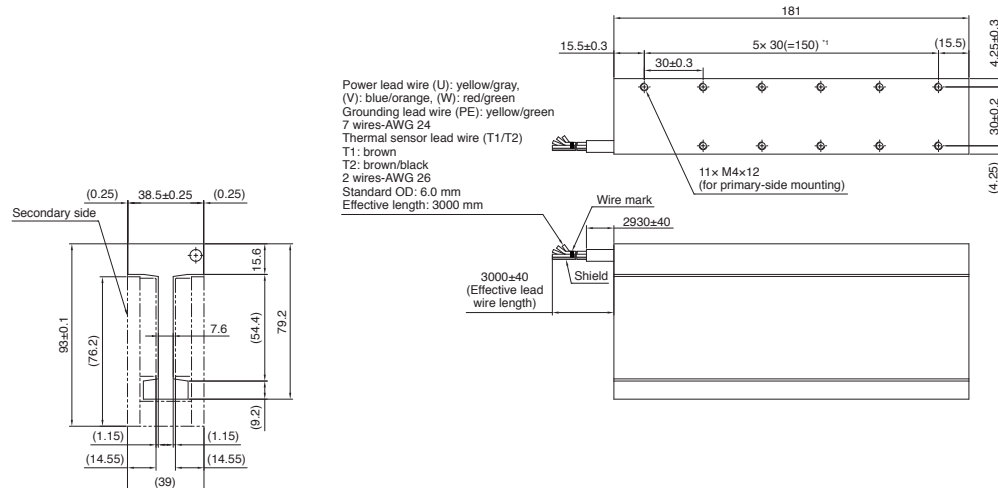

\*1. Pitch tolerance between holes at both ends: ±0.3


[Unit: mm]

Notes: 1. Power, grounding, and thermal sensor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.  
2. Minimum bending radius of the lead wire equals to 10 times the standard overall diameter of the lead wire.




LM-AU Series Primary Side (Coil) Dimensions (Note 1, 2)

●LM-AUP4D-18M-JSS0

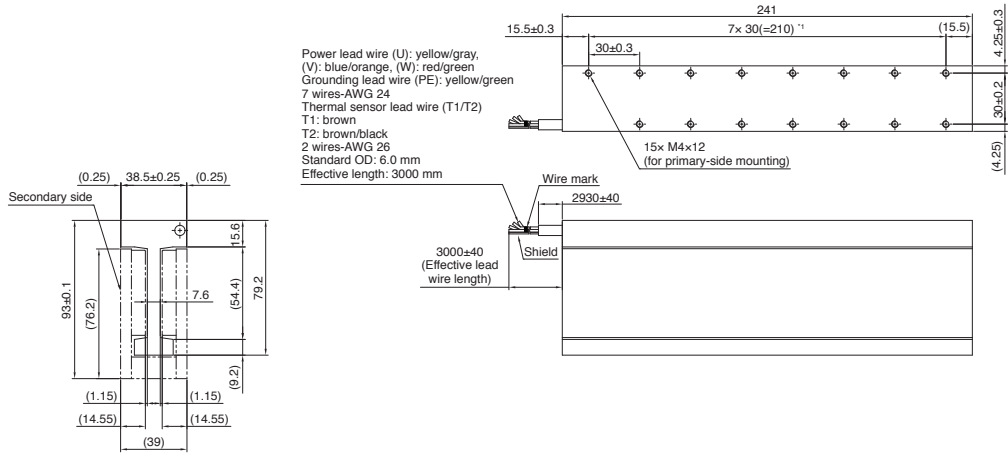


\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

●LM-AUP4F-26P-JSS0

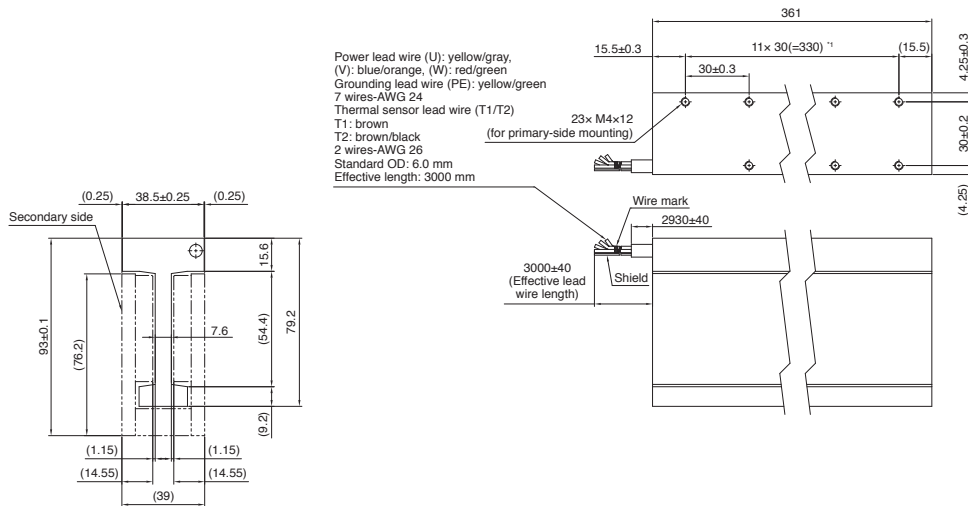

\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

●LM-AUP4H-35M-JSS0

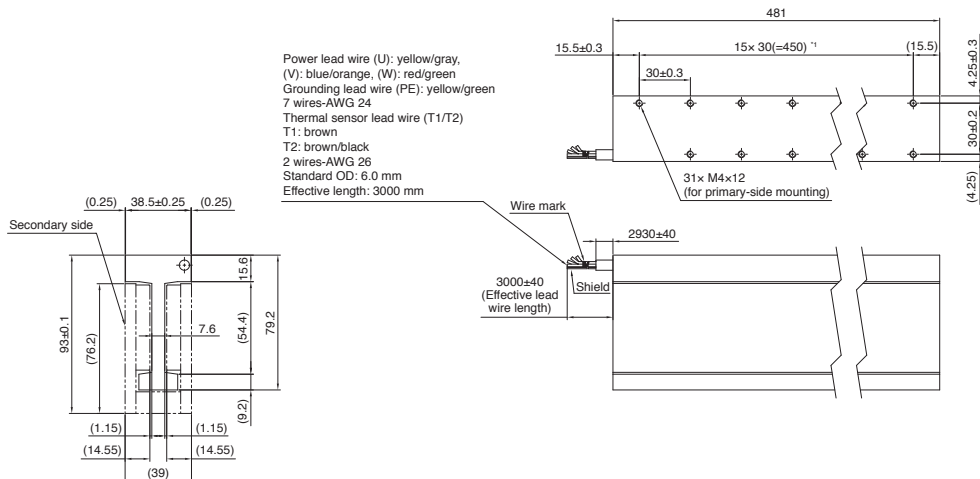

\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]


Notes: 1. Power, grounding, and thermal sensor lead wires do not have a long bending life. Fix the lead wires led from the primary side (coil) to a moving part to prevent the lead wires from repetitive bending.  
 2. Minimum bending radius of the lead wire equals to 10 times the standard overall diameter of the lead wire.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Linear Servo Motors

## LM-AU Series Secondary Side (Magnet) Dimensions

- LM-AUS40-120-JSS0      ● LM-AUS40-180-JSS0      ● LM-AUS40-240-JSS0
- LM-AUS40-300-JSS0      ● LM-AUS40-600-JSS0

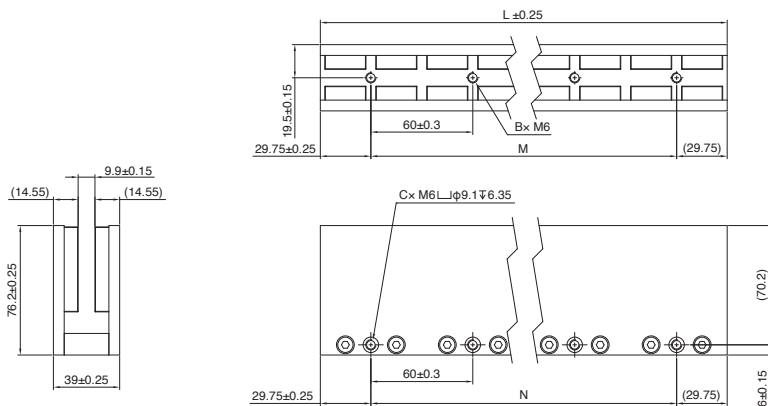

| Model             | Variable dimensions |                            |                            |    |    |
|-------------------|---------------------|----------------------------|----------------------------|----|----|
|                   | L                   | M                          | N                          | B  | C  |
| LM-AUS40-120-JSS0 | 119.5               | 60 <sup>*1</sup>           | 60 <sup>*1</sup>           | 2  | 2  |
| LM-AUS40-180-JSS0 | 179.5               | 2 × 60(=120) <sup>*1</sup> | 2 × 60(=120) <sup>*1</sup> | 3  | 3  |
| LM-AUS40-240-JSS0 | 239.5               | 3 × 60(=180) <sup>*1</sup> | 3 × 60(=180) <sup>*1</sup> | 4  | 4  |
| LM-AUS40-300-JSS0 | 299.5               | 4 × 60(=240) <sup>*1</sup> | 4 × 60(=240) <sup>*1</sup> | 5  | 5  |
| LM-AUS40-600-JSS0 | 599.5               | 9 × 60(=540) <sup>*1</sup> | 9 × 60(=540) <sup>*1</sup> | 10 | 10 |

\*1. Pitch tolerance between holes at both ends: ±0.3 [Unit: mm]

**List of Linear Encoders** (Note 1)

For the available combinations of the linear encoders and the servo amplifiers, contact your local sales office.

Mitsubishi Electric high-speed serial communication-compatible absolute type

| Manufacturer                   | Model           | Resolution                       | Rated speed<br>(Note 2) | Maximum effective measurement length<br>(Note 3) | Communication method<br>(Note 4) |
|--------------------------------|-----------------|----------------------------------|-------------------------|--|----------------------------------|
| Magnescale Co., Ltd.           | SR77            | 0.05 μm/                         | 3.3 m/s                 | 2040 mm  | Two-wire type                    |
|                                | SR87            | 0.01 μm                          |                         | 3040 mm  |                                  |
|                                | SR27A           | 0.01 μm                          | 3.3 m/s                 | 2040 mm  | Two-wire type/<br>Four-wire type |
|                                | SR67A           |                                  |                         | 3640 mm  |                                  |
|                                | SmartSCALE SQ47 | 0.005 μm                         | 3.3 m/s                 | 3740 mm  |                                  |
| SmartSCALE SQ57                | 3770 mm         |                                  |                         |  |                                  |
| Mitutoyo Corporation           | AT343A          | 0.05 μm                          | 2.0 m/s                 | 3000 mm  | Two-wire type                    |
|                                | AT543A-SC       |                                  | 2.5 m/s                 | 2200 mm  |                                  |
|                                | AT545A-SC       | 20 μm/4096<br>(Approx. 0.005 μm) | 2.5 m/s                 | 2200 mm  |                                  |
|                                | ST743A          | 0.1 μm                           | 5.0 m/s                 | 6000 mm  |                                  |
|                                | ST744A          |                                  |                         |  |                                  |
|                                | ST748A          |                                  |                         |  |                                  |
|                                | ST1341A         | 0.01 μm                          | 8.0 m/s                 | 12000 mm   |                                  |
| ST1342A                        | 0.001 μm        | 4200 mm                          |                         |  |                                  |
| Renishaw                       | RESOLUTE RL40M  | 1 nm                             | 100 m/s                 | 2100 mm  | Two-wire type                    |
|                                |                 | 50 nm                            |                         | 20990 mm   |                                  |
|                                | EVOLUTE EL40M   | 50 nm/100 nm/500 nm              | 100 m/s                 | 10010 mm   |                                  |
| Heidenhain                     | LC 495M         | 0.001 μm/                        | 3.0 m/s                 | 2040 mm  | Four-wire type                   |
|                                | LC 195M         | 0.01 μm                          |                         | 4240 mm  |                                  |
|                                | LIC 4193M       | 0.005 μm/<br>0.01 μm             | 10.0 m/s                | 3040 mm  | Two-wire type/<br>Four-wire type |
|                                | LIC 4195M       |                                  |                         | 28440 mm   |                                  |
|                                | LIC 4197M       |                                  |                         | 6040 mm  |                                  |
|                                | LIC 4199M       | 1020 mm                          |                         |  |                                  |
|                                | LIC 3197M       | 0.01 μm                          | 10.0 m/s                | 10000 mm   |                                  |
|                                | LIC 3199M       |                                  |                         |  |                                  |
|                                | LIC 2197M       | 0.05 μm/                         | 10.0 m/s                | 6020 mm  |                                  |
| LIC 2199M                      | 0.1 μm          | 6020 mm                          |                         |  |                                  |
| RSF Elektronik                 | MC15M           | 0.05 μm/<br>0.1 μm               | 10.0 m/s                | 3020 mm  |                                  |
| Nidec Machine Tool Corporation | MPFA-HZ-M01     | 0.1 μm                           | 30.0 m/s                | 8000 mm  | Two-wire type                    |

- Notes: 1. Contact the relevant linear encoder manufacturer for details on operating environment and specifications of the linear encoder such as ambient temperature, vibration resistance and IP rating.  
 2. The listed values are the manufacturer's specifications. When combined with MR-J5\_- servo amplifiers, the specification value is either the listed value or the servo motor maximum speed, whichever is lower.  
 3. The listed values are the manufacturer's specifications. The maximum length of the encoder cable between a linear encoder and a servo amplifier is 30 m. For a linear encoder manufactured by Nidec Machine Tool Corporation, the maximum length of the encoder cable between the linear encoder and a servo amplifier is 20 m.  
 4. The compatible communication method varies by the servo amplifier and operation mode. Refer to "External Encoder Connection Specifications" in this catalog.

# Linear Servo Motors

## List of Linear Encoders <sup>(Note 1)</sup>

For the available combinations of the linear encoders and the servo amplifiers, contact your local sales office.


### Mitsubishi Electric high-speed serial communication-compatible incremental type

| Manufacturer                   | Model  | Resolution                        | Rated speed<br><sup>(Note 2)</sup> | Maximum effective measurement length<br><sup>(Note 3)</sup> | Communication method<br><sup>(Note 4)</sup> |
|--------------------------------|--|-----------------------------------|------------------------------------|---|---|
| Magnescale Co., Ltd.           | SR75   | 0.05 μm/                          | 3.3 m/s                            | 2040 mm   | Two-wire type                               |
|                                | SR85   | 0.01 μm                           |                                    | 3040 mm   |   |
|                                | SL710 + PL101-RM/RHM   | 0.1 μm                            | 10.0 m/s                           | 100000 mm   |   |
|                                | SQ10 + PQ10 + MQ10   | 0.1 μm/<br>0.05 μm                | 10.0 m/s                           | 3800 mm   | Two-wire type/<br>Four-wire type            |
| Heidenhain                     | LIDA 483 + EIB 3091M<br>(16384-fold subdivision) <sup>(Note 7)</sup> | 20 μm/16384<br>(Approx. 1.22 nm)  | 4.0 m/s                            | 3040 mm   | Four-wire type                              |
|                                | LIDA 485 + EIB 3091M<br>(16384-fold subdivision) <sup>(Note 7)</sup> |                                   |                                    | 30040 mm  |   |
|                                | LIDA 487 + EIB 3091M<br>(16384-fold subdivision) <sup>(Note 7)</sup> |                                   |                                    | 6040 mm   |   |
|                                | LIDA 489 + EIB 3091M<br>(16384-fold subdivision) <sup>(Note 7)</sup> |                                   |                                    | 1020 mm   |   |
|                                | LIDA 287 + EIB 3091M<br>(16384-fold subdivision) <sup>(Note 7)</sup> | 200 μm/16384<br>(Approx. 12.2 nm) | 1.6 m/s                            | 10000 mm  |   |
|                                | LIDA 289 + EIB 3091M<br>(16384-fold subdivision) <sup>(Note 7)</sup> |                                   |                                    |   |   |
|                                | LIF 481 + EIB 3091M<br>(4096-fold subdivision)                       | 4 μm/4096<br>(Approx. 0.977 nm)   | 1.6 m/s                            | 1020 mm   |   |
|                                | LIP 6081 + EIB 3091M<br>(4096-fold subdivision)                      |                                   |                                    | 1440 mm   |   |
| Nidec Instruments Corporation  | PSLH041  | 0.1 μm                            | 5.0 m/s                            | 2400 mm   | Two-wire type                               |
| Nidec Machine Tool Corporation | MPFA-HI-M01 <sup>(Note 6)</sup>                                      | 0.1 μm                            | 30.0 m/s                           | 10000 mm <sup>(Note 8)</sup>                                | Two-wire type                               |

### A/B/Z-phase differential output type <sup>(Note 9)</sup>

| Manufacturer   | Model | Resolution                           | Rated speed<br><sup>(Note 2)</sup> | Maximum effective measurement length<br><sup>(Note 3)</sup> | Communication method<br><sup>(Note 4)</sup> |
|----------------|-------|--------------------------------------|------------------------------------|---|---|
| Not designated | -     | 0.001 μm to 5 μm <sup>(Note 5)</sup> | Depends on the linear encoder      | Depends on the linear encoder                               | A/B/Z-phase differential output method      |


- Notes:
- Contact the relevant linear encoder manufacturer for details on operating environment and specifications of the linear encoder such as ambient temperature, vibration resistance and IP rating.
  - The listed values are the manufacturer's specifications. When combined with MR-J5\_ \_ servo amplifiers, the specification value is either the listed value or the servo motor maximum speed, whichever is lower.
  - The listed values are the manufacturer's specifications. The maximum length of the encoder cable between a linear encoder and a servo amplifier is 30 m. For a linear encoder manufactured by Nidec Machine Tool Corporation, the maximum length of the encoder cable between the linear encoder and a servo amplifier is 20 m.
  - The compatible communication method varies by the servo amplifier and operation mode. Refer to "External Encoder Connection Specifications" in this catalog.
  - Select the linear encoder within this range.
  - There are some restrictions on this linear encoder. When using it, contact your local sales office.
  - For this combination, it is recommended using EIB 3091M with a subdivision of 16384. EIB 3091M with a subdivision of 4096 is also available. Contact the manufacturer for details.
  - For the measurement length over 10000 mm, contact Nidec Machine Tool Corporation.
  - The phase difference of the A-phase pulse and the B-phase pulse, and the width of the Z-phase pulse must be 200 ns or wider. The output pulse of A-phase and B-phase of the A/B/Z-phase differential output linear encoder is in the multiply-by-four count method. For linear encoders without Z-phase, some of the homing modes cannot be used. Refer to "MR-J5 User's Manual" for details.

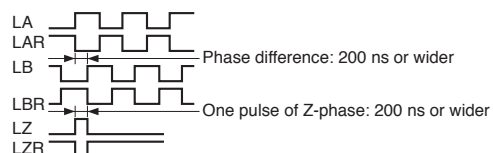

### Determining the Number of the Secondary-Side (Magnet) Blocks

The number of the secondary-side (magnet) blocks is determined according to the total distance calculated from the following equation <sup>(Note 2)</sup> :

$$(\text{Total length of aligned secondary side (magnet)}) \geq (\text{Maximum feed distance}) + (\text{Length of the primary side (coil)})$$

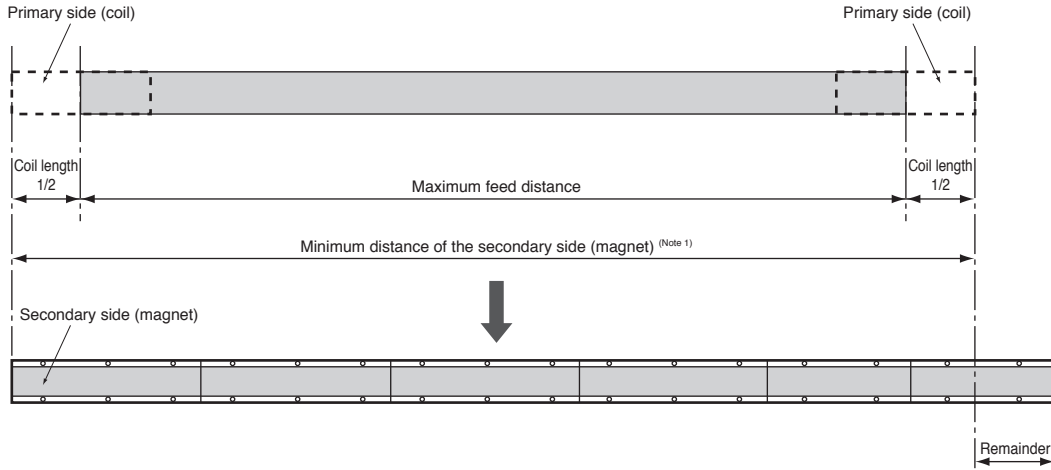

- Notes:
1. Pitch tolerance between any two holes must be within  $\pm 0.2$  mm. When two or more secondary sides (magnets) are mounted lined up, there may be a gap between each block, depending on the mounting method and the number of the blocks.
  2. LM-K2 series has a structure of magnetic attraction counter-force and requires at least two blocks of identical secondary side (magnet). Therefore, the total number of the secondary side necessary equals to twice the number determined from the equation.

MEMO



# 6

## Direct Drive Motors

|                                    |      |
|------------------------------------|------|
| Model Designation.....             | 6-2  |
| Specifications                     |      |
| TM-RG2M Series/TM-RU2M Series..... | 6-4  |
| TM-RFM Series.....                 | 6-6  |
| Machine Accuracy.....              | 6-9  |
| Power Supply Capacity.....         | 6-10 |
| Dimensions                         |      |
| TM-RG2M Series.....                | 6-12 |
| TM-RU2M Series.....                | 6-14 |
| TM-RFM Series.....                 | 6-16 |

\* Refer to p. 7-78 in this catalog for conversion of units.

\* The characteristics and numerical values without tolerances mentioned in this catalog are representative values.


# Direct Drive Motors

## Model Designation (Note 1, 2)

### Low-profile series


#### ● Flange type

## T M - R G 2 M

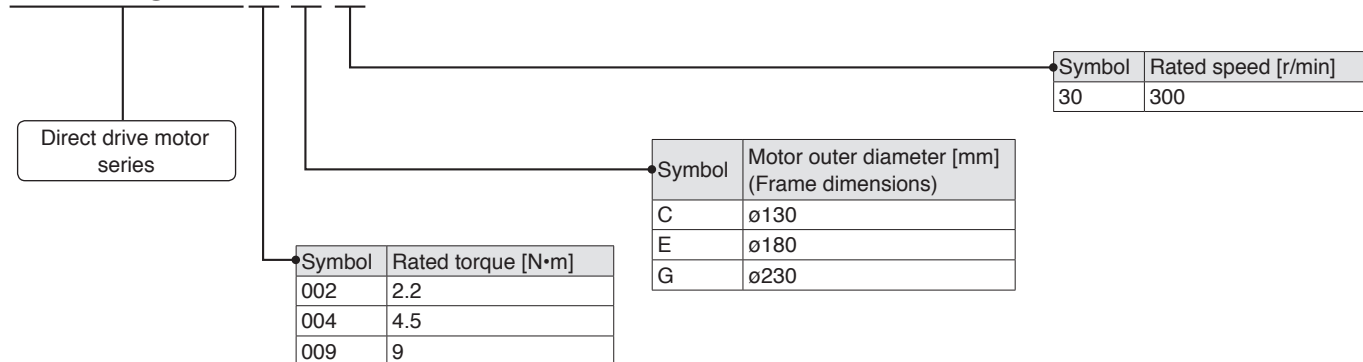

#### ● Table type

## T M - R U 2 M

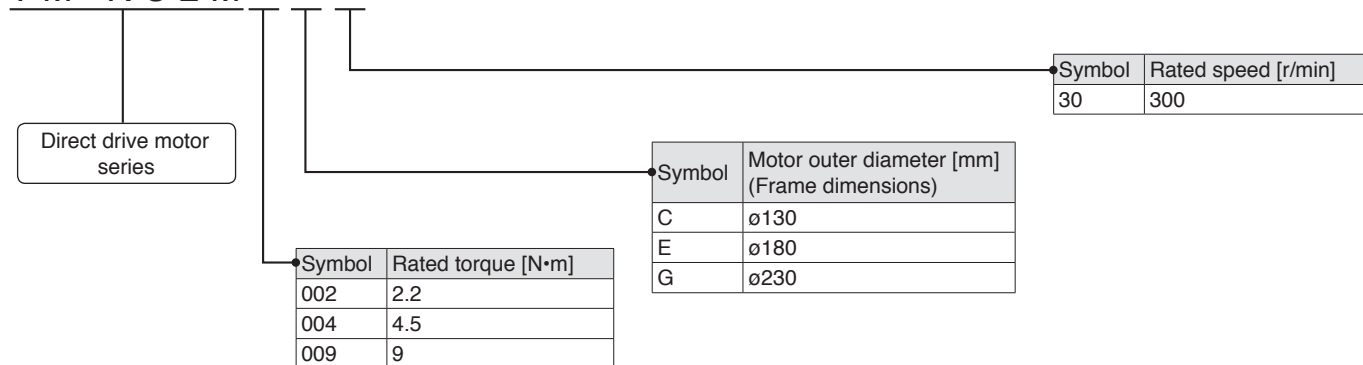


- Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.  
 2. Use the direct drive motors manufactured in June 2019 or later when connecting to MR-J5 servo amplifiers.  
 If the direct drive motors manufactured before the date above are connected, an alarm occurs.



**Model Designation** (Note 1, 2)

**High-rigidity series**

**T M - R F M**

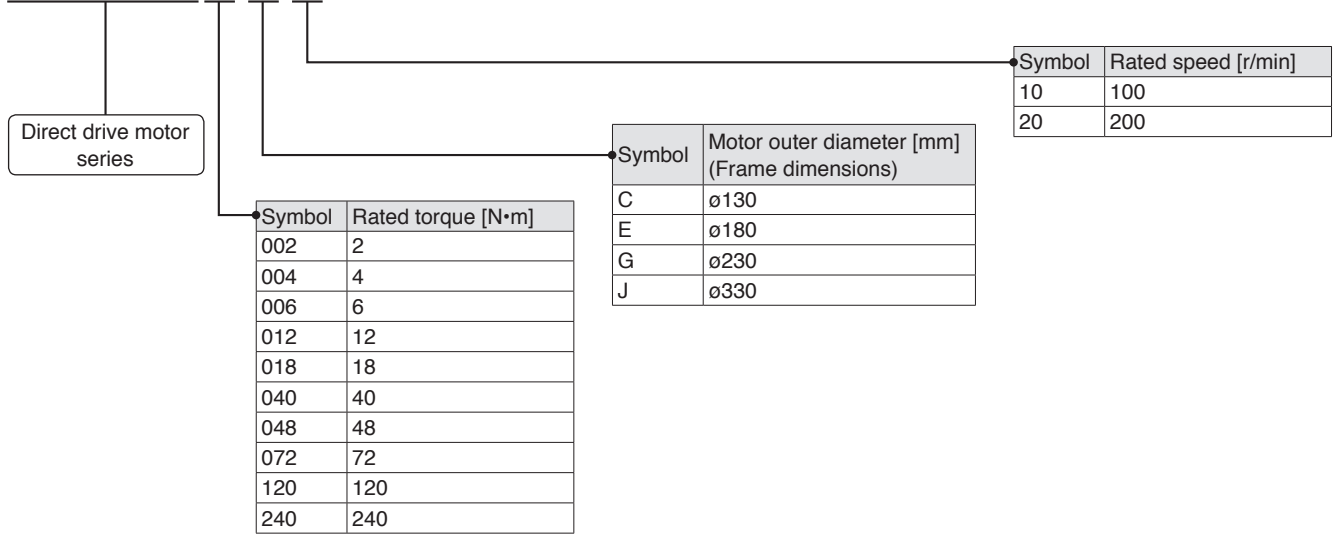

- Notes: 1. This section describes what each symbol in a model name indicates. Some combinations of symbols are not available.  
 2. Use the direct drive motors manufactured in June 2019 or later when connecting to MR-J5 servo amplifiers.  
 If the direct drive motors manufactured before the date above are connected, an alarm occurs.

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors**
- Options/Peripheral Equipment
- LVSWires
- Product List
- Precautions
- Support

# Direct Drive Motors

## TM-RG2M Series/TM-RU2M Series Specifications


| Direct drive motor model                                    |                                     | TM-RG2M<br>TM-RU2M                      | 002C30  | 004E30                               | 009G30 |
|---|-------------------------------------|---|---|--------------------------------------|--------|
| Motor outer diameter (frame dimensions)                     |                                     | [mm]                                    | ø130  | ø180                                 | ø230   |
| Continuous running duty                                     | Rated output <sup>(Note 4)</sup>    | [W]                                     | 69  | 141 (188)                            | 283    |
|   | Rated torque <sup>(Note 3, 4)</sup> | [N·m]                                   | 2.2   | 4.5 (6)                              | 9      |
| Maximum torque <sup>(Note 4)</sup>                          |                                     | [N·m]                                   | 8.8   | 13.5 (18)                            | 27     |
| Rated speed   |                                     | [r/min]                                 | 300   |                                      |        |
| Maximum speed   |                                     | [r/min]                                 | 600   |                                      |        |
| Power rate at continuous rated torque <sup>(Note 4)</sup>   |                                     | [kW/s]                                  | 6.1   | 3.4 (6.0)                            | 5.5    |
| Rated current <sup>(Note 4)</sup>                           |                                     | [A]                                     | 1.2   | 1.3 (1.7)                            | 2.2    |
| Maximum current <sup>(Note 4)</sup>                         |                                     | [A]                                     | 4.9   | 4.0 (5.3)                            | 6.7    |
| Moment of inertia J   |                                     | [× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | 7.88  | 60.2                                 | 147    |
| Recommended load to motor inertia ratio <sup>(Note 1)</sup> |                                     |   | 50 times or less  | 20 times or less                     |        |
| Absolute accuracy <sup>(Note 5)</sup>                       |                                     | [s]                                     | ±15   | ±12.5                                |        |
| Speed/position detector                                     | Absolute/incremental <sup>*1</sup>  |   | 21-bit encoder<br>2097152 pulses/rev                                    | 22-bit encoder<br>4194304 pulses/rev |        |
| Type  |                                     |   | Permanent magnet synchronous motor                                      |                                      |        |
| Thermistor  |                                     |   | Built-in  |                                      |        |
| Insulation class  |                                     |   | 155 (F)   |                                      |        |
| Structure   |                                     |   | Totally enclosed, natural cooling (IP rating: IP40) <sup>(Note 2)</sup> |                                      |        |
| Vibration resistance <sup>*2</sup>                          |                                     | [m/s <sup>2</sup> ]                     | X: 49, Y: 49  |                                      |        |
| Vibration rank  |                                     |   | V10 <sup>*4</sup>   |                                      |        |
| Rotor permissible load <sup>*3</sup>                        | Moment load                         | [N·m]                                   | 15  | 49                                   | 65     |
|   | Axial load                          | [N]                                     | 770   | 2300                                 | 3800   |
| Mass  |                                     | [kg]                                    | 2.7   | 5.5                                  | 8.3    |

- Notes:
1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.
  2. Connectors and a gap along the rotor (output shaft) are excluded.
  3. When unbalanced torque is generated, such as in a vertical lift machine, use the absolute position detection system, and keep the unbalanced torque under 70 % of the servo motor rated torque.
  4. The values in brackets are applicable when the torque is increased in combination with a larger-capacity servo amplifier. Refer to "Combinations of Direct Drive Motors and Servo Amplifiers" in this catalog for the combinations.
  5. Absolute accuracy varies according to the mounting state of load and the surrounding environment.


Refer to "Annotations for Direct Drive Motor Specifications" on p. 6-11 in this catalog for the details about asterisks 1 to 4.

### TM-RG2M Series/TM-RU2M Series Torque Characteristics


TM-RG2M002C30,  
TM-RU2M002C30 (Note 1, 2, 3)




TM-RG2M004E30,  
TM-RU2M004E30 (Note 1, 2, 3)



TM-RG2M004E30,  
TM-RU2M004E30 (Note 1, 2, 3, 4)  
(when torque is increased)




TM-RG2M009G30,  
TM-RU2M009G30 (Note 1, 2, 3)




- Notes:
1. —: For 3-phase 200 V AC or 1-phase 230 V AC
  2. - - -: For 1-phase 200 V AC
  3. Torque drops when the power supply voltage is below the specified value.
  4. This value is applicable when the torque is increased in combination with a larger-capacity servo amplifier. Refer to "Combinations of Direct Drive Motors and Servo Amplifiers" in this catalog for the combinations.

### Mounting of TM-RG2M Series/TM-RU2M Series

#### ● Flange type (with pilot)

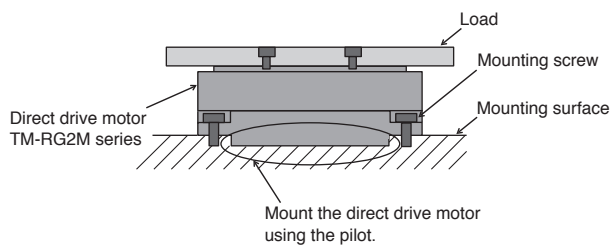

#### ● Table type (with positioning pin holes)

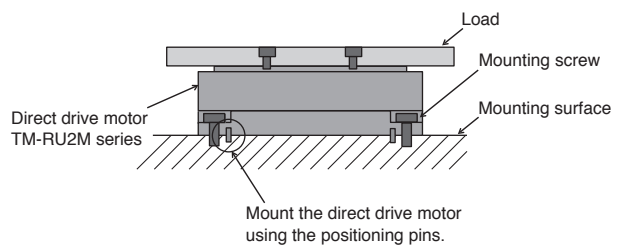

### Precautions when mounting the direct drive motor

- Fix the direct drive motor securely on a high-rigid mounting surface because a machine resonance may occur if the rigidity of the mounting surface is low.
  - Fix the mounting screws of the direct drive motor and a rotating table securely to ensure enough rigidity.
  - To ensure heat dissipation and accuracy, mount the direct drive motor on a high-rigid mounting surface which has enough heat dissipation area without gaps between the bottom of the direct drive motor and the mounting surface.
  - The flange type has a higher mounting accuracy than the table type. When a high-mounting accuracy is required, select the flange type.
- Refer to "Direct Drive Motor Machine Accuracy" on p. 6-9 in this catalog for the machine accuracy of each direct drive motor, and refer to the dimensions in this catalog for the dimensional tolerance.

# Direct Drive Motors

## TM-RFM Series Specifications

| Direct drive motor model                                    |                                  | TM-RFM                                  | 002C20   | 004C20 | 006C20 | 006E20 | 012E20 | 018E20 |
|---|----------------------------------|---|--|--------|--------|--------|--------|--------|
| Motor outer diameter (frame dimensions)                     |                                  | [mm]                                    | ø130   |        |        | ø180   |        |        |
| Continuous running duty                                     | Rated output                     | [W]                                     | 42   | 84     | 126    | 126    | 251    | 377    |
|   | Rated torque <sup>(Note 3)</sup> | [N·m]                                   | 2  | 4      | 6      | 6      | 12     | 18     |
| Maximum torque  |                                  | [N·m]                                   | 6  | 12     | 18     | 18     | 36     | 54     |
| Rated speed   |                                  | [r/min]                                 | 200  |        |        |        |        |        |
| Maximum speed   |                                  | [r/min]                                 | 500  |        |        |        |        |        |
| Power rate at continuous rated torque                       |                                  | [kW/s]                                  | 3.7  | 9.6    | 16.1   | 4.9    | 12.9   | 21.8   |
| Rated current   |                                  | [A]                                     | 1.3  | 2.2    | 3.2    | 3.0    | 3.8    | 6.0    |
| Maximum current   |                                  | [A]                                     | 3.9  | 6.6    | 9.6    | 9.0    | 12     | 18     |
| Moment of inertia J   |                                  | [× 10 <sup>-4</sup> kg·m <sup>2</sup> ] | 10.9   | 16.6   | 22.4   | 74.0   | 111    | 149    |
| Recommended load to motor inertia ratio <sup>(Note 1)</sup> |                                  |   | 50 times or less   |        |        |        |        |        |
| Absolute accuracy <sup>(Note 4)</sup>                       |                                  | [s]                                     | ±15  |        |        | ±12.5  |        |        |
| Speed/position detector                                     |                                  |   | Absolute/incremental 20-bit encoder <sup>†1</sup> (resolution: 1048576 pulses/rev) |        |        |        |        |        |
| Type  |                                  |   | Permanent magnet synchronous motor   |        |        |        |        |        |
| Thermistor  |                                  |   | Built-in   |        |        |        |        |        |
| Insulation class  |                                  |   | 155 (F)  |        |        |        |        |        |
| Structure   |                                  |   | Totally enclosed, natural cooling (IP rating: IP42) <sup>(Note 2)</sup>            |        |        |        |        |        |
| Vibration resistance <sup>†2</sup>                          |                                  | [m/s <sup>2</sup> ]                     | X: 49, Y: 49   |        |        |        |        |        |
| Vibration rank  |                                  |   | V10 <sup>†4</sup>  |        |        |        |        |        |
| Rotor permissible load <sup>†3</sup>                        | Moment load                      | [N·m]                                   | 22.5   |        |        | 70     |        |        |
|   | Axial load                       | [N]                                     | 1100   |        |        | 3300   |        |        |
| Mass  |                                  | [kg]                                    | 5.2  | 6.8    | 8.4    | 11     | 15     | 18     |

- Notes:
1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.
  2. Connectors and a gap along the rotor (output shaft) are excluded.
  3. When unbalanced torque is generated, such as in a vertical lift machine, use the absolute position detection system, and keep the unbalanced torque under 70 % of the servo motor rated torque.
  4. Absolute accuracy varies according to the mounting state of load and the surrounding environment.

Refer to "Annotations for Direct Drive Motor Specifications" on p. 6-11 in this catalog for the details about asterisks 1 to 4.

## TM-RFM Series Specifications

| Direct drive motor model                                    |                                  | TM-RFM                                 | 012G20  | 048G20 | 072G20 | 040J10           | 120J10 | 240J10 |
|---|----------------------------------|--|---|--------|--------|------------------|--------|--------|
| Motor outer diameter (frame dimensions)                     |                                  | [mm]                                   | ø230  |        |        | ø330             |        |        |
| Continuous running duty                                     | Rated output                     | [W]                                    | 251   | 1005   | 1508   | 419              | 1257   | 2513   |
|   | Rated torque <sup>(Note 3)</sup> | [N·m]                                  | 12  | 48     | 72     | 40               | 120    | 240    |
| Maximum torque  |                                  | [N·m]                                  | 36  | 144    | 216    | 120              | 360    | 720    |
| Rated speed   |                                  | [r/min]                                | 200   |        |        | 100              |        |        |
| Maximum speed   |                                  | [r/min]                                | 500   |        |        | 200              |        |        |
| Power rate at continuous rated torque                       |                                  | [kW/s]                                 | 6.0   | 37.5   | 59.3   | 9.4              | 40.9   | 91.4   |
| Rated current   |                                  | [A]                                    | 3.6   | 11     | 16     | 4.3              | 11     | 19     |
| Maximum current   |                                  | [A]                                    | 11  | 33     | 48     | 13               | 33     | 57     |
| Moment of inertia J   |                                  | [ $\times 10^{-4}$ kg·m <sup>2</sup> ] | 238   | 615    | 875    | 1694             | 3519   | 6303   |
| Recommended load to motor inertia ratio <sup>(Note 1)</sup> |                                  |  | 50 times or less  |        |        |                  |        |        |
| Absolute accuracy <sup>(Note 4)</sup>                       |                                  | [s]                                    | ±12.5   |        |        | ±10              |        |        |
| Speed/position detector                                     |                                  |  | Absolute/incremental 20-bit encoder *1 (resolution: 1048576 pulses/rev) |        |        |                  |        |        |
| Type  |                                  |  | Permanent magnet synchronous motor                                      |        |        |                  |        |        |
| Thermistor  |                                  |  | Built-in  |        |        |                  |        |        |
| Insulation class  |                                  |  | 155 (F)   |        |        |                  |        |        |
| Structure   |                                  |  | Totally enclosed, natural cooling (IP rating: IP42) <sup>(Note 2)</sup> |        |        |                  |        |        |
| Vibration resistance *2                                     |                                  | [m/s <sup>2</sup> ]                    | X: 49, Y: 49  |        |        | X: 24.5, Y: 24.5 |        |        |
| Vibration rank  |                                  |  | V10 *4  |        |        |                  |        |        |
| Rotor permissible load *3                                   | Moment load                      | [N·m]                                  | 93  |        |        | 350              |        |        |
|   | Axial load                       | [N]                                    | 5500  |        |        | 16000            |        |        |
| Mass  |                                  | [kg]                                   | 17  | 36     | 52     | 53               | 91     | 146    |


- Notes: 1. Contact your local sales office if the load to motor inertia ratio exceeds the value in the table.  
2. Connectors and a gap along the rotor (output shaft) are excluded.  
3. When unbalanced torque is generated, such as in a vertical lift machine, use the absolute position detection system, and keep the unbalanced torque under 70 % of the servo motor rated torque.  
4. Absolute accuracy varies according to the mounting state of load and the surrounding environment.

Refer to "Annotations for Direct Drive Motor Specifications" on p. 6-11 in this catalog for the details about asterisks 1 to 4.


# Direct Drive Motors

## TM-RFM Series Torque Characteristics


TM-RFM002C20 (Note 1, 2, 3)




TM-RFM004C20 (Note 1, 2, 3)




TM-RFM006C20 (Note 1, 2, 3)




TM-RFM006E20 (Note 1, 2, 3)




TM-RFM012E20 (Note 1, 2, 3)




TM-RFM018E20 (Note 1, 2, 3)




TM-RFM012G20 (Note 1, 2, 3)




TM-RFM048G20 (Note 1, 3)




TM-RFM072G20 (Note 1, 3)




TM-RFM040J10 (Note 1, 2, 3)



TM-RFM120J10 (Note 1, 3)



TM-RFM240J10 (Note 1, 3)



Notes: 1. — : For 3-phase 200 V AC or 1-phase 230 V AC

The following direct drive motors are compatible with 1-phase 230 V AC:

TM-RFM002C20, TM-RFM004C20, TM-RFM006C20, TM-RFM006E20, TM-RFM012E20, TM-RFM018E20, TM-RFM012G20, and TM-RFM040J10

2. - - - : For 1-phase 200 V AC


3. Torque drops when the power supply voltage is below the specified value.

**Direct Drive Motor Machine Accuracy**


The machine accuracy related to the direct drive motor rotor (output shaft) and mounting is indicated below:

| Item  | Measuring position | Accuracy [mm] |
|---|--------------------|---------------|
| Runout of flange surface about rotor (output shaft) | a                  | 0.05          |
| Runout of fitting outer diameter of flange surface  | b                  | 0.07          |
| Runout of rotor (output shaft)                      | c                  | 0.04          |
| Runout of rotor (output shaft) end                  | d                  | 0.02          |


●TM-RG2M series

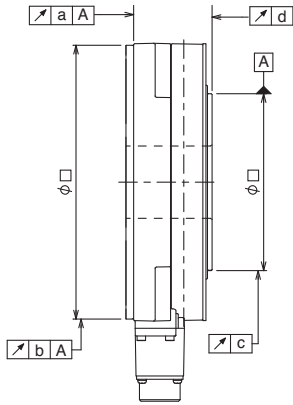

●TM-RU2M series

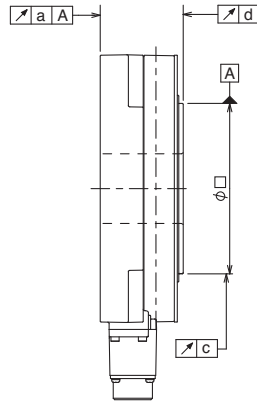

●TM-RFM series

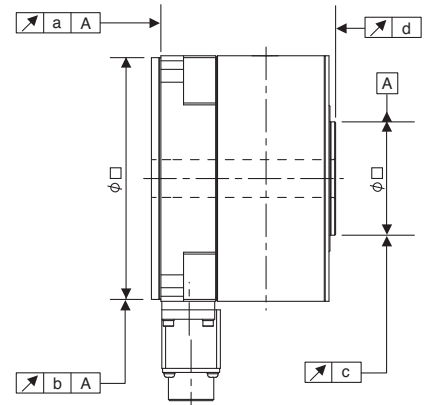

# Direct Drive Motors

## Power Supply Capacity

| Direct drive motor                | Servo amplifier <sup>(Note 3)</sup> | Power supply capacity [kVA] <sup>(Note 1, 2)</sup>                                 |      |
|-----------------------------------|-------------------------------------|--|------|
| TM-RG2M series/<br>TM-RU2M series | TM-RG2M002C30                       | MR-J5-20G/B/A  | 0.25 |
|                                   | TM-RU2M002C30                       | MR-J5W2-22G/B, MR-J5W2-44G/B<br>MR-J5W3-222G/B, MR-J5W3-444G/B                     |      |
|                                   | TM-RG2M004E30                       | MR-J5-20G/B/A  | 0.5  |
|                                   | TM-RU2M004E30                       | MR-J5W2-22G/B<br>MR-J5W3-222G/B  |      |
|                                   | TM-RG2M004E30                       | MR-J5-40G/B/A  | 0.7  |
|                                   | TM-RU2M004E30                       | MR-J5W2-44G/B<br>MR-J5W3-444G/B  |      |
|                                   | TM-RG2M009G30                       | MR-J5-40G/B/A  | 0.9  |
|                                   | TM-RU2M009G30                       | MR-J5W2-44G/B, MR-J5W2-77G/B<br>MR-J5W2-1010G/B<br>MR-J5W3-444G/B                  |      |
| TM-RFM series                     | TM-RFM002C20                        | MR-J5-20G/B/A<br>MR-J5W2-22G/B, MR-J5W2-44G/B<br>MR-J5W3-222G/B, MR-J5W3-444G/B    | 0.25 |
|                                   | TM-RFM004C20                        | MR-J5-40G/B/A<br>MR-J5W2-44G/B, MR-J5W2-77G/B<br>MR-J5W2-1010G/B<br>MR-J5W3-444G/B | 0.38 |
|                                   | TM-RFM006C20                        | MR-J5-60G/B/A<br>MR-J5W2-77G/B, MR-J5W2-1010G/B                                    | 0.53 |
|                                   | TM-RFM006E20                        | MR-J5-60G/B/A<br>MR-J5W2-77G/B, MR-J5W2-1010G/B                                    | 0.46 |
|                                   | TM-RFM012E20                        | MR-J5-70G/B/A<br>MR-J5W2-77G/B, MR-J5W2-1010G/B                                    | 0.81 |
|                                   | TM-RFM018E20                        | MR-J5-100G/B/A<br>MR-J5W2-1010G/B  | 1.3  |
|                                   | TM-RFM012G20                        | MR-J5-70G/B/A<br>MR-J5W2-77G/B, MR-J5W2-1010G/B                                    | 0.71 |
|                                   | TM-RFM048G20                        | MR-J5-350G/B/A   | 2.7  |
|                                   | TM-RFM072G20                        | MR-J5-350G/B/A   | 3.8  |
|                                   | TM-RFM040J10                        | MR-J5-70G/B/A<br>MR-J5W2-77G/B, MR-J5W2-1010G/B                                    | 1.2  |
|                                   | TM-RFM120J10                        | MR-J5-350G/B/A   | 3.4  |
|                                   | TM-RFM240J10                        | MR-J5-500G/B/A   | 6.6  |

Notes: 1. The power supply capacity varies depending on the power supply impedance.


2. The listed values are the power supply capacity for one servo motor. For the multi-axis servo amplifiers, calculate the power supply capacity with the equation below:  
Power supply capacity [kVA] = Sum of power supply capacity [kVA] of the connected servo motors

3. Note that the power supply capacity for servo amplifiers with special specifications is the same as that for standard servo amplifiers. Refer to the servo amplifiers with the same rated output.




### Annotations for Direct Drive Motor Specifications

- \*1. Connect the following options for absolute position detection system.
  - MR-J5-G\_/MR-J5-B\_/MR-J5-A\_: battery (MR-BAT6V1SET or MR-BAT6V1SET-A) and absolute position storage unit (MR-BTAS01)
  - MR-J5W\_: battery case (MR-BT6VCASE), battery (MR-BAT6V1) × 5 pcs., and absolute position storage unit (MR-BTAS01)
 Refer to "MR-J5 User's Manual" for details.
- \*2. The vibration direction is shown in the diagram below. The numerical value indicates the maximum value of the component. Fretting tends to occur on the bearing when the direct drive motor stops. Thus, maintain vibration level at approximately one-half of the allowable value.




- \*3. The following is calculation examples of axial and moment loads to the rotor (output shaft) of the direct drive motor. The axial and moment loads must be maintained equal to or below the permissible value.

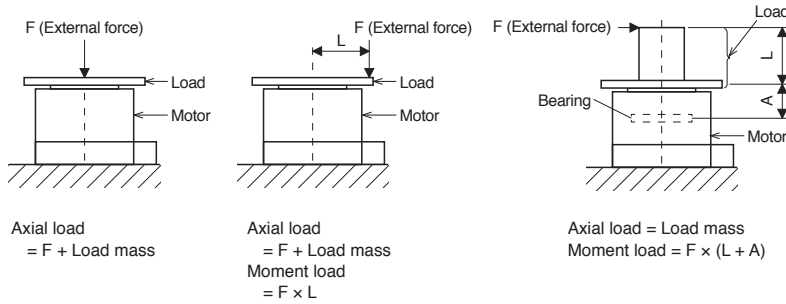

| Motor outer diameter [mm]<br>(Frame dimensions) | Dimension A [mm] |               |
|---|------------------|---------------|
|   | TM-RG2M series   | TM-RFM series |
| ø130  | 20.6             | 19.1          |
| ø180  | 20.7             | 20.2          |
| ø230  | 18.0             | 24.4          |
| ø330  | -                | 32.5          |

- \*4. V10 indicates that the amplitude of the direct drive motor itself is 10 μm or less. The following shows mounting orientation and measuring position of the direct drive motor during the measurement:



Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List


Precautions

Support

# Direct Drive Motors


## TM-RG2M Series Dimensions (Note 1, 2)

### ● TM-RG2M002C30

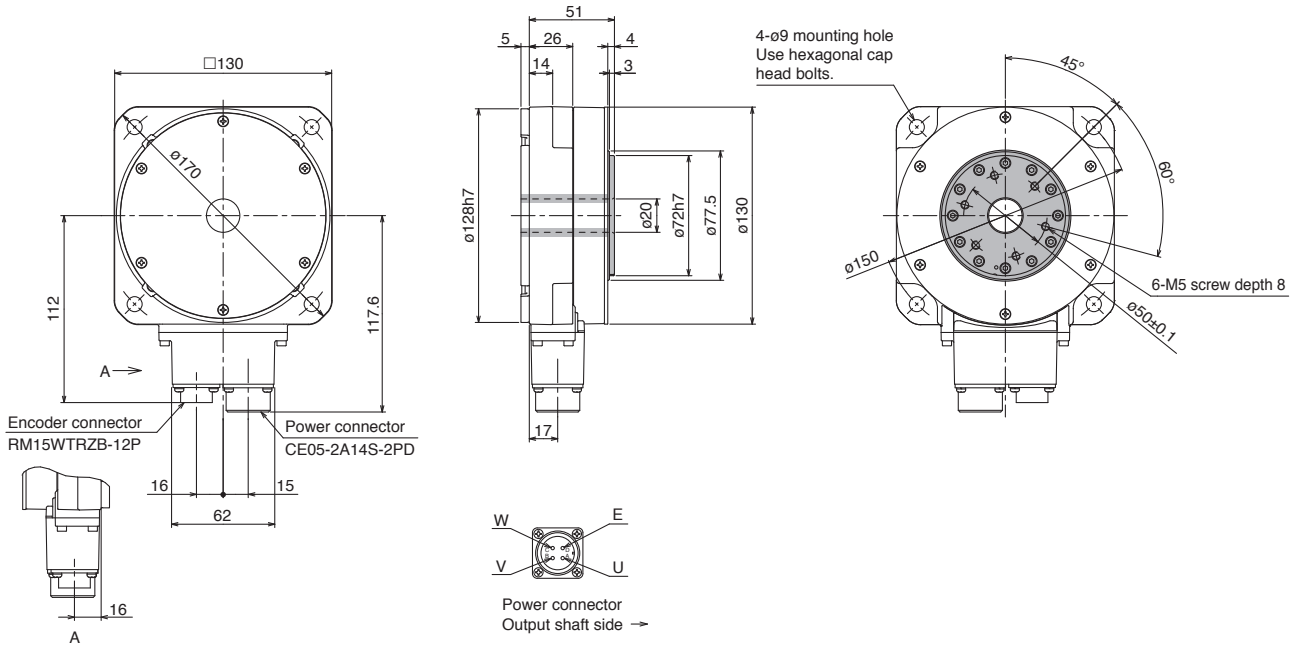

[Unit: mm]

### ● TM-RG2M004E30

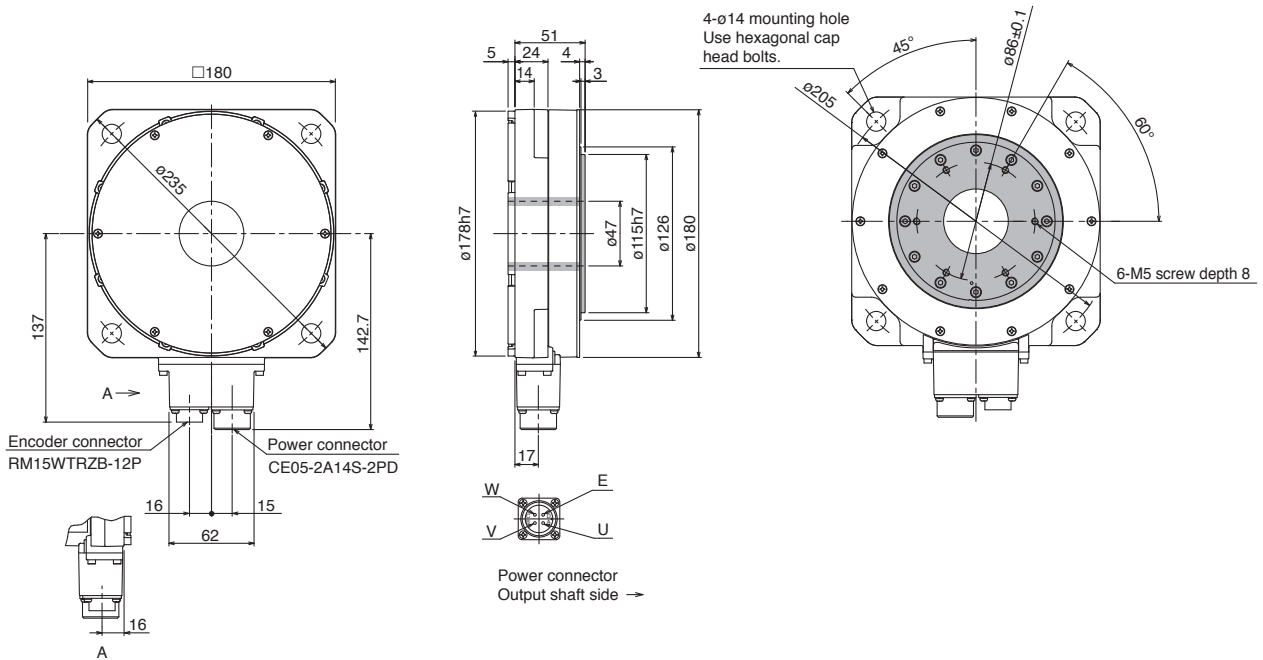


[Unit: mm]

- Notes: 1. General tolerances are applied to the dimensions in which tolerances are not given in the drawing.  
2. ■ indicates rotor.

**TM-RG2M Series Dimensions** (Note 1, 2)

● **TM-RG2M009G30**

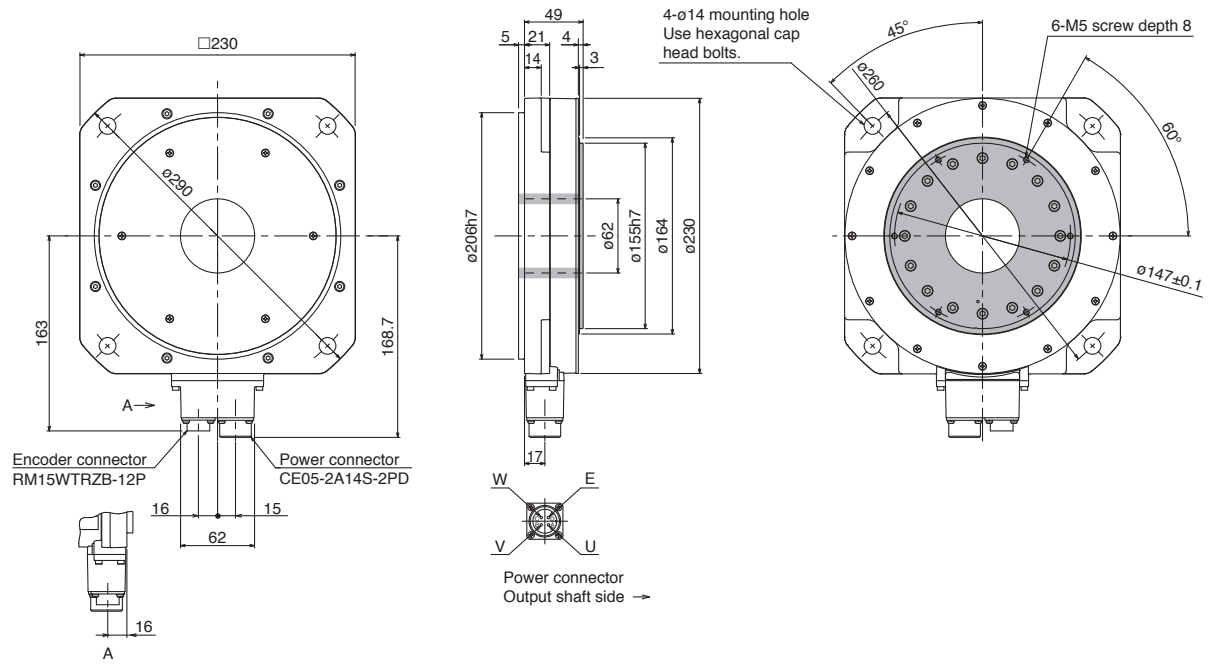

[Unit: mm]

- Notes: 1. General tolerances are applied to the dimensions in which tolerances are not given in the drawing.  
 2. ■ indicates rotor.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List


Precautions

Support

# Direct Drive Motors


## TM-RU2M Series Dimensions (Note 1, 2)

### ● TM-RU2M002C30

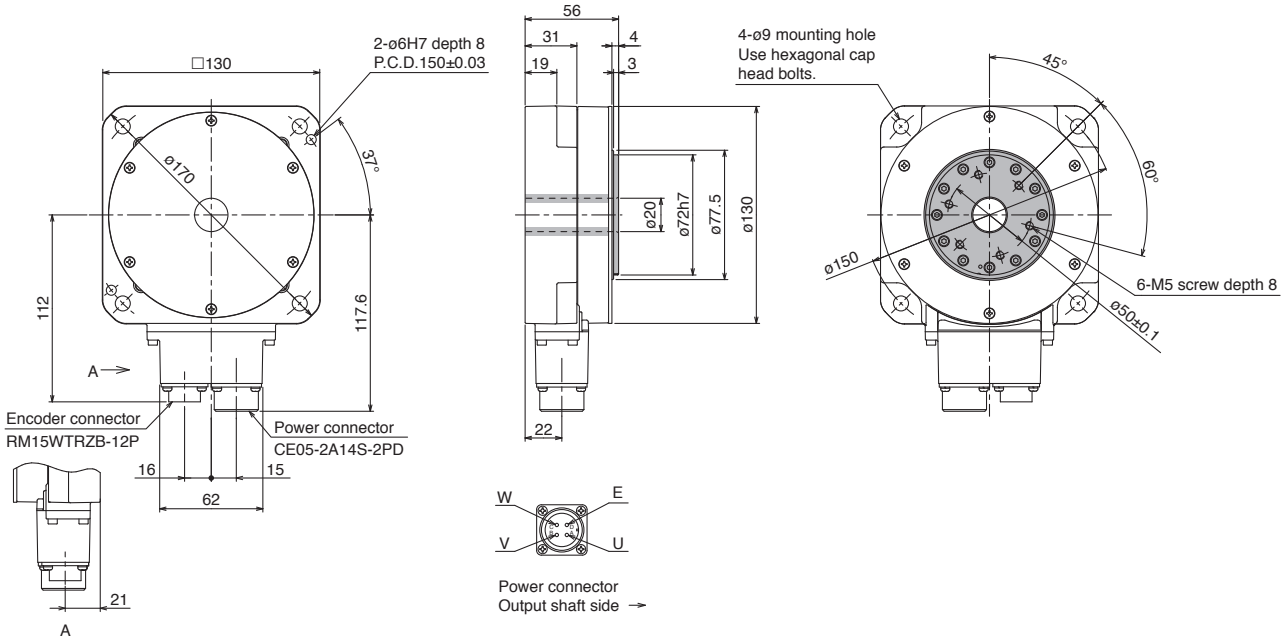

[Unit: mm]

### ● TM-RU2M004E30

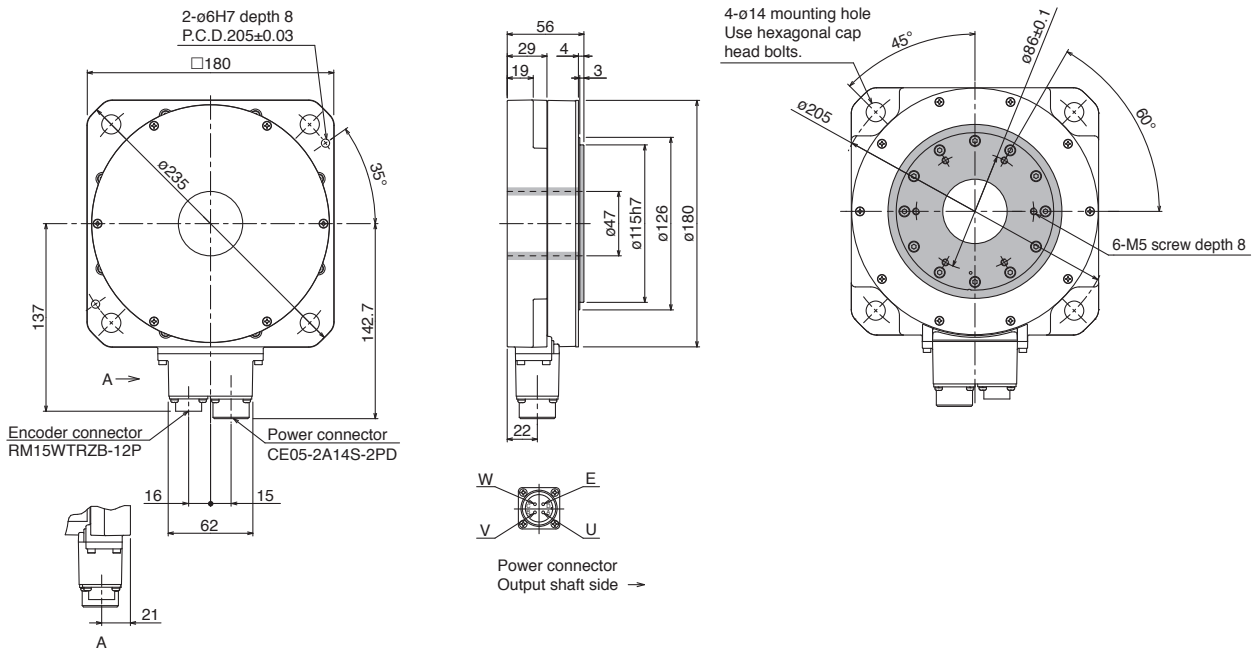


[Unit: mm]

- Notes: 1. General tolerances are applied to the dimensions in which tolerances are not given in the drawing.  
2. ■ indicates rotor.

**TM-RU2M Series Dimensions** (Note 1, 2)

● **TM-RU2M009G30**

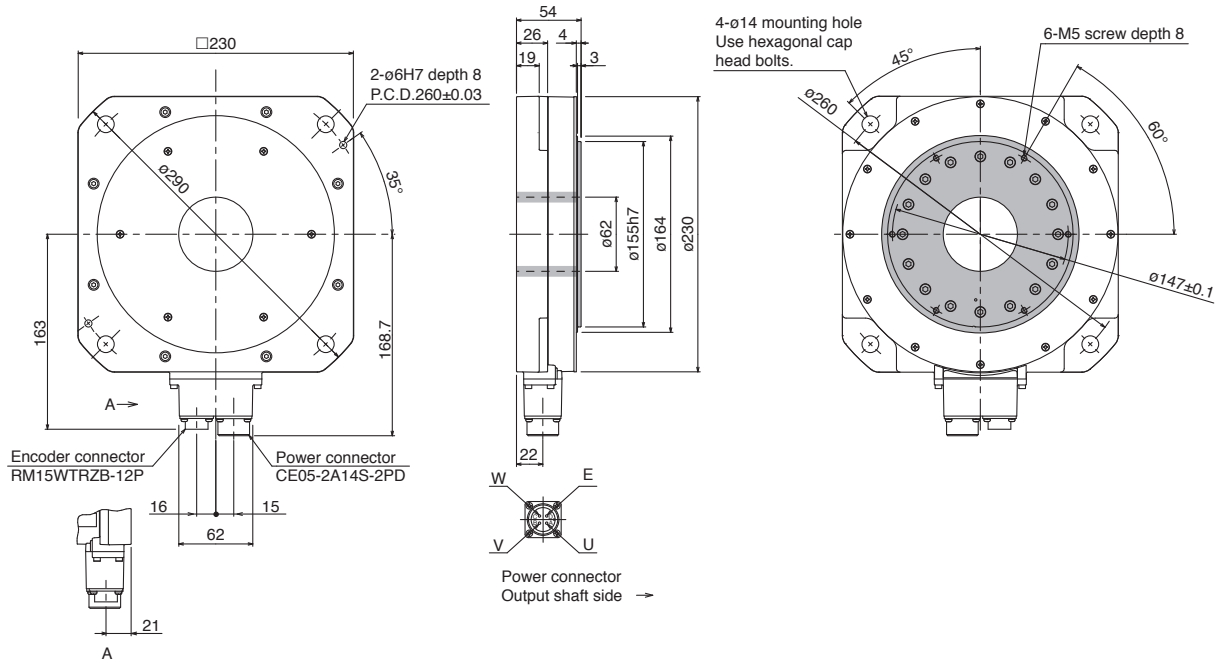

[Unit: mm]


- Notes: 1. General tolerances are applied to the dimensions in which tolerances are not given in the drawing.  
 2. ■ indicates rotor.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Direct Drive Motors


## TM-RFM Series Dimensions (Note 1, 2)

### ● TM-RFM002C20, TM-RFM004C20, TM-RFM006C20

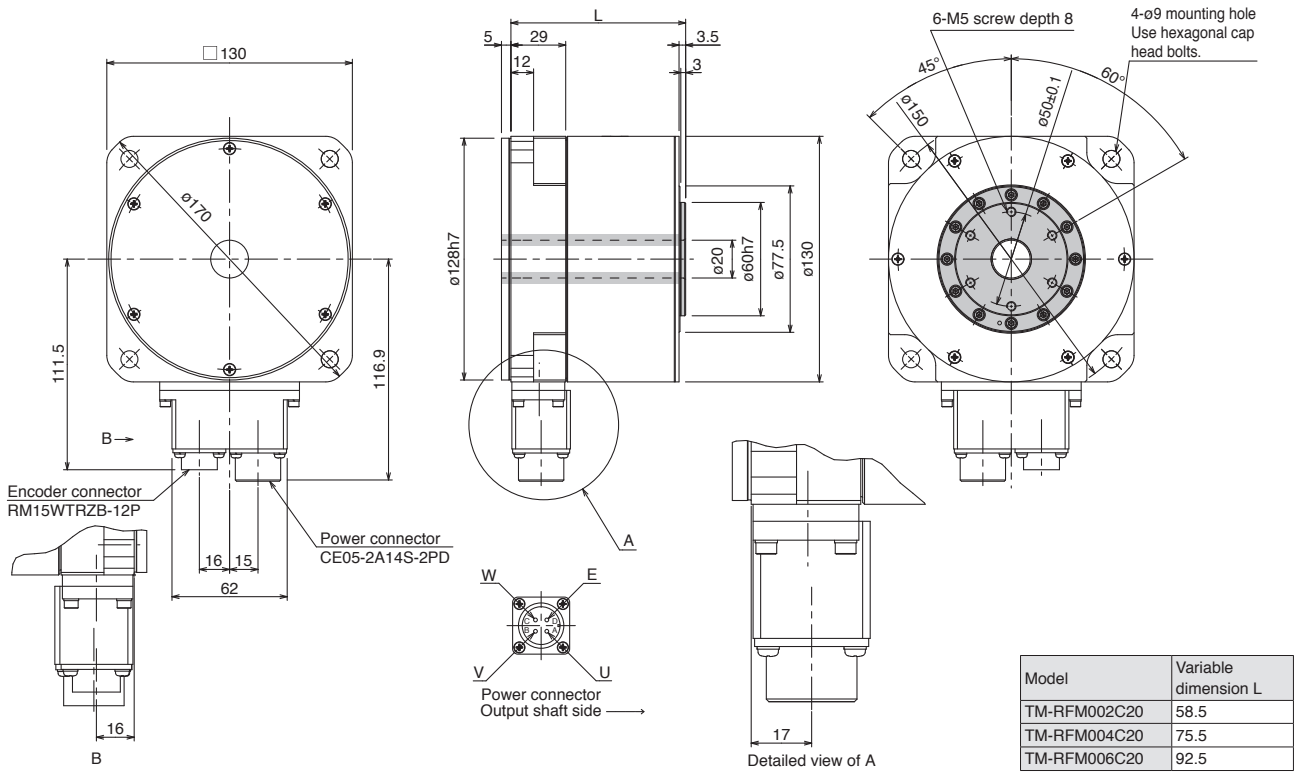

[Unit: mm]

### ● TM-RFM006E20, TM-RFM012E20, TM-RFM018E20

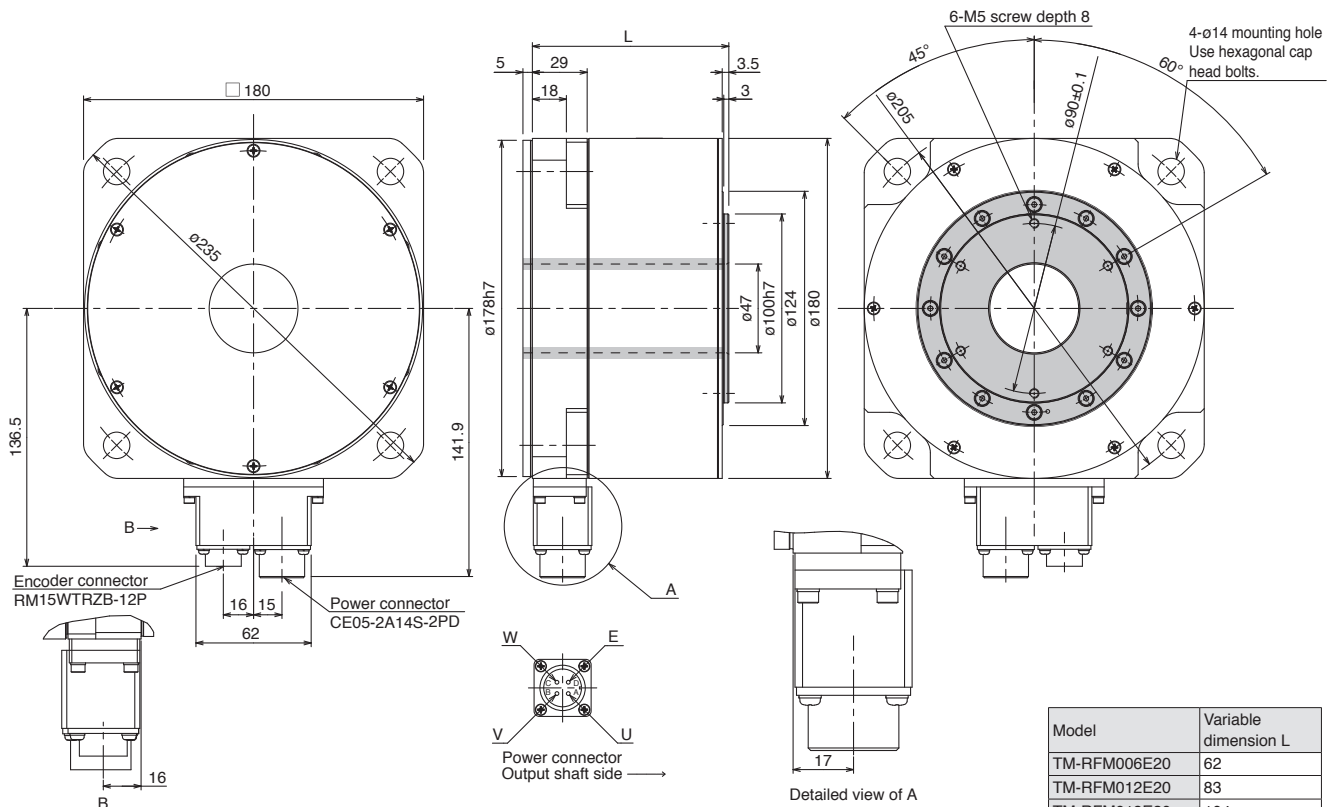


[Unit: mm]


- Notes: 1. General tolerances are applied to the dimensions in which tolerances are not given in the drawing. The actual dimensions may be 1 mm to 3 mm larger than the dimensions indicated. Make allowances for the tolerance when designing a machine.  
 2. ■ indicates rotor.

TM-RFM Series Dimensions (Note 1, 2)

● TM-RFM012G20, TM-RFM048G20, TM-RFM072G20

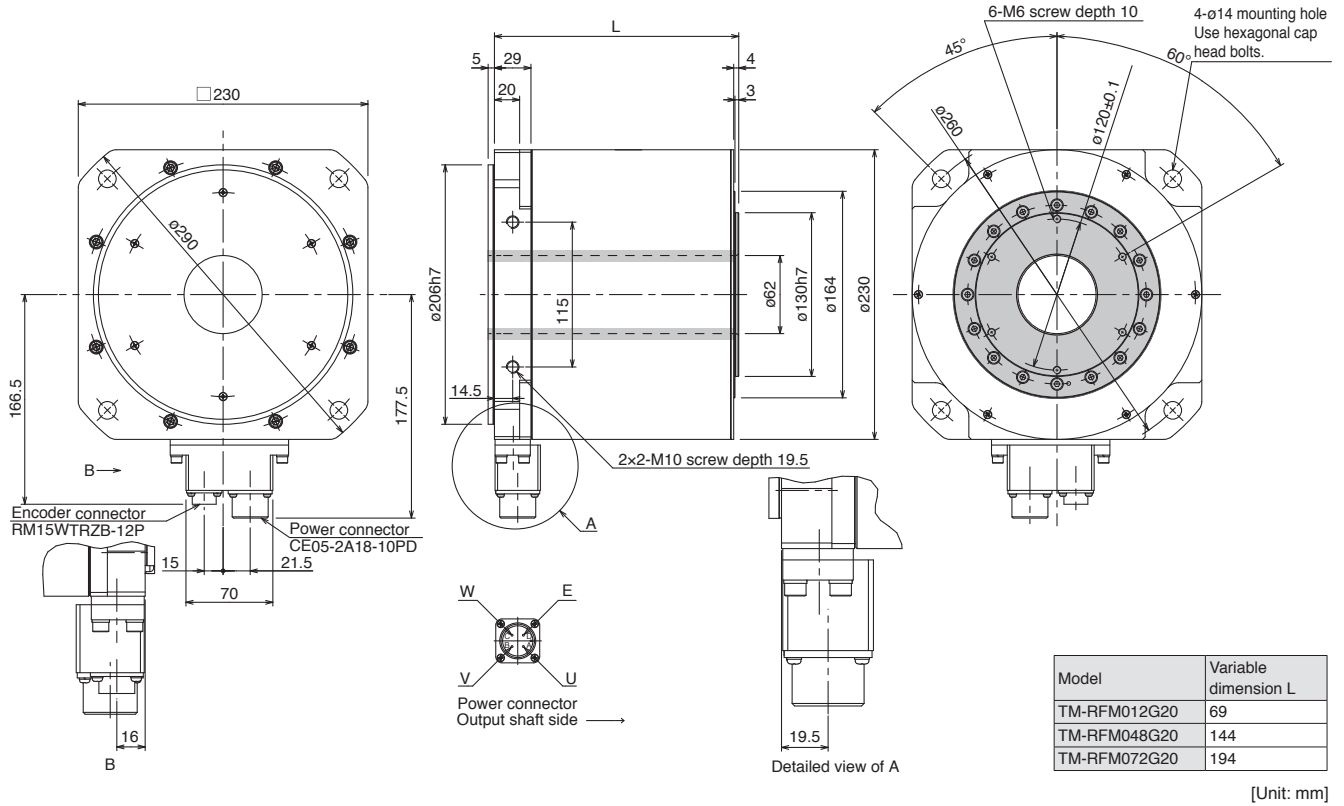

● TM-RFM040J10, TM-RFM120J10, TM-RFM240J10

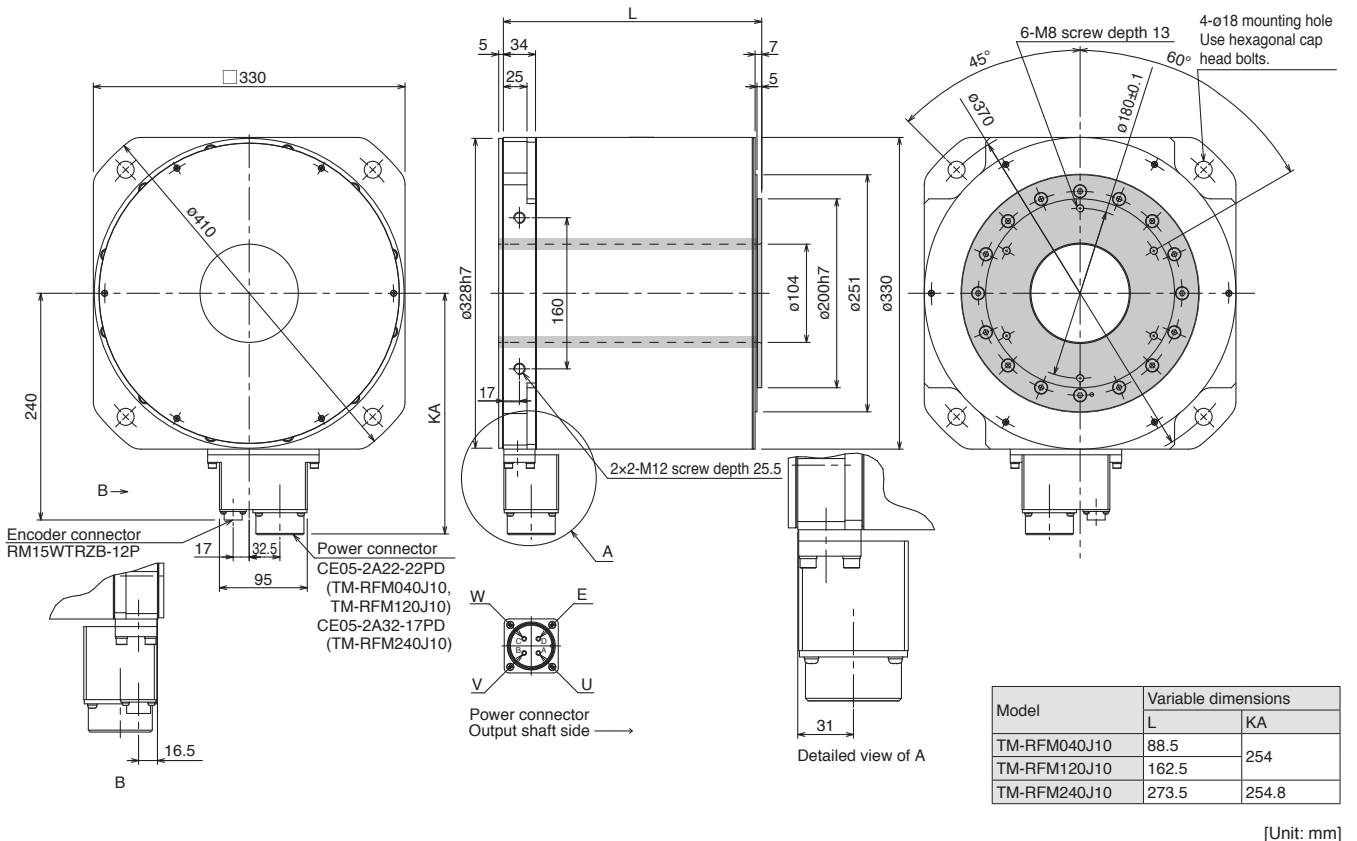

Notes: 1. General tolerances are applied to the dimensions in which tolerances are not given in the drawing. The actual dimensions may be 1 mm to 3 mm larger than the dimensions indicated. Make allowances for the tolerance when designing a machine.  
 2. ■ indicates rotor.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

## Direct Drive Motors

MEMO



# 7

# Options/Peripheral Equipment

|   | Servo amplifier |      |      |    |    |   |      |    |   |      | ● : Applicable |
|---|-----------------|------|------|----|----|---|------|----|---|------|----------------|
|   | G               | G-RJ | G-HS | WG | DG | B | B-RJ | WB | A | A-RJ |                |
| Introducing FA Integrated Selection Tool                          | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-2      |
| Cable and Connector Selection Table for Servo Motors              | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-2      |
| Configuration Example for Servo Motors                            | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-4      |
| Details of Option Connectors for Servo Motors                     | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-19     |
| Products on the Market for Servo Motors                           | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-23     |
| Configuration Example for MR-J5_G(-RJ)/MR-J5_G4-HS/MR-J5W_-G      | ●               | ●    | ●    | ●  |    |   |      |    |   |      | ..... 7-28     |
| Configuration Example for MR-J5D_-G4                              |                 |      |      |    | ●  |   |      |    |   |      | ..... 7-30     |
| Ethernet Cable Specifications                                     | ●               | ●    | ●    | ●  | ●  |   |      |    |   |      | ..... 7-30     |
| Configuration Example for MR-J5_-B(-RJ)/MR-J5W_-B                 |                 |      |      |    |    | ● | ●    | ●  |   |      | ..... 7-31     |
| Configuration Example for MR-J5_-A(-RJ)                           |                 |      |      |    |    |   |      |    | ● | ●    | ..... 7-32     |
| Bus Bar   |                 |      |      |    | ●  |   |      |    |   |      | ..... 7-37     |
| Configuration Example for MR-CM                                   | ●               | ●    |      | ●  |    | ● | ●    | ●  | ● | ●    | ..... 7-38     |
| Configuration Example for MR-J3-D05                               | ●               | ●    |      | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-39     |
| Details of Option Connectors for Servo Amplifiers/MR-CM/MR-J3-D05 | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-40     |
| Products on the Market for Servo Amplifiers                       | ●               | ●    | ●    | ●  |    | ● | ●    | ●  | ● | ●    | ..... 7-44     |
| Safety Logic Unit   | ●               | ●    |      | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-48     |
| Regenerative Option   | ●               | ●    | ●    | ●  |    | ● | ●    | ●  | ● | ●    | ..... 7-50     |
| Multifunction Regeneration Converter                              | ●               | ●    | ●    | ●  |    | ● | ●    | ●  | ● | ●    | ..... 7-53     |
| Battery and Battery Case  | ●               | ●    |      | ●  |    | ● | ●    | ●  | ● | ●    | ..... 7-55     |
| Absolute Position Storage Unit                                    | ●               | ●    |      | ●  |    | ● | ●    | ●  | ● | ●    | ..... 7-57     |
| Replacement Fan Unit  | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-57     |
| Cabinet-Mounting Attachment                                       | ●               | ●    |      | ●  |    | ● | ●    | ●  | ● | ●    | ..... 7-58     |
| Grounding Terminal Attachment                                     | ●               | ●    |      |    |    | ● | ●    |    | ● | ●    | ..... 7-58     |
| Shield Clamp Attachment   | ●               |      | ●    |    |    | ● | ●    |    | ● | ●    | ..... 7-59     |
| Mounting Attachment   |                 |      |      |    | ●  |   |      |    |   |      | ..... 7-60     |
| Side Protection Cover   |                 |      |      |    | ●  |   |      |    |   |      | ..... 7-60     |
| Junction Terminal Block   | ●               | ●    |      | ●  |    | ● | ●    | ●  | ● | ●    | ..... 7-61     |
| Radio Noise Filter/Line Noise Filter/Data Line Filter             | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-63     |
| Surge Killer  | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-63     |
| EMC Filter  | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-64     |
| Surge Protector   | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-67     |
| Power Factor Improving Reactor                                    | ●               | ●    | ●    | ●  |    | ● | ●    | ●  | ● | ●    | ..... 7-68     |
| AC Reactor  |                 |      |      |    | ●  |   |      |    |   |      | ..... 7-75     |
| Motorizer/MR Configurator2  | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-76     |
| Unit Conversion Table   | ●               | ●    | ●    | ●  | ●  | ● | ●    | ●  | ● | ●    | ..... 7-78     |

**G** MR-J5-G(-N1) **G-RJ** MR-J5-G-RJ(N1) **G-HS** MR-J5-G4-HS(N1) **WG** MR-J5W2-G(-N1)/MR-J5W3-G(-N1) **DG** MR-J5D1-G4(-N1)/MR-J5D2-G4(-N1)/MR-J5D3-G4(-N1) **B** MR-J5-B **B-RJ** MR-J5-B-RJ **WB** MR-J5W2-B/MR-J5W3-B **A** MR-J5-A **A-RJ** MR-J5-A-RJ

\* Note that options/peripheral equipment necessary for servo amplifiers or drive units with special specifications are the same as those for standard servo amplifiers or standard drive units. Refer to the servo amplifiers or drive units with the same rated output.

\* Refer to p. 7-78 in this catalog for conversion of units.

\* In this section, a term of servo amplifier includes a combination of a drive unit and a converter unit.

# Options/Peripheral Equipment

## Introducing FA Integrated Selection Tool

FA Integrated Selection Tool is now available, so you can select options such as encoder cables and power cables which are required to use with controllers, servo motors, servo amplifiers, and regenerative options of your choice.



## Cable and Connector Selection Table for Servo Motors

Necessary option cables and connectors vary depending on the servo motor series. Refer to the following tables for necessary options.

### Cables for HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series servo motors

| Cable type      | Cable length                                | IP rating<br>(Note 1)                    | Electromagnetic<br>brake wires | Cable direction                            | Bending life (Note 5)                      | Model                                 | Reference                              |                                       |        |
|-----------------|---|--|--------------------------------|--|--|---------------------------------------|--|---------------------------------------|--------|
| Dual cable type | 10 m or shorter<br>(direct connection type) | IP65<br>(Note 3)                         | Available                      | In the direction of the load side          | Long bending life                          | MR-AEPB2CBL_M-A1-H                    | p. 7-6                                 |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEPB2CBL_M-A1-L                    |  |                                       |        |
|                 |   |  |                                | In the opposite direction of the load side | Long bending life                          | MR-AEPB2CBL_M-A2-H                    |  |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEPB2CBL_M-A2-L                    |  |                                       |        |
|                 |   |  |                                | Vertical (Note 4)                          | Long bending life                          | MR-AEPB2CBL_M-A5-H                    |  |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEPB2CBL_M-A5-L                    |  |                                       |        |
|                 |   |  | Not available                  | In the direction of the load side          | Long bending life                          | MR-AEP2CBL_M-A1-H                     |  |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEP2CBL_M-A1-L                     |  |                                       |        |
|                 |   |  |                                | In the opposite direction of the load side | Long bending life                          | MR-AEP2CBL_M-A2-H                     |  |                                       |        |
|                 | Standard                                    | MR-AEP2CBL_M-A2-L                        |                                |  |  |                                       |  |                                       |        |
|                 | Vertical (Note 4)                           | Long bending life                        | MR-AEP2CBL_M-A5-H              |  |  |                                       |  |                                       |        |
|                 |   | Standard                                 | MR-AEP2CBL_M-A5-L              |  |  |                                       |  |                                       |        |
|                 | Dual cable type                             | Over 10 m<br>(junction type)<br>(Note 2) | IP20                           | Available                                  | In the direction of the load side          | Long bending life                     |  | MR-AEPB2J10CBL03M-A1-L, MR-AEKCBL_M-H | p. 7-7 |
|                 |   |  |                                |  |  | Standard                              |  | MR-AEPB2J10CBL03M-A1-L, MR-AEKCBL_M-L |        |
|                 |   |  |                                |  | In the opposite direction of the load side | Long bending life                     |  | MR-AEPB2J10CBL03M-A2-L, MR-AEKCBL_M-H |        |
|                 |   |  |                                |  |  | Standard                              |  | MR-AEPB2J10CBL03M-A2-L, MR-AEKCBL_M-L |        |
|                 |   |  |                                |  | Vertical (Note 4)                          | Long bending life                     |  | MR-AEPB2J10CBL03M-A5-L, MR-AEKCBL_M-H |        |
|                 |   |  |                                |  |  | Standard                              |  | MR-AEPB2J10CBL03M-A5-L, MR-AEKCBL_M-L |        |
| Not available   |   |  |                                | In the direction of the load side          | Long bending life                          | MR-AEP2J10CBL03M-A1-L, MR-AEKCBL_M-H  |  |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEP2J10CBL03M-A1-L, MR-AEKCBL_M-L  |  |                                       |        |
|                 |   |  |                                | In the opposite direction of the load side | Long bending life                          | MR-AEP2J10CBL03M-A2-L, MR-AEKCBL_M-H  |  |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEP2J10CBL03M-A2-L, MR-AEKCBL_M-L  |  |                                       |        |
|                 |   |  |                                | Vertical (Note 4)                          | Long bending life                          | MR-AEP2J10CBL03M-A5-L, MR-AEKCBL_M-H  |  |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEP2J10CBL03M-A5-L, MR-AEKCBL_M-L  |  |                                       |        |
| Dual cable type |   | Over 10 m<br>(junction type)<br>(Note 2) | IP65<br>(Note 3)               | Available                                  | In the direction of the load side          | Long bending life                     | MR-AEPB2J20CBL03M-A1-L, MR-AENSCBL_M-H | p. 7-8                                |        |
|                 |   |  |                                |  |  | Standard                              | MR-AEPB2J20CBL03M-A1-L, MR-AENSCBL_M-L |                                       |        |
|                 |   |  |                                |  | In the opposite direction of the load side | Long bending life                     | MR-AEPB2J20CBL03M-A2-L, MR-AENSCBL_M-H |                                       |        |
|                 |   |  |                                |  |  | Standard                              | MR-AEPB2J20CBL03M-A2-L, MR-AENSCBL_M-L |                                       |        |
|                 |   |  |                                |  | Vertical (Note 4)                          | Long bending life                     | MR-AEPB2J20CBL03M-A5-L, MR-AENSCBL_M-H |                                       |        |
|                 |   |  |                                |  |  | Standard                              | MR-AEPB2J20CBL03M-A5-L, MR-AENSCBL_M-L |                                       |        |
|                 | Not available                               |  |                                | In the direction of the load side          | Long bending life                          | MR-AEP2J20CBL03M-A1-L, MR-AENSCBL_M-H |  |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEP2J20CBL03M-A1-L, MR-AENSCBL_M-L |  |                                       |        |
|                 |   |  |                                | In the opposite direction of the load side | Long bending life                          | MR-AEP2J20CBL03M-A2-L, MR-AENSCBL_M-H |  |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEP2J20CBL03M-A2-L, MR-AENSCBL_M-L |  |                                       |        |
|                 |   |  |                                | Vertical (Note 4)                          | Long bending life                          | MR-AEP2J20CBL03M-A5-L, MR-AENSCBL_M-H |  |                                       |        |
|                 |   |  |                                |  | Standard                                   | MR-AEP2J20CBL03M-A5-L, MR-AENSCBL_M-L |  |                                       |        |

- Notes: 1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.  
 2. The two types of cables indicated are required.  
 3. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)  
 4. When a vertically mounted cable is led out, the lock lever of the connector must be on the load side.  
 5. Long bending life cables and standard cables are for moving parts and fixed parts respectively.

## Cable and Connector Selection Table for Servo Motors

Cables for HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series servo motors

| Cable type              | Cable length                                      | IP rating<br>(Note 1) | Electromagnetic<br>brake wires | Cable direction                      | Bending life (Note 5)                            | Model              | Reference |                    |
|-------------------------|---|-----------------------|--------------------------------|--------------------------------------|--|--------------------|-----------|--------------------|
| Single<br>cable<br>type | 10 m or shorter<br>(direct<br>connection<br>type) | IP65<br>(Note 3)      | Available                      | In the direction<br>of the load side | Long bending life                                | MR-AEPB1CBL_M-A1-H | p. 7-9    |                    |
|                         |   |                       |                                |                                      | Standard   | MR-AEPB1CBL_M-A1-L |           |                    |
|                         |   |                       |                                |                                      | In the opposite<br>direction of the<br>load side | Long bending life  |           | MR-AEPB1CBL_M-A2-H |
|                         |   |                       |                                |                                      |  | Standard           |           | MR-AEPB1CBL_M-A2-L |
|                         |   |                       |                                |                                      | Vertical (Note 4)                                | Long bending life  |           | MR-AEPB1CBL_M-A5-H |
|                         |   |                       |                                |                                      |  | Standard           |           | MR-AEPB1CBL_M-A5-L |
|                         |   |                       |                                | Not available                        | In the direction<br>of the load side             | Long bending life  |           | MR-AEP1CBL_M-A1-H  |
|                         |   |                       |                                |                                      |  | Standard           |           | MR-AEP1CBL_M-A1-L  |
|                         |   |                       |                                |                                      | In the opposite<br>direction of the<br>load side | Long bending life  |           | MR-AEP1CBL_M-A2-H  |
|                         |   |                       |                                |                                      |  | Standard           |           | MR-AEP1CBL_M-A2-L  |
|                         |   |                       |                                |                                      | Vertical (Note 4)                                | Long bending life  |           | MR-AEP1CBL_M-A5-H  |
|                         |   |                       |                                |                                      |  | Standard           |           | MR-AEP1CBL_M-A5-L  |

Cables for HK-ST series/HK-RT (3.5 kW to 7.0 kW) series servo motors

| Application | Compatible servo motor                            | IP rating (Note 1) | Bending life<br>(Note 5) | Length       | Model           | Reference |
|-------------|---|--------------------|--------------------------|--------------|-----------------|-----------|
| Encoder     | HK-ST series<br>HK-RT353(4)W, 503(4)W,<br>703(4)W | IP67               | Long<br>bending life     | 2 m to 10 m  | MR-J3ENSCBL_M-H | p. 7-8    |
|             |   |                    |                          | 20 m to 50 m | MR-AENSCBL_M-H  |           |
|             |   |                    | Standard                 | 2 m to 10 m  | MR-J3ENSCBL_M-L |           |
|             |   |                    |                          | 20 m to 30 m | MR-AENSCBL_M-L  |           |

Connectors for HK-ST series/HK-RT (3.5 kW to 7.0 kW) series servo motors

| Application              | Compatible servo motor   | IP rating (Note 1) | Connector<br>shape | Type of<br>connection | Model (Note 2) | Reference |
|--------------------------|--|--------------------|--------------------|-----------------------|----------------|-----------|
| Encoder                  | HK-ST series<br>HK-RT353(4)W, 503(4)W,<br>703(4)W                            | IP67               | Straight           | One-touch             | MR-J3SCNS      | p. 7-9    |
|                          |  |                    |                    | Screw                 | MR-ENCNS2      |           |
|                          |  |                    | Angle              | One-touch             | MR-J3SCNSA     |           |
|                          |  |                    |                    | Screw                 | MR-ENCNS2A     |           |
| Power supply<br>(Note 6) | HK-ST52(4)(W), 102(4)(W),<br>172(4)W, 202(4)AW,<br>302(4)W, 353(4)W, 503(4)W | IP67               | Straight           | One-touch             | MR-APWCNS4     | p. 7-10   |
|                          |  |                    |                    | One-touch             | MR-APWCNS5     |           |
| Electromagnetic<br>brake | HK-ST series<br>HK-RT353(4)WB, 503(4)WB,<br>703(4)WB                         | IP67               | Straight           | One-touch             | MR-BKCNS1      |           |
|                          |  |                    |                    | Screw                 | MR-BKCNS2      |           |
|                          |  |                    | Angle              | One-touch             | MR-BKCNS1A     |           |
|                          |  |                    |                    | Screw                 | MR-BKCNS2A     |           |

Notes: 1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

2. Use the option connector set indicated to fabricate a cable.

3. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

4. When a vertically mounted cable is led out, the lock lever of the connector must be on the load side.

5. Long bending life cables and standard cables are for moving parts and fixed parts respectively.

6. Connectors for HK-ST152(4)G1/G1H/G5/G7 geared servo motors are the same as those for HK-ST172(4)W.

# Options/Peripheral Equipment


## Configuration Example for Rotary Servo Motors (Note 2)

**G   G-RJ   G-HS   WG   DG   B   B-RJ   WB   A   A-RJ**


### HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series

(Cable direction: load side/opposite to load side/vertical) (Note 4, 5)


#### ● Cable length of 10 m or shorter

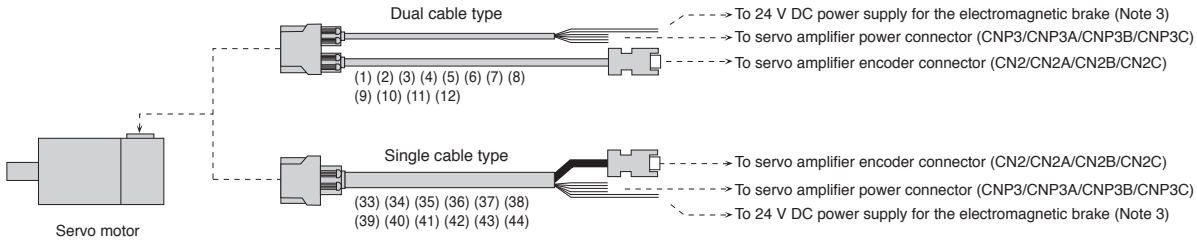


#### ● Cable length of over 10 m

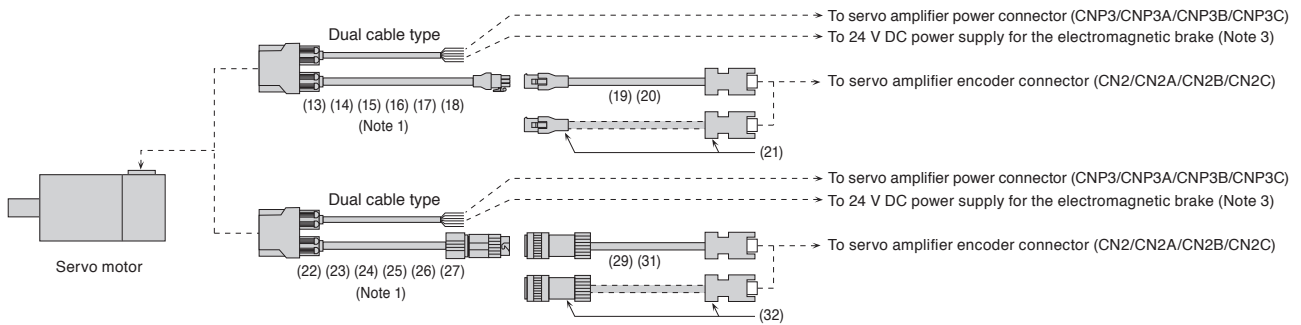

### HK-ST series/HK-RT (3.5 kW to 7.0 kW) series

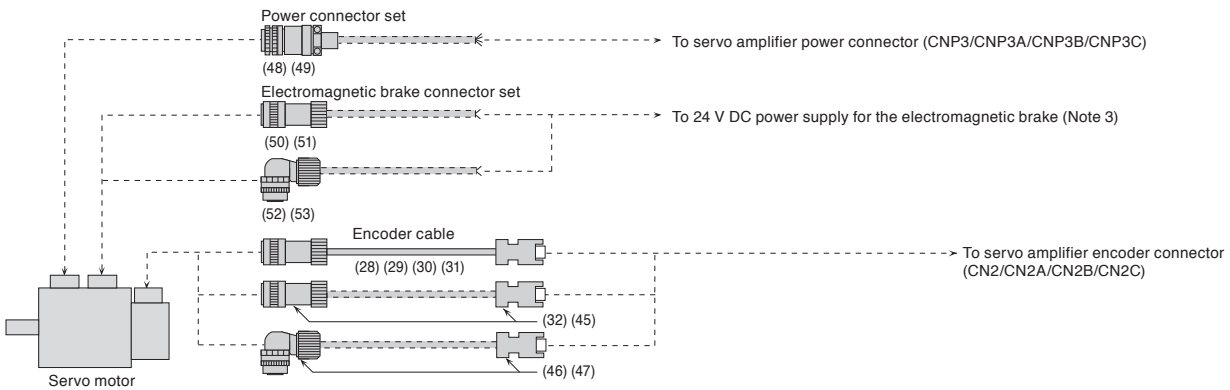

- Notes:
- Secure this cable as it does not have a long bending life.
  - Cables drawn with dashed lines need to be fabricated by users. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.
  - This is for the servo motors with an electromagnetic brake.
  - When a vertically mounted cable is led out, the lock lever of the connector must be on the load side.
  - The cable direction in the configuration examples is in the opposite direction to the load side. Cables can be led out in the direction of the load side, the opposite to the load side, and vertical, depending on the option to be used. These cable directions are shown below.




**Configuration Example for Rotary Servo Motors** (Note 2)

For fully closed loop control

**G WG DG B WB A**


(MR-J5-G\_/MR-J5W2-G/MR-J5D2-G4/MR-J5-B\_/MR-J5W2-B/MR-J5-A\_ and rotary servo motors) (Note 3)

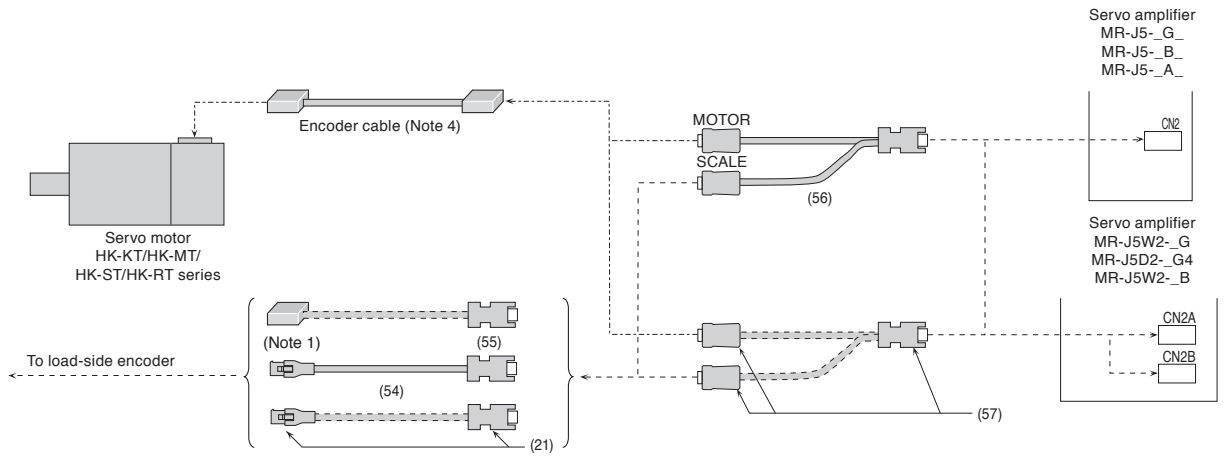

For fully closed loop control

**G-RJ G-HS DG B-RJ A-RJ**

(MR-J5-G\_-RJ/MR-J5-G4-HS/MR-J5D1-G4/MR-J5-B\_-RJ/MR-J5-A\_-RJ and rotary servo motors) (Note 3)

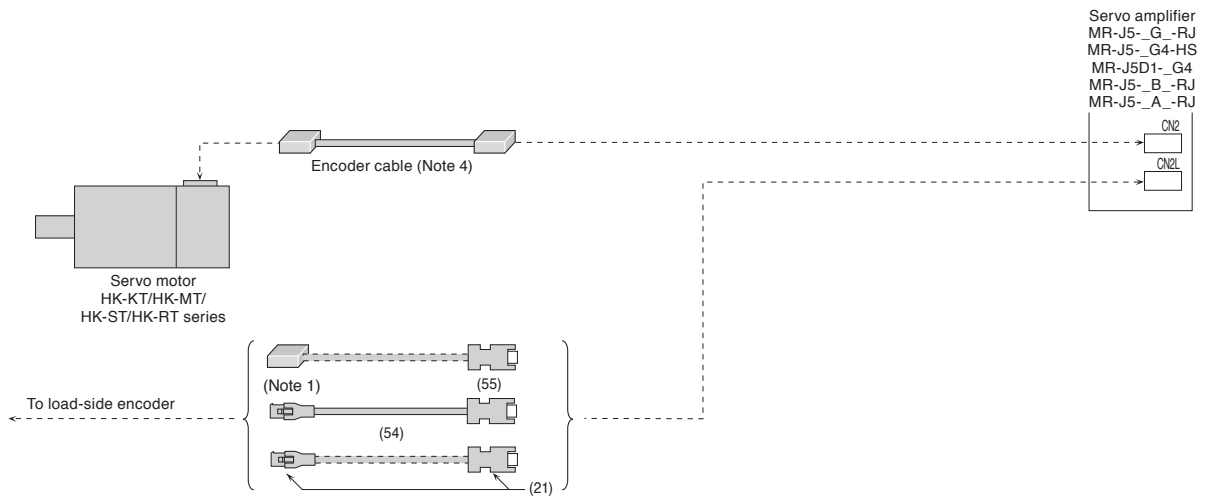







- Notes: 1. Contact the relevant linear encoder manufacturers for connectors to connect with the head cables.  
 2. Cables drawn with dashed lines need to be fabricated by users. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when fabricating the cables.  
 3. Connections other than mentioned are the same as those for each rotary servo motor. Refer to cables and connectors for relevant servo motors in this catalog.  
 4. Necessary encoder cables vary depending on the servo motor series. Refer to cables and connectors for relevant servo motors in this catalog.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Options/Peripheral Equipment

## Cables and Connectors for Rotary Servo Motors









Refer to "Details of Option Connectors for Servo Motors" in this catalog for the detailed models.

| No.  | Item  | Application   | Bending life<br>(Note 4)   | Cable length         | Model               | Description/IP rating (Note 1)  |   |   |                     |
|------|---|---|--|----------------------|---------------------|---|---|---|---------------------|
| (1)  | Motor cable (Note 2, 3)<br>(dual cable type/<br>direct connection<br>type for 10 m or<br>shorter) | HK-KT series  | Long<br>bending life   | 2 m                  | MR-AEPB2CBL2M-A1-H  |  |   |   |                     |
|      |   | HK-MT series  |  | 5 m                  | MR-AEPB2CBL5M-A1-H  |   |   |   |                     |
|      |   | HK-RT103(4)WB,<br>153(4)WB, 203(4)WB                  |  | 10 m                 | MR-AEPB2CBL10M-A1-H |   |   |   |                     |
| (2)  |   | Load-side lead<br>With electromagnetic<br>brake wires |  | Standard             | 2 m                 |   | MR-AEPB2CBL2M-A1-L  |   |                     |
|      |   |   |  |                      | 5 m                 |   | MR-AEPB2CBL5M-A1-L  |   |                     |
|      |   |   |  |                      | 10 m                |   | MR-AEPB2CBL10M-A1-L   |   |                     |
| (3)  |   |   | HK-KT series   | Long<br>bending life | 2 m                 |   | MR-AEPB2CBL2M-A2-H  |    |                     |
|      |   |   | HK-MT series   |                      | 5 m                 |   | MR-AEPB2CBL5M-A2-H  |   |                     |
|      |   |   | HK-RT103(4)WB,<br>153(4)WB, 203(4)WB                                 |                      | 10 m                |   | MR-AEPB2CBL10M-A2-H   |   |                     |
| (4)  |   |   | Opposite to load-side lead<br>With electromagnetic<br>brake wires    |                      | Standard            |   | 2 m   |   | MR-AEPB2CBL2M-A2-L  |
|      |   |   |  |                      |                     |   | 5 m   |   | MR-AEPB2CBL5M-A2-L  |
|      |   |   |  |                      |                     |   | 10 m  |   | MR-AEPB2CBL10M-A2-L |
| (5)  |   |   | HK-KT series   | Long<br>bending life | 2 m                 | MR-AEPB2CBL2M-A5-H  |    |   |                     |
|      |   |   | HK-MT series   |                      | 5 m                 | MR-AEPB2CBL5M-A5-H  |   |   |                     |
|      |   |   | HK-RT103(4)WB,<br>153(4)WB, 203(4)WB                                 |                      | 10 m                | MR-AEPB2CBL10M-A5-H   |   |   |                     |
| (6)  |   |   | Vertical lead (Note 5)<br>With electromagnetic<br>brake wires        |                      | Standard            | 2 m   |   |   | MR-AEPB2CBL2M-A5-L  |
|      |   |   |  |                      |                     | 5 m   |   |   | MR-AEPB2CBL5M-A5-L  |
|      |   |   |  |                      |                     | 10 m  |   |   | MR-AEPB2CBL10M-A5-L |
| (7)  |   |   | HK-KT series   | Long<br>bending life | 2 m                 | MR-AEP2CBL2M-A1-H   |   |  |                     |
|      |   |   | HK-MT series   |                      | 5 m                 | MR-AEP2CBL5M-A1-H   |   |   |                     |
|      |   |   | HK-RT103(4)W,<br>153(4)W, 203(4)W                                    |                      | 10 m                | MR-AEP2CBL10M-A1-H  |   |   |                     |
| (8)  |   |   | Load-side lead<br>Without electromagnetic<br>brake wires             |                      | Standard            | 2 m   |   |   | MR-AEP2CBL2M-A1-L   |
|      |   |   |  |                      |                     | 5 m   |   |   | MR-AEP2CBL5M-A1-L   |
|      |   |   |  |                      |                     | 10 m  |   |   | MR-AEP2CBL10M-A1-L  |
| (9)  |   |   | HK-KT series   | Long<br>bending life | 2 m                 | MR-AEP2CBL2M-A2-H   |  |   |                     |
|      |   |   | HK-MT series   |                      | 5 m                 | MR-AEP2CBL5M-A2-H   |   |   |                     |
|      |   |   | HK-RT103(4)W,<br>153(4)W, 203(4)W                                    |                      | 10 m                | MR-AEP2CBL10M-A2-H  |   |   |                     |
| (10) |   |   | Opposite to load-side lead<br>Without electromagnetic<br>brake wires |                      | Standard            | 2 m   |   |   | MR-AEP2CBL2M-A2-L   |
|      |   |   |  |                      |                     | 5 m   |   |   | MR-AEP2CBL5M-A2-L   |
|      |   |   |  |                      |                     | 10 m  |   |   | MR-AEP2CBL10M-A2-L  |
| (11) |   |   | HK-KT series   | Long<br>bending life | 2 m                 | MR-AEP2CBL2M-A5-H   |   |  |                     |
|      |   |   | HK-MT series   |                      | 5 m                 | MR-AEP2CBL5M-A5-H   |   |   |                     |
|      |   |   | HK-RT103(4)W,<br>153(4)W, 203(4)W                                    |                      | 10 m                | MR-AEP2CBL10M-A5-H  |   |   |                     |
| (12) |   |   | Vertical lead (Note 5)<br>Without electromagnetic<br>brake wires     |                      | Standard            | 2 m   |   |   | MR-AEP2CBL2M-A5-L   |
|      |   |   |  |                      |                     | 5 m   |   |   | MR-AEP2CBL5M-A5-L   |
|      |   |   |  |                      |                     | 10 m  |   |   | MR-AEP2CBL10M-A5-L  |

- Notes:
1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.
  2. For unlisted lengths of the cables, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  3. When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  4. Long bending life cables and standard cables are for moving parts and fixed parts respectively.
  5. When a vertically mounted cable is led out, the lock lever of the connector must be on the load side.

## Cables and Connectors for Rotary Servo Motors

Refer to "Details of Option Connectors for Servo Motors" in this catalog for the detailed models.

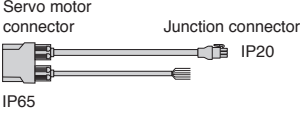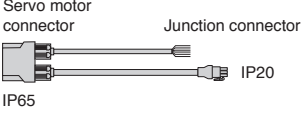
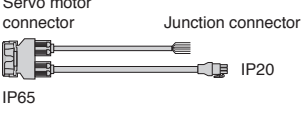
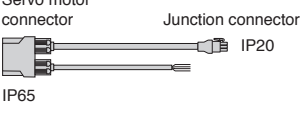
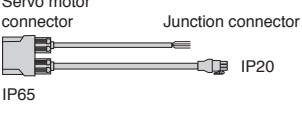
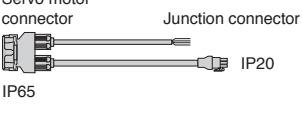


| No.  | Item  | Application   | Bending life<br>(Note 7) | Cable length | Model                  | Description/IP rating (Note 1)   |
|------|---|---|--------------------------|--------------|------------------------|--|
| (13) | Motor cable (Note 3, 5)<br>(dual cable type/<br>junction type for<br>over 10 m) | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB,<br>153(4)WB, 203(4)WB<br>Load-side lead<br>With electromagnetic<br>brake wires             | Standard                 | 0.3 m        | MR-AEPB2J10CBL03M-A1-L |   |
| (14) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB,<br>153(4)WB, 203(4)WB<br>Opposite to load-side lead<br>With electromagnetic<br>brake wires | Standard                 | 0.3 m        | MR-AEPB2J10CBL03M-A2-L |   |
| (15) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB,<br>153(4)WB, 203(4)WB<br>Vertical lead (Note 8)  | Standard                 | 0.3 m        | MR-AEPB2J10CBL03M-A5-L |   |
| (16) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W, 203(4)W<br>Load-side lead<br>Without electromagnetic<br>brake wires             | Standard                 | 0.3 m        | MR-AEP2J10CBL03M-A1-L  |    |
| (17) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W, 203(4)W<br>Opposite to load-side lead<br>Without electromagnetic<br>brake wires | Standard                 | 0.3 m        | MR-AEP2J10CBL03M-A2-L  |   |
| (18) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W, 203(4)W<br>Vertical lead (Note 8)   | Standard                 | 0.3 m        | MR-AEP2J10CBL03M-A5-L  |   |
| (19) | Encoder cable<br>(Note 4, 5, 9)   | HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W, 203(4)W   | Long<br>bending life     | 20 m         | MR-AEKCBL20M-H         |   |
| (20) |   |   |                          | Standard     | 30 m                   |  |
|      | 40 m  | MR-AEKCBL40M-H  |                          |              |                        |  |
|      | 50 m  | MR-AEKCBL50M-H  |                          |              |                        |  |
|      | 20 m  | MR-AEKCBL20M-L  |                          |              |                        |  |
|      |   |   |                          | 30 m         | MR-AEKCBL30M-L         |  |
| (21) | Encoder connector<br>set (Note 2, 4, 6)   | HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W, 203(4)W<br>Connecting<br>a load-side encoder                                    | -                        | -            | MR-ECNM                | <br><br>Applicable cable<br>Wire size: AWG 26 to 22<br>Cable OD: 7 mm to 9 mm |

- Notes: 1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.
2. The crimping tool (91529-1) manufactured by TE Connectivity Ltd. Company is required. Contact the manufacturer directly.
3. Use this cable in combination with an option from (19) to (21).
4. When using this cable or connector set for HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series, use it in combination with an option from (13) to (18).
5. For unlisted lengths of the cables, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
6. Use MR-EKCBL\_M-H or MR-ECNM to connect to an output cable for AT343A, AT543A-SC or AT545A-SC scales manufactured by Mitutoyo Corporation.
7. Long bending life cables and standard cables are for moving parts and fixed parts respectively.
8. When a vertically mounted cable is led out, the lock lever of the connector must be on the load side.
9. Encoder cables are not subject to Low Voltage Directive (50 V AC to 1000 V AC and 75 V DC to 1500 V DC).

# Options/Peripheral Equipment

## Cables and Connectors for Rotary Servo Motors

Refer to "Details of Option Connectors for Servo Motors" in this catalog for the detailed models.

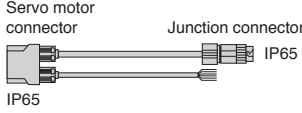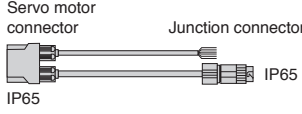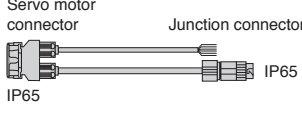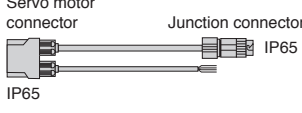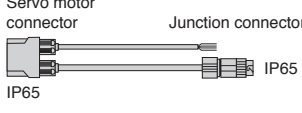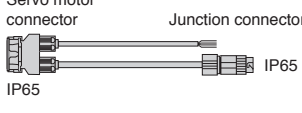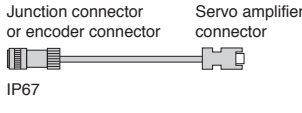



| No.  | Item  | Application   | Bending life<br>(Note 6)                          | Cable length         | Model                  | Description/IP rating (Note 1)  |   |
|------|---|---|---|----------------------|------------------------|---|---|
| (22) | Motor cable<br>(Note 2, 4, 5)<br><br>(dual cable type/<br>junction type for<br>over 10 m) | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB,<br>153(4)WB, 203(4)WB<br>Load-side lead<br>With electromagnetic<br>brake wires             | Standard  | 0.3 m                | MR-AEPB2J20CBL03M-A1-L |    |   |
| (23) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB,<br>153(4)WB, 203(4)WB<br>Opposite to load-side lead<br>With electromagnetic<br>brake wires | Standard  | 0.3 m                | MR-AEPB2J20CBL03M-A2-L |    |   |
| (24) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB,<br>153(4)WB, 203(4)WB<br>Vertical lead (Note 7)<br>With electromagnetic<br>brake wires     | Standard  | 0.3 m                | MR-AEPB2J20CBL03M-A5-L |    |   |
| (25) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W, 203(4)W<br>Load-side lead<br>Without electromagnetic<br>brake wires             | Standard  | 0.3 m                | MR-AEP2J20CBL03M-A1-L  |   |   |
| (26) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W, 203(4)W<br>Opposite to load-side lead<br>Without electromagnetic<br>brake wires | Standard  | 0.3 m                | MR-AEP2J20CBL03M-A2-L  |  |   |
| (27) |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W, 203(4)W<br>Vertical lead (Note 7)<br>Without electromagnetic<br>brake wires     | Standard  | 0.3 m                | MR-AEP2J20CBL03M-A5-L  |  |   |
| (28) |   | Encoder cable<br>(Note 3, 4, 8)   | HK-ST series<br>HK-RT353(4)W,<br>503(4)W, 703(4)W | Long<br>bending life | 2 m                    | MR-J3ENSCBL2M-H   |  |
| (29) | HK-KT series<br>HK-MT series<br>HK-ST series<br>HK-RT series                              |   | Long<br>bending life                              |                      | 5 m                    | MR-J3ENSCBL5M-H   |   |
|      |   |   |   |                      | 10 m                   | MR-J3ENSCBL10M-H  |   |
|      |   |   |   | 20 m                 | MR-AENSCBL20M-H        |   |   |
| (30) | HK-ST series<br>HK-RT353(4)W,<br>503(4)W, 703(4)W   |   | Standard  | 30 m                 | MR-AENSCBL30M-H        |   |   |
|      |   |   |   | 40 m                 | MR-AENSCBL40M-H        |   |   |
|      |   |   |   | 50 m                 | MR-AENSCBL50M-H        |   |   |
| (31) | HK-KT series<br>HK-MT series<br>HK-ST series<br>HK-RT series                              |   | Standard  | 2 m                  | MR-J3ENSCBL2M-L        |   |   |
|      |   |   |   | 5 m                  | MR-J3ENSCBL5M-L        |   |   |
|      |   |   |   | 10 m                 | MR-J3ENSCBL10M-L       |   |   |
|      |   |   |   | 20 m                 | MR-AENSCBL20M-L        |   |   |
|      |   |   |   | 30 m                 | MR-AENSCBL30M-L        |   |   |

- Notes:
- The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.
  - Use this cable in combination with (29), (31), or (32).
  - When using this cable or connector set for HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series, use it in combination with an option from (22) to (27).
  - For unlisted lengths of the cables, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  - When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  - Long bending life cables and standard cables are for moving parts and fixed parts respectively.
  - When a vertically mounted cable is led out, the lock lever of the connector must be on the load side.
  - Encoder cables are not subject to Low Voltage Directive (50 V AC to 1000 V AC and 75 V DC to 1500 V DC).



## Cables and Connectors for Rotary Servo Motors

Refer to "Details of Option Connectors for Servo Motors" in this catalog for the detailed models.









| No.  | Item  | Application  | Bending life<br>(Note 4) | Cable<br>length     | Model   | Description/IP rating (Note 1)  |
|------|---|--|--------------------------|---------------------|---|---|
| (32) | Encoder connector set (Note 6, 7, 8)<br>(one-touch connection type)                           | HK-KT series<br>HK-MT series<br>HK-ST series<br>HK-RT series                           | -                        | -                   | MR-J3SCNS   | Junction connector or encoder connector<br>Servo amplifier connector<br><br>IP67<br>Applicable cable<br>Wire size: 0.5 mm <sup>2</sup> (AWG 20) or smaller<br>Cable OD: 5.5 mm to 9.0 mm |
| (33) | Motor cable (Note 2, 3)<br>(single cable type/<br>direct connection type for 10 m or shorter) | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB,<br>153(4)WB, 203(4)WB<br>Load-side lead | Long bending life        | 2 m                 | MR-AEPB1CBL2M-A1-H  | <br>Servo motor connector<br>Servo amplifier connector<br>IP65   |
| 5 m  |   |  |                          | MR-AEPB1CBL5M-A1-H  |   |   |
| 10 m |   |  |                          | MR-AEPB1CBL10M-A1-H |   |   |
| (34) |   | With electromagnetic brake wires   | Standard                 | 2 m                 | MR-AEPB1CBL2M-A1-L  |   |
| 5 m  |   |  |                          | MR-AEPB1CBL5M-A1-L  |   |   |
| 10 m |   |  |                          | MR-AEPB1CBL10M-A1-L |   |   |
| (35) |   | Opposite to load-side lead<br>With electromagnetic brake wires                         | Long bending life        | 2 m                 | MR-AEPB1CBL2M-A2-H  |   |
| 5 m  |   |  |                          | MR-AEPB1CBL5M-A2-H  |   |   |
| 10 m |   |  |                          | MR-AEPB1CBL10M-A2-H |   |   |
| (36) |   |  | Standard                 | 2 m                 | MR-AEPB1CBL2M-A2-L  |   |
| 5 m  |   |  |                          | MR-AEPB1CBL5M-A2-L  |   |   |
| 10 m |   |  |                          | MR-AEPB1CBL10M-A2-L |   |   |
| (37) |   | Vertical lead (Note 5)<br>With electromagnetic brake wires                             | Long bending life        | 2 m                 | MR-AEPB1CBL2M-A5-H  |   |
| 5 m  |   |  |                          | MR-AEPB1CBL5M-A5-H  |   |   |
| 10 m | MR-AEPB1CBL10M-A5-H   |  |                          |                     |   |   |
| (38) | Standard  |  | 2 m                      | MR-AEPB1CBL2M-A5-L  |   |   |
| 5 m  |   |  | MR-AEPB1CBL5M-A5-L       |                     |   |   |
| 10 m |   |  | MR-AEPB1CBL10M-A5-L      |                     |   |   |
| (39) | Load-side lead<br>Without electromagnetic brake wires   | Long bending life  | 2 m                      | MR-AEP1CBL2M-A1-H   | <br>Servo motor connector<br>Servo amplifier connector<br>IP65 |   |
| 5 m  |   |  | MR-AEP1CBL5M-A1-H        |                     |   |   |
| 10 m |   |  | MR-AEP1CBL10M-A1-H       |                     |   |   |
| (40) |   | Standard   | 2 m                      | MR-AEP1CBL2M-A1-L   |   |   |
| 5 m  |   |  | MR-AEP1CBL5M-A1-L        |                     |   |   |
| 10 m |   |  | MR-AEP1CBL10M-A1-L       |                     |   |   |
| (41) | Opposite to load-side lead<br>Without electromagnetic brake wires                             | Long bending life  | 2 m                      | MR-AEP1CBL2M-A2-H   |   |   |
| 5 m  |   |  | MR-AEP1CBL5M-A2-H        |                     |   |   |
| 10 m |   |  | MR-AEP1CBL10M-A2-H       |                     |   |   |
| (42) |   | Standard   | 2 m                      | MR-AEP1CBL2M-A2-L   |   |   |
| 5 m  |   |  | MR-AEP1CBL5M-A2-L        |                     |   |   |
| 10 m |   |  | MR-AEP1CBL10M-A2-L       |                     |   |   |
| (43) | Vertical lead (Note 5)<br>Without electromagnetic brake wires                                 | Long bending life  | 2 m                      | MR-AEP1CBL2M-A5-H   |   | <br>Servo motor connector<br>Servo amplifier connector<br>IP65   |
| 5 m  |   |  | MR-AEP1CBL5M-A5-H        |                     |   |   |
| 10 m |   |  | MR-AEP1CBL10M-A5-H       |                     |   |   |
| (44) |   | Standard   | 2 m                      | MR-AEP1CBL2M-A5-L   |   |   |
| 5 m  |   |  | MR-AEP1CBL5M-A5-L        |                     |   |   |
| 10 m |   |  | MR-AEP1CBL10M-A5-L       |                     |   |   |

- Notes:
- The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.
  - For unlisted lengths of the cables, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  - When IP67 cables are required, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  - Long bending life cables and standard cables are for moving parts and fixed parts respectively.
  - When a vertically mounted cable is led out, the lock lever of the connector must be on the load side.
  - Cable clamps and bushings for cable OD of 5.5 mm to 7.5 mm and of 7.0 mm to 9.0 mm are included in the set.
  - The connector set contains a plug and contacts. Using contacts for other plugs may damage the connector. Use the enclosed contacts.
  - When using this cable or connector set for HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series, use it in combination with an option from (22) to (27).

# Options/Peripheral Equipment

## Cables and Connectors for Rotary Servo Motors





Refer to "Details of Option Connectors for Servo Motors" in this catalog for the detailed models.

| No.  | Item  | Application  | Bending life | Cable length | Model      | Description/IP rating <sup>(Note 1)</sup>   |
|------|---|--|--------------|--------------|------------|---|
| (45) | Encoder connector set <sup>(Note 2, 3, 4)</sup><br>(screw type)                           | HK-ST series<br>HK-RT353(4)W,<br>503(4)W, 703(4)W<br>(straight type)                                     | -            | -            | MR-ENCNS2  | Encoder connector      Servo amplifier connector<br> <br>IP67<br>Applicable cable<br>Wire size: 0.5 mm <sup>2</sup> (AWG 20) or smaller<br>Cable OD: 5.5 mm to 9.0 mm |
| (46) | Encoder connector set <sup>(Note 2, 3, 4)</sup><br>(one-touch connection type)            | HK-ST series<br>HK-RT353(4)W,<br>503(4)W, 703(4)W<br>(angle type)  | -            | -            | MR-J3SCNSA | Encoder connector      Servo amplifier connector<br> <br>IP67   |
| (47) | Encoder connector set <sup>(Note 2, 3, 4)</sup><br>(screw type)                           | HK-ST series<br>HK-RT353(4)W,<br>503(4)W, 703(4)W<br>(angle type)  | -            | -            | MR-ENCNS2A | Applicable cable<br>Wire size: 0.5 mm <sup>2</sup> (AWG 20) or smaller<br>Cable OD: 5.5 mm to 9.0 mm  |
| (48) | Power connector set <sup>(Note 4, 5, 6)</sup><br>(one-touch connection type)              | HK-ST52(4)W,<br>102(4)(W), 172(4)(W),<br>202(4)AW, 302(4)W,<br>353(4)W, 503(4)W <sup>(Note 7)</sup>      | -            | -            | MR-APWCNS4 | Power connector<br><br>IP67<br>Applicable cable<br>Wire size: 3.5 mm <sup>2</sup> (AWG 12) or smaller<br>Cable OD: 11 mm to 14.1 mm  |
| (49) | Power connector set <sup>(Note 4, 5)</sup><br>(one-touch connection type)                 | HK-ST7M2UW, 172UW,<br>202(4)(W), 352(4)(W),<br>502(4)(W), 702(4)(W)<br>HK-RT353(4)W,<br>503(4)W, 703(4)W | -            | -            | MR-APWCNS5 | Power connector<br><br>IP67<br>Applicable cable<br>Wire size: 8 mm <sup>2</sup> (AWG 8) or smaller<br>Cable OD: 12.9 mm to 16 mm  |
| (50) | Electromagnetic brake connector set <sup>(Note 3, 4)</sup><br>(one-touch connection type) | HK-ST series<br>HK-RT353(4)WB,<br>503(4)WB, 703(4)WB<br>(straight type)                                  | -            | -            | MR-BKCNS1  | Electromagnetic brake connector<br><br>IP67  |
| (51) | Electromagnetic brake connector set <sup>(Note 3, 4)</sup><br>(screw type)                |  | -            | -            | MR-BKCNS2  | Applicable cable<br>Wire size: 1.25 mm <sup>2</sup> (AWG 16) or smaller<br>Cable OD: 9.0 mm to 11.6 mm  |
| (52) | Electromagnetic brake connector set <sup>(Note 3, 4)</sup><br>(one-touch connection type) | HK-ST series<br>HK-RT353(4)WB,<br>503(4)WB, 703(4)WB<br>(angle type)                                     | -            | -            | MR-BKCNS1A | Electromagnetic brake connector<br><br>IP67  |
| (53) | Electromagnetic brake connector set <sup>(Note 3, 4)</sup><br>(screw type)                |  | -            | -            | MR-BKCNS2A | Applicable cable<br>Wire size: 1.25 mm <sup>2</sup> (AWG 16) or smaller<br>Cable OD: 9.0 mm to 11.6 mm  |

- Notes:
- The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.
  - Cable clamps and bushings for cable OD of 5.5 mm to 7.5 mm and of 7.0 mm to 9.0 mm are included in the set.
  - The connector set contains a plug and contacts. Using contacts for other plugs may damage the connector. Use the enclosed contacts.
  - For fabricating cables with these connectors, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION.  
(Email: osb.webmaster@melsc.jp)
  - When the screw type is required, refer to "Products on the Market for Rotary Servo Motors" in this catalog.
  - Connectors for HK-ST152(4)G1/G1H/G5/G7 geared servo motors are the same as those for HK-ST172(4)W.
  - When using HK-ST503W for a machine that is required to comply with UL/CSA standards, do not use MR-APWCNS4. Use a cable (SC-PWC403C\_M-SBLL or SC-PWC403C\_M-SBLH) manufactured by Mitsubishi Electric System & Service Co., Ltd., and fabricate an extension cable with wires of AWG 10. For details of SC-PWC403C\_M-SBLL and SC-PWC403C\_M-SBLH, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION.  
(Email: osb.webmaster@melsc.jp)

## Cables and Connectors for Rotary Servo Motors

Refer to "Details of Option Connectors for Servo Motors" in this catalog for the detailed models.

| No.  | Item  | Application                       | Bending life<br>(Note 5) | Cable<br>length | Model         | Description/IP rating (Note 1)   |
|------|---|-----------------------------------|--------------------------|-----------------|---------------|--|
| (54) | Encoder cable<br>(Note 2, 3, 6)                             | Connecting<br>a load-side encoder | Long<br>bending life     | 2 m             | MR-EKCBL2M-H  | Junction connector    Servo amplifier connector<br> |
|      |   |                                   |                          | 5 m             | MR-EKCBL5M-H  | IP20   |
| (55) | Encoder connector<br>set                                    | Connecting<br>a load-side encoder | -                        | -               | MR-J3CN2      | Servo amplifier connector<br>                       |
| (56) | Junction cable for<br>fully closed loop<br>control (Note 4) | Branching<br>a load-side encoder  | Standard                 | 0.3 m           | MR-J4FCCBL03M | Junction connector    Servo amplifier connector<br> |
| (57) | Connector set   | Branching a load-side<br>encoder  | -                        | -               | MR-J3THMCN2   | Junction connector    Servo amplifier connector<br> |

- Notes:
1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.
  2. Use MR-EKCBL\_M-H or MR-ECNM to connect to an output cable for AT343A, AT543A-SC or AT545A-SC scales manufactured by Mitutoyo Corporation.
  3. For unlisted lengths of the cables, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  4. Servo system will not operate correctly when the junction cables for fully closed loop control and for linear servo motors are used mistakenly or interchangeably. Make sure of the model before placing an order.
  5. Long bending life cables and standard cables are for moving parts and fixed parts respectively.
  6. Encoder cables are not subject to Low Voltage Directive (50 V AC to 1000 V AC and 75 V DC to 1500 V DC).

Common  
SpecificationsServo System  
Controllers

Servo Amplifiers

Rotary Servo  
MotorsLinear Servo  
MotorsDirect Drive  
MotorsOptions/Peripheral  
Equipment

LV/S/Wires

Product List

Precautions


Support

## Configuration Example for Linear Servo Motors (Note 3)


**G** **WG** **B** **WB** **A**

MR-J5-G/B/A or MR-J5W\_-G/B, and LM-H3 series/LM-K2 series/LM-U2 series

### ●When using a junction cable

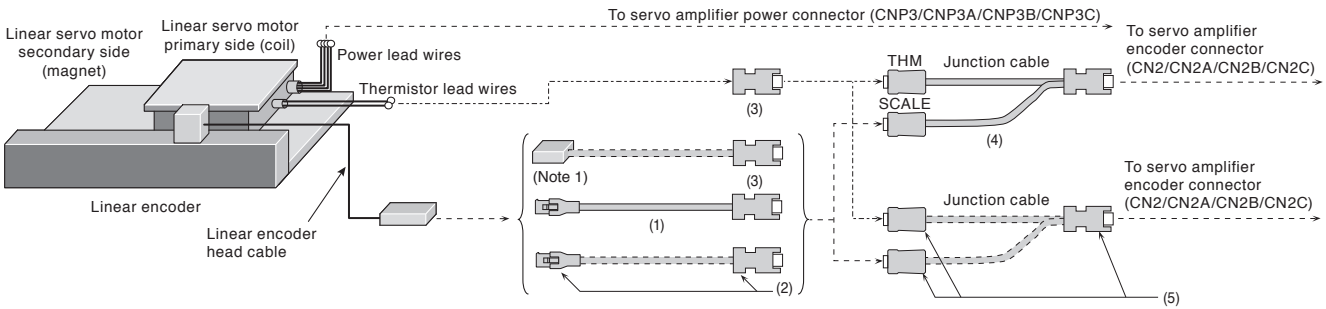


### ●When not using a junction cable

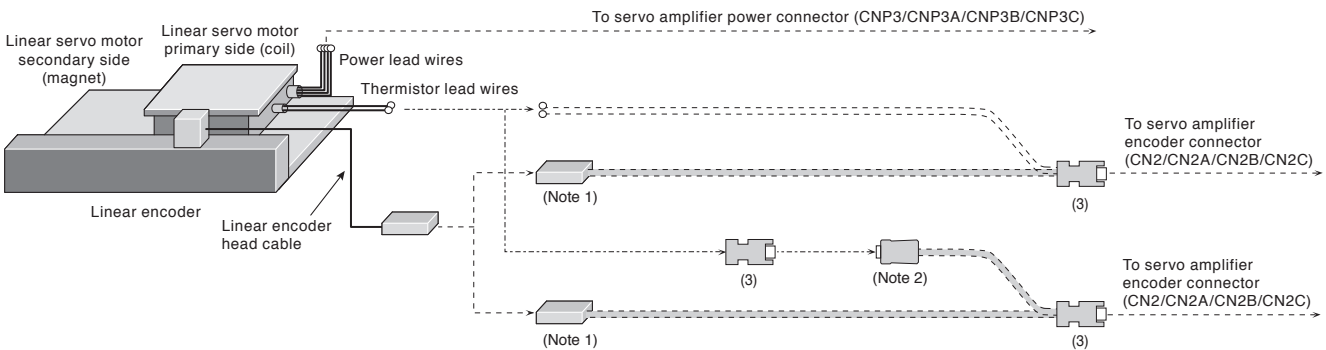


## MR-J5-G/B/A and LM-F series

### ●When using a junction cable

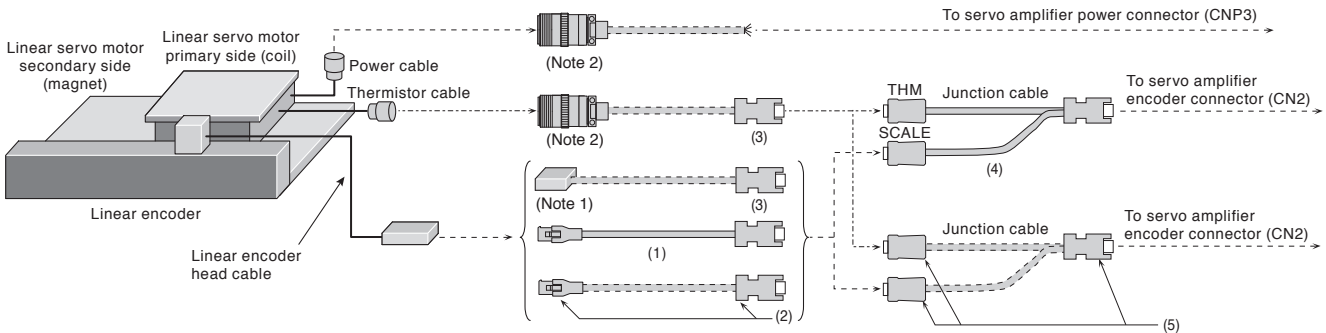

### ●When not using a junction cable

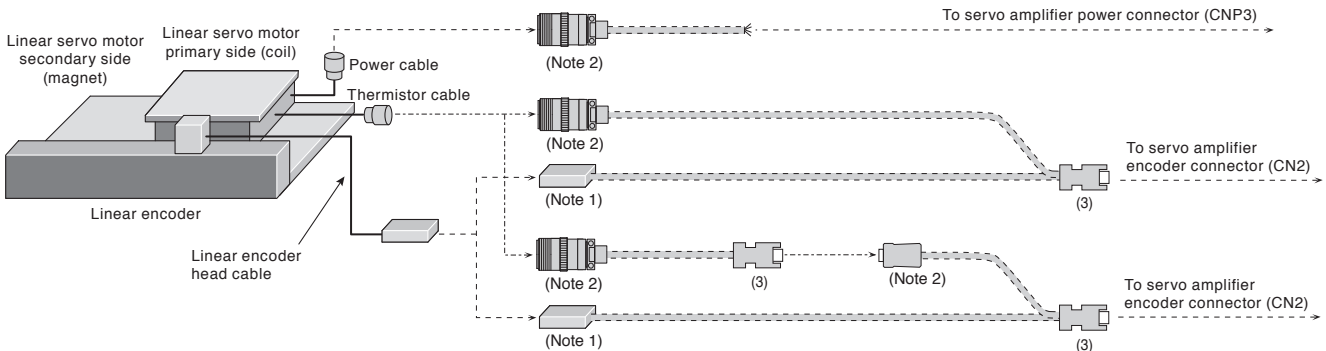


- Notes: 1. Contact the relevant linear encoder manufacturers for connectors to connect with the head cables.  
 2. Refer to "Products on the Market for Linear Servo Motors" in this catalog for these connectors.  
 3. Cables drawn with dashed lines need to be fabricated by users. Refer to "Linear Servo Motor User's Manual" when fabricating the cables.

Configuration Example for Linear Servo Motors (Note 3)


G-RJ B-RJ A-RJ

MR-J5-G-RJ/B-RJ/A-RJ and LM-H3 series/LM-K2 series/LM-U2 series with a serial linear encoder

●When using a junction cable

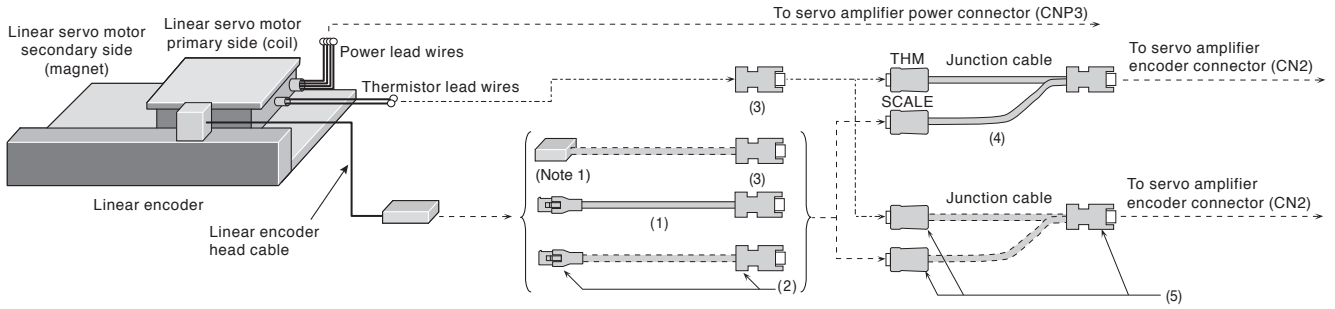


●When not using a junction cable

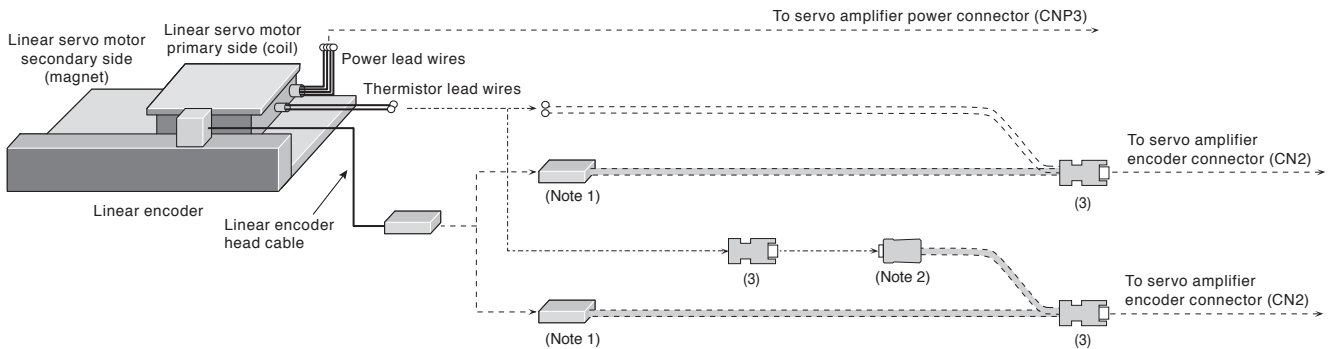


MR-J5-G-RJ/B-RJ/A-RJ and LM-F series with a serial linear encoder

●When using a junction cable

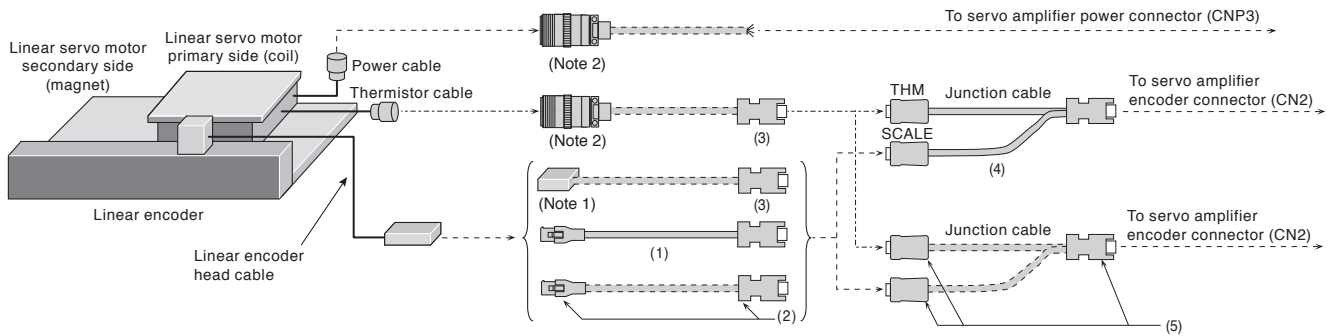

●When not using a junction cable

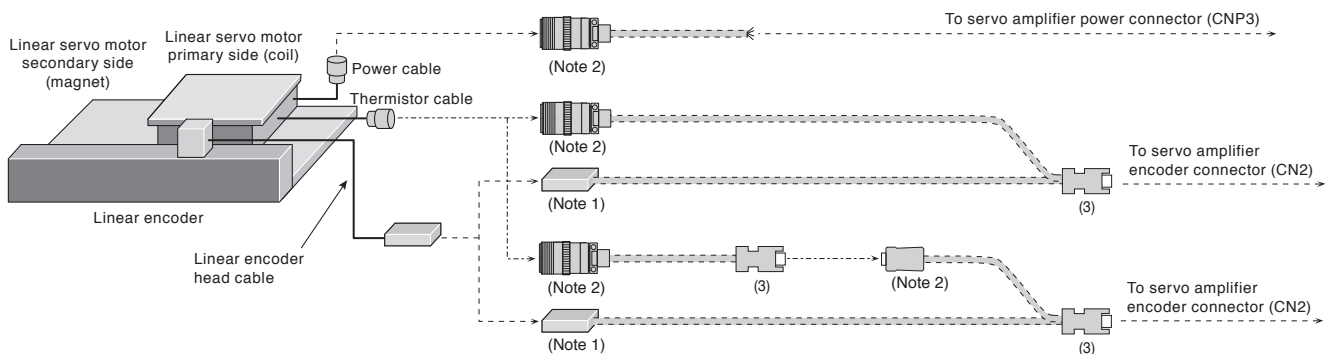


- Notes: 1. Contact the relevant linear encoder manufacturers for connectors to connect with the head cables.
- 2. Refer to "Products on the Market for Linear Servo Motors" in this catalog for these connectors.
- 3. Cables drawn with dashed lines need to be fabricated by users. Refer to "Linear Servo Motor User's Manual" when fabricating the cables.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support


## Configuration Example for Linear Servo Motors (Note 3)

G-RJ B-RJ A-RJ

MR-J5-G-RJ/B-RJ/A-RJ and LM-H3 series/LM-K2 series/LM-U2 series  
with an A/B/Z-phase differential output type linear encoder

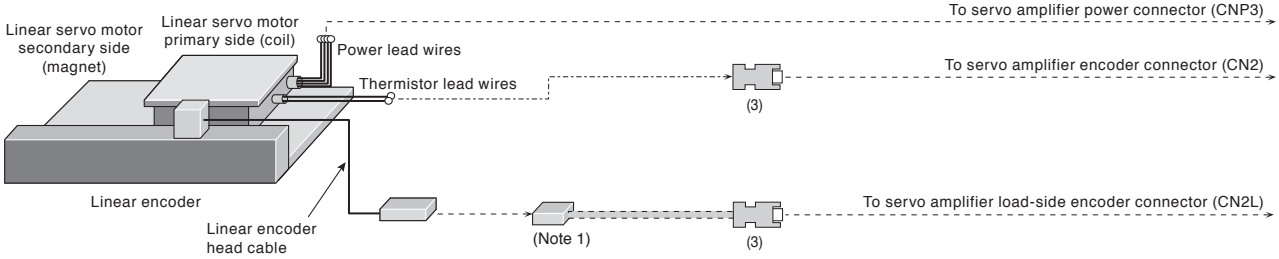

## MR-J5-G-RJ/B-RJ/A-RJ and LM-F series with an A/B/Z-phase differential output type linear encoder

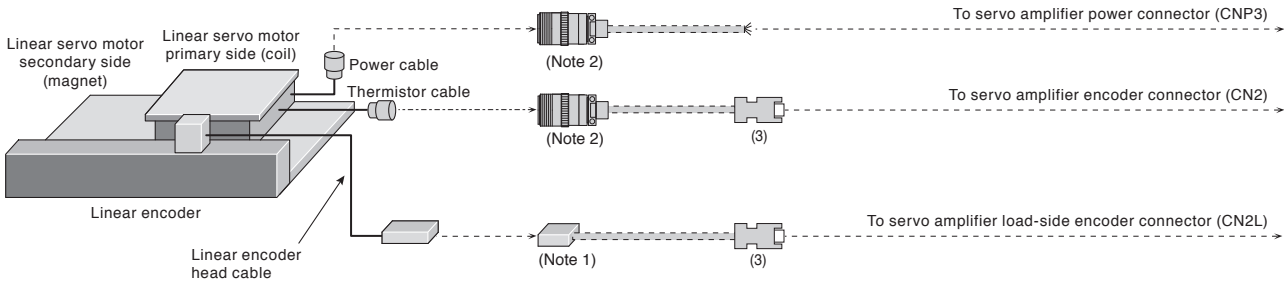

- Notes:
1. Contact the relevant linear encoder manufacturers for connectors to connect with the head cables.
  2. Refer to "Products on the Market for Linear Servo Motors" in this catalog for these connectors.
  3. Cables drawn with dashed lines need to be fabricated by users. Refer to "Linear Servo Motor User's Manual" when fabricating the cables.

## Configuration Example for Linear Servo Motors (Note 2)

G


G-RJ

WG


A

A-RJ

MR-J5-G(-RJ)/A(-RJ) or MR-J5W\_-G, and LM-AJ series/LM-AU series with a serial linear encoder

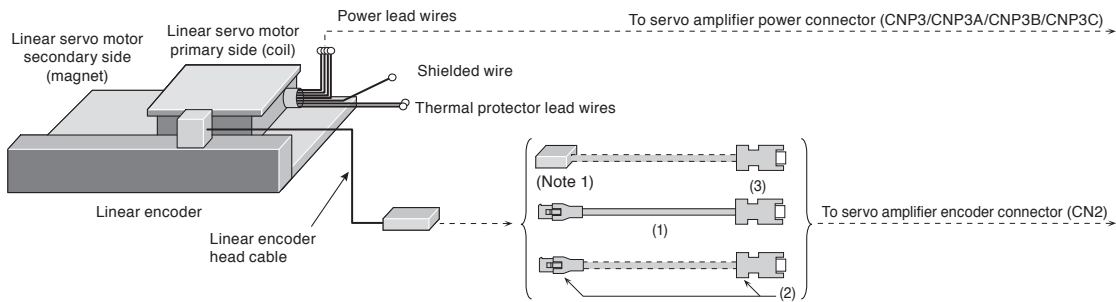

MR-J5-G-RJ/A-RJ and LM-AJ series/LM-AU series with an A/B/Z-phase differential output type linear encoder

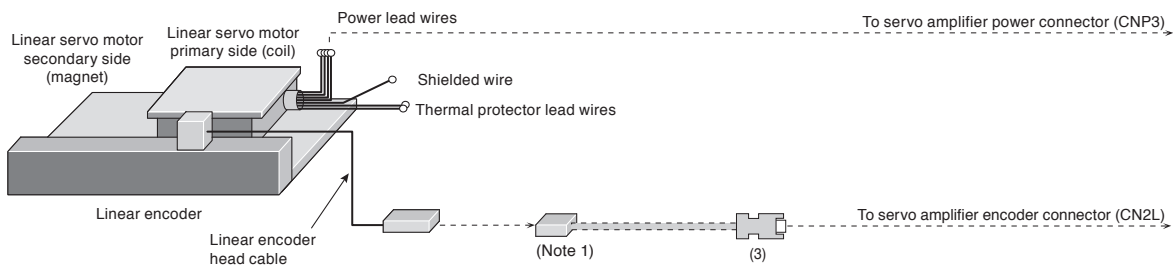

- Notes: 1. Contact the relevant linear encoder manufacturers for connectors to connect with the head cables.  
2. Cables drawn with dashed lines need to be fabricated by users. Refer to "Linear Servo Motor User's Manual" when fabricating the cables.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List






Precautions

Support

# Options/Peripheral Equipment

## Cables and Connectors for Linear Servo Motors

Refer to "Details of Option Connectors for Servo Motors" in this catalog for the detailed models.

| No. | Item   | Application                                 | Bending life<br>(Note 6) | Cable length | Model         | Description/IP rating (Note 1)  |
|-----|--|---|--------------------------|--------------|---------------|---|
| (1) | Encoder cable<br>(Note 3, 4, 7)                    | Connecting a linear encoder                 | Long bending life        | 2 m          | MR-EKCBL2M-H  | Junction connector    Servo amplifier connector<br><br>IP20  |
|     |  |   |                          | 5 m          | MR-EKCBL5M-H  |   |
| (2) | Encoder connector set<br>(Note 2, 3)               | Connecting a linear encoder                 | -                        | -            | MR-ECNM       | Junction connector    Servo amplifier connector<br><br>IP20<br>Applicable cable<br>Wire size: AWG 26 to 22<br>Cable OD: 7 mm to 9 mm |
| (3) | Encoder connector set                              | Connecting a linear encoder or a thermistor | -                        | -            | MR-J3CN2      | Servo amplifier connector<br>  |
| (4) | Junction cable for linear servo motors<br>(Note 5) | Branching a thermistor                      | Standard                 | 0.3 m        | MR-J4THCBL03M | Junction connector    Servo amplifier connector<br>  |
| (5) | Connector set                                      | Branching a thermistor                      | -                        | -            | MR-J3THMCN2   | Junction connector    Servo amplifier connector<br>   |

- Notes:
1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.
  2. The crimping tool (91529-1) manufactured by TE Connectivity Ltd. Company is required. Contact the manufacturer directly.
  3. Use MR-EKCBL\_M-H or MR-ECNM to connect to an output cable for AT343A, AT543A-SC or AT545A-SC scales manufactured by Mitutoyo Corporation.
  4. For unlisted lengths of the cables, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  5. Servo system will not operate correctly when the junction cables for fully closed loop control and for linear servo motors are used mistakenly or interchangeably. Make sure of the model before placing an order.
  6. Long bending life cables and standard cables are for moving parts and fixed parts respectively.
  7. Encoder cables are not subject to Low Voltage Directive (50 V AC to 1000 V AC and 75 V DC to 1500 V DC).




Configuration Example for Direct Drive Motors (Note 1)


G G-RJ WG B B-RJ WB A A-RJ

TM-RG2M series/TM-RU2M series/TM-RFM series

● Incremental system

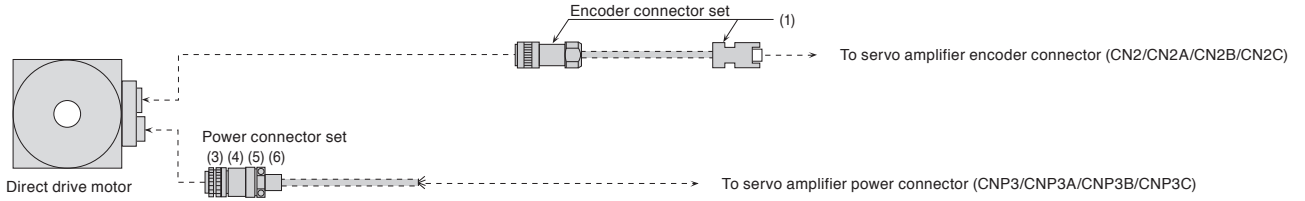

● Absolute position detection system

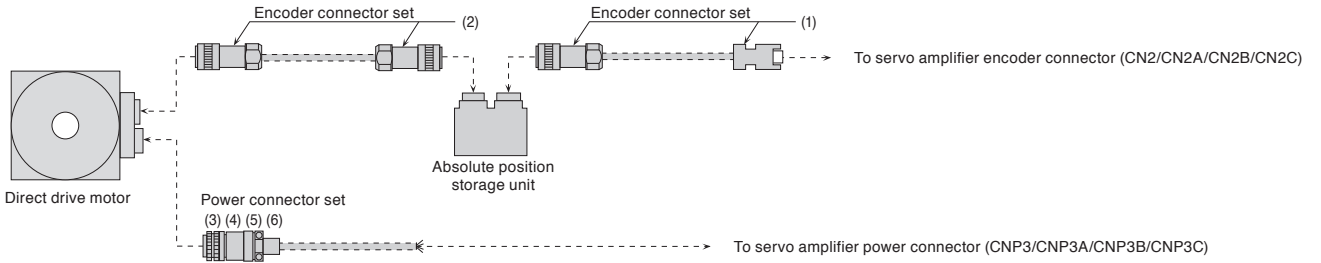









Notes: 1. Cables drawn with dashed lines need to be fabricated by users. Refer to "Direct Drive Motor User's Manual" when fabricating the cables.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Options/Peripheral Equipment















## Cables and Connectors for Direct Drive Motors

Refer to "Details of Option Connectors for Servo Motors" in this catalog for the detailed models.

| No. | Item                                       | Application  | Bending life | Cable length | Model      | Description/IP rating <sup>(Note 1)</sup>   |
|-----|--|--|--------------|--------------|------------|---|
| (1) | Encoder connector set                      | TM-RG2M series<br>TM-RU2M series<br>TM-RFM series<br>(Connecting a direct drive motor and a servo amplifier, or an absolute position storage unit and a servo amplifier) | -            | -            | MR-J3DDCNS | Encoder connector or absolute position storage unit connector<br><br>IP67<br>Servo amplifier connector<br><br>Applicable cable<br>Wire size: 0.25 mm <sup>2</sup> to 0.5 mm <sup>2</sup> (AWG 23 to 20)<br>Cable OD: 7.8 mm to 8.2 mm |
| (2) | Encoder connector set                      | TM-RG2M series<br>TM-RU2M series<br>TM-RFM series<br>(Connecting a direct drive motor and an absolute position storage unit)   | -            | -            | MR-J3DDSPS | Encoder connector<br><br>IP67<br>Absolute position storage unit connector<br><br>IP67<br>Applicable cable<br>Wire size: 0.25 mm <sup>2</sup> to 0.5 mm <sup>2</sup> (AWG 23 to 20)<br>Cable OD: 7.8 mm to 8.2 mm                      |
| (3) | Power connector set <sup>(Note 2, 3)</sup> | TM-RG2M series<br>TM-RU2M series<br>TM-RFM_C20<br>TM-RFM_E20   | -            | -            | MR-PWCNF   | Power connector<br><br>IP67<br>Applicable cable<br>Wire size: 0.3 mm <sup>2</sup> to 1.25 mm <sup>2</sup> (AWG 22 to 16)<br>Cable OD: 8.3 mm to 11.3 mm  |
| (4) | Power connector set <sup>(Note 2)</sup>    | TM-RFM_G20   | -            | -            | MR-PWCNS4  | Power connector<br><br>IP67<br>Applicable cable<br>Wire size: 2 mm <sup>2</sup> to 3.5 mm <sup>2</sup> (AWG 14 to 12)<br>Cable OD: 10.5 mm to 14.1 mm  |
| (5) | Power connector set <sup>(Note 2)</sup>    | TM-RFM040J10,<br>TM-RFM120J10  | -            | -            | MR-PWCNS5  | Power connector<br><br>IP67<br>Applicable cable<br>Wire size: 5.5 mm <sup>2</sup> to 8 mm <sup>2</sup> (AWG 10 to 8)<br>Cable OD: 12.5 mm to 16 mm   |
| (6) | Power connector set <sup>(Note 2)</sup>    | TM-RFM240J10   | -            | -            | MR-PWCNS3  | Power connector<br><br>IP67<br>Applicable cable<br>Wire size: 14 mm <sup>2</sup> to 22 mm <sup>2</sup> (AWG 6 to 4)<br>Cable OD: 22 mm to 23.8 mm  |

- Notes:
- The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor/absolute position storage unit. If the IP rating of the servo motor/absolute position storage unit differs from that of these connectors, overall IP rating depends on the lowest of all.
  - For fabricating cables with these connectors, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  - When using TM-RG2M series/TM-RU2M series/TM-RFM\_C20/TM-RFM\_E20 for a machine that is required to comply with UL/CSA standards, do not use MR-PWCNF. Use a cable (SC-PWCFCBL\_M-L or SC-PWCFCBL\_M-H) manufactured by Mitsubishi Electric System & Service Co., Ltd. For details of SC-PWCFCBL\_M-L or SC-PWCFCBL\_M-H, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

## Details of Option Connectors for Servo Motors

| Model  | Servo motor connector   | Servo amplifier connector   |
|--|---|---|
| MR-AEPB2CBL_M-A1-H<br>MR-AEPB2CBL_M-A1-L<br>MR-AEPB2CBL_M-A2-H<br>MR-AEPB2CBL_M-A2-L<br>MR-AEP2CBL_M-A1-H<br>MR-AEP2CBL_M-A1-L<br>MR-AEP2CBL_M-A2-H<br>MR-AEP2CBL_M-A2-L | <br>Connector set: MT50W-8D/2D4ES-CVLD(7.5)<br>Contact for power supply: MT50E-1820SCFA<br>Contact for signal: MT50D-2224SCFA<br>(Hirose Electric Co., Ltd.)                       | <br>Connector set: 54599-1016<br>(Molex, LLC)<br>or<br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M)   |
| Model  | Servo motor connector   | Servo amplifier connector   |
| MR-AEPB2CBL_M-A5-H<br>MR-AEPB2CBL_M-A5-L<br>MR-AEP2CBL_M-A5-H<br>MR-AEP2CBL_M-A5-L   | <br>Connector set: MT50W-8D/2D4ES-CVSD(7.5)<br>Contact for power supply: MT50E-1820SCFA<br>Contact for signal: MT50D-2224SCFA<br>(Hirose Electric Co., Ltd.)                       | <br>Connector set: 54599-1016<br>(Molex, LLC)<br>or<br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M)   |
| Model  | Servo motor connector   | Junction connector  |
| MR-AEPB2J10CBL03M-A1-L<br>MR-AEPB2J10CBL03M-A2-L<br>MR-AEP2J10CBL03M-A1-L<br>MR-AEP2J10CBL03M-A2-L   | <br>Connector set: MT50W-8D/2D4ES-CVLD(7.5)<br>Contact for power supply: MT50E-1820SCFA<br>Contact for signal: MT50D-2224SCFA<br>(Hirose Electric Co., Ltd.)                       | <br>Contact: 170361-4<br>Housing: 1-172169-9<br>Cable clamp: 316454-1<br>(TE Connectivity Ltd. Company)                |
| Model  | Servo motor connector   | Junction connector  |
| MR-AEPB2J10CBL03M-A5-L<br>MR-AEP2J10CBL03M-A5-L  | <br>Connector set: MT50W-8D/2D4ES-CVSD(7.5)<br>Contact for power supply: MT50E-1820SCFA<br>Contact for signal: MT50D-2224SCFA<br>(Hirose Electric Co., Ltd.)                     | <br>Contact: 170361-4<br>Housing: 1-172169-9<br>Cable clamp: 316454-1<br>(TE Connectivity Ltd. Company)              |
| Model  | Junction connector  | Servo amplifier connector   |
| MR-AEKCBL_M-H<br>MR-AEKCBL_M-L   | <br>Housing: 1-172161-9<br>Connector pin: 170359-1<br>(TE Connectivity Ltd. Company)<br>or an equivalent product<br>Cable clamp: MTI-0002<br>(Toa Electric Industrial Co., Ltd.) | <br>Connector set: 54599-1016<br>(Molex, LLC)<br>or<br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M) |
| Model  | Junction connector  | Servo amplifier connector   |
| MR-ECNM<br>MR-EKCBL_M-H  | <br>Housing: 1-172161-9<br>Connector pin: 170359-1<br>(TE Connectivity Ltd. Company)<br>or an equivalent product<br>Cable clamp: MTI-0002<br>(Toa Electric Industrial Co., Ltd.) | <br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M)<br>or<br>Connector set: 54599-1019<br>(Molex, LLC) |
| Model  | Servo motor connector   | Junction connector  |
| MR-AEPB2J20CBL03M-A1-L<br>MR-AEPB2J20CBL03M-A2-L<br>MR-AEP2J20CBL03M-A1-L<br>MR-AEP2J20CBL03M-A2-L   | <br>Connector set: MT50W-8D/2D4ES-CVLD(7.5)<br>Contact for power supply: MT50E-1820SCFA<br>Contact for signal: MT50D-2224SCFA<br>(Hirose Electric Co., Ltd.)                     | <br>Cable receptacle: CMV1-CR10P-M2<br>(DDK Ltd.)  |

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/SWires













Product List

Precautions

Support













# Options/Peripheral Equipment

## Details of Option Connectors for Servo Motors

| Model  | Servo motor connector   | Junction connector  |
|--|---|---|
| MR-AEPB2J20CBL03M-A5-L<br>MR-AEP2J20CBL03M-A5-L  | <br>Connector set: MT50W-8D/2D4ES-CVSD(7.5)<br>Contact for power supply: MT50E-1820SCFA<br>Contact for signal: MT50D-2224SCFA<br>(Hirose Electric Co., Ltd.)   | <br>Cable receptacle: CMV1-CR10P-M2<br>(DDK Ltd.)  |
| Model  | Encoder connector   | Servo amplifier connector   |
| MR-J3ENSCBL_M-H (Note 2)<br>MR-J3ENSCBL_M-L (Note 2)   | <br>Straight plug: CMV1-SP10S-M1<br>Socket contact: CMV1-#22ASC-C1-100<br>(DDK Ltd.)   | <br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M)<br>or<br>Connector set: 54599-1019<br>(Molex, LLC)   |
| Model  | Junction connector/encoder connector  | Servo amplifier connector   |
| MR-AENSCBL_M-H (Note 2)<br>MR-AENSCBL_M-L (Note 2)   | <br>Straight plug: CMV1-SP10S-M2<br>Socket contact: CMV1-#22ASC-S1-100<br>(DDK Ltd.)   | <br>Connector set: 54599-1016<br>(Molex, LLC)<br>or<br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M)   |
| Model  | Junction connector/encoder connector  | Servo amplifier connector   |
| MR-J3SCNS (Note 1, 2, 3)   | <br>Straight plug: CMV1-SP10S-M2<br>Socket contact: CMV1-#22ASC-S1-100<br>(DDK Ltd.)   | <br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M)<br>or<br>Connector set: 54599-1019<br>(Molex, LLC) |
| Model  | Servo motor connector   | Servo amplifier connector   |
| MR-AEPB1CBL_M-A1-H<br>MR-AEPB1CBL_M-A1-L<br>MR-AEPB1CBL_M-A2-H<br>MR-AEPB1CBL_M-A2-L<br>MR-AEP1CBL_M-A1-H<br>MR-AEP1CBL_M-A1-L<br>MR-AEP1CBL_M-A2-H<br>MR-AEP1CBL_M-A2-L | <br>Connector set: MT50W-8D/2D4ES-CVL(11.9)<br>Contact for power supply: MT50E-1820SCFA<br>Contact for signal: MT50D-2224SCFA<br>(Hirose Electric Co., Ltd.) | <br>Connector set: 54599-1016<br>(Molex, LLC)<br>or<br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M) |
| Model  | Servo motor connector   | Servo amplifier connector   |
| MR-AEPB1CBL_M-A5-H<br>MR-AEPB1CBL_M-A5-L<br>MR-AEP1CBL_M-A5-H<br>MR-AEP1CBL_M-A5-L   | <br>Connector set: MT50W-8D/2D4ES-CVS(11.9)<br>Contact for power supply: MT50E-1820SCFA<br>Contact for signal: MT50D-2224SCFA<br>(Hirose Electric Co., Ltd.) | <br>Connector set: 54599-1016<br>(Molex, LLC)<br>or<br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M) |

- Notes: 1. Cable clamps and bushings for cable OD of 5.5 mm to 7.5 mm and of 7.0 mm to 9.0 mm are included in the set.  
 2. Some cables or connector sets may contain the connectors of different shapes. However, these connectors are all usable.  
 3. The connector set contains a plug and contacts. Using contacts for other plugs may damage the connector. Use the enclosed contacts.

## Details of Option Connectors for Servo Motors

| Model                     | Encoder connector   | Servo amplifier connector   |
|---------------------------|---|---|
| MR-ENCNS2 (Note 2, 3)     | <br>Straight plug: CMV1S-SP10S-M2<br>Socket contact: CMV1-#22ASC-S1-100 (DDK Ltd.) | <br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008 (3M)<br>or<br>Connector set: 54599-1019 (Molex, LLC) |
| MR-J3SCNSA (Note 1, 2, 3) | <br>Angle plug: CMV1-AP10S-M2<br>Socket contact: CMV1-#22ASC-S1-100 (DDK Ltd.)     | <br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008 (3M)<br>or<br>Connector set: 54599-1019 (Molex, LLC) |
| MR-ENCNS2A (Note 2, 3)    | <br>Angle plug: CMV1S-AP10S-M2<br>Socket contact: CMV1-#22ASC-S1-100 (DDK Ltd.)    | <br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008 (3M)<br>or<br>Connector set: 54599-1019 (Molex, LLC) |
| MR-APWCNS4                | <br>Power connector  | Plug: JL10-6A18-10SE-EB (straight)<br>Cable clamp: JL04-18CK(13)-R (Japan Aviation Electronics Industry, Limited)   |
| MR-APWCNS5                | <br>Power connector  | Plug: JL10-6A22-22SE-EB (straight)<br>Cable clamp: JL04-2022CK(14)-R (Japan Aviation Electronics Industry, Limited)   |
| MR-BKCNS1 (Note 1, 2)     | <br>Electromagnetic brake connector  | Straight plug: CMV1-SP2S-L<br>Socket contact: CMV1-#22BSC-S2-100 (DDK Ltd.)   |
| MR-BKCNS2 (Note 2)        | <br>Electromagnetic brake connector  | Straight plug: CMV1S-SP2S-L<br>Socket contact: CMV1-#22BSC-S2-100 (DDK Ltd.)  |
| MR-BKCNS1A (Note 1, 2)    | <br>Electromagnetic brake connector  | Angle plug: CMV1-AP2S-L<br>Socket contact: CMV1-#22BSC-S2-100 (DDK Ltd.)  |
| MR-BKCNS2A (Note 2)       | <br>Electromagnetic brake connector  | Angle plug: CMV1S-AP2S-L<br>Socket contact: CMV1-#22BSC-S2-100 (DDK Ltd.)   |

- Notes: 1. Some cables or connector sets may contain the connectors of different shapes. However, these connectors are all usable.  
 2. The connector set contains a plug and contacts. Using contacts for other plugs may damage the connector. Use the enclosed contacts.  
 3. Cable clamps and bushings for cable OD of 5.5 mm to 7.5 mm and of 7.0 mm to 9.0 mm are included in the set.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LVSWires












Product List

Precautions

Support

## Options/Peripheral Equipment

### Details of Option Connectors for Servo Motors

|   |   |   |
|---|---|---|
| Model   | Servo amplifier connector   |   |
| MR-J3CN2                                      | <br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M)                      | or<br>Connector set: 54599-1019<br>(Molex, LLC)   |
| Model   | Junction connector  | Servo amplifier connector   |
| MR-J4FCCBL03M<br>MR-J4THCBL03M<br>MR-J3THMCN2 | <br>Plug: 36110-3000FD<br>Shell kit: 36310-F200-008<br>(3M)                            | <br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M)  |
| Model   | Encoder connector/absolute position storage unit connector  | Servo amplifier connector   |
| MR-J3DDCNS                                    | <br>Plug: RM15WTPZK-12S<br>Cord clamp: JR13WCCA-8(72)<br>(Hirose Electric Co., Ltd.)   | <br>Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008<br>(3M)<br>or<br>Connector set: 54599-1019<br>(Molex, LLC) |
| Model   | Encoder connector   | Absolute position storage unit connector  |
| MR-J3DDSPS                                    | <br>Plug: RM15WTPZK-12S<br>Cord clamp: JR13WCCA-8(72)<br>(Hirose Electric Co., Ltd.) | <br>Plug: RM15WTPZ-12P(72)<br>Cord clamp: JR13WCCA-8(72)<br>(Hirose Electric Co., Ltd.)                            |
| Model   | Power connector   |   |
| MR-PWCNF                                      |    | Plug: CE05-6A14S-2SD-D (straight)<br>(DDK Ltd.)<br>Cable clamp: YSO14-9 to 11<br>(Daiwa Dengyo Co., Ltd.)   |
| Model   | Power connector   |   |
| MR-PWCNS4                                     |    | Plug: CE05-6A18-10SD-D-BSS (straight)<br>Cable clamp: CE3057-10A-1-D<br>(DDK Ltd.)  |
| Model   | Power connector   |   |
| MR-PWCNS5                                     |    | Plug: CE05-6A22-22SD-D-BSS (straight)<br>Cable clamp: CE3057-12A-1-D<br>(DDK Ltd.)  |
| Model   | Power connector   |   |
| MR-PWCNS3                                     |    | Plug: CE05-6A32-17SD-D-BSS (straight)<br>Cable clamp: CE3057-20A-1-D<br>(DDK Ltd.)  |

## Products on the Market for Rotary Servo Motors

Contact the relevant manufacturers directly.


When fabricating a cable with the following connectors, refer to the relevant manufacturers' instruction manuals for wiring and assembling procedures.

### Encoder connector (servo amplifier side)




|                                  |   |
|----------------------------------|---|
| Application                      | Connector (3M)  |
| Servo amplifier<br>CN2 connector | Receptacle: 36210-0100PL<br>Shell kit: 36310-3200-008 |
|                                  | Connector (Molex, LLC)                                |
|                                  | 54599-1019 (gray)                                     |
|                                  | 54599-1016 (black)                                    |

### Connector for HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series (for dual cable type)




| Applicable servo motor   | IP rating (Note 1) | Connector set (Hirose Electric Co., Ltd.)                                    |                              | Contact (Hirose Electric Co., Ltd.)                            | Applicable cable example   |
|--|--------------------|--|------------------------------|--|--|
|  |                    | Cable direction  | Model                        |  |  |
| HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W,<br>203(4)W | IP67               | In the direction of the load side/In the opposite direction of the load side | MT50W-8D/<br>2D4ES-CVLD(7.5) | For power supply: MT50E-1820SCFA<br>For signal: MT50D-2224SCFA | Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for the applicable cables. |
|  |                    | Vertical (Note 3)  | MT50W-8D/<br>2D4ES-CVSD(7.5) |  |  |

### Connector for HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series (for single cable type)



| Applicable servo motor   | IP rating (Note 1) | Connector set (Hirose Electric Co., Ltd.)                                    |                              | Contact (Hirose Electric Co., Ltd.)                            | Applicable cable example   |
|--|--------------------|--|------------------------------|--|--|
|  |                    | Cable direction  | Model                        |  |  |
| HK-KT series<br>HK-MT series<br>HK-RT103(4)W,<br>153(4)W,<br>203(4)W | IP67               | In the direction of the load side/In the opposite direction of the load side | MT50W-8D/<br>2D4ES-CVL(11.9) | For power supply: MT50E-1820SCFA<br>For signal: MT50D-2224SCFA | Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for the applicable cables. |
|  |                    | Vertical (Note 3)  | MT50W-8D/<br>2D4ES-CVS(11.9) |  |  |

### Encoder connector for HK-ST series/HK-RT (3.5 kW to 7.0 kW) series



| Applicable servo motor                               | IP rating (Note 1) | Connector (DDK Ltd.) |                           |                           |   | Applicable cable example |
|--|--------------------|----------------------|---------------------------|---------------------------|---|--------------------------|
|  |                    | Type                 | Type of connection        | Plug                      | Socket contact  |                          |
| HK-ST series<br>HK-RT353(4)W,<br>503(4)W,<br>703(4)W | IP67               | Straight             | One-touch connection type | CMV1-SP10S-M1             | Select a solder or press bonding type.<br>(Refer to the table below.) | 5.5 to 7.5               |
|  |                    |                      |                           | CMV1-SP10S-M2             |   | 7.0 to 9.0               |
|  |                    |                      | Screw type                | CMV1S-SP10S-M1            |   | 5.5 to 7.5               |
|  |                    | CMV1S-SP10S-M2       |                           | 7.0 to 9.0                |   |                          |
|  |                    | Angle                |                           | One-touch connection type |   | CMV1-AP10S-M1            |
|  |                    |                      | CMV1-AP10S-M2             |                           |   | 7.0 to 9.0               |
| Screw type   | CMV1S-AP10S-M1     |                      | 5.5 to 7.5                |                           |   |                          |
|  | CMV1S-AP10S-M2     | 7.0 to 9.0           |                           |                           |   |                          |

| Contact            | Socket contact (DDK Ltd.) | Wire size (Note 2)   |
|--------------------|---------------------------|--|
| Solder type        | CMV1-#22ASC-S1-100        | 0.5 mm <sup>2</sup> (AWG 20) or smaller  |
| Press bonding type | CMV1-#22ASC-C1-100        | 0.2 mm <sup>2</sup> to 0.5 mm <sup>2</sup> (AWG 24 to 20)<br>Crimping tool (357J-53162T) is required.  |
|                    | CMV1-#22ASC-C2-100        | 0.08 mm <sup>2</sup> to 0.2 mm <sup>2</sup> (AWG 28 to 24)<br>Crimping tool (357J-53163T) is required. |

Notes: 1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

2. The wire size shows wiring specifications of the connector.


3. When a vertically mounted cable is led out, the lock lever of the connector must be on the load side.

# Options/Peripheral Equipment

## Products on the Market for Rotary Servo Motors


Contact the relevant manufacturers directly.

When fabricating a cable with the following connectors, refer to the relevant manufacturers' instruction manuals for wiring and assembling procedures.



### Power connector for HK-ST series/HK-RT (3.5 kW to 7.0 kW) series (Note 3)

| Applicable servo motor   | IP rating (Note 1)        | Plug (Japan Aviation Electronics Industry, Limited)   |                           |                       | Cable clamp (Japan Aviation Electronics Industry, Limited) | Applicable cable example                |                       |  |                                      |                         |
|--|---------------------------|---|---------------------------|-----------------------|--|---|-----------------------|--|--------------------------------------|-------------------------|
|  |                           | Type  | Type of connection        | Model                 |  | Wire size (Note 2)                      | Cable OD [mm]         |  |                                      |                         |
| HK-ST52(4)(W), 102(4)(W), 172(4)W, 202(4)AW, 302(4)W, 353(4)W, 503(4)W | IP67                      | Straight  | One-touch connection type | JL10-6A18-10SE-EB     | JL04-18CK(10)-R<br>JL04-18CK(13)-R                         | 3.5 mm <sup>2</sup> (AWG 12) or smaller | 8 to 11<br>11 to 14.1 |  |                                      |                         |
|  |                           |   | Screw type                | JL04V-6A18-10SE-EB-R  | JL04-18CK(10)-R<br>JL04-18CK(13)-R                         |   | 8 to 11<br>11 to 14.1 |  |                                      |                         |
|  |                           | Angle   | One-touch connection type | JL10-8A18-10SE-EB     | JL04-18CK(10)-R<br>JL04-18CK(13)-R                         |   | 8 to 11<br>11 to 14.1 |  |                                      |                         |
|  |                           |   | Screw type                | JL04V-8A18-10SE-EBH-R | JL04-18CK(10)-R<br>JL04-18CK(13)-R                         |   | 8 to 11<br>11 to 14.1 |  |                                      |                         |
|  |                           | HK-ST7M2UW, 172UW, 202(4)(W), 352(4)(W), 502(4)(W), 702(4)(W)<br>HK-RT353(4)W, 503(4)W, 703(4)W | IP67                      | Straight              | One-touch connection type                                  |   | JL10-6A22-22SE-EB     | JL04-2022CK(12)-R<br>JL04-2022CK(14)-R | 8 mm <sup>2</sup> (AWG 8) or smaller | 9.5 to 13<br>12.9 to 16 |
|  |                           |   |                           |                       | Screw type   |   | JL04V-6A22-22SE-EB-R  | JL04-2022CK(12)-R<br>JL04-2022CK(14)-R |                                      | 9.5 to 13<br>12.9 to 16 |
| Angle  | One-touch connection type |   |                           | JL10-8A22-22SE-EB     | JL04-2022CK(12)-R<br>JL04-2022CK(14)-R                     | 9.5 to 13<br>12.9 to 16                 |                       |  |                                      |                         |
|  | Screw type                |   |                           | JL04V-8A22-22SE-EBH-R | JL04-2022CK(12)-R<br>JL04-2022CK(14)-R                     | 9.5 to 13<br>12.9 to 16                 |                       |  |                                      |                         |



### Electromagnetic brake connector for HK-ST series/HK-RT (3.5 kW to 7.0 kW) series

| Applicable servo motor                                  | IP rating (Note 1) | Connector (DDK Ltd.) |                           |               |   | Applicable cable example |
|---|--------------------|----------------------|---------------------------|---------------|---|--------------------------|
|   |                    | Type                 | Type of connection        | Plug          | Socket contact  | Cable OD [mm]            |
| HK-ST series<br>HK-RT353(4)WB,<br>503(4)WB,<br>703(4)WB | IP67               | Straight             | One-touch connection type | CMV1-SP2S-S   | Select a solder or press bonding type.<br>(Refer to the table below.) | 4.0 to 6.0               |
|   |                    |                      |                           | CMV1-SP2S-M1  |   | 5.5 to 7.5               |
|   |                    |                      |                           | CMV1-SP2S-M2  |   | 7.0 to 9.0               |
|   |                    |                      |                           | CMV1-SP2S-L   |   | 9.0 to 11.6              |
|   |                    |                      | Screw type                | CMV1S-SP2S-S  |   | 4.0 to 6.0               |
|   |                    |                      |                           | CMV1S-SP2S-M1 |   | 5.5 to 7.5               |
|   |                    |                      |                           | CMV1S-SP2S-M2 |   | 7.0 to 9.0               |
|   |                    |                      |                           | CMV1S-SP2S-L  |   | 9.0 to 11.6              |
|   |                    | Angle                | One-touch connection type | CMV1-AP2S-S   |   | 4.0 to 6.0               |
|   |                    |                      |                           | CMV1-AP2S-M1  |   | 5.5 to 7.5               |
|   |                    |                      |                           | CMV1-AP2S-M2  |   | 7.0 to 9.0               |
|   |                    |                      |                           | CMV1-AP2S-L   |   | 9.0 to 11.6              |
|   |                    |                      | Screw type                | CMV1S-AP2S-S  |   | 4.0 to 6.0               |
|   |                    |                      |                           | CMV1S-AP2S-M1 |   | 5.5 to 7.5               |
|   |                    |                      |                           | CMV1S-AP2S-M2 |   | 7.0 to 9.0               |
|   |                    |                      |                           | CMV1S-AP2S-L  |   | 9.0 to 11.6              |

| Contact            | Socket contact (DDK Ltd.) | Wire size (Note 2)   |
|--------------------|---------------------------|--|
| Solder type        | CMV1-#22BSC-S2-100        | 1.25 mm <sup>2</sup> (AWG 16) or smaller   |
| Press bonding type | CMV1-#22BSC-C3-100        | 0.5 mm <sup>2</sup> to 1.25 mm <sup>2</sup> (AWG 20 to 16)<br>Crimping tool (357J-53164T) is required. |

- Notes: 1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.  
 2. The wire size shows wiring specifications of the connector. Refer to "Selection Example in HIV Wires for Servo Motors" in this catalog for examples of wire size selection.  
 3. Connectors for HK-ST152(4)G1/G1H/G5/G7 geared servo motors are the same as those for HK-ST172(4)W.



## Products on the Market for Linear Servo Motors

Contact the relevant manufacturers directly.

When fabricating a cable with the following connectors, refer to the relevant manufacturers' instruction manuals for wiring and assembling procedures.

### Thermistor junction connector for LM-H3 series/LM-K2 series/LM-U2 series/LM-F series



| Applicable servo motor                                      | IP rating <sup>(Note 1)</sup> | Connector (3M) |                | Applicable cable example   |
|---|-------------------------------|----------------|----------------|--|
|   |                               | Plug           | Shell kit      |  |
| LM-H3 series<br>LM-K2 series<br>LM-U2 series<br>LM-F series | -                             | 36110-3000FD   | 36310-F200-008 | Wire size: 0.3 mm <sup>2</sup> (AWG 22) or smaller<br>Cable OD: 7 mm to 9 mm |

### Thermistor connector for LM-F series



| Applicable servo motor | IP rating <sup>(Note 1)</sup> | Cable receptacle (DDK Ltd.) | Cable clamp (DDK Ltd.) | Applicable cable example  |
|------------------------|-------------------------------|-----------------------------|------------------------|---|
| LM-F series            | -                             | D/MS3101A14S-9S             | D/MS3057A-6A           | Wire size: 0.3 mm <sup>2</sup> to 1.25 mm <sup>2</sup><br>(AWG 22 to 16)<br>Cable OD: 7.9 mm or smaller |

### Power connector for LM-F series



| Applicable servo motor | IP rating <sup>(Note 1)</sup> | Cable receptacle (DDK Ltd.) | Cable clamp (DDK Ltd.) | Applicable cable example                                   |                                 |
|------------------------|-------------------------------|-----------------------------|------------------------|--|---------------------------------|
|                        |                               |                             |                        | Wire size <sup>(Note 2)</sup>                              | Cable OD [mm]                   |
| LM-FP2B, 2D, 2F        | -                             | D/MS3101A18-10S             | D/MS3057-10A           | 2 mm <sup>2</sup> to 3.5 mm <sup>2</sup><br>(AWG 14 to 12) | 14.3 or smaller<br>(bushing ID) |
| LM-FP4B, 4D            | -                             | D/MS3101A24-22S             | D/MS3057-16A           | 5.5 mm <sup>2</sup> to 8 mm <sup>2</sup><br>(AWG 10 to 8)  | 19.1 or smaller<br>(bushing ID) |

Notes: 1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.

2. The wire size shows wiring specifications of the connector. Refer to "Selection Example in HIV Wires for Servo Motors" in this catalog for examples of wire size selection.

## Options/Peripheral Equipment

### Products on the Market for Direct Drive Motors

Contact the relevant manufacturers directly.

When fabricating a cable with the following connectors, refer to the relevant manufacturers' instruction manuals for wiring and assembling procedures.

Encoder connector for TM-RG2M series/TM-RU2M series/TM-RFM series and absolute position storage unit connector (servo amplifier side)



| Applicable servo motor                            | Application   | IP rating<br>(Note 1) | Plug (Hirose Electric Co., Ltd.) |               |                | Applicable cable example   |
|---|---|-----------------------|----------------------------------|---------------|----------------|--|
|   |   |                       | Type                             | Plug          | Cord clamp     |  |
| TM-RG2M series<br>TM-RU2M series<br>TM-RFM series | For an encoder or absolute position storage unit (servo amplifier side) | IP67                  | Straight                         | RM15WTPZK-12S | JR13WCCA-8(72) | Wire size: 0.5 mm <sup>2</sup> (AWG 20) or smaller<br>Cable OD: 7.8 mm to 8.2 mm<br>Wire example:<br>Vinyl jacket cable<br>20276 VSVPAG#23 × 6P KB-0492<br>Bando Densen Co., Ltd. (Note 2) |

Encoder connector for TM-RG2M series/TM-RU2M series/TM-RFM series and absolute position storage unit connector (encoder side)




| Applicable servo motor                            | Application  | IP rating<br>(Note 1) | Plug (Hirose Electric Co., Ltd.) |                  |                | Applicable cable example   |
|---|--|-----------------------|----------------------------------|------------------|----------------|--|
|   |  |                       | Type                             | Plug             | Cord clamp     |  |
| TM-RG2M series<br>TM-RU2M series<br>TM-RFM series | For an absolute position storage unit (encoder side) | IP67                  | Straight                         | RM15WTPZ-12P(72) | JR13WCCA-8(72) | Wire size: 0.5 mm <sup>2</sup> (AWG 20) or smaller<br>Cable OD: 7.8 mm to 8.2 mm<br>Wire example:<br>Vinyl jacket cable<br>20276 VSVPAG#23 × 6P KB-0492<br>Bando Densen Co., Ltd. (Note 2) |

- Notes: 1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor/absolute position storage unit. If the IP rating of the servo motor/absolute position storage unit differs from that of these connectors, overall IP rating depends on the lowest of all.  
2. Contact Toa Electric Industrial Co., Ltd.

## Products on the Market for Direct Drive Motors


Contact the relevant manufacturers directly.

When fabricating a cable with the following connectors, refer to the relevant manufacturers' instruction manuals for wiring and assembling procedures.



### Power connector for TM-RFM series

| Applicable servo motor       | IP rating <sup>(Note 1)</sup>                             | Plug (with backshell) (DDK Ltd.) |                      | Cable clamp (DDK Ltd.)                                     |  | Applicable cable example        |  |
|------------------------------|---|----------------------------------|----------------------|--|--|---------------------------------|--|
|                              |   | Type                             | Model                | Model  | Wire size <sup>(Note 2)</sup>                              | Cable OD [mm]                   |  |
| TM-RFM012G20, 048G20, 072G20 | IP67  | Straight                         | CE05-6A18-10SD-D-BSS | CE3057-10A-2-D   | 2 mm <sup>2</sup> to 3.5 mm <sup>2</sup><br>(AWG 14 to 12) | 8.5 to 11                       |  |
|                              |   |                                  |                      | CE3057-10A-1-D   |  |                                 | 10.5 to 14.1   |
| D/MS3106B18-10S              | D/MS3057-10A  |                                  |                      | 2 mm <sup>2</sup> to 3.5 mm <sup>2</sup><br>(AWG 14 to 12) | 14.3 or smaller<br>(bushing ID)                            |                                 |  |
| CE05-6A22-22SD-D-BSS         | 5.5 mm <sup>2</sup> to 8 mm <sup>2</sup><br>(AWG 10 to 8) |                                  |                      | 9.5 to 13  |  |                                 |  |
|                              |   |                                  | CE3057-12A-2-D       |  | CE3057-12A-1-D   | 12.5 to 16                      |  |
| TM-RFM040J10, 120J10         | IP67  |                                  | D/MS3106B22-22S      | D/MS3057-12A   | 5.5 mm <sup>2</sup> to 8 mm <sup>2</sup><br>(AWG 10 to 8)  | 15.9 or smaller<br>(bushing ID) |  |
|                              |   |                                  | CE05-6A32-17SD-D-BSS | CE3057-20A-1-D   | 14 mm <sup>2</sup> to 22 mm <sup>2</sup><br>(AWG 6 to 4)   | 22 to 23.8                      |  |
| D/MS3106B32-17S              | D/MS3057-20A  |                                  |                      |  |  |                                 | 14 mm <sup>2</sup> to 22 mm <sup>2</sup><br>(AWG 6 to 4) |
|                              |   |                                  | TM-RFM240J10         | IP67   |  |                                 |  |




### Power connector for TM-RG2M series/TM-RU2M series/TM-RFM series

| Applicable servo motor   | IP rating <sup>(Note 1)</sup> | Plug (DDK Ltd.)  | Cable clamp |               |  | Applicable cable example                                      |                                |
|--|-------------------------------|------------------|-------------|---------------|--|---|--------------------------------|
|  |                               |                  | Type        | Model         | Manufacturer                                       | Wire size <sup>(Note 2)</sup>                                 | Cable OD [mm]                  |
| TM-RG2M series<br>TM-RU2M series<br>TM-RFM002C20, 004C20, 006C20, 006E20, 012E20, 018E20 | IP67                          | CE05-6A14S-2SD-D | Straight    | C2KD0814      | Sankei Manufacturing Co., Ltd. <sup>(Note 3)</sup> | 0.3 mm <sup>2</sup> to 1.25 mm <sup>2</sup><br>(AWG 22 to 16) | 4 to 8                         |
|  |                               |                  |             | C2KD1214      |  |   | 8 to 12                        |
|  |                               |                  |             | YSO14-5 to 8  | Daiwa Dengyo Co., Ltd.                             |   | 5 to 8.3                       |
|  |                               |                  |             | YSO14-9 to 11 |  |   | 8.3 to 11.3                    |
|  | -                             | D/MS3106B14S-2S  | Straight    | D/MS3057-6A   | DDK Ltd.   | 0.3 mm <sup>2</sup> to 1.25 mm <sup>2</sup><br>(AWG 22 to 16) | 7.9 or smaller<br>(bushing ID) |

Notes: 1. The IP rating indicated is for the connector's protection against ingress of dust and water when coupled to a servo motor. If the IP rating of the servo motor differs from that of these connectors, overall IP rating depends on the lowest of all.  
 2. The wire size shows wiring specifications of the connector. Refer to "Selection Example in HIV Wires for Servo Motors" in this catalog for examples of wire size selection.  
 3. Contact: Sankei Manufacturing Co., Ltd. and Mikuni Electric Co., Ltd.


Configuration Example for MR-J5-G(-RJ)

G G-RJ

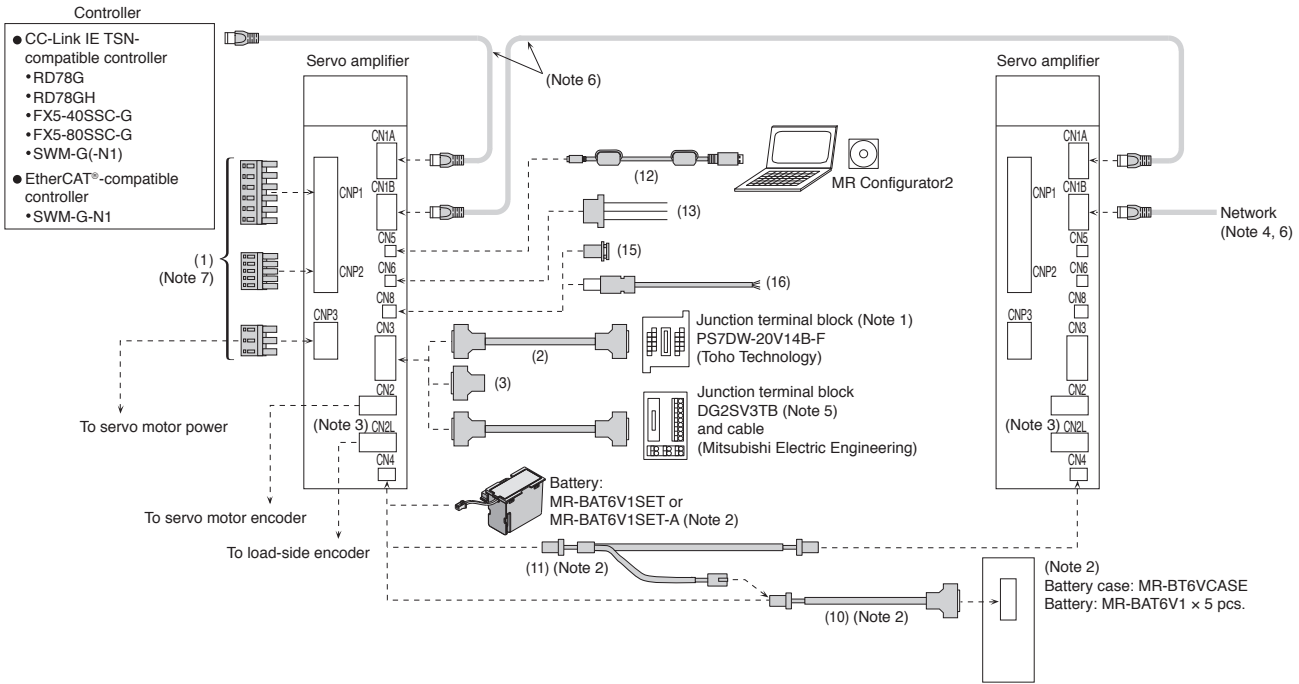


Configuration Example for MR-J5-G4-HS

G-HS

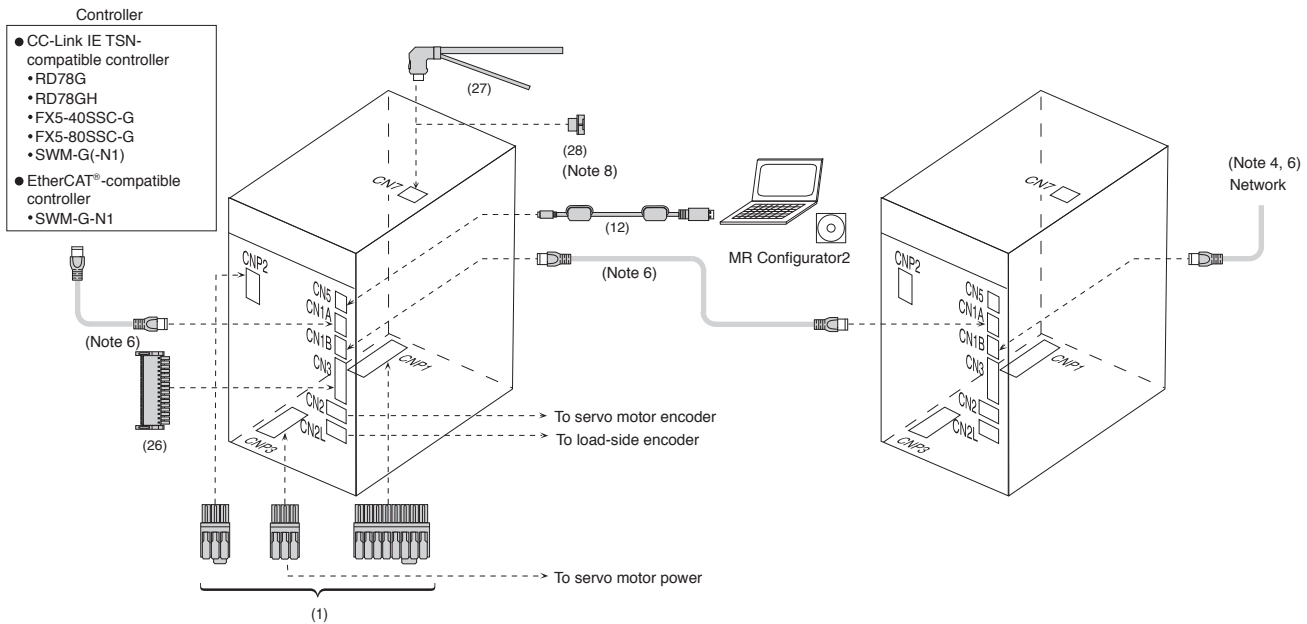

- Notes:
1. Refer to "Junction Terminal Block" in this catalog.
  2. When configuring an absolute position detection system with a direct drive motor, use a battery (MR-BAT6V1SET or MR-BAT6V1SET-A), or a battery case (MR-BT6VCASE) and batteries (MR-BAT6V1 × 5 pieces). When using the battery case, use the indicated cables. Refer to "Battery" or "Battery Case and Battery" in this catalog for details of the battery and connections of the battery case.
  3. CN2L connector is available for MR-J5-G-RJ servo amplifiers.
  4. When branching off CC-Link IE TSN (synchronous communication function) with a switching hub, use a switching hub (class B) recommended by CC-Link Partner Association. When a switching hub (class A) is used, there are restrictions on the topologies to be used. Refer to the controller manual for details.
  5. Refer to p. 7-45 in this catalog for details.
  6. Refer to "Ethernet Cable Specifications" in this catalog for specifications of the Ethernet cable.
  7. The shape and position of the power connector are different from those of the indicated connector for some servo amplifier capacities. Refer to the dimensions for details.
  8. When not using CN7 connector, attach the cap.


## Configuration Example for MR-J5W \_ \_G

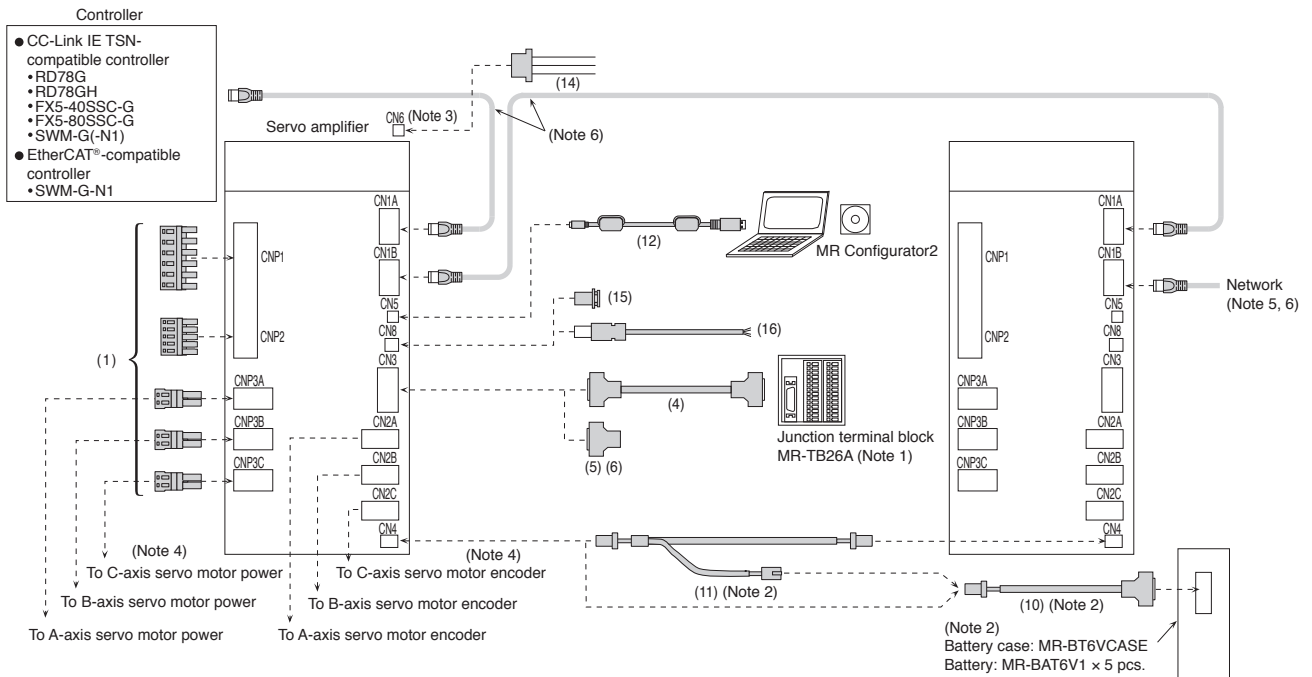

- Notes:
1. Refer to "Junction Terminal Block" in this catalog.
  2. When configuring an absolute position detection system with a direct drive motor, use a battery (MR-BAT6V1SET or MR-BAT6V1SET-A), or a battery case (MR-BT6VCASE) and batteries (MR-BAT6V1 × 5 pieces). When using the battery case, use the indicated cables. Refer to "Battery" or "Battery Case and Battery" in this catalog for details of the battery and connections of the battery case.
  3. MR-J5W\_G servo amplifiers have CN6 connector on the top of the unit.
  4. CNP3C and CN2C connectors are available for MR-J5W3-G servo amplifiers.
  5. When branching off CC-Link IE TSN (synchronous communication function) with a switching hub, use a switching hub (class B) recommended by CC-Link Partner Association. When a switching hub (class A) is used, there are restrictions on the topologies to be used. Refer to the controller user's manual for details.
  6. Refer to "Ethernet Cable Specifications" in this catalog for specifications of the Ethernet cable.

Configuration Example for MR-J5D - G4

For MR-CV\_ and MR-J5D - G4

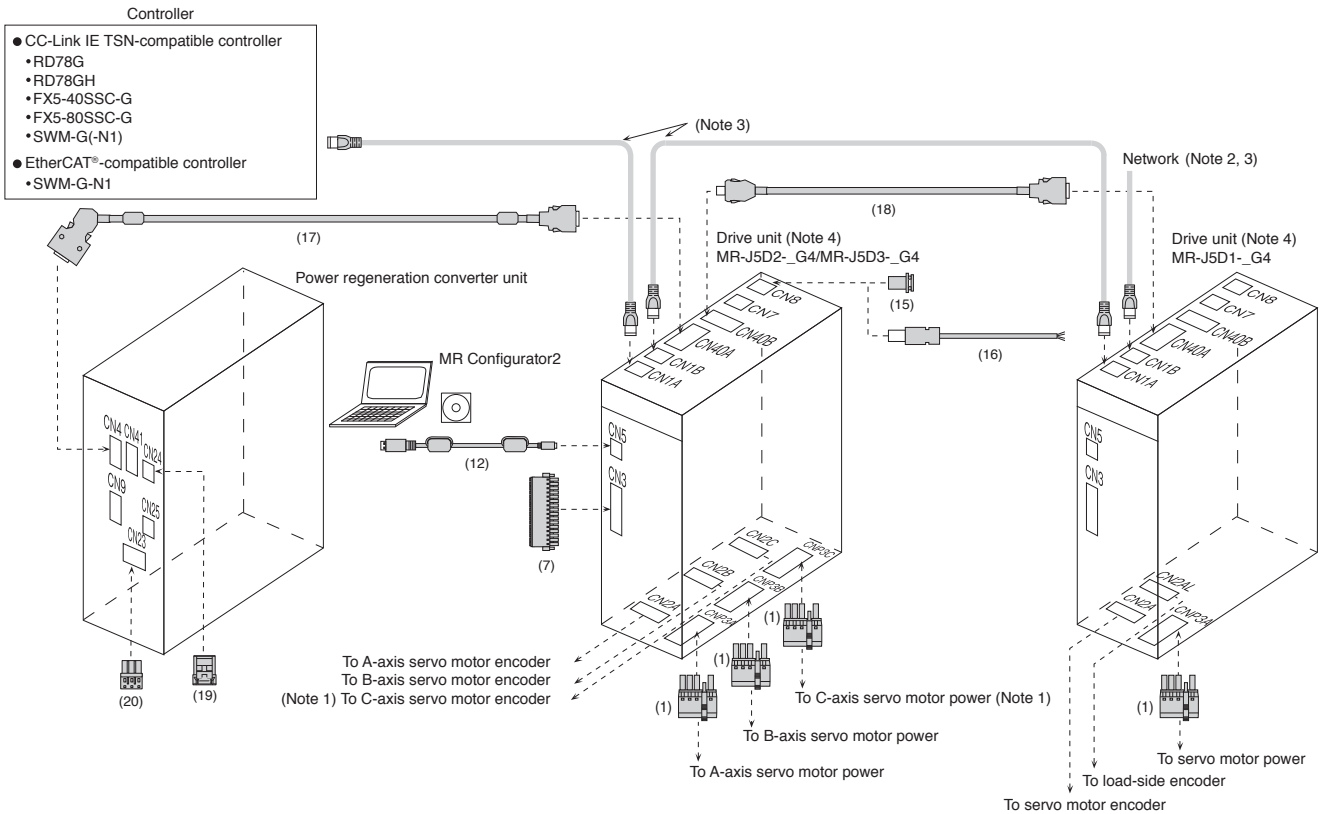

- Notes:
1. CNP3C and CN2C connectors are available for MR-J5D3- G4 drive units.
  2. When branching off CC-Link IE TSN (synchronous communication function) with a switching hub, use a switching hub (class B) recommended by CC-Link Partner Association. When a switching hub (class A) is used, there are restrictions on the topologies to be used. Refer to the controller manual for details.
  3. Refer to "Ethernet Cable Specifications" in this catalog for specifications of the Ethernet cable.
  4. Arrange the drive units in descending order of capacity per axis from the right side of the power regeneration converter unit. When the drive units with the same capacity are used, there are no restrictions on the order.

Ethernet Cable Specifications

| Item       | CC-Link IE TSN <sup>(Note 1, 2)</sup>                       | EtherCAT®  |
|------------|---|--|
| Cable type | Category 5e or higher, (double shielded/STP) straight cable |  |
| Standard   | IEEE802.3 (1000BASE-T)<br>ANSI/TIA/EIA-568-B (Category 5e)  | IEEE802.3 (100BASE-TX)<br>ANSI/TIA/EIA-568-B (Category 5e) |
| Connector  | RJ-45 connector with shield                                 |  |

- Notes:
1. Use wiring parts recommended by CC-Link Partner Association for wiring the CC-Link IE TSN.
  2. Cables for CC-Link IE Controller Network cannot be used with CC-Link IE TSN.

[Products on the Market]

Ethernet Cable


| Application                | Model          | Specifications   |                                     |
|----------------------------|----------------|--|-------------------------------------|
| For indoor                 | SC-E5EW-S_M    | _ : cable length (0.5 m, 1 to 100 m (unit of 1 m))               | Double shielded cable (Category 5e) |
| For indoor and moving part | SC-E5EW-S_M-MV | _ : cable length (0.1, 0.2, 0.3, 0.5 m, 1 to 45 m (unit of 1 m)) |                                     |
| For indoor/outdoor         | SC-E5EW-S_M-L  | _ : cable length (1 to 100 m (unit of 1 m))                      |                                     |

For details, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

\* When using CC-Link IE TSN, refer to the website of CC-Link Partner Association for cables on the market other than above.  
<https://www.cc-link.org/en/>


Configuration Example for MR-J5-B(-RJ) (Note 8)

**B** **B-RJ**

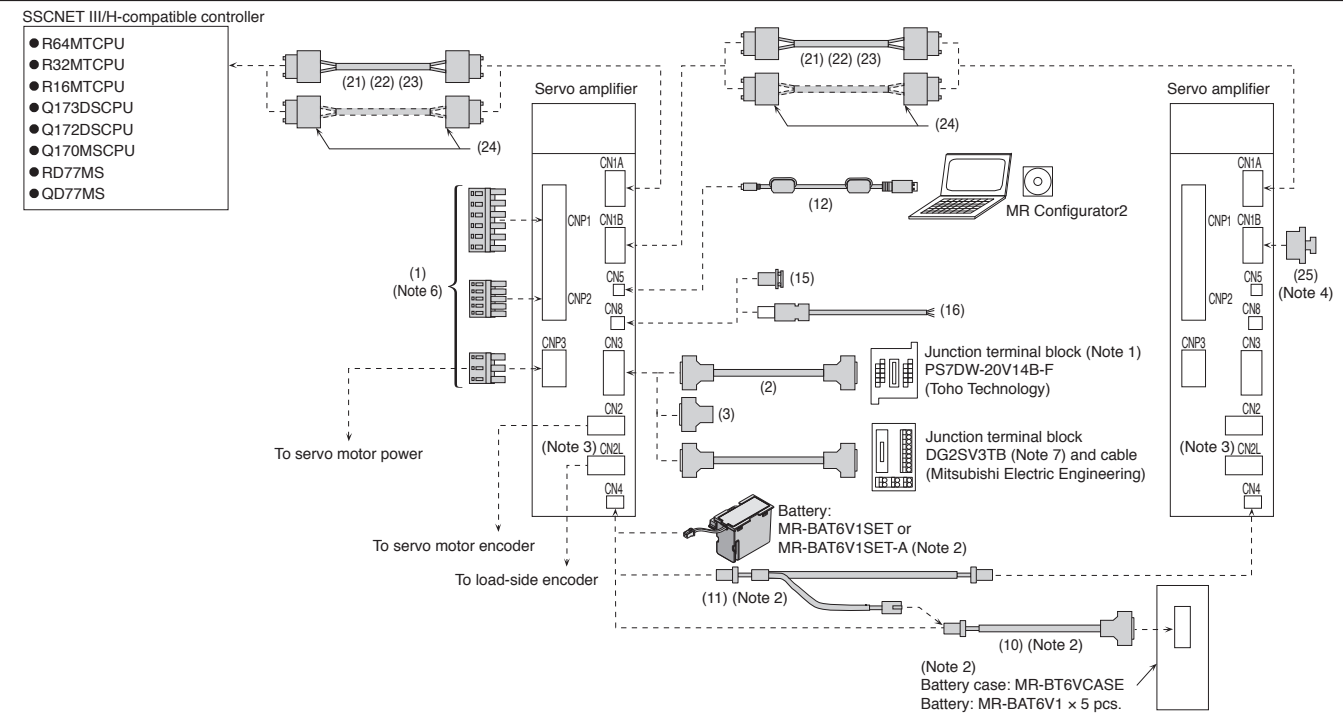

Configuration Example for MR-J5W-B (Note 8)

**WB**

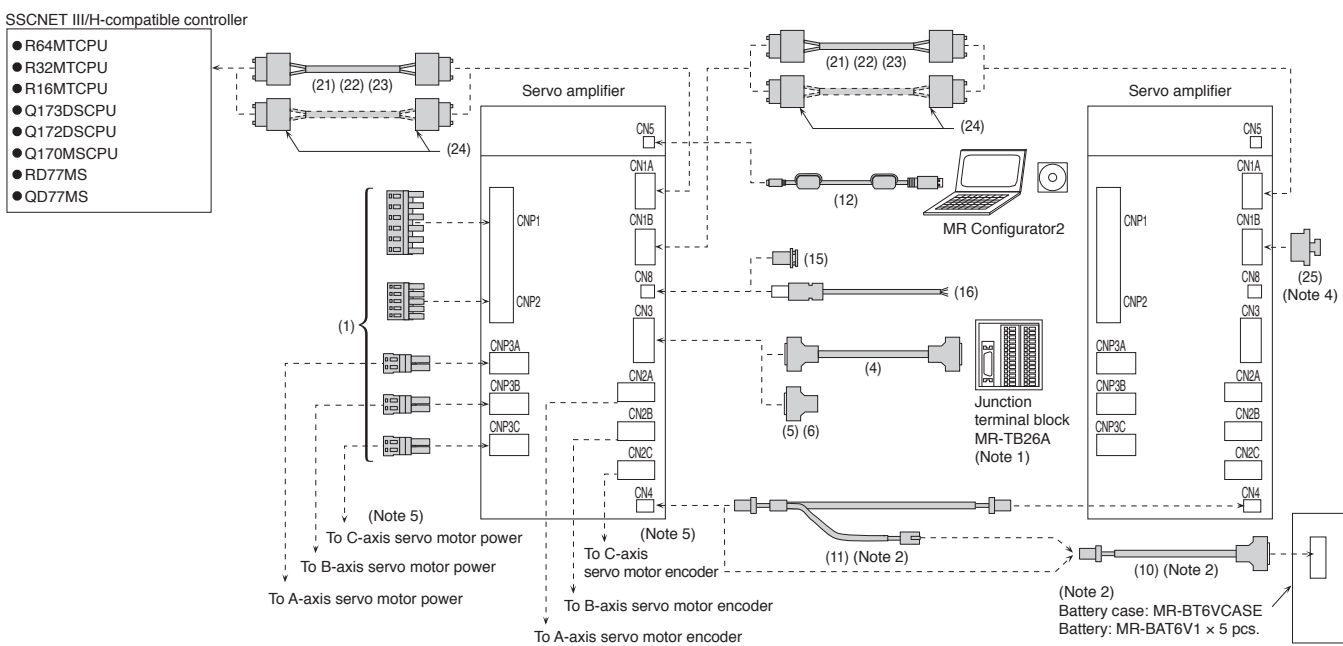


- Notes:
1. Refer to "Junction Terminal Block" in this catalog.
  2. When configuring an absolute position detection system with a direct drive motor, use a battery (MR-BAT6V1SET or MR-BAT6V1SET-A), or a battery case (MR-BT6VCASE) and batteries (MR-BAT6V1 x 5 pieces). When using the battery case, use the indicated cables. Refer to "Battery" or "Battery Case and Battery" in this catalog for details of the battery and connections of the battery case.
  3. CN2L connector is available for MR-J5-B-RJ servo amplifiers.
  4. Attach a cap to CN1B connector of the final axis.
  5. CNP3C and CN2C connectors are available for MR-J5W3-B servo amplifiers.
  6. The shape and position of the power connector are different from those of the indicated connector for some servo amplifier capacities. Refer to the dimensions for details.
  7. Refer to "Products on the Market for Servo Amplifiers Mitsubishi Electric Engineering" in this catalog for details.
  8. Cables drawn with dashed lines need to be fabricated by users. Refer to "MR-J5 User's Manual" when fabricating the cables.

## Configuration Example for MR-J5-A(-RJ) (Note 4)

A

A-RJ

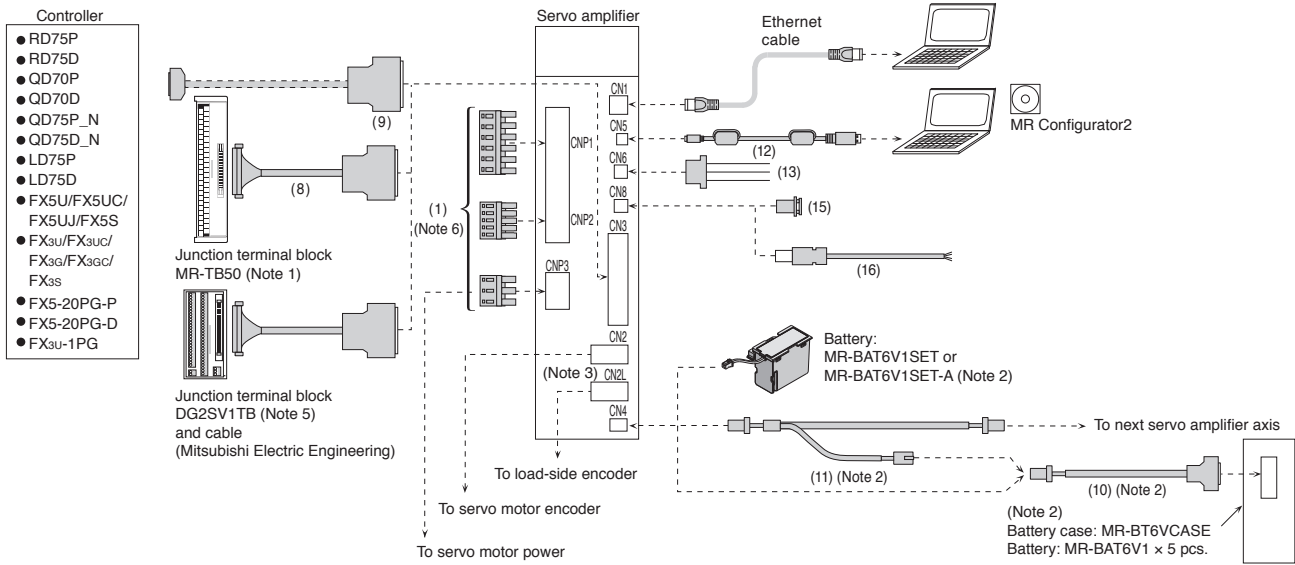




























- Notes:
1. Refer to "Junction Terminal Block" in this catalog.
  2. When configuring an absolute position detection system with a direct drive motor, use a battery (MR-BAT6V1SET or MR-BAT6V1SET-A), or a battery case (MR-BT6VCASE) and batteries (MR-BAT6V1 × 5 pieces). When using the battery case, use the indicated cables. Refer to "Battery" or "Battery Case and Battery" in this catalog for details of the battery and connections of the battery case.
  3. CN2L connector is available for MR-J5-A-RJ servo amplifiers.
  4. Cables drawn with dashed lines need to be fabricated by users. Refer to "MR-J5 User's Manual" when fabricating the cables.
  5. Refer to p. 7-47 in this catalog for details.
  6. The shape and position of the power connector are different from those of the indicated connector for some servo amplifier capacities. Refer to the dimensions for details.



**Cables and Connectors for Servo Amplifiers**

Refer to "Details of Option Connectors for Servo Amplifiers" in this catalog for the detailed models.

| No.  | Item                                    | Application   | Cable length | Model                | Description  |
|--|---|---|--------------|----------------------|--|
| For CNP1/CNP1A/CNP1B/CNP2/CNP3/CNP3A/CNP3B/CNP3C | (1) Servo amplifier power connector set | MR-J5-100G(-RJ) or smaller/<br>MR-J5-100B(-RJ) or smaller/<br>MR-J5-100A(-RJ) or smaller                                  | -            | (Standard accessory) | CNP1 connector    CNP2 connector    CNP3 connector    Open tool<br>   <br>Applicable wire size <sup>(Note 1)</sup> : AWG 18 to 14<br>Insulator OD: 3.9 mm or smaller   |
|  |   | MR-J5-200G(-RJ)/<br>MR-J5-200B(-RJ)/<br>MR-J5-200A(-RJ)/<br>MR-J5-350G(-RJ)/<br>MR-J5-350B(-RJ)/<br>MR-J5-350A(-RJ)       |              |                      | CNP1 connector    CNP2 connector    CNP3 connector    Open tool<br>   <br>CNP1/CNP3 connector<br>Applicable wire size <sup>(Note 1)</sup> : AWG 16 to 10<br>Insulator OD: 4.7 mm or smaller<br>CNP2 connector<br>Applicable wire size <sup>(Note 1)</sup> : AWG 18 to 14<br>Insulator OD: 3.9 mm or smaller                                |
|  |   | MR-J5-500G(-RJ)/<br>MR-J5-500B(-RJ)/<br>MR-J5-500A(-RJ)/<br>MR-J5-700G(-RJ)/<br>MR-J5-700B(-RJ)/<br>MR-J5-700A(-RJ)       |              |                      | CNP1A connector    CNP1B connector    CNP3 connector    Open tool<br>   <br>CNP1A/CNP1B/CNP3 connector<br>Applicable wire size <sup>(Note 1)</sup> : AWG 18 to 8<br>Insulator OD: 7.6 mm or smaller<br>CNP2 connector<br>Applicable wire size <sup>(Note 1)</sup> : AWG 18 to 14<br>Insulator OD: 3.9 mm or smaller                        |
|  |   | MR-J5-350G4(-RJ) or smaller/<br>MR-J5-350B4(-RJ) or smaller/<br>MR-J5-350A4(-RJ) or smaller                               |              |                      | CNP1 connector    CNP2 connector    CNP3 connector    Open tool<br>   <br>Applicable wire size <sup>(Note 1)</sup> : AWG 18 to 14<br>Insulator OD: 3.9 mm or smaller   |
|  |   | MR-J5-500G4(-HS)/<br>MR-J5-500B4(-RJ)/<br>MR-J5-500A4(-RJ)/<br>MR-J5-700G4(-HS)/<br>MR-J5-700B4(-RJ)/<br>MR-J5-700A4(-RJ) |              |                      | CNP1 connector    CNP2 connector    CNP3 connector<br>  <br>Applicable wire size <sup>(Note 1)</sup> : AWG 20 to 8<br>Insulator OD: 6.6 mm or smaller   |
|  |   | MR-J5W2-44G or smaller/<br>MR-J5W2-44B or smaller/<br>MR-J5W3-444G or smaller/<br>MR-J5W3-444B or smaller                 |              |                      | CNP1 connector    CNP2 connector    CNP3_ <sup>(Note 2)</sup> connector    Open tool<br>   <br>Applicable wire size <sup>(Note 1)</sup> : AWG 18 to 14<br>Insulator OD: 3.9 mm or smaller  |
|  |   | MR-J5W2-77G or larger/<br>MR-J5W2-77B or larger   |              |                      | CNP1 connector    CNP2 connector    CNP3_ <sup>(Note 2)</sup> connector    Open tool<br>   <br>CNP1 connector<br>Applicable wire size <sup>(Note 1)</sup> : AWG 16 to 10<br>Insulator OD: 4.7 mm or smaller<br>CNP2, CNP3_ connector<br>Applicable wire size <sup>(Note 1)</sup> : AWG 18 to 14<br>Insulator OD: 3.9 mm or smaller |










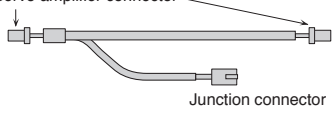

Notes: 1. The wire size shows wiring specifications of the connector. Refer to "Selection Example in HIV Wires for Servo Motors" in this catalog for examples of wire size selection.  
 2. MR-J5W2\_G/MR-J5W2\_B: CNP3A/CNP3B, MR-J5W3\_G/MR-J5W3\_B: CNP3A/CNP3B/CNP3C

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Options/Peripheral Equipment

## Cables and Connectors for Servo Amplifiers









Refer to "Details of Option Connectors for Servo Amplifiers" in this catalog for the detailed models.

| No.  | Item  | Application  | Cable length     | Model  | Description  |
|--|---|--|------------------|--|--|
| For CNP3   | (1) Drive unit power connector set  | MR-J5D_-_G4  | -                | (Standard accessory)   | <p>CNP3_ (Note 2) connector <span style="float: right;">Open tool*</span></p>  <p>CNP3_ connector<br/>Applicable wire size (Note 1): AWG 24 to 8<br/>Insulator OD: 10 mm or smaller<br/>* The open tool is not supplied with a drive unit. The open tool must be prepared by users.</p> |
| For CN3  | (2) Junction terminal block cable   | Connecting MR-J5-_G_(-RJ)/ MR-J5-_B_(-RJ) and PS7DW-20V14B-F                                   | 0.5 m            | MR-J2HBUS05M   |  <p>Servo amplifier connector <span style="float: right;">Junction terminal block connector</span></p>  |
|  |   |  | 1 m              | MR-J2HBUS1M  |  |
|  |   |  | 5 m              | MR-J2HBUS5M  |  |
|  | (3) Connector set   | MR-J5-_G_(-RJ)/ MR-J5-_B_(-RJ)   | -                | MR-CCN1  |  <span style="float: right;">Servo amplifier connector</span>   |
|  | (4) Junction terminal block cable   | Connecting MR-J5W_-_G/ MR-J5W_-_B and MR-TB26A   | 0.5 m            | MR-TBNATBL05M  |  <p>Servo amplifier connector <span style="float: right;">Junction terminal block connector</span></p>  |
|  |   |  | 1 m              | MR-TBNATBL1M   |  |
|  | (5) Connector set (Qty: 1 pc.)  | MR-J5W_-_G/ MR-J5W_-_B   | -                | MR-J2CMP2  |  <span style="float: right;">Servo amplifier connector</span>   |
|  | (6) Connector set (Qty: 20 pcs.)  | MR-J5W_-_G/ MR-J5W_-_B   | -                | MR-ECN1  |  |
|  | (7) I/O and monitor connector   | MR-J5D_-_G4  | -                | MR-ADCN3   |  <span style="float: right;">Drive unit connector</span>  |
| (8) Junction terminal block cable                      | Connecting MR-J5-_A_(-RJ) and MR-TB50   | 0.5 m  | MR-J2M-CN1TBL05M |  <p>Junction terminal block connector <span style="float: right;">Servo amplifier connector</span></p>                                |  |
|  |   | 1 m  | MR-J2M-CN1TBL1M  |  |  |
| (9) Connector set                                      | MR-J5-_A_(-RJ)  | -  | MR-J3CN1         |  <span style="float: right;">Servo amplifier connector</span>   |  |
| For CN4  | (10) Battery cable  | Connecting MR-J5-_G_(-RJ)/ MR-J5W_-_G/ MR-J5-_B_(-RJ)/ MR-J5W_-_B/ MR-J5-_A_(-RJ), MR-BT6VCASE | 0.3 m            | MR-BT6V1CBL03M   |  <p>Servo amplifier connector <span style="float: right;">Battery case connector</span></p>   |
|  |   |  | 1 m              | MR-BT6V1CBL1M  |  |
|  | (11) Junction battery cable   | MR-J5-_G_(-RJ)/ MR-J5W_-_G/ MR-J5-_B_(-RJ)/ MR-J5W_-_B/ MR-J5-_A_(-RJ)                         | 0.3 m            | MR-BT6V2CBL03M   |  <p>Servo amplifier connector <span style="float: right;">Junction connector</span></p>   |
|  |   |  | 1 m              | MR-BT6V2CBL1M  |  |
| (12) Personal computer communication cable (USB cable) | MR-J5-_G_(-RJ)/ MR-J5-_G4-HS/ MR-J5W_-_G/ MR-J5D_-_G4/ MR-J5-_B_(-RJ)/ MR-J5W_-_B/ MR-J5-_A_(-RJ) | 3 m  | MR-J3USBCBL3M    |  <p>Servo amplifier connector mini-B connector (5-pin) <span style="float: right;">Personal computer connector A connector</span></p> |  |

Notes: 1. The wire size shows wiring specifications of the connector. Refer to "Selection Example in HIV Wires for Servo Motors" in this catalog for examples of wire size selection.  
2. MR-J5D1-\_G4: CNP3A, MR-J5D2-\_G4: CNP3A/CNP3B, MR-J5D3-\_G4: CNP3A/CNP3B/CNP3C

## Cables and Connectors for Servo Amplifiers

Refer to "Details of Option Connectors for Servo Amplifiers" in this catalog for the detailed models.

| No.  | Item  | Application   | Cable length | Model                | Description  |
|--|---|---|--------------|----------------------|--|
| For CN6  | (13) Monitor cable                          | MR-J5-_G(-RJ)/<br>MR-J5-_A(-RJ)   | 1 m          | MR-ACN6CBL1M         | Servo amplifier connector<br>   |
|  | (14) Monitor cable                          | MR-J5W_-_G  | 1 m          | MR-J3CN6CBL1M        |  |
| For CN8  | (15) Short-circuit connector                | MR-J5-_G(-RJ)/<br>MR-J5W_-_G/<br>MR-J5D_-_G4/<br>MR-J5-_B(-RJ)/<br>MR-J5W_-_B/<br>MR-J5-_A(-RJ)   | -            | (Standard accessory) |  This connector is required when the STO function is not used.  |
|  | (16) STO cable                              | Connecting<br>MR-J3-D05 or another<br>safety control device with<br>MR-J5-_G(-RJ)/<br>MR-J5W_-_G/<br>MR-J5D_-_G4/<br>MR-J5-_B(-RJ)/<br>MR-J5W_-_B/<br>MR-J5-_A(-RJ) | 3 m          | MR-D05UDL3M-B        | Servo amplifier connector<br>   |
| For power regeneration<br>converter unit CN4/drive<br>unit CN40A | (17) Protection<br>coordination cable       | MR-CV11K4 to<br>MR-CV45K4 and<br>MR-J5D_-_G4  | 0.2 m        | MR-ACDL02M           | Power regeneration<br>converter unit connector<br>Drive unit connector<br>  |
|  |   | MR-CV55K4/MR-CV75K4<br>and MR-J5D_-_G4  | 0.5 m        | MR-ACDL05M           |  |
| For drive<br>unit CN40A/<br>CN40B                                | (18) Protection<br>coordination cable       | MR-J5D_-_G4   | 0.2 m        | MR-ADDL02M           | Drive unit connector<br>Drive unit connector<br>  |
| For power<br>regeneration<br>converter unit CN24                 | (19) Connector set <sup>(Note 1)</sup>      | MR-CV_  | -            | MR-CVCN24S           | Power regeneration<br>converter unit connector<br>  |
| For power<br>regeneration<br>converter unit CN23                 | (20) Magnetic contactor<br>wiring connector | MR-CV_  | -            | (Standard accessory) | Power regeneration<br>converter unit connector<br> Open tool<br> |

Notes: 1. A crimping tool (357J-22733) manufactured by DDK Ltd. is required. Contact the manufacturer directly.

Common  
SpecificationsServo System  
Controllers

Servo Amplifiers

Rotary Servo  
MotorsLinear Servo  
MotorsDirect Drive  
MotorsOptions/Peripheral  
Equipment

LV/S/Wires

Product List






Precautions

Support

# Options/Peripheral Equipment

## Cables and Connectors for Servo Amplifiers


Refer to "Details of Option Connectors for Servo Amplifiers" in this catalog for the detailed models.

| No.                      | Item | Application   | Cable length                  | Model        | Description                       |  |
|--------------------------|------|---|-------------------------------|--------------|-----------------------------------|--|
| For controller/CN1A/CN1B | (21) | SSCNET III cable <sup>(Note 1)</sup><br>(standard cord inside cabinet)<br>Compatible with SSCNET III/H              | MR-J5-_B_(-RJ)/<br>MR-J5W_-_B | 0.15 m       | MR-J3BUS015M                      |   |
|                          |      |   |                               | 0.3 m        | MR-J3BUS03M                       |  |
|                          |      |   |                               | 0.5 m        | MR-J3BUS05M                       |  |
|                          |      |   |                               | 1 m          | MR-J3BUS1M                        |  |
|                          |      |   |                               | 3 m          | MR-J3BUS3M                        |  |
|                          | (22) | SSCNET III cable <sup>(Note 1)</sup><br>(standard cable outside cabinet)<br>Compatible with SSCNET III/H            | MR-J5-_B_(-RJ)/<br>MR-J5W_-_B | 5 m          | MR-J3BUS5M-A <sup>(Note 4)</sup>  |  |
|                          |      |   |                               | 10 m         | MR-J3BUS10M-A <sup>(Note 4)</sup> |  |
|                          |      |   |                               | 20 m         | MR-J3BUS20M-A <sup>(Note 4)</sup> |  |
|                          | (23) | SSCNET III cable <sup>(Note 1, 3)</sup><br>(long distance cable, long bending life)<br>Compatible with SSCNET III/H | MR-J5-_B_(-RJ)/<br>MR-J5W_-_B | 30 m         | MR-J3BUS30M-B <sup>(Note 4)</sup> |  |
|                          |      |   |                               | 40 m         | MR-J3BUS40M-B <sup>(Note 4)</sup> |  |
|                          |      |   |                               | 50 m         | MR-J3BUS50M-B <sup>(Note 4)</sup> |  |
|                          | (24) | SSCNET III connector set <sup>(Note 1, 2)</sup><br>Compatible with SSCNET III/H                                     | MR-J5-_B_(-RJ)/<br>MR-J5W_-_B | -            | MR-J3BCN1                         |  |
| For CN1B                 | (25) | SSCNET III connector cap<br>Compatible with SSCNET III/H  | MR-J5-_B_(-RJ)/<br>MR-J5W_-_B | -            | (Standard accessory)              |   |
| For CN3                  | (26) | Connector set   | MR-J5-_G4-HS                  | -            | (Standard accessory)              |  <p>Servo amplifier connector<br/>Applicable wire size: AWG 24 to 16</p>                                 |
| For CN7                  | (27) | Analog monitor and A/B/Z-phase pulse output cable   | MR-J5-_G4-HS                  | 10 m/<br>2 m | MR-AHSCN7CBL2M10M                 |  <p>Servo amplifier connector</p> <p>For A/B/Z-phase pulse output: 10 m<br/>For analog monitor: 2 m</p> |
|                          | (28) | Connector cap   | MR-J5-_G4-HS                  | -            | (Standard accessory)              |   |

- Notes:
1. Read carefully through the precautions enclosed with the options before use.
  2. Dedicated tools are required. Contact your local sales office for more details.
  3. For cables over 50 m or with ultra-long bending life, refer to "Products on the Market for Servo Amplifiers" in this catalog.
  4. For unlisted lengths of the cables, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION.  
(Email: osb.webmaster@melsc.jp)

## Bus Bar

For connecting L+/L- terminals between a converter unit and a drive unit and between drive units, use bus bars. Each of the bar models in the table includes a set of two bus bars.

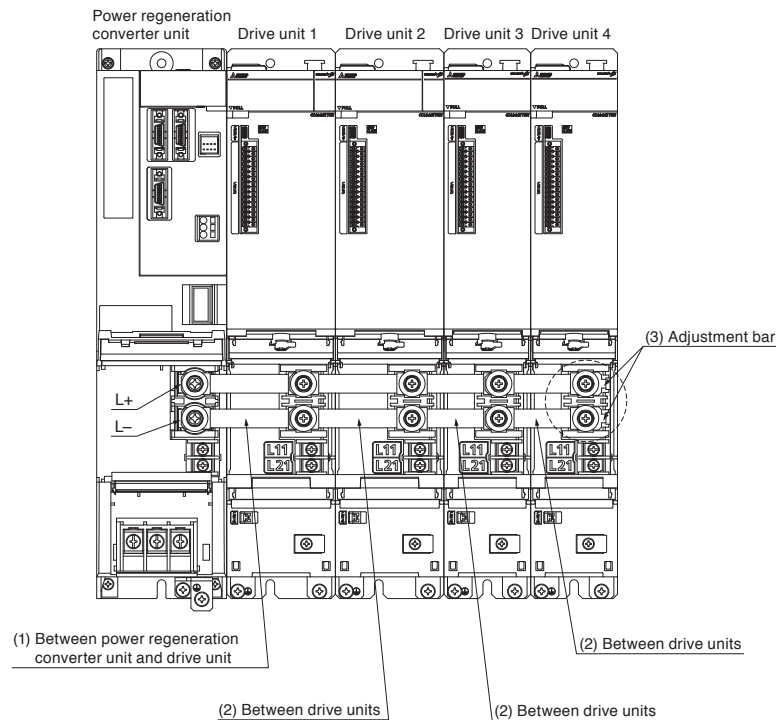

### (1) Between power regeneration converter unit and drive unit

| Unit mounted on the left side <sup>(Note 1)</sup> | Unit mounted on the right side <sup>(Note 1)</sup>                                 | Bus bar model   |
|---|--|-----------------|
| MR-CV11K4<br>MR-CV18K4                            | MR-J5D1-700G4 or smaller,<br>MR-J5D2-350G4 or smaller,<br>MR-J5D3-200G4 or smaller | MR-DCBAR077-B02 |
|   | MR-J5D2-500G4, MR-J5D2-700G4   | MR-DCBAR092-B02 |
| MR-CV30K4<br>MR-CV37K4<br>MR-CV45K4               | MR-J5D1-700G4 or smaller,<br>MR-J5D2-350G4 or smaller,<br>MR-J5D3-200G4 or smaller | MR-DCBAR097-B02 |
|   | MR-J5D2-500G4, MR-J5D2-700G4   | MR-DCBAR112-B02 |
| MR-CV55K4<br>MR-CV75K4                            | MR-J5D1-700G4 or smaller,<br>MR-J5D2-350G4 or smaller,<br>MR-J5D3-200G4 or smaller | MR-DCBAR099-B03 |
|   | MR-J5D2-500G4, MR-J5D2-700G4   | MR-DCBAR114-B03 |

### (2) Between drive units

| Unit mounted on the left side <sup>(Note 1)</sup>                                  | Unit mounted on the right side <sup>(Note 1)</sup>                                 | Bus bar model   |
|--|--|-----------------|
| MR-J5D1-700G4 or smaller,<br>MR-J5D2-350G4 or smaller,<br>MR-J5D3-200G4 or smaller | MR-J5D1-700G4 or smaller,<br>MR-J5D2-350G4 or smaller,<br>MR-J5D3-200G4 or smaller | MR-DCBAR077-B02 |
|  | MR-J5D2-500G4, MR-J5D2-700G4   | MR-DCBAR092-B02 |
| MR-J5D2-500G4,<br>MR-J5D2-700G4  | MR-J5D1-700G4 or smaller,<br>MR-J5D2-350G4 or smaller,<br>MR-J5D3-200G4 or smaller | MR-DCBAR077-B02 |
|  | MR-J5D2-500G4, MR-J5D2-700G4   | MR-DCBAR092-B02 |

### (3) For final drive unit

When an even number of drive units is connected to the power regeneration converter unit, a space is formed between the bus bars and the TE2 terminal block of the final drive unit. To fill this space, place adjustment bars (MR-DCBAR024-B05) between the bus bars and the TE2 terminal block, and tighten the screws.


| Total number of drive units | Adjustment bar model |
|-----------------------------|----------------------|
| Even                        | MR-DCBAR024-B05      |
| Odd                         | Not required         |

Notes: 1. "Unit mounted on the left side" and "Unit mounted on the right side" indicate the position when the units are seen from the front. Install the power regeneration converter unit on the left side of the drive unit.


## Configuration Example for MR-CM

G G-RJ WG B B-RJ WB A A-RJ

### Connectors for MR-CM

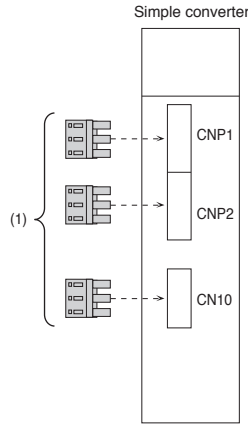

### Connectors for daisy chain wiring <sup>(Note 2)</sup>

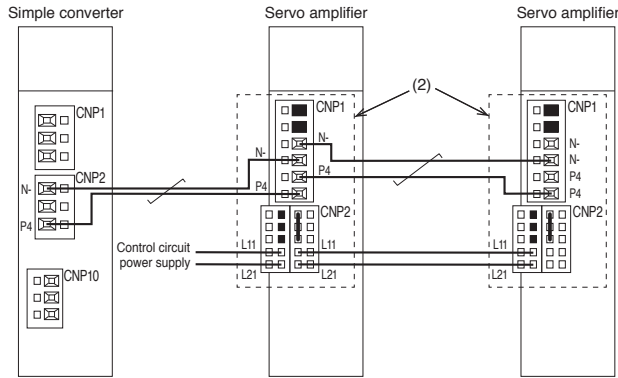

## Cables and Connectors for MR-CM

Refer to "Details of Option Connectors for MR-CM" in this catalog for the detailed models.


| No. | Item                           | Application  | Model                | Description  |
|-----|--------------------------------|--|----------------------|--|
| (1) | Simple converter connector set | MR-CM3K  | (Standard accessory) | <p>CNP1 connector    CNP2 connector    CNP10 connector    Open tool</p> <p>CNP1, CNP2 connector<br/>Applicable wire size <sup>(Note 1)</sup>: AWG 16 to 10<br/>Insulator OD: 4.7 mm or smaller</p> <p>CNP10 connector<br/>Applicable wire size <sup>(Note 1)</sup>: AWG 18 to 14<br/>Insulator OD: 3.9 mm or smaller</p> |
| (2) | Daisy chain power connector    | MR-J5-100G(-RJ) or smaller/<br>MR-J5W2-44G or smaller/<br>MR-J5W3-444G or smaller/<br>MR-J5-100B(-RJ) or smaller/<br>MR-J5W2-44B or smaller/<br>MR-J5W3-444B or smaller/<br>MR-J5-100A(-RJ) or smaller | MR-J5CNP12-J1        | <p>CNP1 connector    CNP2 connector</p> <p>CNP1 connector<br/>Applicable wire size <sup>(Note 1)</sup>: AWG 18 to 10<br/>Insulator OD: 4.7 mm or smaller</p> <p>CNP2 connector<br/>Applicable wire size <sup>(Note 1)</sup>: AWG 18 to 14<br/>Insulator OD: 3.9 mm or smaller</p>  |
|     |                                | MR-J5-200G(-RJ)/<br>MR-J5W2-77G or larger/<br>MR-J5-200B(-RJ)/<br>MR-J5W2-77B or larger/<br>MR-J5-200A(-RJ)  | MR-J5CNP12-J2        | <p>CNP1 connector    CNP2 connector</p> <p>CNP1 connector<br/>Applicable wire size <sup>(Note 1)</sup>: AWG 16 to 10<br/>Insulator OD: 4.7 mm or smaller</p> <p>CNP2 connector<br/>Applicable wire size <sup>(Note 1)</sup>: AWG 18 to 14<br/>Insulator OD: 3.9 mm or smaller</p>  |

Notes: 1. The wire size shows wiring specifications of the connector. Refer to "Wires, Molded-Case Circuit Breakers, and Magnetic Contactors" in this catalog for examples of wire size selection.

2. When mounting the servo amplifiers, follow the restrictions indicated in "MR-J5 User's Manual".

Configuration Example for MR-J3-D05

G G-RJ WG DG B B-RJ WB A A-RJ

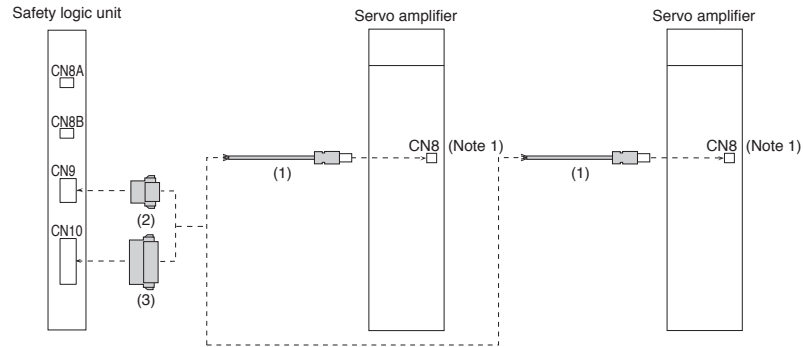

Cables and Connectors for MR-J3-D05

Refer to "Details of Option Connectors for MR-J3-D05" in this catalog for the detailed models.





















| No.             | Item      | Application  | Cable length | Model                             | Description                 |
|-----------------|-----------|--|--------------|-----------------------------------|-----------------------------|
| For CN8<br>(1)  | STO cable | Connecting MR-J3-D05 or another safety control device with MR-J5-_G(-RJ)/ MR-J5W_-_G/ MR-J5D_-_G4/ MR-J5-_B(-RJ)/ MR-J5W_-_B/ MR-J5-_A_(-RJ) | 3 m          | MR-D05UDL3M-B                     | Servo amplifier connector   |
| For CN9<br>(2)  | Connector | MR-J3-D05  | -            | (Standard accessory of MR-J3-D05) | Safety logic unit connector |
| For CN10<br>(3) | Connector | MR-J3-D05  | -            | (Standard accessory of MR-J3-D05) | Safety logic unit connector |

Notes: 1. Attach a short-circuit connector supplied with the servo amplifier when the STO function is not used.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support




















## Options/Peripheral Equipment

### Details of Option Connectors for Servo Amplifiers

|  |   |   |  |   |
|--|---|---|--|---|
| Model  | CNP1 connector  | CNP2 connector  | CNP3 connector   | Open tool   |
| Servo amplifier power connector set<br>For MR-J5-100G(-RJ) or smaller/<br>MR-J5-100B(-RJ) or smaller/<br>MR-J5-100A(-RJ) or smaller<br>(standard accessory)                                  | <br>06JFAT-SAXGDK-K7.5 (LA)<br>(J.S.T. Mfg. Co., Ltd.)   | <br>05JFAT-SAXGDK-K5.0 (LA)<br>(J.S.T. Mfg. Co., Ltd.)                   | <br>03JFAT-SAXGDK-K7.5 (LA)<br>(J.S.T. Mfg. Co., Ltd.)                  | <br>J-FAT-OT-K<br>(J.S.T. Mfg. Co., Ltd.)  |
| Model  | CNP1 connector  | CNP2 connector  | CNP3 connector   | Open tool   |
| Servo amplifier power connector set<br>For MR-J5-200G(-RJ)/<br>MR-J5-200B(-RJ)/<br>MR-J5-200A(-RJ)/<br>MR-J5-350G(-RJ)/<br>MR-J5-350B(-RJ)/<br>MR-J5-350A(-RJ)<br>(standard accessory)       | <br>06JFAT-SAXGFK-XL (LA)<br>(J.S.T. Mfg. Co., Ltd.)   | <br>05JFAT-SAXGDK-H5.0 (LA)<br>(J.S.T. Mfg. Co., Ltd.)                   | <br>03JFAT-SAXGFK-XL (LA)<br>(J.S.T. Mfg. Co., Ltd.)                    | <br>J-FAT-OT-EXL<br>(J.S.T. Mfg. Co., Ltd.)  |
| Model  | CNP1A/CNP1B connector   | CNP2 connector  | CNP3 connector   | Open tool   |
| Servo amplifier power connector set<br>For MR-J5-500G(-RJ)/<br>MR-J5-500B(-RJ)/<br>MR-J5-500A(-RJ)/<br>MR-J5-700G(-RJ)/<br>MR-J5-700B(-RJ)/<br>MR-J5-700A(-RJ)<br>(standard accessory)       | <br>CNP1A connector<br>03JFAT-SAXGDK-P15 (LA)<br>(J.S.T. Mfg. Co., Ltd.)<br><br>CNP1B connector<br>03JFAT-SAYGDK-P15 (LB)<br>(J.S.T. Mfg. Co., Ltd.) | <br>CNP2 connector<br>05JFAT-SAXGDK-H5.0 (LA)<br>(J.S.T. Mfg. Co., Ltd.) | <br>CNP3 connector<br>03JFAT-SAZGDK-P15 (LC)<br>(J.S.T. Mfg. Co., Ltd.) | For CNP1A/CNP1B/CNP3 connectors<br><br>J-FAT-OT-P<br>(J.S.T. Mfg. Co., Ltd.)<br><br>For CNP2 connector<br><br>J-FAT-OT (N)<br>(J.S.T. Mfg. Co., Ltd.) |
| Model  | CNP1 connector  | CNP2 connector  | CNP3 connector   | Open tool   |
| Servo amplifier power connector set<br>For MR-J5-350G4(-RJ) or smaller/<br>MR-J5-350B4(-RJ) or smaller/<br>MR-J5-350A4(-RJ) or smaller<br>(standard accessory)                               | <br>06JFAT-SAXGDK-HT10.5 (LA)<br>(J.S.T. Mfg. Co., Ltd.)   | <br>05JFAT-SAXGDK-HT7.5 (LA)<br>(J.S.T. Mfg. Co., Ltd.)                | <br>03JFAT-SAXGDK-HT10.5 (LA)<br>(J.S.T. Mfg. Co., Ltd.)              | <br>J-FAT-OT-XL<br>(J.S.T. Mfg. Co., Ltd.)   |
| Model  | CNP1 connector  | CNP2 connector  | CNP3 connector   |   |
| Servo amplifier power connector set<br>For MR-J5-500G4(-HS)/<br>MR-J5-500B4(-RJ)/<br>MR-J5-500A4(-RJ)/<br>MR-J5-700G4(-HS)/<br>MR-J5-700B4(-RJ)/<br>MR-J5-700A4(-RJ)<br>(standard accessory) | <br>831-1108/MNC<br>(WAGO)   | <br>831-1103/MNB<br>(WAGO)   | <br>831-1103/MNA<br>(WAGO)  |   |



## Details of Option Connectors for Servo Amplifiers

| Model  | CNP1 connector  | CNP2 connector  | CNP3_ connector   | Open tool  |
|--|---|---|---|--|
| Servo amplifier power connector set<br>For MR-J5W2-44G or smaller/<br>MR-J5W3-444G or smaller/<br>MR-J5W2-44B or smaller/<br>MR-J5W3-444B or smaller<br>(standard accessory) | <br>06JFAT-SAXGDK-K7.5 (LB)<br>(J.S.T. Mfg. Co., Ltd.)   | <br>05JFAT-SAXGDK-K5.0 (LA)<br>(J.S.T. Mfg. Co., Ltd.) | <br>04JFAT-SAGG-G-KK<br>(J.S.T. Mfg. Co., Ltd.)  | <br>J-FAT-OT-K<br>(J.S.T. Mfg. Co., Ltd.)   |
| Servo amplifier power connector set<br>For MR-J5W2-77G or larger/<br>MR-J5W2-77B or larger<br>(standard accessory)   | <br>06JFAT-SAXGFK-XL (LB)<br>(J.S.T. Mfg. Co., Ltd.)   | <br>05JFAT-SAXGDK-H5.0 (LA)<br>(J.S.T. Mfg. Co., Ltd.) | <br>04JFAT-SAGG-G-KK<br>(J.S.T. Mfg. Co., Ltd.)  | <br>J-FAT-OT-EXL<br>(J.S.T. Mfg. Co., Ltd.) |
| Model  | CNP3_ connector   |   | Open tool *   |  |
| Drive unit power connector set<br>For MR-J5D_-_G4<br>(standard accessory)  | <br>BVF 7.62HP/04/180MF4 SN BK BX LRP<br>(Weidmüller Interface GmbH & Co. KG)  |   | <br>SDS 0.8X4.5X125<br>(Weidmüller Interface GmbH & Co. KG)<br>* The open tool is not supplied with a drive unit. The open tool must be prepared by users. |  |
| Model  | Servo amplifier connector   |   | Junction terminal block connector   |  |
| MR-J2HBUS_M  | <br>Press bonding type <sup>(Note 2)</sup><br>Connector: 10120-6000EL<br>Shell kit: 10320-3210-000<br>(3M)<br>or an equivalent product |   | <br>Press bonding type <sup>(Note 2)</sup><br>Connector: 10120-6000EL<br>Shell kit: 10320-3210-000<br>(3M)<br>or an equivalent product                   |  |
| Model  | Servo amplifier connector   |   | Junction terminal block connector   |  |
| MR-CCN1  | <br>Solder type <sup>(Note 1)</sup><br>Connector: 10120-3000PE<br>Shell kit: 10320-52F0-008<br>(3M)<br>or an equivalent product        |   | <br>Connector: 10126-6000EL<br>Shell kit: 10326-3210-000<br>(3M)<br>or an equivalent product   |  |
| Model  | Servo amplifier connector   |   | Junction terminal block connector   |  |
| MR-TBNATBL_M   | <br>Connector: 10126-6000EL<br>Shell kit: 10326-3210-000<br>(3M)<br>or an equivalent product   |   | <br>Connector: 10126-6000EL<br>Shell kit: 10326-3210-000<br>(3M)<br>or an equivalent product   |  |
| Model  | Servo amplifier connector   |   | Junction terminal block connector   |  |
| MR-J2CMP2<br>MR-ECN1   | <br>Connector: 10126-3000PE<br>Shell kit: 10326-52F0-008<br>(3M)<br>or an equivalent product   |   | <br>Connector: 10126-6000EL<br>Shell kit: 10326-3210-000<br>(3M)<br>or an equivalent product   |  |
| Model  | I/O and monitor connector   |   |   |  |
| MR-ADCN3   | <br>Connector: DFMC 1,5/16-STF-3,5<br>(Phoenix Contact)  |   |   |  |

Notes: 1. The press bonding type (connector: 10120-6000EL and shell kit: 10320-3210-000) (3M) is also usable. Contact the manufacturer directly.  
2. The solder type (connector: 10120-3000PE and shell kit: 10320-52F0-008) (3M) is also usable. Contact the manufacturer directly.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

















Product List

Precautions

Support








## Options/Peripheral Equipment

### Details of Option Connectors for Servo Amplifiers

|  |   |  |
|--|---|--|
| Model  | Junction terminal block connector   | Servo amplifier connector  |
| MR-J2M-CN1TBL_M  |  Connector: D7950-B500FL (3M)  |  Press bonding type <sup>(Note 1)</sup><br>Connector: 10150-6000EL<br>Shell kit: 10350-3210-000 (3M)                      |
| Model  | Servo amplifier connector   |  |
| MR-J3CN1   |  Connector: 10150-3000PE<br>Shell kit: 10350-52F0-008 (3M)<br>or an equivalent product |  |
| Model  | Servo amplifier connector   | Battery case connector   |
| MR-BT6V1CBL_M  |  Contact: SPHD-001G-P0.5<br>Housing: PAP-02V-O (J.S.T. Mfg. Co., Ltd.)                 |  Solder type <sup>(Note 2)</sup><br>Connector: 10114-3000PE<br>Shell kit: 10314-52F0-008 (3M)<br>or an equivalent product |
| Model  | Servo amplifier connector   | Junction connector   |
| MR-BT6V2CBL_M  |  Contact: SPHD-001G-P0.5<br>Housing: PAP-02V-O (J.S.T. Mfg. Co., Ltd.)                 |  Contact: SPAL-001GU-P0.5<br>Housing: PALR-02VF-O (J.S.T. Mfg. Co., Ltd.)   |
| Model  | Servo amplifier connector   |  |
| MR-ACN6CBL1M   |  Housing: SHR-03V-S<br>Contact: SSH-003T-P0.2-H (J.S.T. Mfg. Co., Ltd.)               |  |
| Model  | Servo amplifier connector   |  |
| MR-J3CN6CBL1M  |  Housing: 51004-0300<br>Terminal: 50011-8100 (Molex, LLC)                            |  |
| Model  | Servo amplifier connector   |  |
| MR-D05UDL3M-B  |  Connector set: 2069250-1 (TE Connectivity Ltd. Company)                             |  |
| Model  | SSCNET III/H connector  | SSCNET III/H connector   |
| MR-J3BUS_M<br>MR-J3BUS_M-A<br>MR-J3BCN1  | Connector: PF-2D103 (Japan Aviation Electronics Industry, Limited)                   | Connector: PF-2D103 (Japan Aviation Electronics Industry, Limited)    |
| MR-J3BUS_M-B   | Connector: CF-2D103-S (Japan Aviation Electronics Industry, Limited)                 | Connector: CF-2D103-S (Japan Aviation Electronics Industry, Limited)    |
| Model  | Servo amplifier connector   |  |
| Connector set<br>For MR-J5-500G4-HS/<br>MR-J5-700G4-HS<br>(standard accessory) |    | DFMC 1,5/16-ST-3,5-LRBK (Phoenix Contact)<br>or an equivalent product  |
| Model  | Servo amplifier connector   |  |
| MR-AHSCN7CBL2M10M  |    | IX30G-B-10S-CVL1(7.0) (Hirose Electric Co., Ltd.)  |

- Notes: 1. The solder type (connector: 10150-3000PE and shell kit: 10350-52F0-008) (3M) is also usable. Contact the manufacturer directly.  
2. The press bonding type (connector: 10114-6000EL and shell kit: 10314-3210-000) (3M) is also usable. Contact the manufacturer directly.

## Details of Option Connectors for Drive Unit/MR-CV\_

|  |   |  |
|--|---|--|
| Model  | Power regeneration converter unit connector   | Drive unit connector   |
| MR-ACDL_M  |  <p>Plug: 10120-3000PE<br/>Shell kit: 10320-56F0-008 (3M)<br/>or an equivalent product</p> |  <p>Plug: HDR-E26MG1+<br/>Shell kit: HDR-E26LPJP+<br/>(Honda Tsushin Kogyo Co., Ltd.)</p> |
| Model  | Drive unit connector  | Drive unit connector   |
| MR-ADDL02M   |  <p>Connector: IX30G-A-10S-CV(7.0)<br/>(Hirose Electric Co., Ltd.)</p>                     |  <p>Plug: HDR-E26MG1+<br/>Shell kit: HDR-E26LPJP+<br/>(Honda Tsushin Kogyo Co., Ltd.)</p> |
| Model  | Power regeneration converter unit connector   |  |
| MR-CVCN24S   |  <p>Connector: DK-2100D-08R<br/>Contact: DK-2RECSLP1-100<br/>(DDK Ltd.)</p>                |  |
| Model  | Power regeneration converter unit connector   | Open tool  |
| Magnetic contactor wiring connector<br>(Standard accessory of power regeneration converter unit) |  <p>Connector: 03JFAT-SAXGSA-L<br/>(J.S.T. Mfg. Co., Ltd.)</p>                             |  <p>J-FAT-OT-EXL<br/>(J.S.T. Mfg. Co., Ltd.)</p>  |

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires





Product List



Precautions



Support

# Options/Peripheral Equipment


## Details of Option Connectors for MR-CM


| Model   | CNP1 connector  | CNP2 connector  | CNP10 connector   | Open tool  |
|---|---|---|---|--|
| Simple converter connector set (standard accessory) | <br>03JFAT-SAYGFK-XL (LB)<br>(J.S.T. Mfg. Co., Ltd.) | <br>02(16.0)JFAT-SAZGFK-XL (LA)<br>(J.S.T. Mfg. Co., Ltd.) | <br>02(3-2)JFAT-SAYDFK-K7.5<br>(J.S.T. Mfg. Co., Ltd.) | <br>J-FAT-OT-EXL<br>(J.S.T. Mfg. Co., Ltd.) |


| Model         | CNP1 connector   | CNP2 connector   |
|---------------|--|--|
| MR-J5CNP12-J1 | <br>06JFAT-SAXGDK-KC7.5 (LA)<br>(J.S.T. Mfg. Co., Ltd.) | <br>05JFAT-SAXGDK-KC5.0 (LA)<br>(J.S.T. Mfg. Co., Ltd.) |

| Model         | CNP1 connector   | CNP2 connector   |
|---------------|--|--|
| MR-J5CNP12-J2 | <br>06JFAT-SAXGFK-XLC (LA)<br>(J.S.T. Mfg. Co., Ltd.) | <br>05JFAT-SAXGDK-HC5.0 (LA)<br>(J.S.T. Mfg. Co., Ltd.) |

## Details of Option Connectors for MR-J3-D05


| Model         | Servo amplifier connector   |
|---------------|---|
| MR-D05UDL3M-B | <br>Connector set: 2069250-1<br>(TE Connectivity Ltd. Company) |

| Model  | Safety logic unit connector   |
|--|---|
| Connector for CN9 of safety logic unit (Standard accessory of MR-J3-D05) | <br>Connector: 1-1871940-4<br>(TE Connectivity Ltd. Company) |

| Model   | Safety logic unit connector   |
|---|---|
| Connector for CN10 of safety logic unit (Standard accessory of MR-J3-D05) | <br>Connector: 1-1871940-8<br>(TE Connectivity Ltd. Company) |

## Products on the Market for Servo Amplifiers


### SSCNET III Cable

| Application   | Model        | Description                                     |  |
|---|--------------|---|--|
| Standard cable inside cabinet for SSCNET III/H                      | SC-JXBUS_M   | _ = cable length [m]<br>0.15, 0.3, 0.5, 1, 2, 3 | <br>Mitsubishi Electric System & Service Co., Ltd. <sup>(Note 1)</sup> |
| Standard cable outside cabinet for SSCNET III/H                     | SC-J4BUS_M-A | _ = cable length                                |  |
| Long distance cable, ultra-long bending life cable for SSCNET III/H | SC-J3BUS_M-C | (100 m maximum, unit of 1 m)                    |  |

Notes: 1. For details, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

### Shield connection clamp

The shield connection clamp is used to ground the shield of a servo amplifier I/O signal cable on the top surface of the servo amplifier.


| Application   | Model                        | Description                                |  |
|---|------------------------------|--|--|
| I/O cable shield connection for MR-J5-500_4_/MR-J5-700_4_ | SCC 15-F <sup>(Note 2)</sup> | Supported cable diameter:<br>8 mm to 15 mm | <br>Phoenix Contact <sup>(Note 1)</sup> |

Notes: 1. For details, please contact the relevant manufacturers directly.  
2. For installation of this clamp, two screws (M4 × 6 to 12) are required.

Products on the Market for Servo Amplifiers

Mitsubishi Electric Engineering


Network amplifier junction terminal block



Features


- The spring clamp type reduces the installation area by about 40 % compared to the screw type (based on the research of Mitsubishi Electric Engineering).
- When multiple servo amplifiers are connected, the interface power supply can be connected in series across terminal blocks.

Connection with servo amplifier

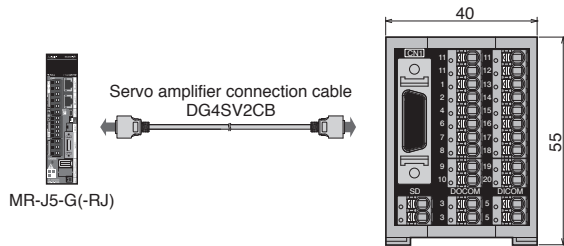

Dimensions

■ DG2SV3TB

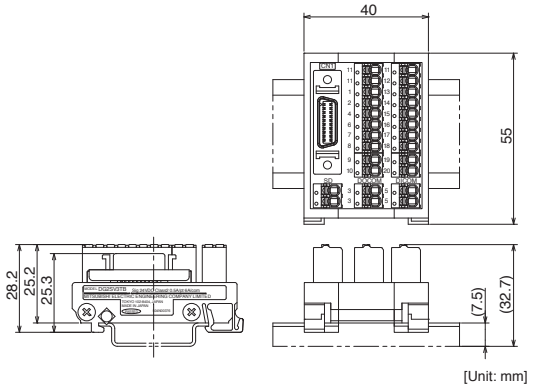

Product models

| Item                                      | Model      | Description  |
|---|------------|--|
| Network amplifier junction terminal block | DG2SV3TB   | For network-connectable 1-axis servo amplifier, sink/source common type<br>External power supply voltage: 24 V DC ± 10 %<br>Maximum usable current: 0.5 A for signal/6 A for common line |
|   | DG4SV2CB05 | Length: 0.5 m  |
|   | DG4SV2CB10 | Length: 1 m  |
| Servo amplifier connection cable          | DG4SV2CB50 | Length: 5 m  |


Junction terminal block for servo motors with brakes

Features

- Easy to build a brake sequence circuit recommended for MR-J5-G servo amplifiers.
- The new terminal block reduces the installation area by up to 50 % compared to preceding types. In addition, fewer wires are required inside the cabinet.




Connection with servo amplifier

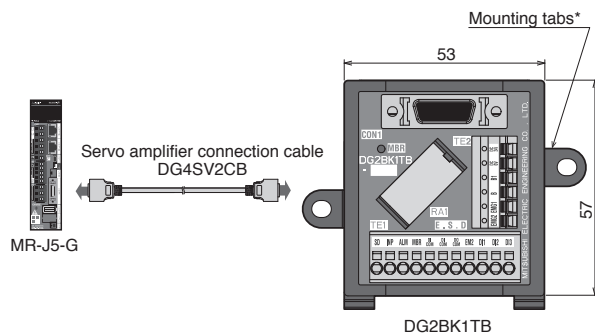

Dimensions

■ DG2BK1TB

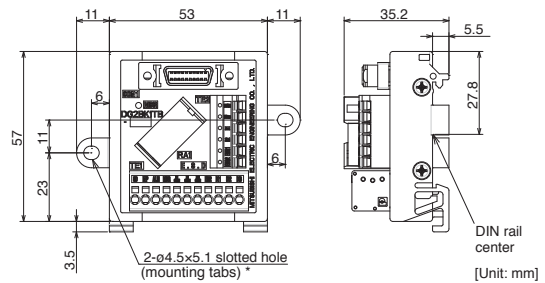

\* The DG2BK1TB-D is without mounting tabs.

\* The DG2BK1TB-D is without mounting tabs.

Product models

| Item   | Model      | Description                              |
|--|------------|--|
| Junction terminal block for motor with brake<br>For network-connectable 1-axis servo amplifier<br>Sink/source common type* | DG2BK1TB   | Screw mounting/<br>DIN rail installation |
|  | DG2BK1TB-D | For DIN rail installation                |
|  | DG4SV2CB05 | Length: 0.5 m                            |
| Servo amplifier connection cable   | DG4SV2CB10 | Length: 1 m                              |
|  | DG4SV2CB50 | Length: 5 m                              |

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

# Options/Peripheral Equipment


## FLS/RLS/DOG signal-specialized network amplifier terminal block



### Features


- Compact terminal blocks designed specifically for the FLS/RLS (stroke limit) and DOG (proximity dog) signals.
- Long cables are available to install the terminal block near the machine. (Long bending life cables are also available.)

### Connection with servo amplifier

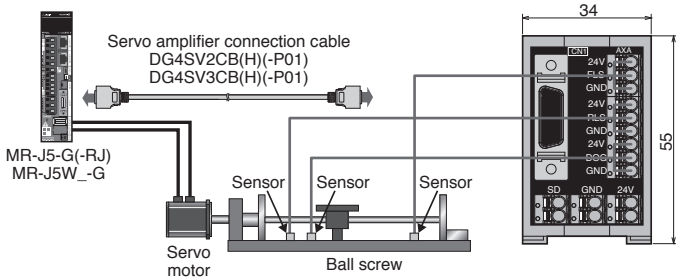


### Dimensions

#### ■ DG2SV2TB (for 1-axis servo amplifier)

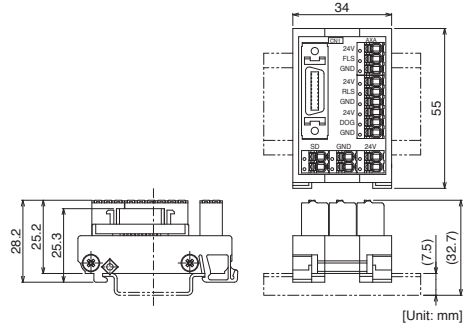


### Dimensions

#### ■ DG2SV2TB2 (for 2-axis servo amplifier)

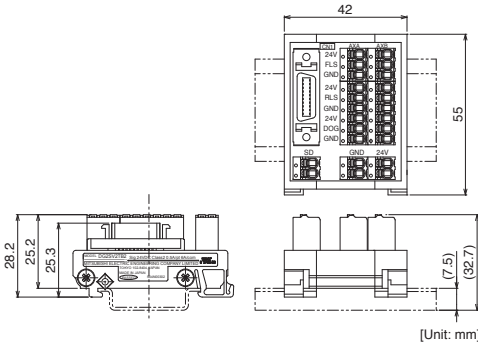

### Dimensions

#### ■ DG2SV2TB3 (for 3-axis servo amplifier)

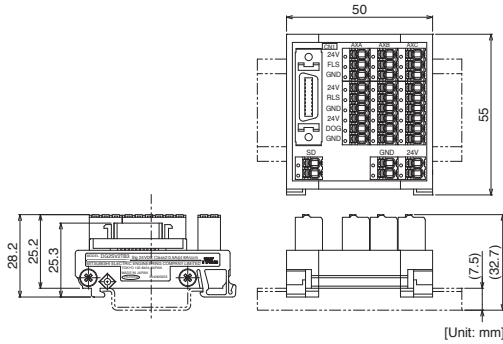


### Product models

| Item  | Model           | Description   |
|---|-----------------|---|
| FLS/RLS/DOG signal-specialized network amplifier terminal block (for 1-axis servo amplifier)        | DG2SV2TB        | For network-connectable 1-axis servo amplifier<br>Sink/source common type, dedicated for FLS/RLS/DOG signals<br>External power supply voltage: 24 V DC $\pm$ 10 %<br>Maximum usable current: 0.5 A for signal / 6 A for common line |
|   | DG4SV2CB05      | Length: 0.5 m   |
|   | DG4SV2CB10      | Length: 1 m   |
|   | DG4SV2CB50      | Length: 5 m   |
|   | DG4SV2CB50H     | Length: 5 m   |
|   | DG4SV2CB100H    | Length: 10 m  |
|   | DG4SV2CB05-P01  | Length: 0.5 m   |
|   | DG4SV2CB10-P01  | Length: 1 m   |
|   | DG4SV2CB50-P01  | Length: 5 m   |
|   | DG4SV2CB50H-P01 | Length: 5 m   |
| DG4SV2CB100H-P01  | Length: 10 m    |   |
| FLS/RLS/DOG signal-specialized network amplifier terminal block (for 2-axis/3-axis servo amplifier) | DG2SV2TB2       | For network-connectable 2-axis servo amplifier<br>Sink/source common type, dedicated for FLS/RLS/DOG signals<br>External power supply voltage: 24 V DC $\pm$ 10 %<br>Maximum usable current: 0.5 A for signal / 6 A for common line |
|   | DG2SV2TB3       | For network-connectable 3-axis servo amplifier<br>Sink/source common type, dedicated for FLS/RLS/DOG signals<br>External power supply voltage: 24 V DC $\pm$ 10 %<br>Maximum usable current: 0.5 A for signal / 6 A for common line |
|   | DG4SV3CB05      | Length: 0.5 m   |
|   | DG4SV3CB10      | Length: 1 m   |
|   | DG4SV3CB50      | Length: 5 m   |
|   | DG4SV3CB50H     | Length: 5 m   |
|   | DG4SV3CB100H    | Length: 10 m  |
|   | DG4SV3CB05-P01  | Length: 0.5 m   |
|   | DG4SV3CB10-P01  | Length: 1 m   |
|   | DG4SV3CB50-P01  | Length: 5 m   |
| DG4SV3CB50H-P01   | Length: 5 m     |   |
| DG4SV3CB100H-P01  | Length: 10 m    |   |

Servo amplifier connection cable for pulse train Positioning modules


**Features**

- This servo amplifier connection cable for pulse train Positioning modules enables easy wiring when the MELSEC Positioning module is used to control the MR-J5-A.

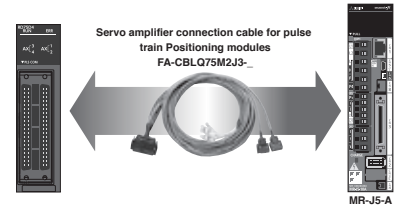


**Dimensions**

■ FA-CBLQ75M2J3, FA-CBLQ75PM2J3

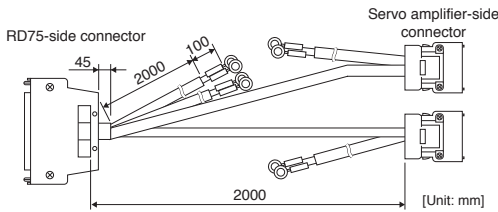

■ FA-CBLQ75M2J3-P

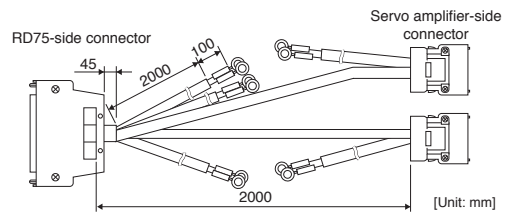


**Product models**

| Item   | Model           | Description  |
|--|-----------------|--|
| Servo amplifier connection cable for pulse train Positioning modules | FA-CBLQ75M2J3-P | Supported Positioning module: RD75D2, RD75D4, FX5-20PG-D<br>Length: 2 m, with pulsar cables    |
|  | FA-CBLQ75M2J3   | Supported Positioning module: RD75D2, RD75D4, FX5-20PG-D<br>Length: 2 m, without pulsar cables |
|  | FA-CBLQ75PM2J3  | Supported Positioning module: RD75P2, RD75P4, FX5-20PG-P<br>Length: 2 m, without pulsar cables |


General-purpose interface amplifier junction terminal block

**Features**

- The spring clamp type reduces the installation area by approximately 50 % compared to the screw type (based on the research of Mitsubishi Electric Engineering).
- When multiple servo amplifiers are connected, the interface power supply can be connected in series across up to four terminal blocks.




**Connection with servo amplifier**

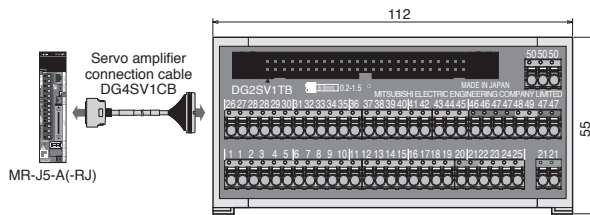

**Dimensions**

■ DG2SV1TB

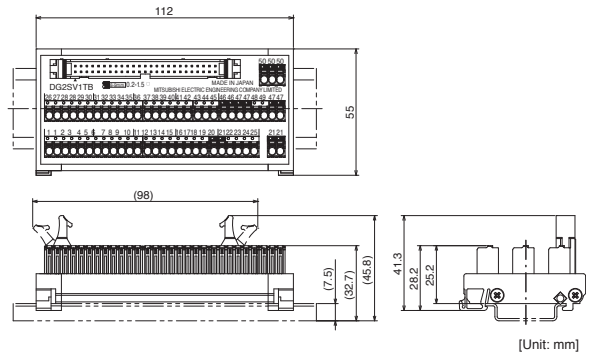

**Product models**

| Item  | Model      | Description  |
|---|------------|--|
| General-purpose interface amplifier junction terminal block | DG2SV1TB   | For general-purpose interface servo amplifier, sink/source common type<br>External power supply voltage: 24 V DC ± 10 %, current capacity 1 A (max.) |
|   | DG4SV1CB05 | Length: 0.5 m  |
| Servo amplifier connection cable                            | DG4SV1CB10 | Length: 1 m  |

For inquiries about Mitsubishi Electric Engineering products, please contact us at the following email address. (Supported languages: English and Japanese).

fagoods.products.faq@mitsubishielectricengineering.com

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LVSWires  
Product List  
Precautions  
Support

## Options/Peripheral Equipment

### Safety Logic Unit (MR-J3-D05)

G G-RJ WG DG B B-RJ WB A A-RJ

The safety logic unit (MR-J3-D05) has SS1 (Safe Stop1) and STO functions. A combination of the servo amplifier and the safety logic unit achieves SS1 function.

#### Specifications

|                              |  |  |
|------------------------------|--|--|
| Safety logic unit model      |  | MR-J3-D05  |
| Control circuit power supply | Voltage  | 24 V DC  |
|                              | Permissible voltage fluctuation  | 24 V DC $\pm$ 10 %   |
|                              | Required current capacity [A]  | 0.5 <sup>(Note 1, 2)</sup>   |
| Compatible system            |  | 2 systems (A-axis, B-axis independent)   |
| Shut-off input               |  | 2 points (double wiring) SDI_ : source/sink compatible <sup>(Note 3)</sup>   |
| Shut-off release input       |  | 1 point (double wiring) SRES_ : source/sink compatible <sup>(Note 3)</sup>   |
| Feedback input               |  | 1 point (double wiring) TOF_ : source compatible <sup>(Note 3)</sup>   |
| Input type                   |  | Photocoupler insulation, 24 V DC (external supply), internal limited resistance 5.4 k $\Omega$   |
| Shut-off output              |  | 4 points (double wiring) STO_ : source compatible <sup>(Note 3)</sup><br>SDO_ : source/sink compatible <sup>(Note 3)</sup>                     |
| Output type                  |  | Photocoupler insulation, open-collector type<br>Permissible current: 40 mA or less per output, Inrush current: 100 mA or less per output       |
| Delay time setting           |  | A-axis: select from 0 s, 1.4 s, 2.8 s, 5.6 s, 9.8 s or 30.8 s<br>B-axis: select from 0 s, 1.4 s, 2.8 s, 9.8 s or 30.8 s<br>Accuracy: $\pm$ 2 % |
| Safety sub-function          |  | STO, SS1 (IEC/EN 61800-5-2)<br>EMG STOP, EMG OFF (IEC/EN 60204-1)  |
| Safety performance           | Standards  | ISO 13849-1:2015 Category 3 PL d, EN IEC 62061, EN 61508 SIL2, IEC 61800-5-2   |
|                              | Response performance (when delay time is set to 0 s) <sup>(Note 4)</sup> | 10 ms or less (STO input OFF $\rightarrow$ shut-off output OFF)  |
|                              | Mean time to dangerous failure (MTTFd)                                   | MTTFd $\geq$ 100 [years] (516a)  |
|                              | Diagnostic coverage (DC)   | DC = Medium, 93.1 %  |
| Standards                    | CE marking   | LVD: EN 61800-5-1<br>EMC: EN 61800-3<br>MD: EN ISO 13849-1:2015, EN 61800-5-2, EN IEC 62061  |
|                              | Structure (IP rating)  | Natural cooling, open (IP00)   |
| Environment                  | Ambient temperature  | Operation: 0 °C to 55 °C (non-freezing), storage: -20 °C to 65 °C (non-freezing)   |
|                              | Ambient humidity   | Operation/storage: 5 %RH to 90 %RH (non-condensing)  |
|                              | Ambience   | Indoors (no direct sunlight); no corrosive gas, inflammable gas, oil mist or dust  |
|                              | Altitude   | 1000 m or less   |
| Vibration resistance         |  | 5.9 m/s <sup>2</sup> at 10 Hz to 55 Hz (directions of X, Y, and Z axes)  |
| Mass [kg]                    |  | 0.2 (including CN9 and CN10 connectors)  |


- Notes: 1. Inrush current of approximately 1.5 A flows instantaneously when the power is switched on. Select an appropriate capacity of a power supply considering the inrush current.  
2. Power-on duration of the safety logic unit is 100,000 times.  
3. \_ in signal name indicates a number and axis name.  
4. Contact your local sales office for test pulse input.



**Safety Logic Unit (MR-J3-D05)**


**G G-RJ WG DG B B-RJ WB A A-RJ**

Connection example

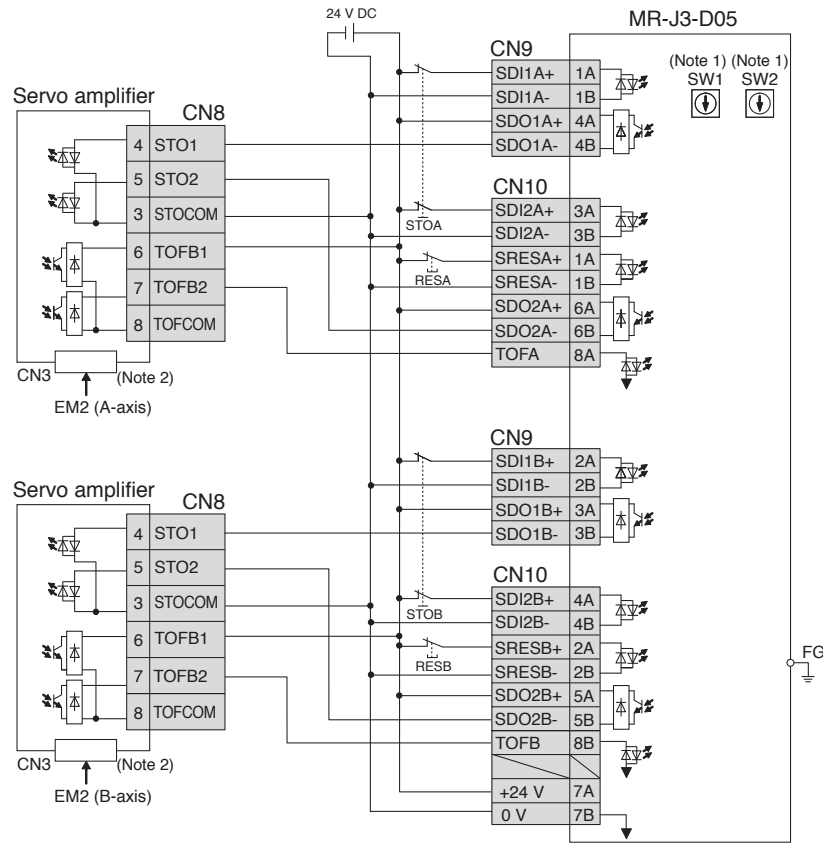

- Notes: 1. Set delay time of STO output with SW1 and SW2.  
2. This connection is for source interface.

**Dimensions**

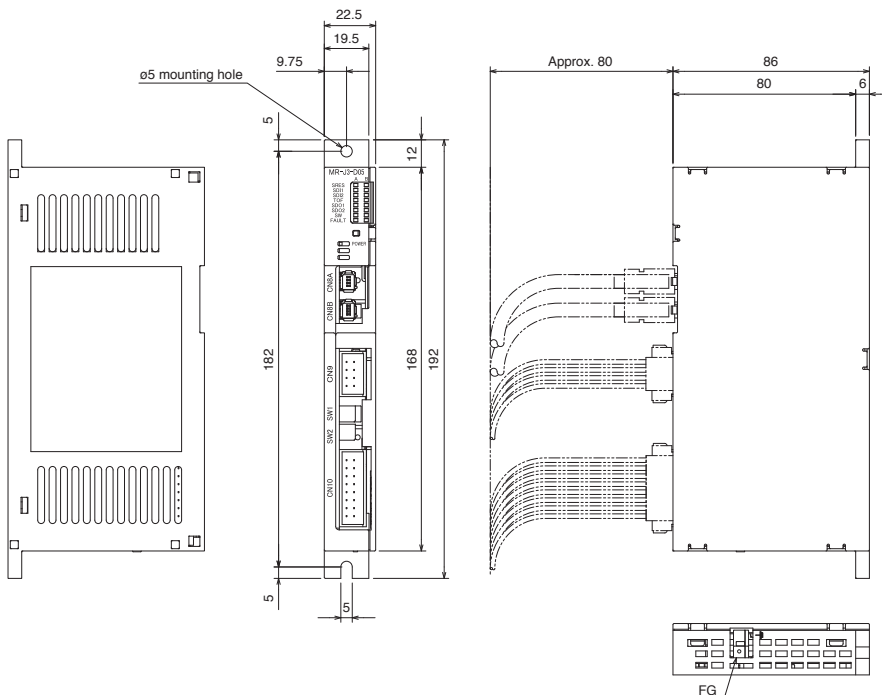

Mounting screw size: M4

[Unit: mm]

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

# Options/Peripheral Equipment

## Regenerative Option

|   |      |      |    |   |      |    |   |      |
|---|------|------|----|---|------|----|---|------|
| G | G-RJ | G-HS | WG | B | B-RJ | WB | A | A-RJ |
|---|------|------|----|---|------|----|---|------|

For 200 V (MR-RB\_)

| Servo amplifier model | Permissible regenerative power [W] <sup>(Note 2)</sup> |                     |      |                        |                        |                        |                           |                        |                        |                        |                        |                           |
|-----------------------|--|---------------------|------|------------------------|------------------------|------------------------|---------------------------|------------------------|------------------------|------------------------|------------------------|---------------------------|
|                       | Built-in regenerative resistor                         | Regenerative option |      |                        |                        |                        |                           |                        |                        |                        |                        |                           |
|                       |  | MR-RB               |      |                        |                        |                        |                           |                        |                        |                        |                        |                           |
|                       | 032  | 12                  | 14   | 30 <sup>(Note 3)</sup> | 3N <sup>(Note 3)</sup> | 31 <sup>(Note 3)</sup> | 3Z <sup>(Note 3, 4)</sup> | 34 <sup>(Note 3)</sup> | 50 <sup>(Note 1)</sup> | 5N <sup>(Note 1)</sup> | 51 <sup>(Note 1)</sup> | 5Z <sup>(Note 1, 4)</sup> |
|                       | 40 Ω   | 40 Ω                | 26 Ω | 13 Ω                   | 9 Ω                    | 6.7 Ω                  | 5.5 Ω                     | 26 Ω                   | 13 Ω                   | 9 Ω                    | 6.7 Ω                  | 5.5 Ω                     |
| MR-J5-10G/B/A         | -  | 30                  | -    | -                      | -                      | -                      | -                         | -                      | -                      | -                      | -                      | -                         |
| MR-J5-20G/B/A         | 10   | 30                  | 100  | -                      | -                      | -                      | -                         | -                      | -                      | -                      | -                      | -                         |
| MR-J5-40G/B/A         | 10   | 30                  | 100  | -                      | -                      | -                      | -                         | -                      | -                      | -                      | -                      | -                         |
| MR-J5-60G/B/A         | 10   | 30                  | 100  | -                      | -                      | -                      | -                         | -                      | -                      | -                      | -                      | -                         |
| MR-J5-70G/B/A         | 30   | -                   | -    | 100                    | -                      | -                      | -                         | 300                    | -                      | -                      | -                      | -                         |
| MR-J5-100G/B/A        | 30   | -                   | -    | 100                    | -                      | -                      | -                         | 300                    | -                      | -                      | -                      | -                         |
| MR-J5-200G/B/A        | 100  | -                   | -    | -                      | 300                    | -                      | -                         | -                      | 500                    | -                      | -                      | -                         |
| MR-J5-350G/B/A        | 100  | -                   | -    | -                      | -                      | 300                    | -                         | -                      | -                      | 500                    | -                      | -                         |
| MR-J5-500G/B/A        | 130  | -                   | -    | -                      | -                      | -                      | 300                       | -                      | -                      | -                      | 500                    | -                         |
| MR-J5-700G/B/A        | 170  | -                   | -    | -                      | -                      | -                      | -                         | 300                    | -                      | -                      | -                      | 500                       |
| MR-J5W2-22G/B         | 20   | -                   | -    | 100                    | -                      | -                      | -                         | -                      | -                      | -                      | -                      | -                         |
| MR-J5W2-44G/B         | 20   | -                   | -    | 100                    | -                      | -                      | -                         | -                      | -                      | -                      | -                      | -                         |
| MR-J5W2-77G/B         | 100  | -                   | -    | -                      | -                      | 300                    | -                         | -                      | -                      | -                      | -                      | -                         |
| MR-J5W2-1010G/B       | 100  | -                   | -    | -                      | -                      | 300                    | -                         | -                      | -                      | -                      | -                      | -                         |
| MR-J5W3-222G/B        | 30   | -                   | -    | 100                    | -                      | -                      | -                         | 300                    | -                      | -                      | -                      | -                         |
| MR-J5W3-444G/B        | 30   | -                   | -    | 100                    | -                      | -                      | -                         | 300                    | -                      | -                      | -                      | -                         |

For 400 V (MR-RB\_-4)

| Servo amplifier model | Permissible regenerative power [W] <sup>(Note 2)</sup> |                          |                          |                          |                          |                          |                          |                          |                          |                          |
|-----------------------|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
|                       | Built-in regenerative resistor                         | Regenerative option      |                          |                          |                          |                          |                          |                          |                          |                          |
|                       |  | MR-RB                    |                          |                          |                          |                          |                          |                          |                          |                          |
|                       | 1H-4   | 3M-4 <sup>(Note 1)</sup> | 3G-4 <sup>(Note 1)</sup> | 3Y-4 <sup>(Note 1)</sup> | 34-4 <sup>(Note 1)</sup> | 3U-4 <sup>(Note 1)</sup> | 5G-4 <sup>(Note 1)</sup> | 5Y-4 <sup>(Note 1)</sup> | 54-4 <sup>(Note 1)</sup> | 5U-4 <sup>(Note 1)</sup> |
|                       | 82 Ω   | 120 Ω                    | 47 Ω                     | 36 Ω                     | 26 Ω                     | 22 Ω                     | 47 Ω                     | 36 Ω                     | 26 Ω                     | 22 Ω                     |
| MR-J5-60G4/B4/A4      | 15   | 100                      | 300                      | -                        | -                        | -                        | -                        | -                        | -                        | -                        |
| MR-J5-100G4/B4/A4     | 15   | 100                      | 300                      | -                        | -                        | -                        | -                        | -                        | -                        | -                        |
| MR-J5-200G4/B4/A4     | 100  | -                        | -                        | 300                      | -                        | -                        | 500                      | -                        | -                        | -                        |
| MR-J5-350G4/B4/A4     | 120  | -                        | -                        | -                        | 300                      | -                        | -                        | 500                      | -                        | -                        |
| MR-J5-500G4/B4/A4     | 130  | -                        | -                        | -                        | -                        | 300                      | -                        | -                        | 500                      | -                        |
| MR-J5-700G4/B4/A4     | 170  | -                        | -                        | -                        | -                        | -                        | 300                      | -                        | -                        | 500                      |

- Notes: 1. Cool the unit forcibly with a cooling fan (92 mm x 92 mm, minimum air flow: 1.0 m<sup>3</sup>/min). The cooling fan must be prepared by users.  
 2. The power values in this table are resistor-generated powers, not rated powers.  
 3. Depending on the operating environment, it may be necessary to cool the unit forcibly with a cooling fan (92 mm x 92 mm, minimum air flow: 1.0 m<sup>3</sup>/min). Refer to "MR-J5 User's Manual" for details. The cooling fan must be prepared by users.  
 4. Use the servo amplifier with firmware version B6 or later.

### \* Precautions when installing and connecting the regenerative option


- The regenerative option causes a temperature rise of 100 °C or higher relative to the ambient temperature. Fully examine heat dissipation, installation position, wires used before installing the unit. Use flame-retardant wires or apply flame retardant on wires, and keep the wires clear of the unit.
- Use twisted wires for connecting the regenerative option to the servo amplifier, and keep the wire length to a maximum of 5 m.
- Use twisted wires for connecting a thermal sensor so that the sensor does not fail to work properly because of induced noise.
- There are restrictions on the mounting direction of the regenerative option. Refer to "MR-J5 User's Manual" for details.

Regenerative Option


|   |      |    |   |      |    |   |      |
|---|------|----|---|------|----|---|------|
| G | G-RJ | WG | B | B-RJ | WB | A | A-RJ |
|---|------|----|---|------|----|---|------|

|            |            |             |
|------------|------------|-------------|
| Dimensions | [Unit: mm] | Connections |
|------------|------------|-------------|

MR-RB032 (for 200 V)




Terminal arrangement




Applicable wire size (Note 3):  
0.2 mm<sup>2</sup> to 2.5 mm<sup>2</sup> (AWG 24 to 12)  
Mounting screw size: M5

| Model    | Mass [kg] |
|----------|-----------|
| MR-RB032 | 0.5       |

MR-RB12, MR-RB14 (for 200 V)

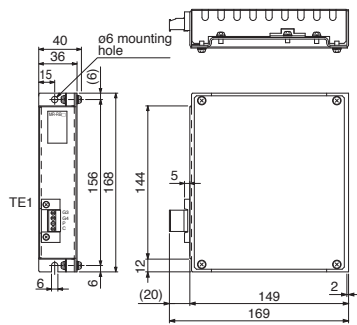


Terminal arrangement




Applicable wire size (Note 3):  
0.2 mm<sup>2</sup> to 2.5 mm<sup>2</sup> (AWG 24 to 12)  
Mounting screw size: M5

| Model   | Mass [kg] |
|---------|-----------|
| MR-RB12 | 1.1       |
| MR-RB14 |           |



MR-RB1H-4 (for 400 V)

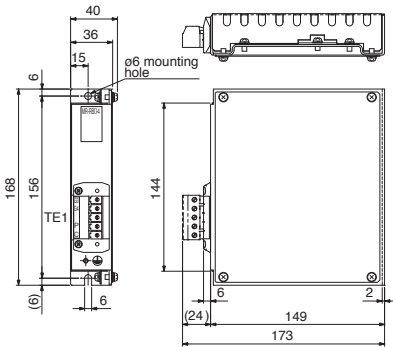

Terminal arrangement



Applicable wire size (Note 3):  
0.2 mm<sup>2</sup> to 4.0 mm<sup>2</sup> (AWG 24 to 10)  
Mounting screw size: M5

| Model     | Mass [kg] |
|-----------|-----------|
| MR-RB1H-4 | 1.1       |

- Notes:
1. Create a sequence circuit that turns off the magnetic contactor when abnormal overheating occurs.
  2. G3 and G4 terminals are thermal sensor. G3-G4 opens when the regenerative option overheats abnormally.
  3. The wire size shows wiring specifications of the connector. Refer to "Wires, Molded-Case Circuit Breakers, and Magnetic Contactors" in this catalog for examples of wire size selection.

|                              |
|------------------------------|
| Common Specifications        |
| Servo System Controllers     |
| Servo Amplifiers             |
| Rotary Servo Motors          |
| Linear Servo Motors          |
| Direct Drive Motors          |
| Options/Peripheral Equipment |
| LVSWires                     |
| Product List                 |
| Precautions                  |
| Support                      |


# Options/Peripheral Equipment

## Regenerative Option

G G-RJ G-HS WG B B-RJ WB A A-RJ

Dimensions [Unit: mm] Connections

MR-RB30, MR-RB3N, MR-RB31, MR-RB3Z, MR-RB34 (for 200 V)  
 MR-RB3M-4, MR-RB3G-4, MR-RB3Y-4, MR-RB34-4, MR-RB3U-4 (for 400 V)

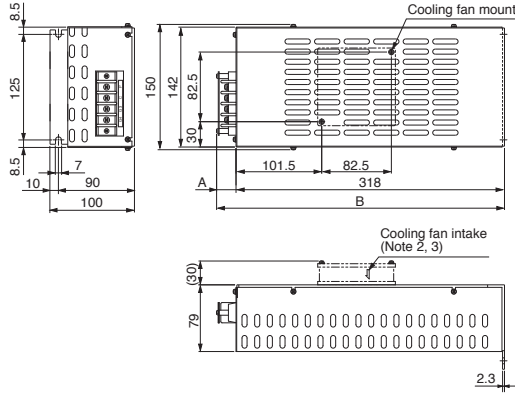


Terminal arrangement




Terminal screw size: M4  
 Mounting screw size: M6

| Model     | Variable dimensions |     | Mass [kg] |
|-----------|---------------------|-----|-----------|
|           | A                   | B   |           |
| MR-RB30   | 17                  | 335 | 2.9       |
| MR-RB3N   |                     |     |           |
| MR-RB31   |                     |     |           |
| MR-RB3Z   |                     |     |           |
| MR-RB34   |                     |     |           |
| MR-RB3M-4 | 23                  | 341 |           |
| MR-RB3G-4 |                     |     |           |
| MR-RB3Y-4 |                     |     |           |
| MR-RB34-4 |                     |     |           |
| MR-RB3U-4 |                     |     |           |

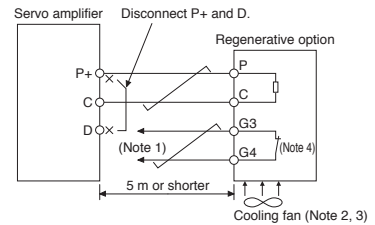

MR-RB50, MR-RB5N, MR-RB51, MR-RB5Z (for 200 V)  
 MR-RB5G-4, MR-RB5Y-4, MR-RB54-4, MR-RB5U-4 (for 400 V)

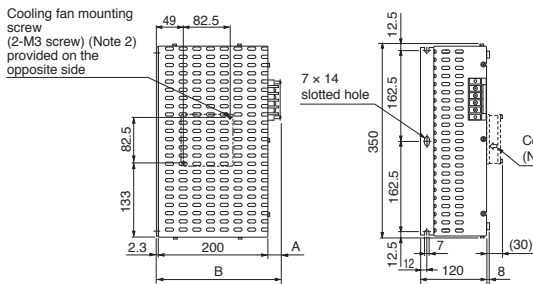

Terminal arrangement



Terminal screw size: M4  
 Mounting screw size: M6

| Model     | Variable dimensions |     | Mass [kg] |
|-----------|---------------------|-----|-----------|
|           | A                   | B   |           |
| MR-RB50   | 17                  | 217 | 5.6       |
| MR-RB5N   |                     |     |           |
| MR-RB51   |                     |     |           |
| MR-RB5Z   |                     |     |           |
| MR-RB5G-4 |                     |     |           |
| MR-RB5Y-4 | 23                  | 223 |           |
| MR-RB54-4 |                     |     |           |
| MR-RB5U-4 |                     |     |           |

- Notes:
1. Create a sequence circuit that turns off the magnetic contactor when abnormal overheating occurs.
  2. When using MR-RB3M-4, MR-RB3G-4, MR-RB3Y-4, MR-RB34-4, MR-RB3U-4, MR-RB50, MR-RB5N, MR-RB51, MR-RB5Z, MR-RB5G-4, MR-RB5Y-4, MR-RB54-4, or MR-RB5U-4, cool the unit forcibly with a cooling fan (92 mm × 92 mm, minimum air flow: 1.0 m<sup>3</sup>/min). The cooling fan must be prepared by users.
  3. When MR-RB30, MR-RB3N, MR-RB31, MR-RB3Z, or MR-RB34 is used, it may be necessary to cool the unit forcibly with a cooling fan (92 mm × 92 mm, minimum air flow: 1.0 m<sup>3</sup>/min), depending on the operating environment. Refer to "MR-J5 User's Manual" for details. The cooling fan must be prepared by users.
  4. G3 and G4 terminals are thermal sensor. G3-G4 opens when the regenerative option overheats abnormally.

## Multifunction Regeneration Converter (FR-XC, FR-XC-H) (Note 5)

**G** **G-RJ** **G-HS** **B** **B-RJ** **A** **A-RJ**

FR-XC multifunction regeneration converter is suitable for 200 V class servo amplifiers ranged from 100 W to 7 kW and FR-XC-H for 400 V class servo amplifiers ranged from 600 W to 7 kW. The multifunction regeneration converter is not compatible with multi-axis servo amplifiers and drive units.

Use the common bus regeneration mode with the harmonic suppression function disabled. The power regeneration mode and the harmonic suppression function are not supported.

### 200 V class

| Multifunction regeneration converter                                  |                                    | FR-XC- | 7.5K   | 11K                         | 15K                           | 22K                            | 30K                            | 37K                            | 55K                            |
|---|------------------------------------|--------|--|-----------------------------|-------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Capacity  |                                    | [kW]   | 7.5  | 11                          | 15                            | 22                             | 30                             | 37                             | 55                             |
| Maximum number of connectable servo amplifiers                        |                                    |        | 10   |                             |                               |                                |                                |                                |                                |
| Total capacity of connectable servo amplifiers (Note 1)               |                                    | [kW]   | 3.5 (5.5)  | 5.5 (7.5)                   | 7.5 (11)                      | 22                             | 30                             | 37                             | 55                             |
| Continuous output (Note 1)  |                                    | [kW]   | 3.5 (5.5)  | 5.5 (7.5)                   | 7.5 (11)                      | 18.5                           | 22                             | 30                             | 45                             |
| Rated input current   | Power driving                      | [A]    | 33   | 47                          | 63                            | 92                             | 124                            | 151                            | 223                            |
|   | Regenerative driving               | [A]    | 26   | 37                          | 51                            | 74                             | 102                            | 125                            | 186                            |
| Overload current rating   |                                    |        | 100 % continuous / 150 % 60 s  |                             |                               |                                |                                |                                |                                |
| Power source  | Rated input AC voltage/frequency   |        | 3-phase 200 V AC to 240 V AC, 50 Hz/60 Hz  |                             |                               |                                |                                |                                |                                |
|   | Permissible AC voltage fluctuation |        | 3-phase 170 V AC to 264 V AC, 50 Hz/60 Hz  |                             |                               |                                |                                |                                |                                |
|   | Permissible frequency fluctuation  |        | ±5 %   |                             |                               |                                |                                |                                |                                |
|   | Power supply capacity              | [kVA]  | 17   | 20                          | 28                            | 41                             | 52                             | 66                             | 100                            |
| IP rating (IEC 60529)   |                                    |        | Open type (IP00)   |                             |                               |                                |                                |                                |                                |
| Cooling system  |                                    |        | Forced air   |                             |                               |                                |                                |                                |                                |
| Environment   | Ambient temperature                |        | -10 °C to 50 °C (non-freezing)   |                             |                               |                                |                                |                                |                                |
|   | Ambient humidity                   |        | 90 %RH or less (non-condensing)  |                             |                               |                                |                                |                                |                                |
|   | Storage temperature                |        | -20 °C to 65 °C  |                             |                               |                                |                                |                                |                                |
|   | Ambience                           |        | Indoors (without corrosive gas, flammable gas, oil mist, dust and dirt)  |                             |                               |                                |                                |                                |                                |
|   | Altitude                           |        | 2500 m or less (For the installation at an altitude above 1000 m, consider a 3 % reduction in the rated current per 500 m increase in altitude.) |                             |                               |                                |                                |                                |                                |
| Vibration resistance  |                                    |        | 5.9 m/s <sup>2</sup> at 10 Hz to 55 Hz (directions of X, Y, and Z axes)  |                             |                               |                                |                                |                                |                                |
| Molded-case circuit breaker or earth-leakage current breaker (Note 4) |                                    |        | 100 AF 60 A<br>(30 AF 30 A)  | 100 AF 75 A<br>(50 AF 50 A) | 225 AF 125 A<br>(100 AF 75 A) | 225 AF 175 A<br>(100 AF 100 A) | 225 AF 225 A<br>(125 AF 125 A) | 400 AF 250 A<br>(125 AF 125 A) | 400 AF 400 A<br>(225 AF 175 A) |
| Magnetic contactor (Note 4)   |                                    |        | S-T35<br>(S-T21)   | S-T50<br>(S-T35)            | S-T65<br>(S-T50)              | S-T100<br>(S-T65)              | S-N125<br>(S-T80)              | S-N150<br>(S-T100)             | S-N220<br>(S-N125)             |

### 400 V class

| Multifunction regeneration converter                                  |   | FR-XC-H | 7.5K   | 11K                        | 15K                         | 22K                          | 30K                          | 37K                           | 55K                            |
|---|---|---------|--|----------------------------|-----------------------------|------------------------------|------------------------------|-------------------------------|--------------------------------|
| Capacity  |   | [kW]    | 7.5  | 11                         | 15                          | 22                           | 30                           | 37                            | 55                             |
| Maximum number of connectable servo amplifiers                        |   |         | 10   |                            |                             |                              |                              |                               |                                |
| Total capacity of connectable servo amplifiers (Note 1)               |   | [kW]    | 3.5 (5.5)  | 5.5 (7.5)                  | 7.5 (11)                    | 22                           | 30                           | 37                            | 55                             |
| Continuous output (Note 1)  |   | [kW]    | 3.5 (5.5)  | 5.5 (7.5)                  | 7.5 (11)                    | 18.5                         | 22                           | 30                            | 45                             |
| Rated input current   | Power driving                               | [A]     | 18   | 25                         | 34                          | 49                           | 65                           | 80                            | 118                            |
|   | Regenerative driving                        | [A]     | 14   | 20                         | 27                          | 39                           | 54                           | 66                            | 98                             |
| Overload current rating   |   |         | 100 % continuous / 150 % 60 s  |                            |                             |                              |                              |                               |                                |
| Power source  | Rated input AC voltage/frequency (Note 2)   |         | 3-phase 380 to 500 V AC, 50 Hz/60 Hz   |                            |                             |                              |                              |                               |                                |
|   | Permissible AC voltage fluctuation (Note 3) |         | 3-phase 323 to 550 V AC, 50 Hz/60 Hz   |                            |                             |                              |                              |                               |                                |
|   | Permissible frequency fluctuation           |         | ±5 %   |                            |                             |                              |                              |                               |                                |
|   | Power supply capacity                       | [kVA]   | 17   | 20                         | 28                          | 41                           | 52                           | 66                            | 100                            |
| IP rating (IEC 60529)   |   |         | Open type (IP00)   |                            |                             |                              |                              |                               |                                |
| Cooling system  |   |         | Forced air   |                            |                             |                              |                              |                               |                                |
| Environment   | Ambient temperature                         |         | -10 °C to 50 °C (non-freezing)   |                            |                             |                              |                              |                               |                                |
|   | Ambient humidity                            |         | 90 %RH or less (non-condensing)  |                            |                             |                              |                              |                               |                                |
|   | Storage temperature                         |         | -20 °C to 65 °C  |                            |                             |                              |                              |                               |                                |
|   | Ambience                                    |         | Indoors (without corrosive gas, flammable gas, oil mist, dust and dirt)  |                            |                             |                              |                              |                               |                                |
|   | Altitude                                    |         | 2500 m or less (For the installation at an altitude above 1000 m, consider a 3 % reduction in the rated current per 500 m increase in altitude.) |                            |                             |                              |                              |                               |                                |
| Vibration resistance  |   |         | 5.9 m/s <sup>2</sup> at 10 Hz to 55 Hz (directions of X, Y, and Z axes)  |                            |                             |                              |                              |                               |                                |
| Molded-case circuit breaker or earth-leakage current breaker (Note 4) |   |         | 30 AF 30 A<br>(30 AF 15 A)   | 50 AF 50 A<br>(30 AF 20 A) | 100 AF 60 A<br>(30 AF 30 A) | 100 AF 100 A<br>(50 AF 50 A) | 225 AF 125 A<br>(60 AF 60 A) | 225 AF 150 A<br>(100 AF 75 A) | 225 AF 200 A<br>(100 AF 100 A) |
| Magnetic contactor (Note 4)   |   |         | S-T21  | S-T25<br>(S-T21)           | S-T35<br>(S-T21)            | S-T50<br>(S-T25)             | S-T65<br>(S-T35)             | S-T80<br>(S-T50)              | S-N125<br>(S-T65)              |

Notes: 1. The values in brackets are applicable when the number of connected servo amplifiers is six or less.

2. When connecting to a servo amplifier, use with a voltage range of 380 V to 480 V.

3. When connecting to a servo amplifier, use with a voltage range of 323 V to 528 V.

4. The models in brackets are applicable when the capacity [kW] of FR-XC-(H) ≥ Total rated capacity [kW] of servo amplifiers connected to FR-XC-(H) × 2.

5. The following are specifications at the time of December 2023.

For selecting an FR-XC-(H) multifunction regeneration converter, refer to the latest "FR-XC Instruction Manual" and "MR-J5 User's Manual".

### \* Precautions when selecting the multifunction regeneration converter


Drive system sizing software Motorizer does not support combinations of servo amplifiers and a multifunction regeneration converter.

Select a multifunction regeneration converter which meets the following conditions.

- Total rated capacity [kW] of servo amplifiers connected to FR-XC-(H) ≤ Capacity [kW] of FR-XC-(H)
- Effective value [kW] of total output power of servo motors ≤ Continuous output [kW] of FR-XC-(H)
- Maximum value [kW] of total output power of servo motors ≤ FR-XC-(H) capacity [kW] × 1.5

## Multifunction Regeneration Converter (FR-XC, FR-XC-H) G G-RJ G-HS B B-RJ A A-RJ

### Connection example

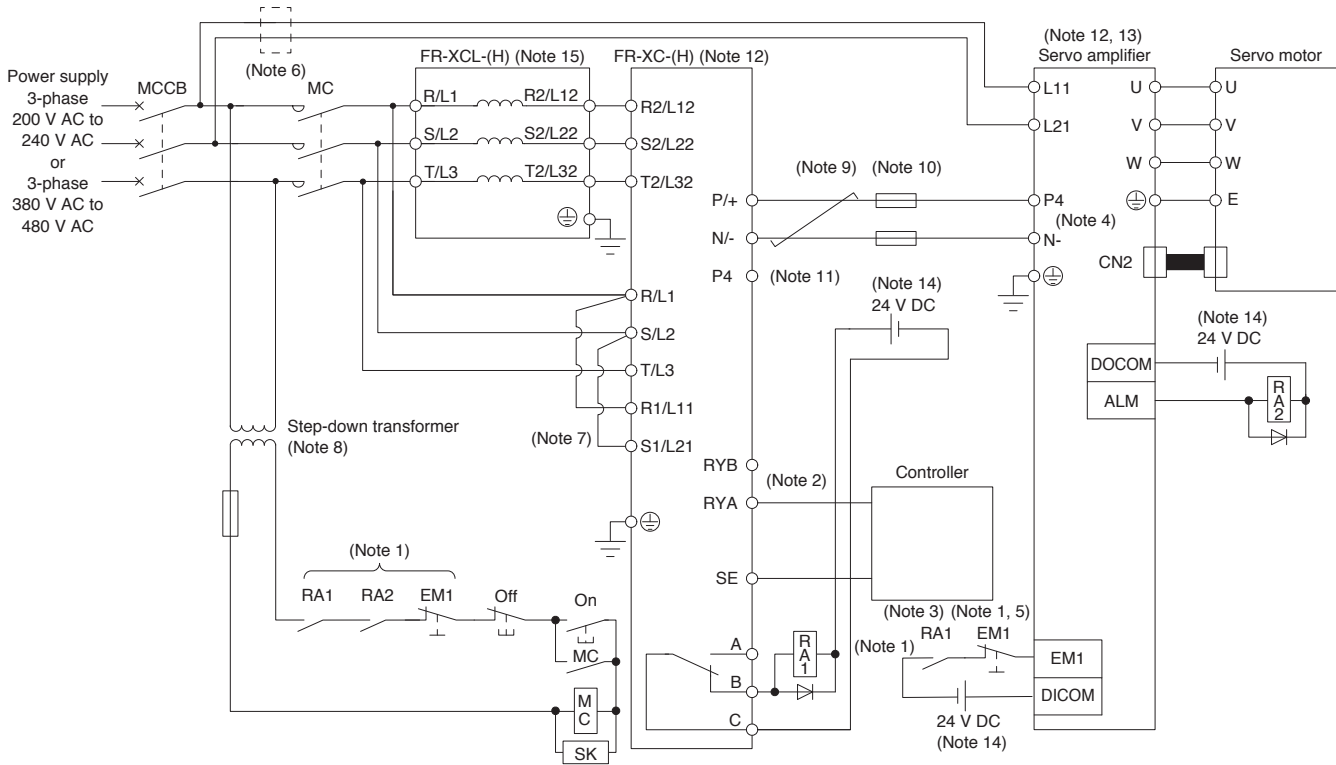

- Notes:
- Create a sequence that shuts off the main circuit power when either:
    - An alarm occurs on FR-XC(H) or the servo amplifier, or
    - EM1 (Forced stop 1) is enabled.
  - For the servo amplifier, create a sequence that switches the servo-on after FR-XC(H) is ready.
  - Create a sequence that stops the servo motor with the emergency stop input to the controller when an alarm occurs on FR-XC(H). When the emergency stop input is not available in the controller, stop the servo motor with the forced stop input to the servo amplifier as shown in the diagram.
  - Disconnect the short-circuit bar between P3 and P4 when using FR-XC(H).
  - Set [Pr. PA04.3] and [Pr. PA04.2] to "0" to enable EM1 (Forced stop 1).
  - When wires used for L11 and L21 are thinner than those for L1, L2, and L3, use a molded-case circuit breaker.
  - When using a separate power supply for the control circuit, remove the short-circuit bars between R/L1 and R1/L11, and S/L2 and S1/L21.
  - When FR-XC-H is used, a step-down transformer is required if coil voltage of the magnetic contactor is in 200 V class.
  - Use twisted wires for connecting the DC power supply between FR-XC(H) and the servo amplifiers, and keep the wire length to a maximum of 5 m (3 m for EMC compliance).
  - Install a fuse between each FR-XC(H) and servo amplifier.
  - Do not connect anything to the P4 terminal of FR-XC(H).
  - Inputs/outputs (main circuit) of FR-XC(H) and the servo amplifier include high frequency components, and they may interfere with peripheral communication devices. In that case, the interference can be reduced with the installation of a radio noise filter (FR-BIF or FR-BIF-H) or line noise filter (FR-BSF01 or FR-BLF).
  - When using 7 kW or smaller servo amplifiers, do not disconnect the short-bar between P+ and D.
  - For convenience of illustration, the diagram shows separate 24 V DC power supplies for input and output signals. However, the input and output signals can share a common power supply.
  - When using FR-XC(H), use the following dedicated stand-alone reactor (FR-XCL or FR-XCL-H). Do not use a power factor improving AC reactor (FR-HAL or FR-HAL-H) or a power factor improving DC reactor (FR-HEL or FR-HEL-H) with FR-XC(H).

| Multifunction regeneration converter | Dedicated stand-alone reactor |
|--------------------------------------|-------------------------------|
| FR-XC-7.5K                           | FR-XCL-7.5K                   |
| FR-XC-11K                            | FR-XCL-11K                    |
| FR-XC-15K                            | FR-XCL-15K                    |
| FR-XC-22K                            | FR-XCL-22K                    |
| FR-XC-30K                            | FR-XCL-30K                    |
| FR-XC-37K                            | FR-XCL-37K                    |
| FR-XC-55K                            | FR-XCL-55K                    |

| Multifunction regeneration converter | Dedicated stand-alone reactor |
|--------------------------------------|-------------------------------|
| FR-XC-H7.5K                          | FR-XCL-H7.5K                  |
| FR-XC-H11K                           | FR-XCL-H11K                   |
| FR-XC-H15K                           | FR-XCL-H15K                   |
| FR-XC-H22K                           | FR-XCL-H22K                   |
| FR-XC-H30K                           | FR-XCL-H30K                   |
| FR-XC-H37K                           | FR-XCL-H37K                   |
| FR-XC-H55K                           | FR-XCL-H55K                   |

## Battery (MR-BAT6V1SET, MR-BAT6V1SET-A)





G G-RJ B B-RJ A A-RJ

Use the battery to configure an absolute position detection system with a direct drive motor. The absolute position data can be retained when the battery is mounted on the servo amplifier. The battery is not required for rotary servo motors and linear servo motors. When the battery life runs out, please replace the built-in MR-BAT6V1 battery. Refer to "MR-J5 User's Manual" for installation of the battery.

| Servo amplifier | Motor side  | Semi closed loop control system | Fully closed loop control system       |                   |
|-----------------|---|---------------------------------|--|-------------------|
|                 |   |                                 | Load side                              |                   |
|                 |   |                                 | Battery-less absolute position encoder | Linear encoder    |
| MR-J5-G/A       | Servo motor with battery-less absolute position encoder | Not required                    | Not required                           | Not required      |
|                 | Direct drive motor                                      | Required (Note 1)               | Required (Note 2)                      | Required (Note 2) |
|                 | Linear servo motor                                      | Not required                    | Not supported                          | Not supported     |
| MR-J5-B         | Servo motor with battery-less absolute position encoder | Not required                    | Not required                           | Not required      |
|                 | Direct drive motor                                      | Required (Note 1)               | Not supported                          | Not supported     |
|                 | Linear servo motor                                      | Not required                    | Not supported                          | Not supported     |

Notes: 1. An absolute position storage unit (MR-BTAS01) is required.

2. An absolute position storage unit (MR-BTAS01) may be required depending on the parameter setting. Refer to "MR-J5 User's Manual" for details.
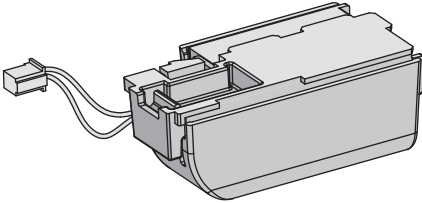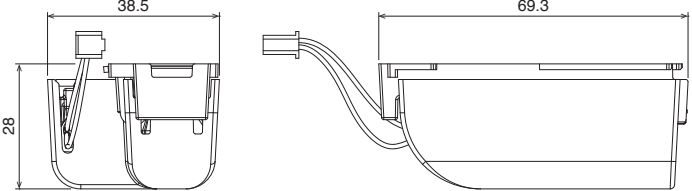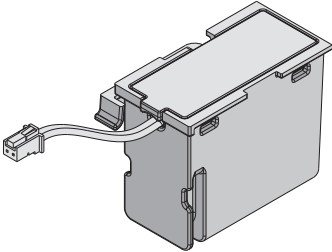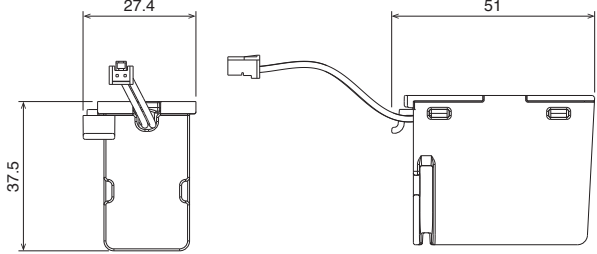
| External appearance   | Dimensions [Unit: mm]  |
|---|--|
| <p>MR-BAT6V1SET</p>    |   |
| <p>MR-BAT6V1SET-A</p>  |  |

|                        |   |
|------------------------|---|
| Model                  | MR-BAT6V1SET/MR-BAT6V1SET-A             |
| Nominal voltage [V]    | 6                                       |
| Nominal capacity [mAh] | 1650                                    |
| Lithium content [g]    | 1.2                                     |
| Primary battery        | 2CR17335A (CR17335A × 2 pcs. in series) |
| Mass [g]               | 55 (including MR-BAT6V1 battery)        |

\* MR-J3BAT battery cannot be used because of the difference in voltage.

\* MR-BAT6V1 is an assembled battery composed of lithium metal batteries of CR17335A. This battery is not subject to the dangerous goods (Class 9) of the UN Recommendations.

To transport lithium metal batteries and lithium metal batteries contained in equipment, take actions to comply with the following regulations: the United Nations Recommendations on the Transport of Dangerous Goods, the Technical Instruction (ICAO-TI) by the International Civil Aviation Organization (ICAO), and the International Maritime Dangerous Goods Code (IMDG Code) by the International Maritime Organization (IMO). To transport the batteries, check the latest standards or the laws of the destination country and take actions. Contact your local sales office for more details.

\* Please dispose of the battery according to your local laws and regulations.

# Options/Peripheral Equipment

## Battery Case (MR-BT6VCASE) and Battery (MR-BAT6V1)

G G-RJ WG B B-RJ WB A A-RJ

Absolute position data of up to four axes of direct drive motors can be retained when the battery case and the batteries are used. Direct drive motors used in incremental systems are also included in the number of the connectable axes. The synchronous encoders used for load side in the fully closed loop control system are also included in the number of the connectable axes. The linear servo motors are not included in the number of the connectable axes. The battery cases and batteries can be used in systems including 1-axis servo amplifiers and multi-axis servo amplifiers.

The case stores five batteries by connecting to the connectors. The batteries are not included in the battery case. Please purchase the batteries separately.


|  |  |       |           |                     |   |                        |      |                     |     |                 |   |          |    |
|--|--|-------|-----------|---------------------|---|------------------------|------|---------------------|-----|-----------------|---|----------|----|
| <p>Dimensions (assembled) [Unit: mm]</p> | <p>MR-BAT6V1</p> <table border="1"> <tr> <td>Model</td> <td>MR-BAT6V1</td> </tr> <tr> <td>Nominal voltage [V]</td> <td>6</td> </tr> <tr> <td>Nominal capacity [mAh]</td> <td>1650</td> </tr> <tr> <td>Lithium content [g]</td> <td>1.2</td> </tr> <tr> <td>Primary battery</td> <td>2CR17335A (CR17335A × 2 pcs. in series)</td> </tr> <tr> <td>Mass [g]</td> <td>34</td> </tr> </table> | Model | MR-BAT6V1 | Nominal voltage [V] | 6 | Nominal capacity [mAh] | 1650 | Lithium content [g] | 1.2 | Primary battery | 2CR17335A (CR17335A × 2 pcs. in series) | Mass [g] | 34 |
| Model                                    | MR-BAT6V1  |       |           |                     |   |                        |      |                     |     |                 |   |          |    |
| Nominal voltage [V]                      | 6  |       |           |                     |   |                        |      |                     |     |                 |   |          |    |
| Nominal capacity [mAh]                   | 1650   |       |           |                     |   |                        |      |                     |     |                 |   |          |    |
| Lithium content [g]                      | 1.2  |       |           |                     |   |                        |      |                     |     |                 |   |          |    |
| Primary battery                          | 2CR17335A (CR17335A × 2 pcs. in series)  |       |           |                     |   |                        |      |                     |     |                 |   |          |    |
| Mass [g]                                 | 34   |       |           |                     |   |                        |      |                     |     |                 |   |          |    |

\* MR-BAT6V1 is an assembled battery composed of lithium metal batteries of CR17335A. This battery is not subject to the dangerous goods (Class 9) of the UN Recommendations. To transport lithium metal batteries and lithium metal batteries contained in equipment, take actions to comply with the following regulations: the United Nations Recommendations on the Transport of Dangerous Goods, the Technical Instruction (ICAO-TI) by the International Civil Aviation Organization (ICAO), and the International Maritime Dangerous Goods Code (IMDG Code) by the International Maritime Organization (IMO). To transport the batteries, check the latest standards or the laws of the destination country and take actions. Contact your local sales office for more details.


\* Please dispose of the battery according to your local laws and regulations.

### Connections

#### One unit of servo amplifier

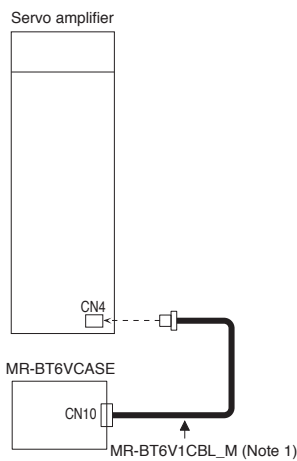

#### Up to four servo amplifier axes

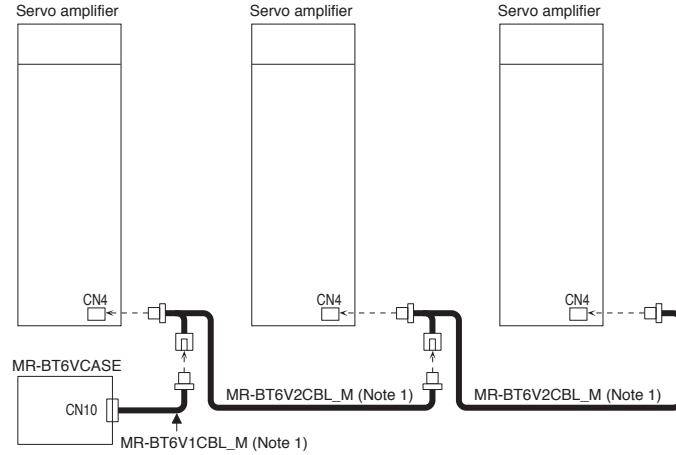


Notes: 1. This is an option cable. Refer to "Cables and Connectors for Servo Amplifiers" in this catalog.



## Absolute Position Storage Unit (MR-BTAS01)

**G G-RJ WG B B-RJ WB A A-RJ**

This absolute position storage unit is required for configuring an absolute position detection system using the direct drive motor. This unit is not required when the servo system is used in incremental system.

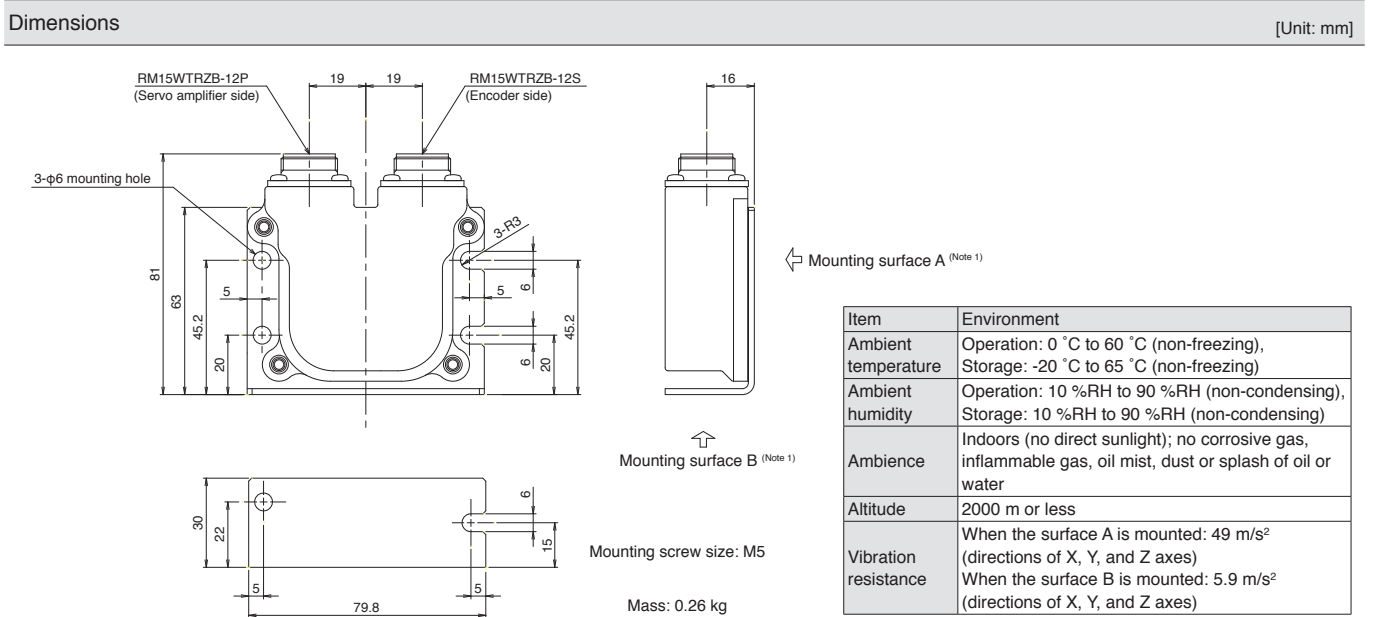

Notes: 1. When mounting the absolute position storage unit outside a cabinet, mount the surface A with four screws. When mounting the unit inside a cabinet, mounting the surface B with two screws is also possible.

## Replacement Fan Unit (MR-J5-FAN)

**G G-RJ G-HS WG DG B B-RJ WB A A-RJ**

The cooling fan of the servo amplifier has a fan and a fan cover as a unit. Replace the fan unit when the fan needs to be replaced. Refer to "MR-J5 User's Manual" or "MR-J5D User's Manual" for replacement of the cooling fan.

| Servo amplifier model   | Replacement fan unit model |
|---|----------------------------|
| MR-J5-70G/B/A<br>MR-J5-100G/B/A   | MR-J5-FAN1                 |
| MR-J5-200G/B/A<br>MR-J5-350G/B/A<br>MR-J5-200G4/B4/A4<br>MR-J5-350G4/B4/A4        | MR-J5-FAN6                 |
| MR-J5-500G/B/A  | MR-J5-FAN3                 |
| MR-J5-700G/B/A  | MR-J5-FAN4                 |
| MR-J5-500G4/B4/A4<br>MR-J5-700G4/B4/A4  | MR-J5-FAN7                 |
| MR-J5W2-44G/B   | MR-J5W-FAN1                |
| MR-J5W2-77G/B<br>MR-J5W2-1010G/B  | MR-J5W-FAN3                |
| MR-J5W3-222G/B<br>MR-J5W3-444G/B  | MR-J5W-FAN2                |
| MR-J5D1-500G4<br>MR-J5D1-700G4<br>MR-J5D2-200G4<br>MR-J5D2-350G4<br>MR-J5D3-200G4 | MR-J5D-FAN1                |
| MR-J5D2-500G4<br>MR-J5D2-700G4  | MR-J5D-FAN2                |



# Options/Peripheral Equipment

## Cabinet-Mounting Attachment (J5-CHP07-10P)

**G G-RJ WG B B-RJ WB A A-RJ**

The cabinet-mounting attachment is used when a servo amplifier is mounted on a cabinet with a screwdriver. A screw can be tightened horizontally at the upper side of the servo amplifier.

Compatible model: MR-J5-350G\_/B\_/A\_ or smaller/MR-J5W\_/MR-CM3K

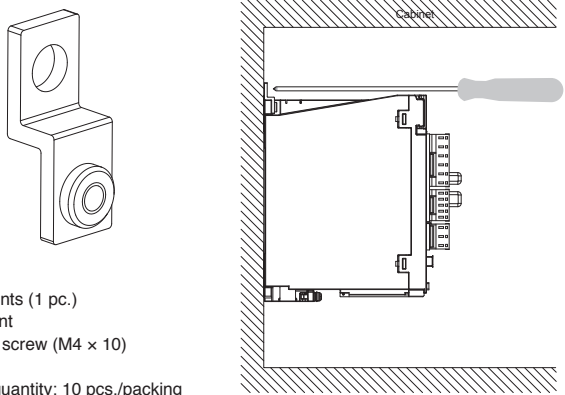
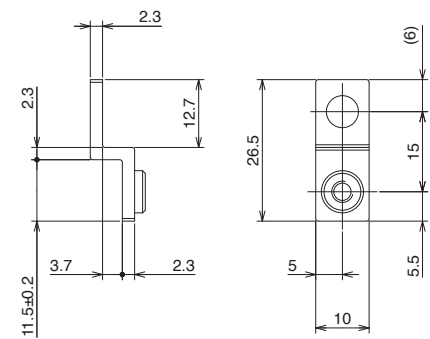
| External appearance/mounting  | Dimensions <span style="float: right;">[Unit: mm]</span>                           |
|---|--|
|  <p>Components (1 pc.)<br/>Attachment<br/>Flat head screw (M4 × 10)</p> <p>Packing quantity: 10 pcs./packing</p> |  |

## Grounding Terminal Attachment (J5-CHP08)

**G G-RJ B B-RJ A A-RJ**

The grounding terminal attachment extends grounding terminals to the front side of the servo amplifier and clamps cables at the front side.

Compatible servo amplifier: MR-J5-350G\_/B\_/A\_ or smaller
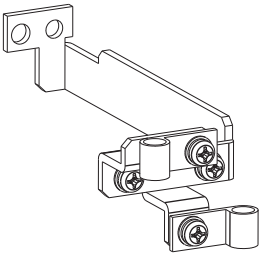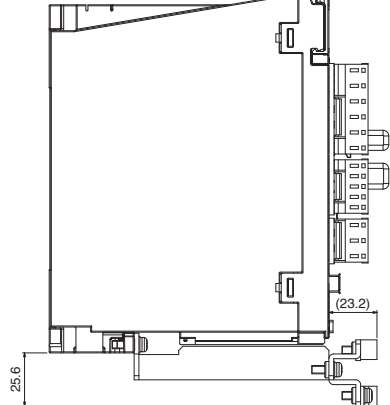
| External appearance  | Installation <sup>(Note 2)</sup> <span style="float: right;">[Unit: mm]</span>       |
|--|--|
| <p>With cable clamps</p>  <p>Components<br/>Attachment<br/>Cable clamp <sup>(Note 1)</sup> (ALC7 with a bundle diameter of φ6.5 mm to 7.5 mm manufactured by Takeuchi Industry Co., Ltd.) × 2<br/>Screw (M4 × 12) × 4</p> |  |



- Notes:
1. For a bundle diameter other than that of the attachment, aluminum clamps in ALC series (manufactured by Takeuchi Industry Co., Ltd.) can be used. For details, please contact the relevant manufacturers directly.
  2. When a battery (MR-BAT6V1SET or MR-BAT6V1SET-A) is used, the grounding terminal attachment cannot be used.

**Shield Clamp Attachment (MR-ASCHP06)**

**G G-HS B B-RJ A A-RJ**

The shield clamp attachment clamps the shield of a servo motor power cable on the bottom surface of the servo amplifier.

Compatible servo amplifier: MR-J5-500G4\_/B4\_/A4\_/MR-J5-700G4\_/B4\_/A4\_
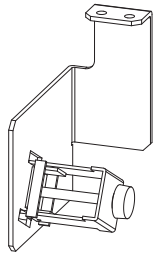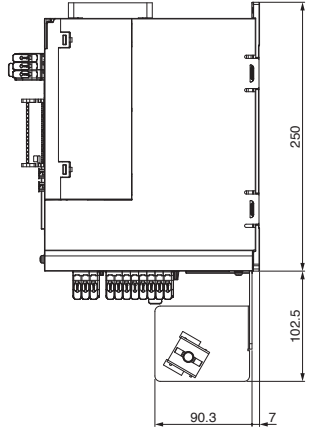
| External appearance  | Installation <span style="float: right;">[Unit: mm]</span>   |
|--|--|
| <div style="text-align: center;">  </div> <p>Components<br/>Attachment<br/>Cable clamp<br/>Flat head screw (M4) × 2</p> | <div style="text-align: center;">  </div> |

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

## Mounting Attachment

DG

### Power regeneration converter unit attachment (MR-ADCACN)

Attach a mounting attachment to a power regeneration converter unit.

| Power regeneration converter unit model | Attachment model | Variable dimensions [mm] |     |       |       | Dimension with attachment [Unit: mm] |
|---|------------------|--------------------------|-----|-------|-------|--------------------------------------|
|   |                  | D                        | Da  | Db    | Dc    |                                      |
| MR-CV11K4<br>MR-CV18K4                  | MR-ADCACN090     | 280                      | 80  | 255.5 | 258.5 |                                      |
| MR-CV30K4<br>MR-CV37K4<br>MR-CV45K4     | MR-ADCACN150     | 310                      | 110 | 285.5 | 288.5 |                                      |
| MR-CV55K4<br>MR-CV75K4                  | MR-ADCACN300     |                          |     |       |       |                                      |

### Drive unit attachment (MR-ADACN)

Select a drive unit attachment that supports a power regeneration converter unit to be connected.

| Power regeneration converter unit model  | Attachment model        | Drive unit model  | Dimension with attachment [Unit: mm] |
|--|-------------------------|---|--------------------------------------|
| MR-CV11K4<br>MR-CV18K4   | MR-ADCACN090            | MR-CV30K4<br>MR-CV37K4<br>MR-CV45K4<br>MR-CV55K4<br>MR-CV75K4 |                                      |
| MR-J5D1-700G4 or smaller,<br>MR-J5D2-350G4 or smaller,<br>MR-J5D3-200G4 or smaller | Attachment not required | MR-ADACN060   |                                      |
| MR-J5D2-500G4<br>MR-J5D2-700G4   | Attachment not required | MR-ADACN075   |                                      |

### Side Protection Cover (MR-J5DCASE01)

DG

By attaching a side protection cover to the outside of the final drive unit, the terminal block conforms to IP20.

| External appearance | Installation (Note 1) |
|---------------------|-----------------------|
|                     |                       |

Notes: 1. Attaching the side protection cover does not change the dimensions of the drive unit.


[Products on the Market]

**Junction Terminal Block (DG2SV3TB),  
Servo Amplifier Connection Cable (DG4SV2CB\_)**

**G G-RJ B B-RJ**

This terminal block is used for wiring signals.

Dimensions [Unit: mm]

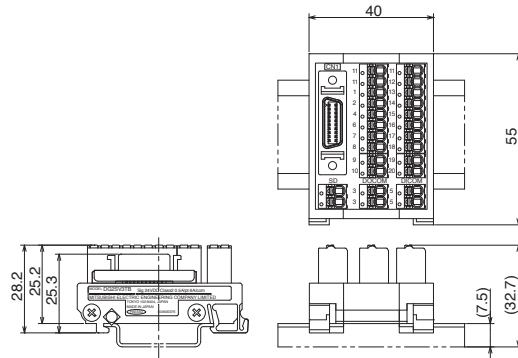

Mitsubishi Electric Engineering Co., Ltd. <sup>(Note 1)</sup>

Applicable wire: 1.5 mm<sup>2</sup> maximum  
(Wire insulator OD: ø2.8 mm or smaller)

Notes: 1. For details, please contact the relevant manufacturers directly.


[Products on the Market]

**Junction Terminal Block (PS7DW-20V14B-F)**

**G G-RJ B B-RJ**

This terminal block is used for wiring signals.

Dimensions [Unit: mm]

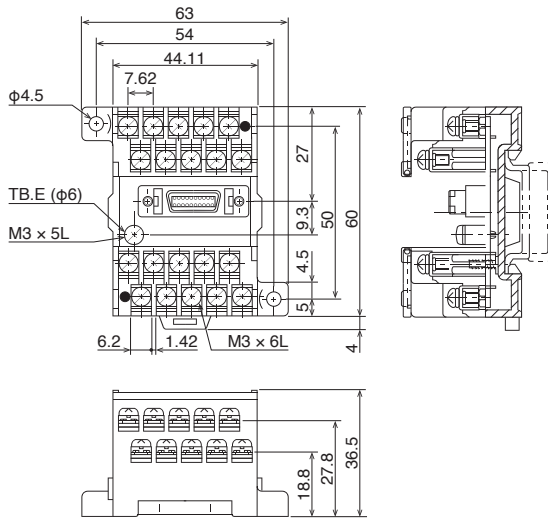

Toho Technology Corp. <sup>(Note 1)</sup>,  
Kyoto Factory

Applicable wire: 1.25 mm<sup>2</sup> maximum

Notes: 1. For details, please contact the relevant manufacturers directly.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support


# Options/Peripheral Equipment

## Junction Terminal Block (MR-TB26A)

**WG** **WB**


This terminal block is used for wiring signals.

Dimensions <sup>(Note 1)</sup> [Unit: mm]

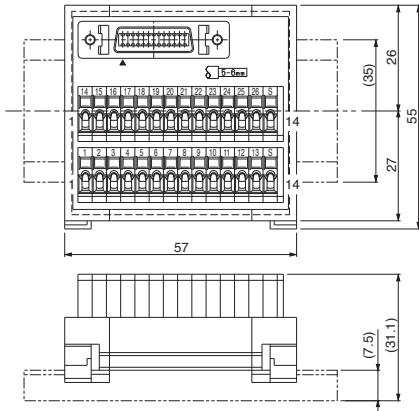

### Specifications

|                                 |  |  |
|---------------------------------|--|--|
| Rating                          | 32 V AC/DC, 0.5 A  |  |
| Applicable wire (terminal side) | Stranded wire  | 0.08 mm <sup>2</sup> to 1.5 mm <sup>2</sup> (AWG 28 to 14) |
|                                 | Solid wire   | ø0.32 mm to 1.2 mm   |
|                                 | Wire insulator OD  | 3.4 mm or smaller  |
| Operating tool                  | 210-619 (WAGO) or an equivalent<br>210-119SB (WAGO) or an equivalent |  |
| Stripped length of wire         | 5 mm to 6 mm   |  |





Notes: 1. The lengths in brackets are applicable when the junction terminal block is mounted on a 35 mm wide DIN rail.

## Junction Terminal Block (MR-TB50)

**A** **A-RJ**

This terminal block is used for wiring signals.

Dimensions [Unit: mm]

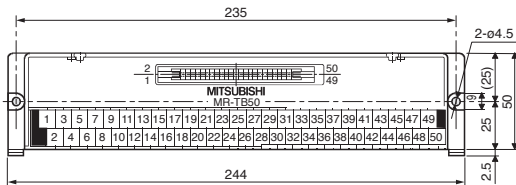

Terminal screw size: M3.5  
Applicable wire: 2 mm<sup>2</sup> maximum  
Crimp terminal width: 7.2 mm or shorter  
Mounting screw size: M4


[Products on the Market]

## Junction Terminal Block (DG2SV1TB), Servo Amplifier Connection Cable (DG4SV1CB\_)

**A** **A-RJ**

This terminal block is used for wiring signals.

Dimensions [Unit: mm]

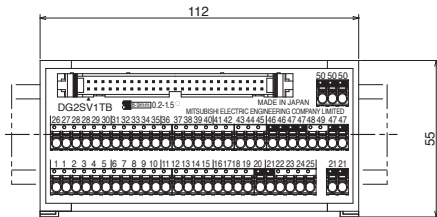

Mitsubishi Electric Engineering Co., Ltd. <sup>(Note 1)</sup>

Applicable wire: 1.5 mm<sup>2</sup> maximum (Wire insulator OD: ø2.8 mm or smaller)

Notes: 1. For details, please contact the relevant manufacturers directly.

**Radio Noise Filter (FR-BIF, FR-BIF-H)**

**G G-RJ G-HS WG B B-RJ WB A A-RJ**

This filter suppresses noise from the power supply side of the servo amplifier, especially effective for the radio frequency bands of 10 MHz or lower. The radio noise filter is designed to be installed on the input side.

| Dimensions [Unit: mm] | Connections  |
|-----------------------|--|
|                       | <p>Do not use the radio noise filter on the output side of the servo amplifier. Wiring should be as short as possible. Grounding is required. Insulate the unused wire when using the radio noise filter with a 1-phase power supply.</p> <p>200 V class: FR-BIF<br/>400 V class: FR-BIF-H</p> |

**Line Noise Filter (FR-BSF01, FR-BLF)**

**G G-RJ G-HS WG B B-RJ WB A A-RJ**

This filter is effective in suppressing noise emitted from the power supply side or the output side of the servo amplifier, and also in suppressing high-frequency leakage current (zero-phase current), especially within 0.5 MHz to 5 MHz band.

| Dimensions [Unit: mm]  | Connections   |
|--|---|
| <p><b>FR-BSF01</b><br/>For wire size of 3.5 mm<sup>2</sup> (AWG 12) or smaller</p> <p><b>FR-BLF</b><br/>For wire size of 5.5 mm<sup>2</sup> (AWG 10) or larger</p> | <p>The line noise filters can be mounted on lines of the main circuit power supply (L1/L2/L3) and of the servo motor power (U/V/W). Pass each of the wires through the line noise filter an equal number of times in the same direction. For wires of the main circuit power supply, the effect of the filter rises as the number of passes increases, but generally four passes would be appropriate. For the servo motor power lines, passes must be four times or less. Do not pass the grounding wire through the filter. Otherwise, the effect of the filter will drop. Wind the wires by passing through the filter to satisfy the required number of passes as shown in Example 1. If the wires are too thick to wind, use two or more filters to have the required number of passes as shown in Example 2. Place the line noise filters as close to the servo amplifier as possible for their best performance.</p> <p><b>Example 1</b></p> <p><b>Example 2</b></p> |

**Data Line Filter**

**G G-RJ G-HS WG DG B B-RJ WB A A-RJ**

This filter is effective in preventing noise when attached to the pulse output cable of the pulse train output controller or the motor encoder cable.

- Example) ESD-SR-250 (manufactured by TOKIN Corporation)  
 ZCAT3035-1330 (manufactured by TDK)  
 GRFC-13 (manufactured by Kitagawa Industries Co., Ltd.)  
 E04SRM563218 (manufactured by Seiwa Electric Mfg. Co., Ltd.)

**Surge Killer**

**G G-RJ G-HS WG DG B B-RJ WB A A-RJ**

Attach surge killers to AC relays and AC valves around the servo amplifier. Attach diodes to DC relays and DC valves.

- Example) Surge killer: CR-50500 (manufactured by Okaya Electric Industries Co., Ltd. (Note 1))  
 Diode: A diode with breakdown voltage four or more times greater than the relay drive voltage, and with current capacity two or more times greater than the relay drive current.

Notes: 1. For details, please contact the relevant manufacturers directly.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSWires  
 Product List  
 Precautions  
 Support

# Options/Peripheral Equipment

## EMC Filter

**G G-RJ G-HS WG DG B B-RJ WB A A-RJ**

### For servo amplifiers

The following filters are recommended as a filter compliant with the EMC directive for the power supply of the servo amplifier.

A surge protector is separately required to use the filters. Refer to "MR-J5 User's Manual" for details.

Fulfill the following requirements when connecting one or more units of servo amplifiers to one EMC filter.

- Rated voltage [V] of EMC filter  $\geq$  Rated input voltage [V] of servo amplifier
- Rated current [A] of EMC filter  $\geq$  Total rated input current [A] of servo amplifiers connected to EMC filter

| Operating environment                     | Total length of servo motor power cables | EMC filter                    |                   |                      |                            |           |      |                           |                    |   |
|---|--|-------------------------------|-------------------|----------------------|----------------------------|-----------|------|---------------------------|--------------------|---|
|   |  | Model                         | Rated current [A] | Rated voltage [V AC] | Operating temperature [°C] | Mass [kg] | Fig. | Manufacturer              |                    |   |
| IEC/EN 61800-3<br>Category C2/C3 (Note 1) | 50 m or shorter                          | FSB-10-254-HU                 | 10                | 250                  | -40 to 85                  | 1.8       | A    | COSEL Co., Ltd.           |                    |   |
|   |  | FSB-20-254-HU                 | 20                |                      |                            |           |      |                           |                    |   |
|   |  | FSB-30-254-HU                 | 30                |                      |                            |           |      |                           |                    |   |
|   |  | FSB-40-324-HU                 | 40                |                      |                            |           |      |                           |                    |   |
|   |  | FSB-10-355                    | 10                | 500                  |                            | 1.8       | A    |                           |                    |   |
|   |  | FSB-20-355                    | 20                |                      |                            |           |      |                           |                    |   |
|   |  | FN3288-16-44-C35-R65 (Note 3) | 16                | 530                  | -40 to 50                  | 1.0       | J    |                           | Schaffner EMC K.K. |   |
|   |  | FN3288-40-33-C35-R65 (Note 3) | 40                |                      |                            |           |      |                           |                    |   |
|   |  | FN3288-63-53-C35-R65          | 63                |                      |                            |           |      |                           |                    |   |
| IEC/EN 61800-3<br>Category C3 (Note 1)    | 100 m or shorter                         | HF3010C-SZB                   | 10                | 500                  | -20 to 50                  | 0.9       | E    | Soshin Electric Co., Ltd. |                    |   |
|   |  | HF3020C-SZB                   | 20                |                      |                            |           |      |                           |                    |   |
|   |  | HF3030C-SZB                   | 30                |                      |                            |           |      |                           |                    |   |
|   |  | HF3040C-SZB                   | 40                |                      |                            |           |      |                           |                    |   |
|   | 200 m or shorter                         | HF3030C-SZL                   | 30                | 500                  | -20 to 50                  | 1.3       | G    |                           |                    |   |
|   |  | HF3060C-SZL                   | 60                |                      |                            |           |      |                           |                    |   |
|   | 250 m or shorter                         | HF3100C-SZL                   | 100               |                      |                            | 5.8       | H    |                           |                    |   |
|   |  | HF3150C-SZL                   | 150               |                      |                            |           |      |                           | 9.0                | I |

### For power regeneration converter units

The following filters are recommended as a filter compliant with the EMC directive for the power supply of the power regeneration converter unit.

A surge protector is separately required to use the filters. Refer to "MR-CV Power Regeneration Converter Unit User's Manual" for details.

Fulfill the following requirements when connecting one or more power regeneration converter units to one EMC filter.

- Rated voltage [V] of EMC filter  $\geq$  Rated input voltage [V] of power regeneration converter unit
- Rated current [A] of EMC filter  $\geq$  Total rated input current [A] of power regeneration converter units connected to EMC filter

| Operating environment                      | EMC filter           |                   |                      |                            |           |      |                           |                    |
|--|----------------------|-------------------|----------------------|----------------------------|-----------|------|---------------------------|--------------------|
|  | Model                | Rated current [A] | Rated voltage [V AC] | Operating temperature [°C] | Mass [kg] | Fig. | Manufacturer (Note 2)     |                    |
| IEC/EN 61800-3<br>Category C2, C3 (Note 1) | FSB-20-355           | 20                | 500                  | -40 to 85                  | 1.8       | A    | COSEL Co., Ltd.           |                    |
|  | FSB-30-355           | 30                |                      |                            |           |      |                           |                    |
|  | FSB-40-355           | 40                |                      |                            |           |      |                           |                    |
|  | FSB-80-355           | 80                |                      |                            | 6.3       | C    |                           |                    |
|  | FSB-100-355          | 100               |                      |                            |           |      |                           |                    |
|  | FSB-150-355          | 150               |                      |                            |           |      |                           |                    |
|  | FN3288-16-44-C35-R65 | 16                | 530                  | -40 to 50                  | 1.0       | J    |                           | Schaffner EMC K.K. |
|  | FN3288-40-33-C35-R65 | 40                |                      |                            |           |      |                           |                    |
|  | FN3288-63-53-C35-R65 | 63                |                      |                            |           |      |                           |                    |
| IEC/EN 61800-3<br>Category C3 (Note 1)     | HF3030C-SZL          | 30                | 500                  | -20 to 50                  | 1.3       | G    | Soshin Electric Co., Ltd. |                    |
|  | HF3060C-SZL          | 60                |                      |                            |           |      |                           |                    |
|  | HF3100C-SZL          | 100               |                      |                            | 5.8       | H    |                           |                    |
|  | HF3150C-SZL          | 150               |                      |                            |           |      |                           | 9.0                |

Notes: 1. Category C2: Intended to be installed in either the first environment (residential environment) by a professional or in the second environment (commercial, light industrial, and industrial environments).

Category C3: Intended to be installed in the second environment (commercial, light industrial, and industrial environments).

2. For details, please contact the relevant manufacturers directly.

3. FN3288-16-44-C17-R65 and FN3288-40-33-C17-R65, which feature low leakage current from the EMC filter, can also be used for 200 V class servo amplifiers.



EMC Filter

G G-RJ G-HS WG DG B B-RJ WB A A-RJ

| Dimensions |  | [Unit: mm]                      |
|------------|--|---------------------------------|
| A          | <p>FSB-10-254-HU/FSB-20-254-HU/FSB-30-254-HU/<br/>FSB-10-355/FSB-20-355/FSB-30-355</p> | <p>FSB-40-324-HU/FSB-40-355</p> |
|            | B  |                                 |
| C          | <p>FSB-80-355/FSB-100-355</p>  | <p>FSB-150-355</p>              |
|            | D  |                                 |
| E          | <p>HF3010C-SZB/HF3020C-SZB/HF3030C-SZB</p>   | <p>HF3040C-SZB</p>              |
|            | F  |                                 |



Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LVSWires  
Product List  
Precautions  
Support

# Options/Peripheral Equipment


## EMC Filter

G G-RJ G-HS WG DG B B-RJ WB A A-RJ


Dimensions [Unit: mm]

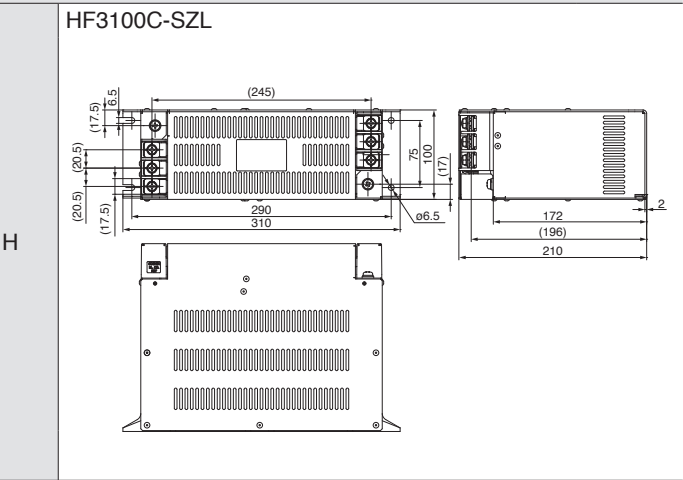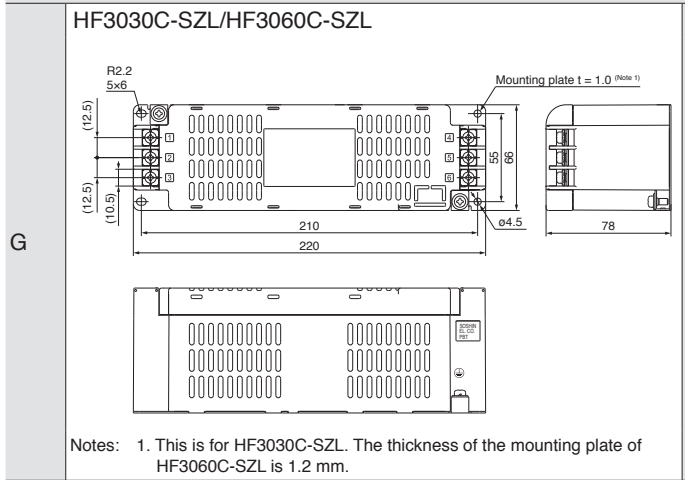

Notes: 1. This is for HF3030C-SZL. The thickness of the mounting plate of HF3060C-SZL is 1.2 mm.

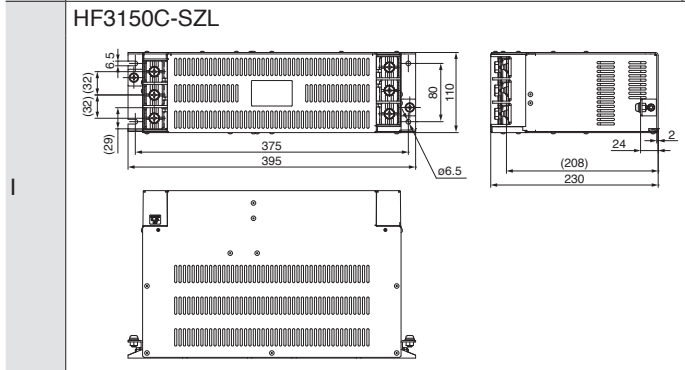

FN3288-16-44-C35-R65/FN3288-40-33-C35-R65/FN3288-63-53-C35-R65

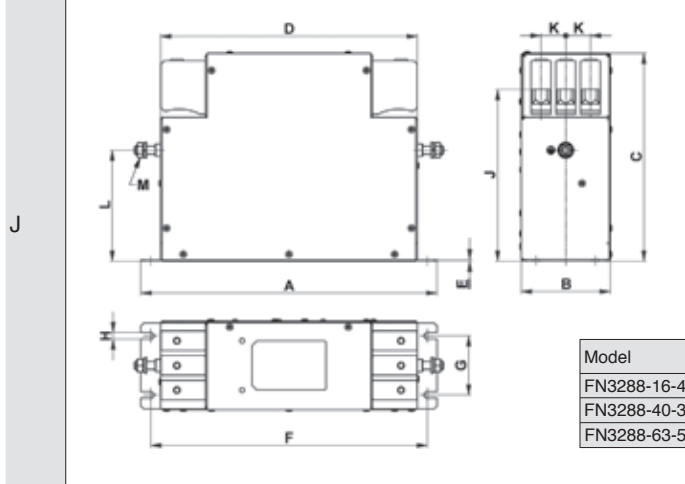


| Model                | A   | B  | C   | D   | E   | F   | G  | H   | J   | K  | L   | M  |
|----------------------|-----|----|-----|-----|-----|-----|----|-----|-----|----|-----|----|
| FN3288-16-44-C35-R65 | 195 | 45 | 140 | 164 | 0.8 | 180 | 25 | 5.4 | 122 | 11 | 93  | M5 |
| FN3288-40-33-C35-R65 | 235 | 50 | 168 | 207 | 1.0 | 220 | 30 | 5.4 | 149 | 13 | 115 | M6 |
| FN3288-63-53-C35-R65 |     |    |     |     |     |     |    |     |     |    |     |    |

EMC Filter


G G-RJ G-HS WG DG B B-RJ WB A A-RJ

Connections


3-phase 200 V/400 V AC

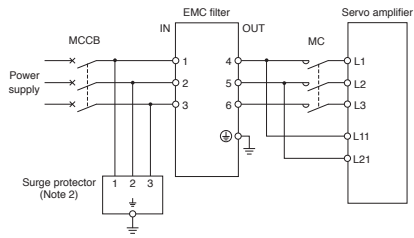


3-phase 200 V AC

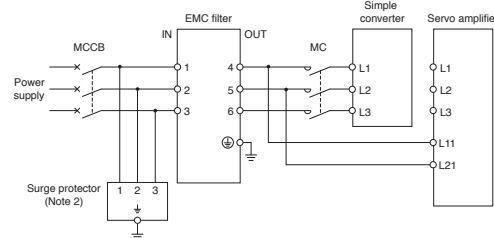

1-phase 200 V AC

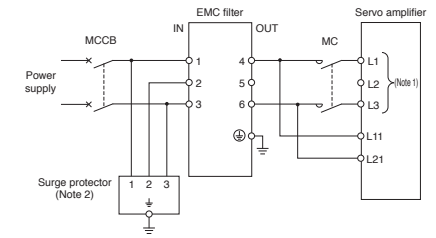

For MR-CV and MR-J5D\_-\_G4

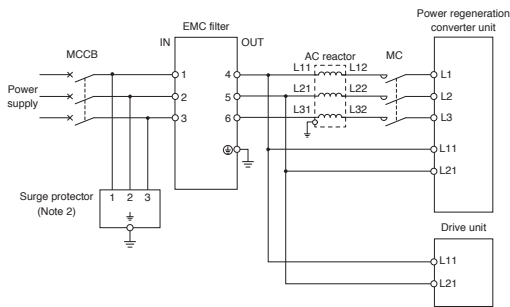

Notes: 1. Connect the power supply to L1 and L3 terminals. Do not connect anything to L2.  
2. This is for when a surge protector is connected.

Surge Protector

G G-RJ G-HS WG DG B B-RJ WB A A-RJ

Attach surge protectors of RSPD series (manufactured by Okaya Electric Industries Co., Ltd. (Note 1)) or LT-CS-WS series (manufactured by Soshin Electric Co., Ltd. (Note 1)) to the servo amplifiers.

Notes: 1. For details, please contact the relevant manufacturers directly.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

# Options/Peripheral Equipment

## Power Factor Improving DC Reactor (FR-HEL, FR-HEL-H)

**G G-RJ G-HS B B-RJ A A-RJ**


This boosts the power factor of servo amplifier and reduces the power supply capacity.

Use either the DC reactor or the AC reactor.

As compared to the AC reactor (FR-HAL, FR-HAL-H), the DC reactor (FR-HEL, FR-HEL-H) is more recommended since the DC reactor is more effective in power factor improvement, smaller and lighter, and its wiring is easier. (The DC reactor uses two wires, while the AC reactor uses six wires.)


| Servo amplifier model | Power factor improving DC reactor model | Fig. |
|-----------------------|---|------|
| MR-J5-10G/B/A         | FR-HEL-0.4K                             | A    |
| MR-J5-20G/B/A         |   |      |
| MR-J5-40G/B/A         | FR-HEL-0.75K                            |      |
| MR-J5-60G/B/A         | FR-HEL-1.5K                             |      |
| MR-J5-70G/B/A         | FR-HEL-2.2K                             |      |
| MR-J5-100G/B/A        | FR-HEL-3.7K                             | B    |
| MR-J5-200G/B/A        | FR-HEL-7.5K                             | C    |
| MR-J5-500G/B/A        | FR-HEL-11K                              | D    |
| MR-J5-700G/B/A        | FR-HEL-15K                              | E    |
| MR-J5-60G4/B4/A4      | FR-HEL-H1.5K                            |      |
| MR-J5-100G4/B4/A4     | FR-HEL-H2.2K                            | F    |
| MR-J5-200G4/B4/A4     | FR-HEL-H3.7K                            |      |
| MR-J5-350G4/B4/A4     | FR-HEL-H7.5K                            | G    |
| MR-J5-500G4/B4/A4     | FR-HEL-H11K                             |      |
| MR-J5-700G4/B4/A4     | FR-HEL-H15K                             | H    |

### Connections




Notes: 1. Disconnect a short-circuit bar between P3 and P4 when using the power factor improving DC reactor.

### Dimensions

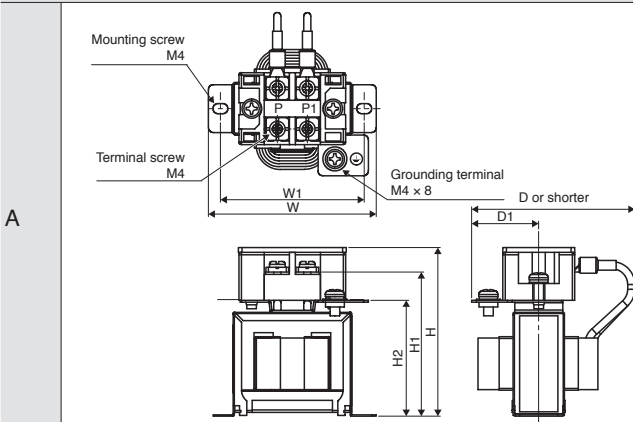

| Model        | Variable dimensions [mm] |    |    |    |    |    |    | Mass [kg]  | Wire size [mm <sup>2</sup> ] (Note 2) |
|--------------|--------------------------|----|----|----|----|----|----|------------|---------------------------------------|
|              | D (Note 1)               | D1 | W  | W1 | H  | H1 | H2 |            |                                       |
| FR-HEL-0.4K  | 61                       | 28 | 70 | 60 | 71 | 61 | 48 | 2 (AWG 14) |                                       |
| FR-HEL-0.75K | 61                       | 28 | 85 | 74 | 81 | 71 | 59 |            |                                       |
| FR-HEL-1.5K  | 70                       | 33 | 85 | 74 | 81 | 71 | 59 |            |                                       |
| FR-HEL-2.2K  | 70                       | 33 | 85 | 74 | 81 | 71 | 59 |            |                                       |

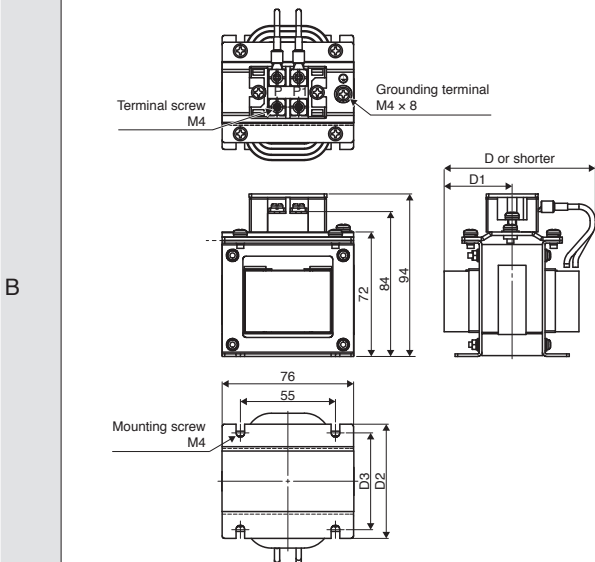

| Model       | Variable dimensions [mm] |    |    |    | Mass [kg] | Wire size [mm <sup>2</sup> ] (Note 2) |
|-------------|--------------------------|----|----|----|-----------|---------------------------------------|
|             | D (Note 1)               | D1 | D2 | D3 |           |                                       |
| FR-HEL-3.7K | 82                       | 39 | 66 | 56 | 1.4       | 2 (AWG 14)                            |

Notes: 1. This indicates the maximum dimension. The dimension varies depending on the bending degree of the input/output lines.  
2. The wire size is applicable when 600 V grade heat-resistant polyvinyl chloride insulated wires (HIV wires) are used.

Power Factor Improving DC Reactor (FR-HEL, FR-HEL-H)

G G-RJ B B-RJ A A-RJ

Dimensions

C

| Model       | Mass [kg] | Wire size [mm <sup>2</sup> ] (Note 2) |
|-------------|-----------|---------------------------------------|
| FR-HEL-7.5K | 2.5       | 3.5 (AWG 12)                          |

D

| Model      | Variable dimensions [mm] |    |    |    |     |     | Mass [kg] | Wire size [mm <sup>2</sup> ] (Note 2) |
|------------|--------------------------|----|----|----|-----|-----|-----------|---------------------------------------|
|            | D (Note 1)               | D1 | D2 | D3 | H   | H1  |           |                                       |
| FR-HEL-11K | 112                      | 47 | 92 | 78 | 138 | 118 | 3.1       | 5.5 (AWG 10)                          |
| FR-HEL-15K | 115                      | 49 | 97 | 83 | 142 | 120 | 3.8       | 8 (AWG 8)                             |

Notes: 1. This indicates the maximum dimension. The dimension varies depending on the bending degree of the input/output lines.  
 2. The wire size is applicable when 600 V grade heat-resistant polyvinyl chloride insulated wires (HIV wires) are used.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Options/Peripheral Equipment

## Power Factor Improving DC Reactor (FR-HEL, FR-HEL-H)

G G-RJ B B-RJ A A-RJ

### Dimensions

**E**

Mounting screw M4  
Terminal screw M3.5  
Grounding terminal M4 × 8  
50  
D3  
D2  
D or shorter  
D1  
W  
H2  
H1  
H

| Model        | Variable dimensions [mm] |    |    |    |    |     |    |    | Mass [kg] | Wire size [mm <sup>2</sup> ] (Note 2) |
|--------------|--------------------------|----|----|----|----|-----|----|----|-----------|---------------------------------------|
|              | D (Note 1)               | D1 | D2 | D3 | W  | H   | H1 | H2 |           |                                       |
| FR-HEL-H1.5K | 80                       | 36 | 74 | 54 | 66 | 100 | 87 | 75 | 1.0       | 2 (AWG 14)                            |
| FR-HEL-H2.2K | 80                       | 38 | 74 | 54 | 76 | 110 | 97 | 85 | 1.3       | 2 (AWG 14)                            |

**F**

Mounting screw  
Grounding terminal  
Terminal screw M4  
W1  
W  
D or shorter  
D1  
H2  
H1  
H

| Model        | Variable dimensions [mm] |    |     |    |    |    |     |     |     |    | Mounting screw | Grounding terminal | Mass [kg]  | Wire size [mm <sup>2</sup> ] (Note 2) |
|--------------|--------------------------|----|-----|----|----|----|-----|-----|-----|----|----------------|--------------------|------------|---------------------------------------|
|              | D (Note 1)               | D1 | D2  | D3 | W  | W1 | H   | H1  | H2  |    |                |                    |            |                                       |
| FR-HEL-H3.7K | 95                       | 39 | 89  | 69 | 86 | 55 | 128 | 114 | 94  | M4 | M4 × 8         | 2.3                | 2 (AWG 14) |                                       |
| FR-HEL-H7.5K | 105                      | 47 | 100 | 80 | 96 | 60 | 136 | 122 | 102 | M5 | M5 × 10        | 3.5                | 2 (AWG 14) |                                       |

- Notes: 1. This indicates the maximum dimension. The dimension varies depending on the bending degree of the input/output lines.  
2. The wire size is applicable when 600 V grade heat-resistant polyvinyl chloride insulated wires (HIV wires) are used.

Power Factor Improving DC Reactor (FR-HEL, FR-HEL-H)

G G-RJ G-HS B B-RJ A A-RJ

Dimensions

G

| Model       | Mass [kg] | Wire size [mm <sup>2</sup> ] (Note 2) |
|-------------|-----------|---------------------------------------|
| FR-HEL-H11K | 4.5       | 3.5 (AWG 12)                          |

Common Specifications

H

| Model       | Variable dimensions [mm] |    |     |    |     |    |     |     |     |     | Mass [kg]    | Wire size [mm <sup>2</sup> ] (Note 2) |
|-------------|--------------------------|----|-----|----|-----|----|-----|-----|-----|-----|--------------|---------------------------------------|
|             | D (Note 1)               | D1 | D2  | D3 | W   | W1 | H   | H1  | H2  |     |              |                                       |
| FR-HEL-H15K | 125                      | 57 | 115 | 95 | 105 | 75 | 152 | 130 | 111 | 5.0 | 5.5 (AWG 10) |                                       |

Servo System Controllers

Notes: 1. This indicates the maximum dimension. The dimension varies depending on the bending degree of the input/output lines.  
 2. The wire size is applicable when 600 V grade heat-resistant polyvinyl chloride insulated wire (HIV wires) is used.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/5Wires

Product List

Precautions

Support

# Options/Peripheral Equipment

## Power Factor Improving AC Reactor (FR-HAL, FR-HAL-H)

**G   G-RJ   G-HS   WG   B   B-RJ   WB   A   A-RJ**

This boosts the power factor of servo amplifier and reduces the power supply capacity.

MR-J5-G/B/A, MR-CM3K

MR-J5W2-G/B (Note 1)

| Servo amplifier/<br>simple converter<br>model | Power factor<br>improving AC<br>reactor model (Note 2) | Fig. |
|---|--|------|
| MR-J5-10G/B/A                                 | FR-HAL-0.4K  | A    |
| MR-J5-20G/B/A                                 |  |      |
| MR-J5-40G/B/A                                 |  |      |
| MR-J5-60G/B/A                                 |  |      |
| MR-J5-70G/B/A                                 |  |      |
| MR-J5-100G/B/A<br>(3-phase power<br>input)    | FR-HAL-2.2K  | B    |
| MR-J5-100G/B/A<br>(1-phase power<br>input)    |  |      |
| MR-J5-200G/B/A<br>(3-phase power<br>input)    |  |      |
| MR-J5-200G/B/A<br>(1-phase power<br>input)    |  |      |
| MR-J5-350G/B/A<br>MR-CM3K                     | FR-HAL-7.5K  | C    |
| MR-J5-500G/B/A                                |  |      |
| MR-J5-700G/B/A                                |  |      |
| MR-J5-60G4/B4/A4                              | FR-HAL-H1.5K   | D    |
| MR-J5-100G4/B4/A4                             |  |      |
| MR-J5-200G4/B4/A4                             | FR-HAL-H3.7K   | E    |
| MR-J5-350G4/B4/A4                             |  |      |
| MR-J5-500G4/B4/A4                             | FR-HAL-H11K  | F    |
| MR-J5-700G4/B4/A4                             |  |      |

| Total output of rotary<br>servo motors | Total continuous<br>thrust of linear servo<br>motors | Total output of direct<br>drive motors | Power factor<br>improving AC<br>reactor model (Note 2) | Fig. |
|--|--|--|--|------|
| 450 W or less                          | 150 N or less  | 100 W or less                          | FR-HAL-0.75K   | A    |
| Over 450 W to 600 W                    | Over 150 N to 240 N                                  | Over 100 W to 377 W                    | FR-HAL-1.5K  |      |
| Over 600 W to 1 kW                     | Over 240 N to 300 N                                  | Over 377 W to 545 W                    | FR-HAL-2.2K  | B    |
| Over 1 kW to 2 kW                      | Over 300 N to 720 N                                  | Over 545 W to 838 W                    | FR-HAL-3.7K  |      |


MR-J5W3-G/B (Note 1)

| Total output of rotary<br>servo motors | Total continuous<br>thrust of linear servo<br>motors | Total output of direct<br>drive motors | Power factor<br>improving AC<br>reactor model (Note 2) | Fig. |
|--|--|--|--|------|
| 450 W or less                          | 150 N or less  | -                                      | FR-HAL-0.75K   | A    |
| Over 450 W to 600 W                    | Over 150 N to 240 N                                  | 378 W or less                          | FR-HAL-1.5K  |      |
| Over 600 W to 1 kW                     | Over 240 N to 300 N                                  | -                                      | FR-HAL-2.2K  | B    |
| Over 1 kW to 2 kW                      | Over 300 N to 450 N                                  | -                                      | FR-HAL-3.7K  |      |


- Notes: 1. Refer to "MR-J5 User's Manual" for selecting a power factor improving AC reactor when combining multiple servo motors among the rotary servo motor, the linear servo motor or the direct drive motor.  
2. When using the power factor improving AC reactor, install one reactor for each servo amplifier.

### Connections

3-phase 200 V AC  
3-phase 400 V AC

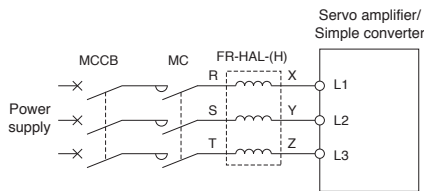

1-phase 200 V AC

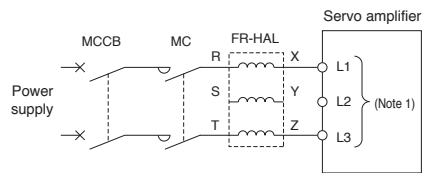

- Notes: 1. Connect the power supply to L1 and L3 terminals. Do not connect anything to L2.



Power Factor Improving AC Reactor (FR-HAL, FR-HAL-H)

G G-RJ WG B B-RJ WB A A-RJ

Dimensions

A

| Model        | Variable dimensions [mm] |    |    |            |    |    |    | Mass [kg] | Terminal size |
|--------------|--------------------------|----|----|------------|----|----|----|-----------|---------------|
|              | W                        | W1 | H  | D (Note 1) | D1 | D2 | d  |           |               |
| FR-HAL-0.4K  | 104                      | 84 | 99 | 72         | 51 | 40 | M5 | 0.6       | M4            |
| FR-HAL-0.75K | 104                      | 84 | 99 | 74         | 56 | 44 | M5 | 0.8       | M4            |
| FR-HAL-1.5K  | 104                      | 84 | 99 | 77         | 61 | 50 | M5 | 1.1       | M4            |

---

B

| Model       | Variable dimensions [mm] |    |     |            |    |    |    | Mass [kg] | Terminal size |
|-------------|--------------------------|----|-----|------------|----|----|----|-----------|---------------|
|             | W                        | W1 | H   | D (Note 1) | D1 | D2 | d  |           |               |
| FR-HAL-2.2K | 115                      | 40 | 115 | 77         | 71 | 57 | M6 | 1.5       | M4            |
| FR-HAL-3.7K | 115                      | 40 | 115 | 83         | 81 | 67 | M6 | 2.2       | M4            |
| FR-HAL-5.5K | 115                      | 40 | 115 | 83         | 81 | 67 | M6 | 2.3       | M4            |

---

C

| Model       | Variable dimensions [mm] |    |     |            |     |     |    | Mass [kg] | Terminal size |
|-------------|--------------------------|----|-----|------------|-----|-----|----|-----------|---------------|
|             | W                        | W1 | H   | D (Note 1) | D1  | D2  | d  |           |               |
| FR-HAL-7.5K | 130                      | 50 | 135 | 100        | 98  | 86  | M6 | 4.2       | M5            |
| FR-HAL-11K  | 160                      | 75 | 164 | 111        | 109 | 92  | M6 | 5.2       | M6            |
| FR-HAL-15K  | 160                      | 75 | 167 | 126        | 124 | 107 | M6 | 7.0       | M6            |

Notes: 1. This indicates the maximum dimension. The dimension varies depending on the bending degree of the input/output lines.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LVSWires  
Product List  
Precautions  
Support

7-73

## Power Factor Improving AC Reactor (FR-HAL, FR-HAL-H)

G G-RJ G-HS WG B B-RJ WB A A-RJ

### Dimensions

D

Installation hole for 4-d varnish removed (front, rear)

Terminal layout  
R X | S | Y | T | Z

Earth (ground) terminal  
Wire the earthing (grounding) cable to the earth (ground) terminal

Terminal block (with cover)

Dimensions: W, W1, W2, H, D, D1, D2, d

| Model        | Variable dimensions [mm] |     |    |     |            |      |    |    | Mass [kg] | Terminal size |
|--------------|--------------------------|-----|----|-----|------------|------|----|----|-----------|---------------|
|              | W                        | W1  | W2 | H   | D (Note 1) | D1   | D2 | d  |           |               |
| FR-HAL-H1.5K | 135                      | 120 | 8  | 115 | 59         | 59.6 | 45 | M4 | 1.5       | M3.5          |
| FR-HAL-H2.2K | 135                      | 120 | 8  | 115 | 59         | 59.6 | 45 | M4 | 1.5       | M3.5          |
| FR-HAL-H3.7K | 135                      | 120 | 8  | 115 | 69         | 70.6 | 57 | M4 | 2.5       | M3.5          |

---



E

Installation hole for 4-d (varnish removed (front, rear)

Terminal layout  
R X | S | Y | T | Z

Earth (ground) terminal  
Wire the earthing (grounding) cable to the earth (ground) terminal

Terminal block (with cover)

Dimensions: W, W1, W2, H, D, D1, D2, d

| Model        | Variable dimensions [mm] |     |    |     |            |    |    |    | Mass [kg] | Terminal size |
|--------------|--------------------------|-----|----|-----|------------|----|----|----|-----------|---------------|
|              | W                        | W1  | W2 | H   | D (Note 1) | D1 | D2 | d  |           |               |
| FR-HAL-H7.5K | 160                      | 145 | 8  | 150 | 91         | 91 | 75 | M4 | 5.0       | M4            |

---



F

Installation hole for 4-d Varnish removed (front, rear)

Terminal layout  
R X | S | Y | T | Z

Earth (ground) terminal  
Wire the earthing (grounding) cable to the earth (ground) terminal

Terminal block (2) (with cover)

Dimensions: W, W1, W2, H, D, D1, D2, d

| Model       | Variable dimensions [mm] |     |    |     |            |    |    |    | Mass [kg] | Terminal size |
|-------------|--------------------------|-----|----|-----|------------|----|----|----|-----------|---------------|
|             | W                        | W1  | W2 | H   | D (Note 1) | D1 | D2 | d  |           |               |
| FR-HAL-H11K | 160                      | 145 | 8  | 146 | 91         | 91 | 75 | M4 | 6.0       | M5            |
| FR-HAL-H15K | 220                      | 200 | 10 | 195 | 105        | 90 | 70 | M5 | 9.0       | M5            |

Notes: 1. This indicates the maximum dimension. The dimension varies depending on the bending degree of the input/output lines.


7-74

DG


AC Reactor (MR-AL)

| Power regeneration converter unit model | AC reactor model | Fig. |
|---|------------------|------|
| MR-CV11K4                               | MR-AL-11K4       | A    |
| MR-CV18K4                               | MR-AL-18K4       |      |
| MR-CV30K4                               | MR-AL-30K4       |      |
| MR-CV37K4                               | MR-AL-37K4       |      |
| MR-CV45K4                               | MR-AL-45K4       |      |
| MR-CV55K4                               | MR-AL-55K4       |      |
| MR-CV75K4                               | MR-AL-75K4       |      |

Connections

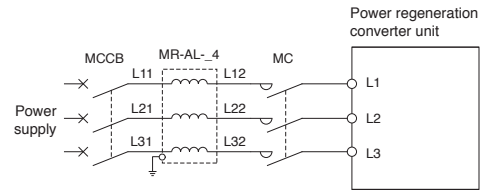

Dimensions

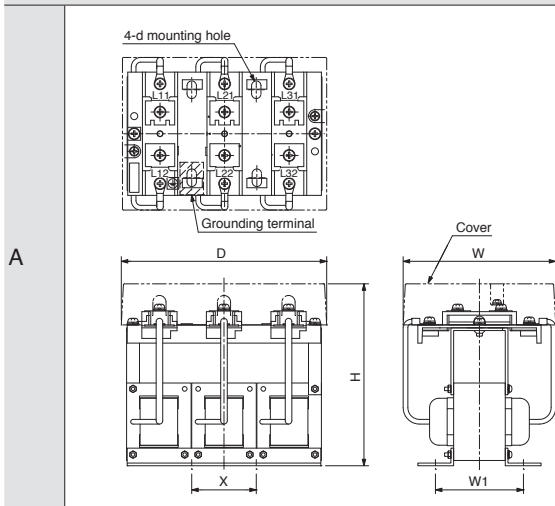

| Model      | Variable dimensions [mm] |     |     |     |     |    | Mass [kg] | Terminal screw size |
|------------|--------------------------|-----|-----|-----|-----|----|-----------|---------------------|
|            | W                        | D   | H   | W1  | X   | d  |           |                     |
| MR-AL-11K4 | 145                      | 175 | 155 | 75  | 55  | M6 | 3.7       | M5                  |
| MR-AL-18K4 | 145                      | 175 | 155 | 105 | 55  | M6 | 5.3       | M6                  |
| MR-AL-30K4 | 145                      | 175 | 155 | 110 | 55  | M6 | 6.0       | M6                  |
| MR-AL-37K4 | 150                      | 215 | 175 | 110 | 70  | M6 | 8.5       | M6                  |
| MR-AL-45K4 | 160                      | 215 | 175 | 120 | 70  | M6 | 9.8       | M6                  |
| MR-AL-55K4 | 230                      | 220 | 210 | 120 | 200 | M8 | 10.5      | M6                  |
| MR-AL-75K4 | 230                      | 250 | 215 | 143 | 230 | M8 | 13.0      | M6                  |

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

## Drive System Sizing Software MELSOFT Motorizer

MELSOFT

## Specifications

| Item   | Description  |
|--|--|
| Types of motor/drive   | Servo, Inverter, Sensorless servo  |
| Types of load mechanism  | Ball screw, Rack and pinion, Roll feed, Rotary table, Cart, Elevator/Hoist, Conveyor, Fan, Pump, Crank, Generic (Rotary), Generic (Linear), Linear servo   |
| Types of transmission mechanism                                  | Coupling, External gear reducer, V belt and pulley, Toothed belt/roller chain  |
| Operation pattern  | Constant speed/Pause, Acceleration/Deceleration, Trapezoid, Triangle, Speed CSV File, MELSOFT GX LogViewer file  |
| Types of input support of moment of inertia calculation function | Solid cylinder, Hollow cylinder, Disk, Rectangular solid, Truncated cone, Sphere, Generic  |
| Sizing results   | Result, Motor type, Power supply voltage, Motor, Motor capacity, Drive, Drive capacity, Effective torque, Torque effective load rate, Peak torque, Peak load rate, Effective torque at stop, Effective load rate at stop, Motor output, Motor output rate, Maximum speed, Maximum speed rate, Maximum load inertia moment, Inertia moment ratio, Regenerative power, Regenerative load ratio, Regenerative option, Maximally increased torque, Rated speed, Brake, Oil seal, Structure specification, Graph of Motor side speed/Motor side torque/Motor output |
| Printing of output of results                                    | Prints load mechanism, transmission mechanism, operation pattern, and sizing results.  |
| Data saving  | Load mechanism, transmission mechanism, operation pattern, motor selection, drive selection, and sizing results are saved with a file name.  |

## Operating environment (Note 1, 2)

| Item                     | Description  |
|--------------------------|--|
| OS                       | Microsoft® Windows® 11<br>Microsoft® Windows® 10 (64-bit/32-bit)   |
| .NET Framework           | .NET Framework 4.6 or later  |
| CPU                      | Windows® 11<br>2 or more cores on a compatible 64-bit processor or System on a Chip (SoC)  |
|                          | Windows® 10<br>Desktop PC: Intel® Celeron® processor 2.4 GHz or more recommended<br>Laptop PC: Intel® Pentium® processor 1.9 GHz or more recommended |
| Memory                   | Windows® 11<br>4 GB or more recommended  |
|                          | Windows® 10<br>For 64-bit OS: 2 GB or more recommended, For 32-bit OS: 1 GB or more recommended  |
| Required hard disk space | For installation: 1 GB or more free hard disk space<br>For operation: 512 MB or more free virtual memory space                                       |
| Monitor                  | Resolution 1024 × 768 or more (XGA)<br>Compatible with above personal computers  |

Notes: 1. This software may not run correctly on some personal computers.

2. Surrogate pair characters and environment dependent characters are not available.

**Servo Engineering Software MELSOFT MR Configurator2 (SW1DNC-MRC2-E) (Note 1)****MELSOFT**

MR Configurator2 can be obtained by either of the following:

- Purchase MR Configurator2 alone.
- Purchase GX Works3 or MT Works2: MR Configurator2 is included in GX Works3 and MT Works2 with software version 1.34L or later.

**Specification (Note 2)**

| Item             | Description   |
|------------------|---|
| Project          | New/Open/Save/Save As/Delete Project, Read Other Format, Write Other Format, System Setting, Print  |
| Parameter        | Parameter Setting, Network Parameter, Axis Name Setting, Parameter Converter  |
| Safety           | Safety parameter setting, Change password, Initialize password  |
| Positioning-data | Point Table, Program, Indirect Addressing, Cam Data   |
| Monitor          | Display All, I/O Monitor, Graph, ABS Data Display, Object Monitor   |
| Diagnosis        | Alarm Display, Alarm Onset Data, Drive recorder, No Motor Rotation, System Configuration, Life Diagnosis, Machine Diagnosis, Linear Diagnosis, Fully Closed Loop Diagnosis, Gear Failure Diagnosis, Encoder Communication Diagnosis |
| Test Operation   | JOG Operation, Positioning Operation, Motor-Less Operation, DO Forced Output, Program Operation, Single-Step Feed, Test Operation Information   |
| Adjustment       | One-Touch Tuning, Tuning, Multi-Axis Tuning, Machine Analyzer, Advanced Gain Search   |
| Others           | Servo Assistant, Update Parameter Setting Range, Machine Unit Conversion Setting, Switch Display Language, Axis Label Name Settings, Add-ons, Help  |

- Notes: 1. Each servo amplifier is supported by MR Configurator2 with the following or later software version.  
 • MR-J5\_-G/MR-J5-A: 1.100E • MR-J5D\_-G: 1.125F • MR-J5-G4-HS: 1.150G • MR-J5-B: 1.130L  
 2. Supported items vary depending on the servo amplifiers. Refer to "MR Configurator2 SW1DNC-MRC2-E\_ Installation Guide" for details.

**Operating environment (Note 1, 3, 4)**

| Components   | Description   |   |
|--|---|---|
| OS   | Microsoft® Windows® 11 Education  |   |
|  | Microsoft® Windows® 11 Enterprise   |   |
|  | Microsoft® Windows® 11 Pro  |   |
|  | Microsoft® Windows® 11 Home   |   |
|  | Microsoft® Windows® 10 Education  |   |
|  | Microsoft® Windows® 10 Enterprise   |   |
|  | Microsoft® Windows® 10 Pro  |   |
|  | Microsoft® Windows® 10 Home   |   |
|  | Microsoft® Windows® 10 IoT Enterprise 2016 LTSC (Note 2)  |   |
| Microsoft® Windows® 10 IoT Enterprise 2019 LTSC (Note 2) |   |   |
| CPU  | Windows® 11   | 2 or more cores on a compatible 64-bit processor or System on a Chip (SoC)  |
|  | Windows® 10   | Desktop PC: Intel® Celeron® processor 2.8 GHz or more recommended<br>Laptop PC: Intel® Pentium® M processor 1.7 GHz or more recommended |
| Memory   | Windows® 11   | 4 GB or more recommended  |
|  | Windows® 10   | For 64-bit OS: 2 GB or more recommended, For 32-bit OS: 1 GB or more recommended  |
| Required hard disk space                                 | 1.5 GB or more  |   |
| Monitor  | Resolution 1024 × 768 or more, 16-bit high color,<br>Compatible with above personal computers   |   |
| USB cable  | MR-J3USBCBL3M   |   |
| Ethernet cable   | Cable type: Category 5e or higher, (double shielded/STP) straight cable<br>Standard: IEEE802.3 (1000BASE-T) or ANSI/TIA/EIA-568-B (Category 5e)<br>Connector: RJ-45 connector with shield |   |

- Notes: 1. This software may not run correctly on some personal computers.  
 2. This software is supported by 64-bit OS only.  
 3. Surrogate pair characters and environment dependent characters are not available.  
 4. When .NET Framework 3.5 (including .NET 2.0 and 3.0) is disabled, enable the .NET Framework.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

## Options/Peripheral Equipment

### Unit Conversion Table

| Quantity                      | SI (metric) unit                           | U.S. customary unit          |
|-------------------------------|--|------------------------------|
| Mass                          | 1 [kg]                                     | 2.2046 [lb]                  |
| Length                        | 1 [mm]                                     | 0.03937 [in]                 |
| Torque                        | 1 [N·m]                                    | 141.6 [oz·in]                |
| Moment of inertia             | 1 [( $\times 10^{-4}$ kg·m <sup>2</sup> )] | 5.4675 [oz·in <sup>2</sup> ] |
| Load (thrust load/axial load) | 1 [N]                                      | 0.2248 [lbf]                 |
| Temperature                   | n [°C]                                     | $n \times 9/5 + 32$ [°F]     |

# 8

## Low-Voltage Switchgear/ Wires

|   |      |
|---|------|
| Wires, Molded-Case Circuit Breakers, and Magnetic Contactors.....             | 8-2  |
| Selection Example According to IEC/EN/UL 61800-5-1 and CSA C22.2 No. 274..... | 8-5  |
| Type E Combination Motor Controller.....                                      | 8-9  |
| Selection Example in HIV Wires for Servo Motors.....                          | 8-10 |

**G** MR-J5-G(-N1) **G-RJ** MR-J5-G-RJ(N1) **G-HS** MR-J5-G4-HS(N1) **WG** MR-J5W2-G(-N1)/MR-J5W3-G(-N1) **DG** MR-J5D1-G4(-N1)/  
MR-J5D2-G4(-N1)/MR-J5D3-G4(-N1) **B** MR-J5-B **B-RJ** MR-J5-B-RJ **WB** MR-J5W2-B/MR-J5W3-B **A** MR-J5-A **A-RJ** MR-J5-A-RJ

\* Note that low-voltage switchgears/wires necessary for servo amplifiers/drive units with special specifications are the same as those for standard servo amplifiers/  
drive units. Refer to the servo amplifiers or drive units with the same rated output.

\* Refer to p. 7-78 in this catalog for conversion of units.

# Low-Voltage Switchgear/Wires

## Wires, Molded-Case Circuit Breakers, and Magnetic Contactors

**G** **G-RJ** **G-HS** **B** **B-RJ** **A** **A-RJ**

The following are examples of wire sizes when 600 V grade heat-resistant polyvinyl chloride insulated wires (HIV wires) are used. The wire size for U/V/W/E varies depending on the servo motor. Refer to "Selection Example in HIV Wires for Servo Motors" in this catalog for details on wires for each servo motor.

### Wires and molded-case circuit breakers (MR-J5-G/MR-J5-B/MR-J5-A)

| Servo amplifier model                   | Molded-case circuit breaker<br>(Note 4, 5, 6) | Wire size [mm <sup>2</sup> ] (Note 4) |                             |               |  |
|---|---|---------------------------------------|-----------------------------|---------------|--|
|   |   | L1/L2/L3/⊕                            | L11/L21                     | P+/C (Note 1) | U/V/W/E                                |
| MR-J5-10G/B/A                           | 30 A frame 5 A<br>(30 A frame 5 A)            | 2 (AWG 14)                            | 1.25 to 2<br>(AWG 16 to 14) | 2 (AWG 14)    | 0.75 to 2<br>(AWG 18 to 14) (Note 3)   |
| MR-J5-20G/B/A                           | 30 A frame 5 A<br>(30 A frame 5 A)            |                                       |                             |               |  |
| MR-J5-40G/B/A                           | 30 A frame 10 A<br>(30 A frame 5 A)           |                                       |                             |               |  |
| MR-J5-60G/B/A                           | 30 A frame 15 A<br>(30 A frame 10 A)          |                                       |                             |               |  |
| MR-J5-70G/B/A                           | 30 A frame 15 A<br>(30 A frame 10 A)          |                                       |                             |               |  |
| MR-J5-100G/B/A<br>(3-phase power input) | 30 A frame 15 A<br>(30 A frame 10 A)          |                                       |                             |               |  |
| MR-J5-100G/B/A<br>(1-phase power input) | 30 A frame 15 A<br>(30 A frame 15 A)          |                                       |                             |               |  |
| MR-J5-200G/B/A<br>(3-phase power input) | 30 A frame 20 A<br>(30 A frame 20 A)          | 3.5 (AWG 12)                          |                             |               | 0.75 to 5.5<br>(AWG 18 to 10) (Note 3) |
| MR-J5-200G/B/A<br>(1-phase power input) | 30 A frame 20 A<br>(30 A frame 20 A)          |                                       |                             |               |  |
| MR-J5-350G/B/A                          | 30 A frame 30 A<br>(30 A frame 30 A)          |                                       |                             |               |  |
| MR-J5-500G/B/A                          | 50 A frame 50 A<br>(50 A frame 50 A)          | 5.5 (AWG 10)                          |                             |               | 0.75 to 8<br>(AWG 18 to 8) (Note 3)    |
| MR-J5-700G/B/A                          | 100 A frame 75 A<br>(60 A frame 60 A)         | 8 (AWG 8)                             |                             |               |  |

### Wires and molded-case circuit breakers (MR-J5-G4/MR-J5-B4/MR-J5-A4)

| Servo amplifier model | Molded-case circuit breaker<br>(Note 4, 5, 6) | Wire size [mm <sup>2</sup> ] (Note 4) |                             |               |                                      |
|-----------------------|---|---------------------------------------|-----------------------------|---------------|--------------------------------------|
|                       |   | L1/L2/L3/⊕                            | L11/L21                     | P+/C (Note 1) | U/V/W/E                              |
| MR-J5-60G4/B4/A4      | 30 A frame 5 A<br>(30 A frame 5 A)            | 2 (AWG 14)                            | 1.25 to 2<br>(AWG 16 to 14) | 2 (AWG 14)    | 0.75 to 2<br>(AWG 18 to 14) (Note 3) |
| MR-J5-100G4/B4/A4     | 30 A frame 10 A<br>(30 A frame 5 A)           |                                       |                             |               |                                      |
| MR-J5-200G4/B4/A4     | 30 A frame 15 A<br>(30 A frame 10 A)          |                                       |                             |               |                                      |
| MR-J5-350G4/B4/A4     | 30 A frame 20 A<br>(30 A frame 15 A)          |                                       |                             |               |                                      |
| MR-J5-500G4/B4/A4     | 30 A frame 20 A<br>(30 A frame 20 A)          |                                       |                             |               |                                      |
| MR-J5-700G4/B4/A4     | 30 A frame 30 A<br>(30 A frame 30 A)          | 3.5 (AWG 12)                          |                             |               | 0.5 to 10<br>(AWG 20 to 8)           |

### Magnetic contactors (MR-J5-G/MR-J5-B/MR-J5-A)

| Servo amplifier model | Magnetic contactor (Note 2, 5)      |                 |
|-----------------------|-------------------------------------|-----------------|
|                       | On/off of main circuit power supply |                 |
|                       | AC power supply                     | DC power supply |
| MR-J5-10G/B/A         | S-T10                               | SD-T12          |
| MR-J5-20G/B/A         |                                     |                 |
| MR-J5-40G/B/A         |                                     |                 |
| MR-J5-60G/B/A         |                                     |                 |
| MR-J5-70G/B/A         |                                     |                 |
| MR-J5-100G/B/A        |                                     |                 |
| MR-J5-200G/B/A        | S-T10, S-T21                        | SD-T21          |
| MR-J5-350G/B/A        | S-T21                               |                 |
| MR-J5-500G/B/A        | S-T25, S-T35                        | SD-T35          |
| MR-J5-700G/B/A        | S-T35, S-T50                        | SD-T50          |

### Magnetic contactors (MR-J5-G4/MR-J5-B4/MR-J5-A4)

| Servo amplifier model | Magnetic contactor (Note 2, 5)      |                 |
|-----------------------|-------------------------------------|-----------------|
|                       | On/off of main circuit power supply |                 |
|                       | AC power supply                     | DC power supply |
| MR-J5-60G4/B4/A4      | S-T10                               | SD-T12          |
| MR-J5-100G4/B4/A4     |                                     |                 |
| MR-J5-200G4/B4/A4     |                                     |                 |
| MR-J5-350G4/B4/A4     | S-T21                               | SD-T21          |
| MR-J5-500G4/B4/A4     |                                     |                 |
| MR-J5-700G4/B4/A4     |                                     |                 |

- Notes:
1. Keep the wire length to the regenerative option within 5 m.
  2. Use a magnetic contactor with an operation delay time of 80 ms or less. The operation delay time is the time interval from current being applied to the coil until closure of contacts.
  3. The wire size shows applicable size for the servo amplifier connector.
  4. When complying with IEC/EN/UL/CSA standard, refer to "Selection Example According to IEC/EN/UL 61800-5-1 and CSA C22.2 No. 274" in this catalog.
  5. These selection examples are for when one molded-case circuit breaker and one magnetic contactor are installed for one unit of servo amplifier. When connecting multiple units of servo amplifiers, refer to "MR-J5 User's Manual".
  6. When using a power improving reactor, use a molded-case circuit breaker listed in the brackets.



**Wires, Molded-Case Circuit Breakers, and Magnetic Contactors**

**WG WB**

The following are examples of wire sizes when 600 V grade heat-resistant polyvinyl chloride insulated wires (HIV wires) are used. The wire size for U/V/W/E varies depending on the servo motor. Refer to "Selection Example in HIV Wires for Servo Motors" in this catalog for details on wires for each servo motor.

**Wires (MR-J5W2-G/MR-J5W3-G/MR-J5W2-B/MR-J5W3-B)**

| Servo amplifier model | Wire size [mm <sup>2</sup> ] (Note 3) |            |               |                                   |
|-----------------------|---------------------------------------|------------|---------------|-----------------------------------|
|                       | L1/L2/L3/⊕                            | L11/L21    | P+/C (Note 5) | U/V/W/E                           |
| MR-J5W2-22G/B         | 2 (AWG 14)                            | 2 (AWG 14) | 2 (AWG 14)    | 0.75 to 2 (AWG 18 to 14) (Note 2) |
| MR-J5W2-44G/B         |                                       |            |               |                                   |
| MR-J5W2-77G/B         |                                       |            |               |                                   |
| MR-J5W2-1010G/B       |                                       |            |               |                                   |
| MR-J5W3-222G/B        |                                       |            |               |                                   |
| MR-J5W3-444G/B        |                                       |            |               |                                   |

**Molded-case circuit breakers (MR-J5W2-G/MR-J5W2-B) (Note 4)**

| Total output of rotary servo motors | Total continuous thrust of linear servo motors | Total output of direct drive motors | Molded-case circuit breaker (Note 3, 6) |
|-------------------------------------|--|-------------------------------------|---|
| 300 W or less                       | -  | -                                   | 30 A frame 5 A                          |
| Over 300 W to 600 W                 | 150 N or less                                  | 100 W or less                       | 30 A frame 10 A                         |
| Over 600 W to 1 kW                  | Over 150 N to 300 N                            | Over 100 W to 252 W                 | 30 A frame 15 A                         |
| Over 1 kW to 2 kW                   | Over 300 N to 720 N                            | Over 252 W to 838 W                 | 30 A frame 20 A                         |

**Magnetic contactor (MR-J5W2-G/MR-J5W2-B) (Note 4)**

| Total output of rotary servo motors | Total continuous thrust of linear servo motors | Total output of direct drive motors | Magnetic contactor (Note 1, 6)      |                 |
|-------------------------------------|--|-------------------------------------|-------------------------------------|-----------------|
|                                     |  |                                     | On/off of main circuit power supply | AC power supply |
| 300 W or less                       | -  | -                                   | S-T10                               | SD-T12          |
| Over 300 W to 600 W                 | 150 N or less                                  | 100 W or less                       |                                     |                 |
| Over 600 W to 1 kW                  | Over 150 N to 300 N                            | Over 100 W to 252 W                 | S-T21                               | SD-T21          |
| Over 1 kW to 2 kW                   | Over 300 N to 720 N                            | Over 252 W to 838 W                 |                                     |                 |

**Molded-case circuit breakers (MR-J5W3-G/MR-J5W3-B) (Note 4)**

| Total output of rotary servo motors | Total continuous thrust of linear servo motors | Total output of direct drive motors | Molded-case circuit breaker (Note 3, 6) |
|-------------------------------------|--|-------------------------------------|---|
| 450 W or less                       | 150 N or less                                  | -                                   | 30 A frame 10 A                         |
| Over 450 W to 800 W                 | Over 150 N to 300 N                            | 252 W or less                       | 30 A frame 15 A                         |
| Over 800 W to 1.5 kW                | Over 300 N to 450 N                            | Over 252 W to 378 W                 | 30 A frame 20 A                         |

**Magnetic contactor (MR-J5W3-G/MR-J5W3-B) (Note 4)**

| Total output of rotary servo motors | Total continuous thrust of linear servo motors | Total output of direct drive motors | Magnetic contactor (Note 1, 6)      |                 |
|-------------------------------------|--|-------------------------------------|-------------------------------------|-----------------|
|                                     |  |                                     | On/off of main circuit power supply | AC power supply |
| 450 W or less                       | 150 N or less                                  | -                                   | S-T10                               | SD-T12          |
| Over 450 W to 800 W                 | Over 150 N to 300 N                            | 252 W or less                       |                                     |                 |
| Over 800 W to 1.5 kW                | Over 300 N to 450 N                            | Over 252 W to 378 W                 | S-T21                               | SD-T21          |
|                                     |  |                                     |                                     |                 |

- Notes: 1. Use a magnetic contactor with an operation delay time of 80 ms or less. The operation delay time is the time interval from current being applied to the coil until closure of contacts.  
 2. The wire size shows applicable size for the servo amplifier connector.  
 3. When complying with IEC/EN/UL/CSA standard, refer to "Selection Example According to IEC/EN/UL 61800-5-1 and CSA C22.2 No. 274" in this catalog.  
 4. When multiple different types of servo motors (rotary servo motor, linear servo motor, or direct drive motor) are connected to the multi-axis servo amplifier, refer to "MR-J5 User's Manual" for selecting a molded-case circuit breaker and a magnetic contactor.  
 5. Keep the wire length to the regenerative option within 5 m.  
 6. These selection examples are for when one molded-case circuit breaker and one magnetic contactor are installed for one unit of servo amplifier. When connecting multiple units of servo amplifiers, refer to "MR-J5 User's Manual".

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LV/S/Wires  
 Product List  
 Precautions  
 Support

# Low-Voltage Switchgear/Wires

## Wires, Molded-Case Circuit Breakers, and Magnetic Contactors

The following are examples of wire sizes when 600 V grade heat-resistant polyvinyl chloride insulated wires (HIV wires) are used. The wire size for U/V/W/E varies depending on the servo motor. Refer to "Selection Example in HIV Wires for Servo Motors" in this catalog for details on wires for each servo motor.

### Wires (MR-J5D1-G4/MR-J5D2-G4/MR-J5D3-G4)

DG

| Drive unit model <sup>(Note 1)</sup> | Wire size [mm <sup>2</sup> ] <sup>(Note 2, 3)</sup> |                             |
|--------------------------------------|---|-----------------------------|
|                                      | L11/L21/⊕   | U/V/W/E                     |
| MR-J5D1-100G4                        | 1.25 to 5.5<br>(AWG 16 to 10) <sup>(Note 8)</sup>   | 1.25 to 2<br>(AWG 16 to 14) |
| MR-J5D1-200G4                        |   |                             |
| MR-J5D1-350G4                        |   |                             |
| MR-J5D1-500G4                        |   | 3.5 (AWG 12)                |
| MR-J5D1-700G4                        |   | 5.5 (AWG 10)                |
| MR-J5D2-100G4                        |   | 1.25 to 2<br>(AWG 16 to 14) |
| MR-J5D2-200G4                        |   |                             |
| MR-J5D2-350G4                        |   |                             |
| MR-J5D2-500G4                        |   | 3.5 (AWG 12)                |
| MR-J5D2-700G4                        |   | 5.5 (AWG 10)                |
| MR-J5D3-100G4                        |   | 1.25 to 2<br>(AWG 16 to 14) |
| MR-J5D3-200G4                        |   |                             |

### Wires (MR-CM3K)

G G-RJ WG B B-RJ WB A A-RJ

| Simple converter unit model | Wire size [mm <sup>2</sup> ] <sup>(Note 2, 3)</sup> |              |
|-----------------------------|---|--------------|
|                             | L1/L2/L3/⊕  | P4/N-        |
| MR-CM3K                     | 3.5 (AWG 12)  | 3.5 (AWG 12) |

### Molded-case circuit breaker and magnetic contactor (MR-CM3K)

| Simple converter unit model | Total capacity of servo amplifiers <sup>(Note 7)</sup> | Molded-case circuit breaker <sup>(Note 3, 5, 6)</sup>          | Magnetic contactor <sup>(Note 4, 6)</sup> |                 |
|-----------------------------|--|--|---|-----------------|
|                             |  |  | On/off of main circuit power supply       |                 |
|                             |  |  | AC power supply                           | DC power supply |
| MR-CM3K                     | Less than 2 kW   | 30 to 125 A frame 15 to 20 A<br>(30 to 125 A frame 15 to 20 A) | S-T21                                     | SD-T21          |
|                             | 2 kW or over   | 30 to 125 A frame 20 to 30 A<br>(30 to 125 A frame 20 to 30 A) | S-T21                                     | SD-T21          |

### Wires, molded-case circuit breaker, and magnetic contactor (MR-CV\_4)

DG

| Power regeneration converter unit model <sup>(Note 1)</sup> | Molded-case circuit breaker <sup>(Note 3, 6)</sup> | Magnetic contactor <sup>(Note 4, 6)</sup> | Wire size [mm <sup>2</sup> ] <sup>(Note 2, 3)</sup> |                             |
|---|--|---|---|-----------------------------|
|   |  |   | L1/L2/L3/⊕  | L11/L21                     |
| MR-CV11K4   | 30 A frame 30 A                                    | S-T21                                     | 5.5 (AWG 10)  | 1.25 to 2<br>(AWG 16 to 14) |
| MR-CV18K4   | 50 A frame 50 A                                    | S-T35                                     | 8 (AWG 8)   |                             |
| MR-CV30K4   | 100 A frame 80 A                                   | S-T65                                     | 14 (AWG 6)  |                             |
| MR-CV37K4   | 100 A frame 100 A                                  | S-T80                                     | 22 (AWG 4)  |                             |
| MR-CV45K4   | 125 A frame 125 A                                  | S-T100                                    | 38 (AWG 2)  |                             |
| MR-CV55K4   | 225 A frame 150 A                                  | S-N125                                    | 38 (AWG 2)  |                             |
| MR-CV75K4   | 225 A frame 200 A                                  | S-N150                                    | 60 (AWG 2/0)  |                             |

- Notes:
- When connecting the wires to the terminal blocks, use the screws attached to the terminal blocks.
  - Wires are selected based on the highest rated current among the servo motors to be combined.
  - When complying with IEC/EN/UL/CSA standard, refer to "Selection Example According to IEC/EN/UL 61800-5-1 and CSA C22.2 No. 274" in this catalog.
  - Use a magnetic contactor with an operation delay time of 80 ms or less. The operation delay time is the time interval from current being applied to the coil until closure of contacts.
  - When using a power improving reactor, use a molded-case circuit breaker listed in the brackets.
  - Install one molded-case circuit breaker and one magnetic contactor for one converter unit.
  - The sum of rated capacities [kW] of connected servo amplifiers ≤ 3 kW (MR-CM3K rated output)  
When using a multi-axis servo amplifier, calculate the sum of the rated capacities of all axes as the rated capacity of the servo amplifier.
  - The National Electrical Code recommends that the wire size should be a minimum of AWG 14 (2 mm<sup>2</sup>).

**Selection Example According to IEC/EN/UL 61800-5-1 and CSA C22.2 No. 274**

The following are examples of molded-case circuit breakers and semiconductor fuses selected on the basis of the rated inputs/outputs of the servo amplifiers.

Molded-case circuit breakers/semiconductor fuses

**G G-RJ WG B B-RJ WB A A-RJ**

(MR-J5-G/MR-J5W2-G/MR-J5W3-G/MR-J5-B/MR-J5W2-B/MR-J5W3-B/MR-J5-A)

| Servo amplifier model                | Molded-case circuit breaker (240 V AC)<br>SCCR 50 kA (Mitsubishi Electric) | Semiconductor fuse (700 V)<br>SCCR 100 kA (Bussmann) |                 |
|--------------------------------------|--|--|-----------------|
| MR-J5-10G/B/A                        | NF125-SVU-15A (125 A frame 15 A)   | 170M1408 (10 A)                                      |                 |
| MR-J5-20G/B/A                        |  |  |                 |
| MR-J5-40G/B/A                        |  |  |                 |
| MR-J5-60G/B/A (3-phase power input)  |  | 170M1409 (16 A)                                      |                 |
| MR-J5-60G/B/A (1-phase power input)  |  | 170M1408 (10 A)                                      |                 |
| MR-J5-70G/B/A (3-phase power input)  |  | 170M1409 (16 A)                                      |                 |
| MR-J5-70G/B/A (1-phase power input)  |  | 170M1412 (32 A)                                      |                 |
| MR-J5-100G/B/A (3-phase power input) |  | NF125-SVU-20A (125 A frame 20 A)                     | 170M1413 (40 A) |
| MR-J5-100G/B/A (1-phase power input) |  |  |                 |
| MR-J5-200G/B/A (3-phase power input) |  |  |                 |
| MR-J5-200G/B/A (1-phase power input) | NF125-SVU-30A (125 A frame 30 A) <sup>(Note 1)</sup>                       | 170M1415 (63 A)                                      |                 |
| MR-J5-350G/B/A                       | NF125-SVU-40A (125 A frame 40 A) <sup>(Note 1)</sup>                       | 170M1416 (80 A)                                      |                 |
| MR-J5W2-22G/B (3-phase power input)  | NF125-SVU-15A (125 A frame 15 A)   | 170M1408 (10 A)                                      |                 |
| MR-J5W2-22G/B (1-phase power input)  |  | 170M1409 (16 A)                                      |                 |
| MR-J5W2-44G/B (3-phase power input)  |  | 170M1412 (32 A)                                      |                 |
| MR-J5W2-44G/B (1-phase power input)  |  | NF125-SVU-20A (125 A frame 20 A)                     | 170M1413 (40 A) |
| MR-J5W2-77G/B (3-phase power input)  | 170M1412 (32 A)  |  |                 |
| MR-J5W2-77G/B (1-phase power input)  | NF125-SVU-15A (125 A frame 15 A)   | 170M1409 (16 A)                                      |                 |
| MR-J5W2-1010G/B                      |  | 170M1412 (32 A)                                      |                 |
| MR-J5W3-222G/B (3-phase power input) |  | 170M1412 (32 A)                                      |                 |
| MR-J5W3-222G/B (1-phase power input) | NF125-SVU-20A (125 A frame 20 A)   | 170M1413 (40 A)                                      |                 |
| MR-J5W3-444G/B (3-phase power input) |  | 170M1413 (40 A)                                      |                 |
| MR-J5W3-444G/B (1-phase power input) |  | 170M1413 (40 A)                                      |                 |

Molded-case circuit breakers/semiconductor fuses

**G G-RJ G-HS B B-RJ A A-RJ**

(MR-J5-G4/MR-J5-B4/MR-J5-A4)

| Servo amplifier model | Molded-case circuit breaker (480 V AC)<br>SCCR 30 kA (Mitsubishi Electric) | Semiconductor fuse (700 V)<br>SCCR 100 kA (Bussmann) |
|-----------------------|--|--|
| MR-J5-60G4/B4/A4      | NF125-SVU-15A (125 A frame 15 A) <sup>(Note 1)</sup>                       | 170M1408 (10 A)                                      |
| MR-J5-100G4/B4/A4     |  | 170M1409 (16 A)                                      |
| MR-J5-200G4/B4/A4     |  | 170M1412 (32 A)                                      |
| MR-J5-350G4/B4/A4     | NF125-SVU-20A (125 A frame 20 A) <sup>(Note 1)</sup>                       | 170M1413 (40 A)                                      |
| MR-J5-500G4/B4/A4     | NF125-SVU-30A (125 A frame 30 A) <sup>(Note 1)</sup>                       | 170M1414 (50 A)                                      |

Notes: 1. For the use under the conditions of UL Listed, select a semiconductor fuse.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LVSWires  
Product List  
Precautions  
Support

## Low-Voltage Switchgear/Wires

### Selection Example According to IEC/EN/UL 61800-5-1 and CSA C22.2 No. 274

The following are examples of molded-case circuit breakers and semiconductor fuses selected on the basis of the rated inputs/outputs of the converter units.

#### Molded-case circuit breakers/semiconductor fuses (MR-CM3K)

|                             |                                    | G  | G-RJ | WG | B | B-RJ   | WB | A | A-RJ |
|-----------------------------|------------------------------------|--|------|----|---|--|----|---|------|
| Simple converter unit model | Total capacity of servo amplifiers | Molded-case circuit breaker (240 V AC)<br>SCCR 50 kA (Mitsubishi Electric) |      |    |   | Semiconductor fuse (700 V)<br>SCCR 100 kA (Bussmann) |    |   |      |
| MR-CM3K                     | Less than 2 kW                     | NF125-SVU-15A (125 A frame 15 A)   |      |    |   | 170M1409 (16 A)                                      |    |   |      |
|                             | 2 kW or over                       | NF125-SVU-20A (125 A frame 20 A)   |      |    |   | 170M1413 (40 A)                                      |    |   |      |

#### Semiconductor fuses (MR-CV\_4)

DG

| Power regeneration converter unit model <sup>(Note 1)</sup> | Semiconductor fuse (700 V)<br>SCCR 100 kA (Bussmann) |
|---|--|
| MR-CV11K4   | 170M1413 (40 A)                                      |
| MR-CV18K4   | 170M1416 (80 A)                                      |
| MR-CV30K4   | 170M1419 (160 A)                                     |
| MR-CV37K4   |  |
| MR-CV45K4   | 170M1420 (200 A)                                     |
| MR-CV55K4   | 170M1421 (250 A)                                     |
| MR-CV75K4   | 170M1422 (315 A)                                     |

Notes: 1. When connecting the wires to the terminal blocks, use the screws attached to the terminal blocks.

**Selection Example According to IEC/EN/UL 61800-5-1 and CSA C22.2 No. 274**

The following are examples of recommended wire sizes selected on the basis of the rated inputs/outputs of the servo amplifiers or the drive units.

Recommended wires

**G G-RJ WG B B-RJ WB A A-RJ**

(MR-J5-G/MR-J5W2-G/MR-J5W3-G/MR-J5-B/MR-J5W2-B/MR-J5W3-B/MR-J5-A)

| Servo amplifier model                | 75 °C stranded wire [AWG] |         |      |         |
|--------------------------------------|---------------------------|---------|------|---------|
|                                      | L1/L2/L3/⊕                | L11/L21 | P+/C | U/V/W/E |
| MR-J5-10G/B/A                        | 14                        |         |      | 14      |
| MR-J5-20G/B/A                        |                           |         |      |         |
| MR-J5-40G/B/A                        |                           |         |      |         |
| MR-J5-60G/B/A                        |                           |         |      |         |
| MR-J5-70G/B/A                        |                           |         |      |         |
| MR-J5-100G/B/A                       |                           |         |      |         |
| MR-J5-200G/B/A (3-phase power input) | 12                        | 14      | 14   | 12      |
| MR-J5-200G/B/A (1-phase power input) |                           |         |      |         |
| MR-J5-350G/B/A                       |                           |         |      |         |
| MR-J5-500G/B/A                       | 10                        |         |      | 8       |
| MR-J5-700G/B/A                       | 8                         |         |      |         |
| MR-J5W2-22G/B                        | 14                        |         |      | 14      |
| MR-J5W2-44G/B                        |                           |         |      |         |
| MR-J5W2-77G/B                        |                           |         |      |         |
| MR-J5W2-1010G/B                      |                           |         |      |         |
| MR-J5W3-222G/B                       |                           |         |      |         |
| MR-J5W3-444G/B                       |                           |         |      |         |

Recommended wires (MR-J5-G4/MR-J5-B4/MR-J5-A4)

**G G-RJ G-HS B B-RJ A A-RJ**

| Servo amplifier model | 75 °C stranded wire [AWG] |         |      |         |
|-----------------------|---------------------------|---------|------|---------|
|                       | L1/L2/L3/⊕                | L11/L21 | P+/C | U/V/W/E |
| MR-J5-60G4/B4/A4      | 14                        | 14      | 14   | 14      |
| MR-J5-100G4/B4/A4     |                           |         |      |         |
| MR-J5-200G4/B4/A4     |                           |         |      |         |
| MR-J5-350G4/B4/A4     |                           |         |      |         |
| MR-J5-500G4/B4/A4     |                           |         |      | 12      |
| MR-J5-700G4/B4/A4     | 12                        |         |      | 10      |

Recommended wires (MR-J5D1-G4/MR-J5D2-G4/MR-J5D3-G4)

**DG**

| Drive unit model (Note 1) | 75 °C stranded wire [AWG] |         |
|---------------------------|---------------------------|---------|
|                           | L11/L21/⊕                 | U/V/W/E |
| MR-J5D1-100G4             | 14                        | 14      |
| MR-J5D1-200G4             |                           |         |
| MR-J5D1-350G4             |                           |         |
| MR-J5D1-500G4             |                           | 12      |
| MR-J5D1-700G4             |                           | 10      |
| MR-J5D2-100G4             |                           | 14      |
| MR-J5D2-200G4             |                           |         |
| MR-J5D2-350G4             |                           |         |
| MR-J5D2-500G4             |                           | 12      |
| MR-J5D2-700G4             |                           | 10      |
| MR-J5D3-100G4             | 14                        | 14      |
| MR-J5D3-200G4             |                           |         |

Notes: 1. When connecting the wires to the terminal blocks, use the screws attached to the terminal blocks.

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

## Low-Voltage Switchgear/Wires

### Selection Example According to IEC/EN/UL 61800-5-1 and CSA C22.2 No. 274

The following are examples of recommended wire sizes selected on the basis of the rated inputs/outputs of the converter units.

#### Recommended wires (MR-CM3K)

**G** **G-RJ** **WG** **B** **B-RJ** **WB** **A** **A-RJ**

| Simple converter unit model | 75 °C stranded wire [AWG] |                |
|-----------------------------|---------------------------|----------------|
|                             | L1/L2/L3/⊕                | P4/N-          |
| MR-CM3K                     | 14/12 (Note 2)            | 14/12 (Note 2) |

#### Recommended wires (MR-CV\_4)

**DG**

| Power regeneration converter unit model (Note 1) | 75 °C stranded wire [AWG] |         |
|--|---------------------------|---------|
|  | L1/L2/L3/⊕                | L11/L21 |
| MR-CV11K4  | 10                        | 14      |
| MR-CV18K4  | 8                         |         |
| MR-CV30K4  | 6                         |         |
| MR-CV37K4  | 4                         |         |
| MR-CV45K4  | 4                         |         |
| MR-CV55K4  | 2                         |         |
| MR-CV75K4  | 1/0                       |         |

- Notes: 1. When connecting the wires to the terminal blocks, use the screws attached to the terminal blocks.  
 2. The wire size varies depending on a total current of connected servo amplifiers. When the total current is larger than 12 A, use AWG 12.

**Type E Combination Motor Controller**

**G G-RJ WG B B-RJ WB A A-RJ**

The Type E Combination Motor Controller is comprised of the Manual Motor Starter, Short-circuit Display Unit "UT-TU", and Power Side Terminal Cover Kit "UT-CV3".

| Servo amplifier model              | Rated input voltage AC [V] | Input phase <sup>(Note 2)</sup> | Manual Motor Starter <sup>(Note 4)</sup> |                      |                                   | SCCR [kA] <sup>(Note 1)</sup> |    |
|------------------------------------|----------------------------|---------------------------------|--|----------------------|-----------------------------------|-------------------------------|----|
|                                    |                            |                                 | Model (Mitsubishi Electric)              | Rated voltage AC [V] | Rated current [A] (Heater design) |                               |    |
| MR-J5-10G/B/A                      | 200 to 240                 | 3-phase                         | MMP-T32                                  | 240                  | 1.6                               | 50                            |    |
| MR-J5-20G/B/A                      |                            |                                 |  |                      | 2.5                               |                               |    |
| MR-J5-40G/B/A                      |                            |                                 |  |                      | 4                                 |                               |    |
| MR-J5-60G/B/A                      |                            |                                 |  |                      | 6.3                               |                               |    |
| MR-J5-70G/B/A                      |                            |                                 |  |                      | 8                                 |                               |    |
| MR-J5-100G/B/A                     |                            |                                 |  |                      | 18                                |                               |    |
| MR-J5-200G/B/A                     |                            |                                 |  |                      | 25                                | 25                            |    |
| MR-J5-350G/B/A                     |                            |                                 |  |                      | 32                                |                               |    |
| MR-J5-500G/B/A <sup>(Note 3)</sup> |                            |                                 |  |                      | 6.3                               |                               |    |
| MR-J5W2-22G/B                      |                            |                                 |  |                      | 8                                 |                               | 50 |
| MR-J5W2-44G/B                      |                            |                                 |  |                      | 13                                |                               |    |
| MR-J5W2-77G/B                      |                            |                                 |  |                      | 18                                |                               |    |
| MR-J5W2-1010G/B                    |                            |                                 |  |                      | 8                                 |                               |    |
| MR-J5W3-222G/B                     |                            |                                 |  |                      | 13                                |                               |    |
| MR-J5W3-444G/B                     |                            |                                 |  |                      |                                   |                               |    |

- Notes: 1. The value is applicable when the Type E Combination Motor Controller is combined with the servo amplifier.  
 2. 1-phase power input is not supported.  
 3. For the use under the conditions of UL Listed, select a semiconductor fuse.  
 4. Use the MMP-T series products that bear the UL mark.

Common Specifications  
 Servo System Controllers  
 Servo Amplifiers  
 Rotary Servo Motors  
 Linear Servo Motors  
 Direct Drive Motors  
 Options/Peripheral Equipment  
 LVSM/Wires  
 Product List  
 Precautions  
 Support

# Low-Voltage Switchgear/Wires

## Selection Example in HIV Wires for Servo Motors

**G   G-RJ   WG   DG   B   B-RJ   WB   A   A-RJ**

The following are examples of wire sizes when 600 V grade heat-resistant polyvinyl chloride insulated wires (HIV wires) with a length of 30 m are used.

| Rotary servo motor model |             | Wire size [mm <sup>2</sup> ] <small>(Note 6)</small> |                                   |
|--------------------------|-------------|--|-----------------------------------|
|                          |             | For power and grounding (U/V/W/E)                    | For electromagnetic brake (B1/B2) |
| HK-KT_W                  | HK-KT053W   | 0.75 (AWG 18) <small>(Note 1, 2, 3)</small>          |                                   |
|                          | HK-KT13W    |  |                                   |
|                          | HK-KT1M3W   |  |                                   |
|                          | HK-KT13UW   |  |                                   |
|                          | HK-KT23W    |  |                                   |
|                          | HK-KT43W    |  |                                   |
|                          | HK-KT63W    |  |                                   |
|                          | HK-KT23UW   |  |                                   |
|                          | HK-KT43UW   |  |                                   |
|                          | HK-KT7M3W   |  |                                   |
|                          | HK-KT103W   |  |                                   |
|                          | HK-KT63UW   |  |                                   |
|                          | HK-KT7M3UW  |  |                                   |
|                          | HK-KT103UW  |  |                                   |
|                          | HK-KT153W   | 0.75 (AWG 18) <small>(Note 1, 3, 7)</small>          |                                   |
|                          | HK-KT203W   |  |                                   |
| HK-KT_4_W                | HK-KT202W   | 0.2 (AWG 24) <small>(Note 4, 5)</small>              |                                   |
|                          | HK-KT434W   |  |                                   |
|                          | HK-KT634W   |  |                                   |
|                          | HK-KT7M34W  |  |                                   |
|                          | HK-KT1034W  |  |                                   |
|                          | HK-KT634UW  |  |                                   |
|                          | HK-KT1034UW |  |                                   |
|                          | HK-KT1534W  |  |                                   |
| HK-MT_W                  | HK-KT2034W  | 0.75 (AWG 18) <small>(Note 1, 2, 3)</small>          |                                   |
|                          | HK-KT2024W  |  |                                   |
|                          | HK-MT053W   |  |                                   |
|                          | HK-MT13W    |  |                                   |
|                          | HK-MT1M3W   |  |                                   |
|                          | HK-MT23W    |  |                                   |
|                          | HK-MT43W    |  |                                   |
|                          | HK-MT63W    |  |                                   |
| HK-MT_VW                 | HK-MT7M3W   | 0.75 (AWG 18) <small>(Note 1, 2, 3)</small>          |                                   |
|                          | HK-MT103W   |  |                                   |
|                          | HK-MT053VW  |  |                                   |
|                          | HK-MT13VW   |  |                                   |
|                          | HK-MT1M3VW  |  |                                   |
|                          | HK-MT23VW   |  |                                   |
|                          | HK-MT43VW   |  |                                   |
|                          | HK-MT63VW   |  |                                   |
|                          | HK-MT7M3VW  | 0.75 (AWG 18) <small>(Note 1, 2, 3)</small>          |                                   |
|                          | HK-MT103VW  |  |                                   |

- Notes:
1. Use fluorine resin wires of 0.75 mm<sup>2</sup> (AWG 18) for wiring to the servo motor power supply.
  2. This size is applicable for wiring length of 10 m or shorter. For over 10 m, use MR-AEPB2J10CBL03M\_-L, MR-AEP2J10CBL03M\_-L, MR-AEPB2J20CBL03M\_-L, or MR-AEP2J20CBL03M\_-L, and extend it with HIV wires of 1.25 mm<sup>2</sup> (AWG 16).
  3. Use a cable provided by Mitsubishi Electric or Mitsubishi Electric System & Service Co., Ltd. When fabricating a cable, select wires applicable for the usage. The National Electrical Code recommends that the wire size should be a minimum of AWG 14 (2 mm<sup>2</sup>).
  4. Use fluorine resin wires of 0.2 mm<sup>2</sup> (AWG 24) for wiring to the electromagnetic brake.
  5. This size is applicable for wiring length of 10 m or shorter. For over 10 m, extend the wires with HIV wires of 1.25 mm<sup>2</sup> (AWG 16).
  6. The same wire size is applicable when the torques are increased.
  7. This size is applicable for wiring length of 10 m or shorter. For over 10 m, use MR-AEPB2J10CBL03M\_-L, MR-AEP2J10CBL03M\_-L, MR-AEPB2J20CBL03M\_-L, or MR-AEP2J20CBL03M\_-L, and extend it with HIV wires of 2 mm<sup>2</sup> (AWG 14).



Selection Example in HIV Wires for Servo Motors

G G-RJ G-HS WG DG B B-RJ WB A A-RJ

The following are examples of wire sizes when 600 V grade heat-resistant polyvinyl chloride insulated wires (HIV wires) with a length of 30 m are used. Refer to "Rotary Servo Motor User's Manual (For MR-J5)" when using cab-tire cables for supplying power (U/V/W) to HK-ST or HK-RT series.

| Rotary servo motor model |               | Wire size [mm <sup>2</sup> ] (Note 6) |                                   |
|--------------------------|---------------|---------------------------------------|-----------------------------------|
|                          |               | For power and grounding (U/V/W/E)     | For electromagnetic brake (B1/B2) |
| HK-ST_W (Note 7)         | HK-ST52W      | 1.25 (AWG 16) (Note 5)                | 1.25 (AWG 16)                     |
|                          | HK-ST102W     |                                       |                                   |
|                          | HK-ST172W     | 2 (AWG 14)                            |                                   |
|                          | HK-ST202AW    |                                       |                                   |
|                          | HK-ST302W     | 3.5 (AWG 12)                          |                                   |
|                          | HK-ST353W     |                                       |                                   |
|                          | HK-ST503W     | 3.5 (AWG 12) (Note 8)                 |                                   |
|                          | HK-ST7M2UW    | 1.25 (AWG 16) (Note 5)                |                                   |
|                          | HK-ST172UW    |                                       |                                   |
|                          | HK-ST202W     | 2 (AWG 14)                            |                                   |
|                          | HK-ST352W     | 3.5 (AWG 12)                          |                                   |
| HK-ST502W                | 8 (AWG 8)     |                                       |                                   |
| HK-ST702W                |               |                                       |                                   |
| HK-ST_4_W (Note 7)       | HK-ST524W     | 1.25 (AWG 16) (Note 5)                | 1.25 (AWG 16)                     |
|                          | HK-ST1024W    |                                       |                                   |
|                          | HK-ST1724W    |                                       |                                   |
|                          | HK-ST2024AW   |                                       |                                   |
|                          | HK-ST3024W    |                                       |                                   |
|                          | HK-ST3534W    | 2 (AWG 14)                            |                                   |
|                          | HK-ST5034W    | 1.25 (AWG 16) (Note 5)                |                                   |
|                          | HK-ST2024W    | 2 (AWG 14)                            |                                   |
|                          | HK-ST3524W    | 3.5 (AWG 12)                          |                                   |
| HK-RT_W                  | HK-RT103W     | 0.75 (AWG 18) (Note 1, 2, 5)          | 0.2 (AWG 24) (Note 4, 9)          |
|                          | HK-RT153W     | 0.75 (AWG 18) (Note 1, 3, 5)          |                                   |
|                          | HK-RT203W     | 3.5 (AWG 12)                          |                                   |
|                          | HK-RT353W     |                                       |                                   |
|                          | HK-RT503W     |                                       | 5.5 (AWG 10)                      |
| HK-RT703W                | 1.25 (AWG 16) |                                       |                                   |
| HK-RT1034W               |               | 0.75 (AWG 18) (Note 1, 2, 5)          |                                   |
| HK-RT_4W                 | HK-RT1534W    |                                       | 0.75 (AWG 18) (Note 1, 2, 5)      |
|                          | HK-RT2034W    | 1.25 (AWG 16) (Note 5)                |                                   |
|                          | HK-RT3534W    |                                       |                                   |
|                          | HK-RT5034W    | 2 (AWG 14)                            |                                   |
|                          | HK-RT7034W    | 1.25 (AWG 16)                         |                                   |
| HK-RT1034W               |               |                                       |                                   |

- Notes:
1. Use fluorine resin wires of 0.75 mm<sup>2</sup> (AWG 18) for wiring to the servo motor power supply.
  2. This size is applicable for wiring length of 10 m or shorter. For over 10 m, use MR-AEPB2J10CBL03M-\_-L, MR-AEP2J10CBL03M-\_-L, MR-AEPB2J20CBL03M-\_-L, or MR-AEP2J20CBL03M-\_-L, and extend it with HIV wires of 1.25 mm<sup>2</sup> (AWG 16).
  3. This size is applicable for wiring length of 10 m or shorter. For over 10 m, use MR-AEPB2J10CBL03M-\_-L, MR-AEP2J10CBL03M-\_-L, MR-AEPB2J20CBL03M-\_-L, or MR-AEP2J20CBL03M-\_-L, and extend it with HIV wires of 2 mm<sup>2</sup> (AWG 14).
  4. Use fluorine resin wires of 0.2 mm<sup>2</sup> (AWG 24) for wiring to the electromagnetic brake.
  5. The National Electrical Code recommends that the wire size should be a minimum of AWG 14 (2 mm<sup>2</sup>). Refer to "Rotary Servo Motor User's Manual (For MR-J5)" for details.
  6. The same wire size is applicable when the torques are increased.
  7. Wires for HK-ST152(4)G1/G1H/G5/G7 geared servo motors are the same as those for HK-ST172(4)W.
  8. When using HK-ST503W for a machine that is required to comply with UL/CSA standards, use a cable (SC-PWC403C\_M-SBLL or SC-PWC403C\_M-SBLH) manufactured by Mitsubishi Electric System & Service Co., Ltd., and fabricate an extension cable with wires of AWG 10. For details of SC-PWC403C\_M-SBLL and SC-PWC403C\_M-SBLH, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)
  9. This size is applicable for wiring length of 10 m or shorter. For over 10 m, extend the wires with HIV wires of 1.25 mm<sup>2</sup> (AWG 16).

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

## Low-Voltage Switchgear/Wires

### Selection Example in HIV Wires for Servo Motors

**G G-RJ WG B B-RJ WB A A-RJ**

The following are examples of wire sizes when 600 V grade heat-resistant polyvinyl chloride insulated wires (HIV wires) with a length of 30 m are used.

| Linear servo motor model<br>Primary side   | Wire size [mm <sup>2</sup> ]      |                        |
|--|-----------------------------------|------------------------|
|  | For power and grounding (U/V/W/E) | For thermistor (G1/G2) |
| LM-H3P2A-07P-BSS0  | 1.25 (AWG 16) (Note 1)            | 0.2 (AWG 24)           |
| LM-H3P3A-12P-CSS0  |                                   |                        |
| LM-H3P3B-24P-CSS0  |                                   |                        |
| LM-H3P3C-36P-CSS0  |                                   |                        |
| LM-H3P3D-48P-CSS0  |                                   |                        |
| LM-H3P7A-24P-ASS0  | 2 (AWG 14)                        |                        |
| LM-H3P7B-48P-ASS0  | 1.25 (AWG 16) (Note 1)            |                        |
| LM-H3P7C-72P-ASS0  | 2 (AWG 14)                        |                        |
| LM-H3P7D-96P-ASS0  | 3.5 (AWG 12)                      |                        |
| LM-FP2B-06M-1SS0   | Natural cooling                   |                        |
|  | Liquid cooling                    |                        |
| LM-FP2D-12M-1SS0   | Natural cooling                   | 3.5 (AWG 12)           |
|  | Liquid cooling                    |                        |
| LM-FP2F-18M-1SS0   | Natural cooling                   | 2 (AWG 14)             |
|  | Liquid cooling                    | 3.5 (AWG 12) (Note 3)  |
| LM-FP4B-12M-1SS0   | Natural cooling                   | 5.5 (AWG 10)           |
|  | Liquid cooling                    |                        |
| LM-FP4D-24M-1SS0   | Natural cooling                   | 5.5 (AWG 10)           |
|  | Liquid cooling                    |                        |
| LM-K2P1A-01M-2SS1  | 1.25 (AWG 16) (Note 1)            | 0.2 (AWG 24)           |
| LM-K2P1C-03M-2SS1  | 2 (AWG 14)                        |                        |
| LM-K2P2A-02M-1SS1  | 1.25 (AWG 16) (Note 1)            |                        |
| LM-K2P2C-07M-1SS1  | 3.5 (AWG 12)                      |                        |
| LM-K2P2E-12M-1SS1  | 5.5 (AWG 10)                      |                        |
| LM-K2P3C-14M-1SS1  | 3.5 (AWG 12)                      |                        |
| LM-K2P3E-24M-1SS1  | 5.5 (AWG 10)                      |                        |
| LM-U2PAB-05M-0SS0, LM-U2PAD-10M-0SS0,<br>LM-U2PAF-15M-0SS0, LM-U2PBB-07M-1SS0,<br>LM-U2PBD-15M-1SS0, LM-U2PBF-22M-1SS0 | 1.25 (AWG 16) (Note 1)            |                        |
| LM-U2P2B-40M-2SS0  | 2 (AWG 14)                        |                        |
| LM-U2P2C-60M-2SS0  | 3.5 (AWG 12)                      |                        |
| LM-U2P2D-80M-2SS0  | 5.5 (AWG 10)                      |                        |

| Linear servo motor model<br>Primary side   | Wire size [mm <sup>2</sup> ]      |                       |
|--|-----------------------------------|-----------------------|
|  | For power and grounding (U/V/W/E) | For thermal protector |
| LM-AJP1B-07K-JSS0, LM-AJP1D-14K-JSS0,<br>LM-AJP2B-12S-JSS0, LM-AJP2D-23T-JSS0,<br>LM-AJP3B-17N-JSS0, LM-AJP3D-35R-JSS0,<br>LM-AJP4B-22M-JSS0, LM-AJP4D-45N-JSS0  | 1.25 (AWG 16) (Note 1)            | 0.2 (AWG 24)          |
| LM-AUP3A-03V-JSS0, LM-AUP3B-06V-JSS0,<br>LM-AUP3C-09V-JSS0, LM-AUP3D-11R-JSS0,<br>LM-AUP4A-04R-JSS0, LM-AUP4B-09R-JSS0,<br>LM-AUP4C-13P-JSS0, LM-AUP4D-18M-JSS0,<br>LM-AUP4F-26P-JSS0, LM-AUP4H-35M-JSS0 |                                   |                       |

| Direct drive motor model   | Wire size [mm <sup>2</sup> ]      |  |
|--|-----------------------------------|--|
|  | For power and grounding (U/V/W/E) |  |
| TM-RG2M002C30, TM-RG2M004E30, TM-RG2M009G30,<br>TM-RU2M002C30, TM-RU2M004E30, TM-RU2M009G30            | 0.75 (AWG 18) (Note 1, 2)         |  |
| TM-RFM002C20, TM-RFM004C20, TM-RFM006C20,<br>TM-RFM006E20, TM-RFM012E20, TM-RFM018E20,<br>TM-RFM012G20 | 1.25 (AWG 16) (Note 1)            |  |
| TM-RFM048G20, TM-RFM072G20   | 3.5 (AWG 12)                      |  |
| TM-RFM040J10   | 1.25 (AWG 16) (Note 1)            |  |
| TM-RFM120J10   | 3.5 (AWG 12)                      |  |
| TM-RFM240J10   | 5.5 (AWG 10)                      |  |

- Notes: 1. The National Electrical Code recommends that the wire size should be a minimum of AWG 14 (2 mm<sup>2</sup>). Refer to the servo motor User's Manual for details.  
2. The same wire size is applicable when the torques are increased.  
3. Use a wire which has a heat resistance temperature of 105 °C for wiring to the servo motor power supply.

MEMO

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

**LV/S/Wires**

Product List

Precautions

Support

# Product List

## Servo system controllers

| Item  | Model                       | Application   |  |
|---|-----------------------------|---|--|
| Motion module                               | RD78G4                      | Maximum number of control axes: 4 axes<br>CC-Link IE TSN master station   |  |
|   | RD78G8                      | Maximum number of control axes: 8 axes<br>CC-Link IE TSN master station   |  |
|   | RD78G16                     | Maximum number of control axes: 16 axes<br>CC-Link IE TSN master station  |  |
|   | RD78G32                     | Maximum number of control axes: 32 axes<br>CC-Link IE TSN master station  |  |
|   | RD78G64                     | Maximum number of control axes: 64 axes<br>CC-Link IE TSN master station  |  |
|   | RD78GHV                     | Maximum number of control axes: 128 axes<br>CC-Link IE TSN master station   |  |
|   | RD78GHW                     | Maximum number of control axes: 256 axes<br>CC-Link IE TSN master station   |  |
|   | FX5-40SSC-G                 | Maximum number of control axes: 4 axes<br>CC-Link IE TSN master station   |  |
| Motion Control Software <sup>(Note 1)</sup> | SWM-G<br>SW1DNN-SWMG-M      | • SWM-G Engine • SWM-G Operating Station<br>• Network API • SWM-G API<br>• Real Time OS (RTX64)<br>CC-Link IE TSN compatible  |  |
|   | SWM-G-N1<br>SW1DNN-SWMGN1-M | • SWM-G Engine • SWM-G Operating Station<br>• Network API • SWM-G API<br>• EcConfigurator • Real Time OS (RTX64)<br>CC-Link IE TSN/<br>EtherCAT <sup>®</sup> compatible |  |
| USB key for Motion Control Software         | SWM-G                       | MR-SWMG16-U   | Maximum number of control axes: 16 axes<br>USB key (license)       |
|   |                             | MR-SWMG32-U   | Maximum number of control axes: 32 axes<br>USB key (license)       |
|   |                             | MR-SWMG64-U   | Maximum number of control axes: 64 axes<br>USB key (license)       |
|   |                             | MR-SWMG128-U  | Maximum number of control axes: 128 axes<br>USB key (license)      |
|   | SWM-G-N1                    | MR-SWMG16N1-U   | Maximum number of control axes: 16 axes<br>USB key (license)       |
|   |                             | MR-SWMG32N1-U   | Maximum number of control axes: 32 axes<br>USB key (license)       |
|   |                             | MR-SWMG64N1-U   | Maximum number of control axes: 64 axes<br>USB key (license)       |
|   |                             | MR-SWMG128N1-U  | Maximum number of control axes: 128 axes<br>USB key (license)      |
| Simple Motion module <sup>(Note 2)</sup>    | RD77MS2                     | Maximum number of control axes: 2 axes<br>SSCNET III/H compatible   |  |
|   | RD77MS4                     | Maximum number of control axes: 4 axes<br>SSCNET III/H compatible   |  |
|   | RD77MS8                     | Maximum number of control axes: 8 axes<br>SSCNET III/H compatible   |  |
|   | RD77MS16                    | Maximum number of control axes: 16 axes<br>SSCNET III/H compatible  |  |
|   | QD77MS2                     | Maximum number of control axes: 2 axes<br>SSCNET III/H compatible   |  |
|   | QD77MS4                     | Maximum number of control axes: 4 axes<br>SSCNET III/H compatible   |  |
|   | QD77MS16                    | Maximum number of control axes: 16 axes<br>SSCNET III/H compatible  |  |
|   | Motion controller           | R16MTCPU  | Maximum number of control axes: 16 axes<br>SSCNET III/H compatible |
| R32MTCPU                                    |                             | Maximum number of control axes: 32 axes<br>SSCNET III/H compatible  |  |
| R64MTCPU                                    |                             | Maximum number of control axes: 64 axes<br>SSCNET III/H compatible  |  |
| Q172DSCPU                                   |                             | Maximum number of control axes: 16 axes<br>SSCNET III/H compatible  |  |
| Q173DSCPU                                   |                             | Maximum number of control axes: 32 axes<br>SSCNET III/H compatible  |  |
| Q170MPCPU                                   |                             | Maximum number of control axes: 16 axes<br>SSCNET III/H compatible  |  |

Notes:

1. Download and install Motion Control Software from Mitsubishi Electric FA global website.
2. Connectors are not included. Please purchase A6CON1, A6CON2, or A6CON4 separately.

Servo amplifiers

| Item   | Model          | Rated output   | Main circuit power supply   |
|--|----------------|----------------|---|
| Servo amplifier<br>MR-J5-G                     | 200 V<br>class | MR-J5-10G      | 0.1 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-20G      | 0.2 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-40G      | 0.4 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-60G      | 0.6 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-70G      | 0.75 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC          |
|  |                | MR-J5-100G     | 1 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC             |
|  |                | MR-J5-200G     | 2 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC             |
|  |                | MR-J5-350G     | 3.5 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                        |
|  |                | MR-J5-500G     | 5 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                          |
|  |                | MR-J5-700G     | 7 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                          |
| Servo amplifier<br>MR-J5-G4                    | 400 V<br>class | MR-J5-60G4     | 0.6 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-100G4    | 1 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-200G4    | 2 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-350G4    | 3.5 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-500G4    | 5 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-700G4    | 7 kW<br>3-phase 380 V AC to 480 V AC  |
| Servo amplifier<br>MR-J5-G-RJ                  | 200 V<br>class | MR-J5-10G-RJ   | 0.1 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-20G-RJ   | 0.2 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-40G-RJ   | 0.4 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-60G-RJ   | 0.6 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-70G-RJ   | 0.75 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC          |
|  |                | MR-J5-100G-RJ  | 1 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC             |
|  |                | MR-J5-200G-RJ  | 2 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC             |
|  |                | MR-J5-350G-RJ  | 3.5 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                        |
|  |                | MR-J5-500G-RJ  | 5 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                          |
|  |                | MR-J5-700G-RJ  | 7 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                          |
| Servo amplifier<br>MR-J5-G4-RJ/<br>MR-J5-G4-HS | 400 V<br>class | MR-J5-60G4-RJ  | 0.6 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-100G4-RJ | 1 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-200G4-RJ | 2 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-350G4-RJ | 3.5 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-500G4-HS | 5 kW<br>3-phase 380 V AC to 480 V AC  |
| Servo amplifier<br>MR-J5W2-G                   | 200 V<br>class | MR-J5W2-22G    | 0.2 kW x 2 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC  |
|  |                | MR-J5W2-44G    | 0.4 kW x 2 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC  |
|  |                | MR-J5W2-77G    | 0.75 kW x 2 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|  |                | MR-J5W2-1010G  | 1 kW x 2 axes<br>3-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC               |
| Servo amplifier<br>MR-J5W3-G                   | 200 V<br>class | MR-J5W3-222G   | 0.2 kW x 3 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC  |
|  |                | MR-J5W3-444G   | 0.4 kW x 3 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC  |

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

# Product List

## Servo amplifiers

| Item   | Model          | Rated output     | Main circuit power supply   |
|--|----------------|------------------|---|
| Servo amplifier<br>MR-J5-G-N1                      | 200 V<br>class | MR-J5-10G-N1     | 0.1 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-20G-N1     | 0.2 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-40G-N1     | 0.4 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-60G-N1     | 0.6 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-70G-N1     | 0.75 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC          |
|  |                | MR-J5-100G-N1    | 1 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC             |
|  |                | MR-J5-200G-N1    | 2 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC             |
|  |                | MR-J5-350G-N1    | 3.5 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                        |
|  |                | MR-J5-500G-N1    | 5 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                          |
|  |                | MR-J5-700G-N1    | 7 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                          |
| Servo amplifier<br>MR-J5-G4-N1                     | 400 V<br>class | MR-J5-60G4-N1    | 0.6 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-100G4-N1   | 1 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-200G4-N1   | 2 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-350G4-N1   | 3.5 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-500G4-N1   | 5 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-700G4-N1   | 7 kW<br>3-phase 380 V AC to 480 V AC  |
| Servo amplifier<br>MR-J5-G-RJN1                    | 200 V<br>class | MR-J5-10G-RJN1   | 0.1 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-20G-RJN1   | 0.2 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-40G-RJN1   | 0.4 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-60G-RJN1   | 0.6 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC           |
|  |                | MR-J5-70G-RJN1   | 0.75 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC          |
|  |                | MR-J5-100G-RJN1  | 1 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC             |
|  |                | MR-J5-200G-RJN1  | 2 kW<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC             |
|  |                | MR-J5-350G-RJN1  | 3.5 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                        |
|  |                | MR-J5-500G-RJN1  | 5 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                          |
|  |                | MR-J5-700G-RJN1  | 7 kW<br>3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC                          |
| Servo amplifier<br>MR-J5-G4-RJN1/<br>MR-J5-G4-HSN1 | 400 V<br>class | MR-J5-60G4-RJN1  | 0.6 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-100G4-RJN1 | 1 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-200G4-RJN1 | 2 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-350G4-RJN1 | 3.5 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-500G4-HSN1 | 5 kW<br>3-phase 380 V AC to 480 V AC  |
|  |                | MR-J5-700G4-HSN1 | 7 kW<br>3-phase 380 V AC to 480 V AC  |
| Servo amplifier<br>MR-J5W2-G-N1                    | 200 V<br>class | MR-J5W2-22G-N1   | 0.2 kW x 2 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC  |
|  |                | MR-J5W2-44G-N1   | 0.4 kW x 2 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC  |
|  |                | MR-J5W2-77G-N1   | 0.75 kW x 2 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|  |                | MR-J5W2-1010G-N1 | 1 kW x 2 axes<br>3-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC               |
| Servo amplifier<br>MR-J5W3-G-N1                    | 200 V<br>class | MR-J5W3-222G-N1  | 0.2 kW x 3 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC  |
|  |                | MR-J5W3-444G-N1  | 0.4 kW x 3 axes<br>3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC  |

Drive units

| Item                        |                | Model            | Rated output    | Main circuit power supply  |
|-----------------------------|----------------|------------------|-----------------|--|
| Drive unit<br>MR-J5D1-G4    | 400 V<br>class | MR-J5D1-100G4    | 1 kW            | Main circuit power is supplied from the power regeneration converter unit to the drive unit. |
|                             |                | MR-J5D1-200G4    | 2 kW            |  |
|                             |                | MR-J5D1-350G4    | 3.5 kW          |  |
|                             |                | MR-J5D1-500G4    | 5 kW            |  |
|                             |                | MR-J5D1-700G4    | 7 kW            |  |
| Drive unit<br>MR-J5D2-G4    | 400 V<br>class | MR-J5D2-100G4    | 1 kW x 2 axes   | Main circuit power is supplied from the power regeneration converter unit to the drive unit. |
|                             |                | MR-J5D2-200G4    | 2 kW x 2 axes   |  |
|                             |                | MR-J5D2-350G4    | 3.5 kW x 2 axes |  |
|                             |                | MR-J5D2-500G4    | 5 kW x 2 axes   |  |
|                             |                | MR-J5D2-700G4    | 7 kW x 2 axes   |  |
| Drive unit<br>MR-J5D3-G4    | 400 V<br>class | MR-J5D3-100G4    | 1 kW x 3 axes   | Main circuit power is supplied from the power regeneration converter unit to the drive unit. |
|                             |                | MR-J5D3-200G4    | 2 kW x 3 axes   |  |
| Drive unit<br>MR-J5D1-G4-N1 | 400 V<br>class | MR-J5D1-100G4-N1 | 1 kW            | Main circuit power is supplied from the power regeneration converter unit to the drive unit. |
|                             |                | MR-J5D1-200G4-N1 | 2 kW            |  |
|                             |                | MR-J5D1-350G4-N1 | 3.5 kW          |  |
|                             |                | MR-J5D1-500G4-N1 | 5 kW            |  |
|                             |                | MR-J5D1-700G4-N1 | 7 kW            |  |
| Drive unit<br>MR-J5D2-G4-N1 | 400 V<br>class | MR-J5D2-100G4-N1 | 1 kW x 2 axes   | Main circuit power is supplied from the power regeneration converter unit to the drive unit. |
|                             |                | MR-J5D2-200G4-N1 | 2 kW x 2 axes   |  |
|                             |                | MR-J5D2-350G4-N1 | 3.5 kW x 2 axes |  |
|                             |                | MR-J5D2-500G4-N1 | 5 kW x 2 axes   |  |
|                             |                | MR-J5D2-700G4-N1 | 7 kW x 2 axes   |  |
| Drive unit<br>MR-J5D3-G4-N1 | 400 V<br>class | MR-J5D3-100G4-N1 | 1 kW x 3 axes   | Main circuit power is supplied from the power regeneration converter unit to the drive unit. |
|                             |                | MR-J5D3-200G4-N1 | 2 kW x 3 axes   |  |

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List

Precautions

Support

# Product List

## Servo amplifiers

| Item                           |                | Model          | Rated output     | Main circuit power supply                                       |
|--------------------------------|----------------|----------------|------------------|---|
| Servo amplifier<br>MR-J5-B     | 200 V<br>class | MR-J5-10B      | 0.1 kW           | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-20B      | 0.2 kW           | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-40B      | 0.4 kW           | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-60B      | 0.6 kW           | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-70B      | 0.75 kW          | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-100B     | 1 kW             | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-200B     | 2 kW             | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-350B     | 3.5 kW           | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
|                                |                | MR-J5-500B     | 5 kW             | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
|                                |                | MR-J5-700B     | 7 kW             | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
| Servo amplifier<br>MR-J5-B4    | 400 V<br>class | MR-J5-60B4     | 0.6 kW           | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-100B4    | 1 kW             | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-200B4    | 2 kW             | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-350B4    | 3.5 kW           | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-500B4    | 5 kW             | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-700B4    | 7 kW             | 3-phase 380 V AC to 480 V AC                                    |
| Servo amplifier<br>MR-J5-B-RJ  | 200 V<br>class | MR-J5-10B-RJ   | 0.1 kW           | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-20B-RJ   | 0.2 kW           | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-40B-RJ   | 0.4 kW           | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-60B-RJ   | 0.6 kW           | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-70B-RJ   | 0.75 kW          | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-100B-RJ  | 1 kW             | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-200B-RJ  | 2 kW             | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-350B-RJ  | 3.5 kW           | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
|                                |                | MR-J5-500B-RJ  | 5 kW             | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
|                                |                | MR-J5-700B-RJ  | 7 kW             | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
| Servo amplifier<br>MR-J5-B4-RJ | 400 V<br>class | MR-J5-60B4-RJ  | 0.6 kW           | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-100B4-RJ | 1 kW             | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-200B4-RJ | 2 kW             | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-350B4-RJ | 3.5 kW           | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-500B4-RJ | 5 kW             | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-700B4-RJ | 7 kW             | 3-phase 380 V AC to 480 V AC                                    |
| Servo amplifier<br>MR-J5W2-B   | 200 V<br>class | MR-J5W2-22B    | 0.2 kW x 2 axes  | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5W2-44B    | 0.4 kW x 2 axes  | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5W2-77B    | 0.75 kW x 2 axes | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5W2-1010B  | 1 kW x 2 axes    | 3-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC            |
| Servo amplifier<br>MR-J5W3-B   | 200 V<br>class | MR-J5W3-222B   | 0.2 kW x 3 axes  | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5W3-444B   | 0.4 kW x 3 axes  | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |



Servo amplifiers

| Item                           |                | Model          | Rated output | Main circuit power supply                                       |
|--------------------------------|----------------|----------------|--------------|---|
| Servo amplifier<br>MR-J5-A     | 200 V<br>class | MR-J5-10A      | 0.1 kW       | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-20A      | 0.2 kW       | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-40A      | 0.4 kW       | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-60A      | 0.6 kW       | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-70A      | 0.75 kW      | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-100A     | 1 kW         | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-200A     | 2 kW         | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-350A     | 3.5 kW       | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
|                                |                | MR-J5-500A     | 5 kW         | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
|                                |                | MR-J5-700A     | 7 kW         | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
| Servo amplifier<br>MR-J5-A4    | 400 V<br>class | MR-J5-60A4     | 0.6 kW       | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-100A4    | 1 kW         | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-200A4    | 2 kW         | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-350A4    | 3.5 kW       | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-500A4    | 5 kW         | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-700A4    | 7 kW         | 3-phase 380 V AC to 480 V AC                                    |
| Servo amplifier<br>MR-J5-A-RJ  | 200 V<br>class | MR-J5-10A-RJ   | 0.1 kW       | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-20A-RJ   | 0.2 kW       | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-40A-RJ   | 0.4 kW       | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-60A-RJ   | 0.6 kW       | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-70A-RJ   | 0.75 kW      | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-100A-RJ  | 1 kW         | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-200A-RJ  | 2 kW         | 3-phase or 1-phase 200 V AC to 240 V AC<br>283 V DC to 340 V DC |
|                                |                | MR-J5-350A-RJ  | 3.5 kW       | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
|                                |                | MR-J5-500A-RJ  | 5 kW         | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
|                                |                | MR-J5-700A-RJ  | 7 kW         | 3-phase 200 V AC to 240 V AC, 283 V DC to 340 V DC              |
| Servo amplifier<br>MR-J5-A4-RJ | 400 V<br>class | MR-J5-60A4-RJ  | 0.6 kW       | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-100A4-RJ | 1 kW         | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-200A4-RJ | 2 kW         | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-350A4-RJ | 3.5 kW       | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-500A4-RJ | 5 kW         | 3-phase 380 V AC to 480 V AC                                    |
|                                |                | MR-J5-700A4-RJ | 7 kW         | 3-phase 380 V AC to 480 V AC                                    |

Converter units

| Item  |                | Model                        | Rated output | Main circuit power supply    |
|---|----------------|------------------------------|--------------|------------------------------|
| Simple converter<br>MR-CM                     | 200 V<br>class | MR-CM3K                      | 3 kW         | 3-phase 200 V AC to 240 V AC |
| Power regeneration<br>converter unit<br>MR-CV | 400 V<br>class | MR-CV11K4                    | 11 kW        | 3-phase 380 V AC to 480 V AC |
|   |                | MR-CV18K4                    | 18 kW        | 3-phase 380 V AC to 480 V AC |
|   |                | MR-CV30K4                    | 30 kW        | 3-phase 380 V AC to 480 V AC |
|   |                | MR-CV37K4                    | 37 kW        | 3-phase 380 V AC to 480 V AC |
|   |                | MR-CV45K4                    | 45 kW        | 3-phase 380 V AC to 480 V AC |
|   |                | MR-CV55K4                    | 55 kW        | 3-phase 380 V AC to 480 V AC |
| MR-CV75K4                                     | 75 kW          | 3-phase 380 V AC to 480 V AC |              |                              |

Common Specifications  
Servo System Controllers  
Servo Amplifiers  
Rotary Servo Motors  
Linear Servo Motors  
Direct Drive Motors  
Options/Peripheral Equipment  
LV/S/Wires  
Product List  
Precautions  
Support

# Product List

## Rotary servo motors

| Item  | Flange size [mm] | Model           | Rated output     | Rated speed |            |
|---|------------------|-----------------|------------------|-------------|------------|
| HK-KT series<br><br>B: With an electromagnetic brake  | HK-KT_W          | 40 x 40         | HK-KT053W(B)     | 0.05 kW     | 3000 r/min |
|   |                  |                 | HK-KT13W(B)      | 0.1 kW      | 3000 r/min |
|   |                  |                 | HK-KT1M3W(B)     | 0.15 kW     | 3000 r/min |
|   |                  | 60 x 60         | HK-KT13UW(B)     | 0.1 kW      | 3000 r/min |
|   |                  |                 | HK-KT23W(B)      | 0.2 kW      | 3000 r/min |
|   |                  |                 | HK-KT43W(B)      | 0.4 kW      | 3000 r/min |
|   |                  |                 | HK-KT63W(B)      | 0.6 kW      | 3000 r/min |
|   |                  | 80 x 80         | HK-KT23UW(B)     | 0.2 kW      | 3000 r/min |
|   |                  |                 | HK-KT43UW(B)     | 0.4 kW      | 3000 r/min |
|   | HK-KT7M3W(B)     |                 | 0.75 kW          | 3000 r/min  |            |
|   | 90 x 90          | HK-KT103W(B)    | 1.0 kW           | 3000 r/min  |            |
|   |                  | HK-KT63UW(B)    | 0.6 kW           | 3000 r/min  |            |
|   |                  | HK-KT7M3UW(B)   | 0.75 kW          | 3000 r/min  |            |
|   |                  | HK-KT103UW(B)   | 1.0 kW           | 3000 r/min  |            |
|   |                  | HK-KT153W(B)    | 1.5 kW           | 3000 r/min  |            |
|   |                  | HK-KT203W(B)    | 2.0 kW           | 3000 r/min  |            |
|   | HK-KT_4_W        | 60 x 60         | HK-KT434W(B)     | 0.4 kW      | 3000 r/min |
|   |                  |                 | HK-KT634W(B)     | 0.6 kW      | 3000 r/min |
|   |                  | 80 x 80         | HK-KT7M34W(B)    | 0.75 kW     | 3000 r/min |
|   |                  |                 | HK-KT1034W(B)    | 1.0 kW      | 3000 r/min |
|   |                  | 90 x 90         | HK-KT634UW(B)    | 0.6 kW      | 3000 r/min |
|   |                  |                 | HK-KT1034UW(B)   | 1.0 kW      | 3000 r/min |
|   |                  |                 | HK-KT1534W(B)    | 1.5 kW      | 3000 r/min |
|   |                  |                 | HK-KT2034W(B)    | 2.0 kW      | 3000 r/min |
| HK-KT2024W(B)   |                  |                 | 2.0 kW           | 2000 r/min  |            |
| Servo motors with functional safety<br>HK-KT series<br><br>B: With an electromagnetic brake | HK-KT_W_WS       | 40 x 40         | HK-KT053W(B)WS   | 0.05 kW     | 3000 r/min |
|   |                  |                 | HK-KT13W(B)WS    | 0.1 kW      | 3000 r/min |
|   |                  |                 | HK-KT1M3W(B)WS   | 0.15 kW     | 3000 r/min |
|   |                  | 60 x 60         | HK-KT13UW(B)WS   | 0.1 kW      | 3000 r/min |
|   |                  |                 | HK-KT23W(B)WS    | 0.2 kW      | 3000 r/min |
|   |                  |                 | HK-KT43W(B)WS    | 0.4 kW      | 3000 r/min |
|   |                  |                 | HK-KT63W(B)WS    | 0.6 kW      | 3000 r/min |
|   |                  | 80 x 80         | HK-KT23UW(B)WS   | 0.2 kW      | 3000 r/min |
|   |                  |                 | HK-KT43UW(B)WS   | 0.4 kW      | 3000 r/min |
|   | HK-KT7M3W(B)WS   |                 | 0.75 kW          | 3000 r/min  |            |
|   | HK-KT103W(B)WS   |                 | 1.0 kW           | 3000 r/min  |            |
|   | 90 x 90          | HK-KT63UW(B)WS  | 0.6 kW           | 3000 r/min  |            |
|   |                  | HK-KT7M3UW(B)WS | 0.75 kW          | 3000 r/min  |            |
|   |                  | HK-KT103UW(B)WS | 1.0 kW           | 3000 r/min  |            |
|   |                  | HK-KT153W(B)WS  | 1.5 kW           | 3000 r/min  |            |
|   |                  | HK-KT203W(B)WS  | 2.0 kW           | 3000 r/min  |            |
|   |                  | HK-KT202W(B)WS  | 2.0 kW           | 2000 r/min  |            |
|   | HK-KT_4_W_WS     | 60 x 60         | HK-KT434W(B)WS   | 0.4 kW      | 3000 r/min |
|   |                  |                 | HK-KT634W(B)WS   | 0.6 kW      | 3000 r/min |
|   |                  | 80 x 80         | HK-KT7M34W(B)WS  | 0.75 kW     | 3000 r/min |
|   |                  |                 | HK-KT1034W(B)WS  | 1.0 kW      | 3000 r/min |
|   |                  | 90 x 90         | HK-KT634UW(B)WS  | 0.6 kW      | 3000 r/min |
|   |                  |                 | HK-KT1034UW(B)WS | 1.0 kW      | 3000 r/min |
|   |                  |                 | HK-KT1534W(B)WS  | 1.5 kW      | 3000 r/min |
| HK-KT2034W(B)WS   |                  |                 | 2.0 kW           | 3000 r/min  |            |
| HK-KT2024W(B)WS   |                  |                 | 2.0 kW           | 2000 r/min  |            |

Rotary servo motors

| Item  | Model                       | Rated output | Rated speed | Reduction ratio                        |
|---|-----------------------------|--------------|-------------|--|
| HK-KT series<br>With a gear reducer for general industrial machines<br><br>B: With an electromagnetic brake                                     | HK-KT053(B)G1 1/5           | 0.05 kW      | 3000 r/min  | 1/5                                    |
|   | HK-KT053(B)G1 1/12          | 0.05 kW      | 3000 r/min  | 1/12                                   |
|   | HK-KT053(B)G1 1/20          | 0.05 kW      | 3000 r/min  | 1/20                                   |
|   | HK-KT13(B)G1 1/5            | 0.1 kW       | 3000 r/min  | 1/5                                    |
|   | HK-KT13(B)G1 1/12           | 0.1 kW       | 3000 r/min  | 1/12                                   |
|   | HK-KT13(B)G1 1/20           | 0.1 kW       | 3000 r/min  | 1/20                                   |
|   | HK-KT23(B)G1 1/5            | 0.2 kW       | 3000 r/min  | 1/5                                    |
|   | HK-KT23(B)G1 1/12           | 0.2 kW       | 3000 r/min  | 1/12                                   |
|   | HK-KT23(B)G1 1/20           | 0.2 kW       | 3000 r/min  | 1/20                                   |
|   | HK-KT43(B)G1 1/5            | 0.4 kW       | 3000 r/min  | 1/5                                    |
|   | HK-KT43(B)G1 1/12           | 0.4 kW       | 3000 r/min  | 1/12                                   |
|   | HK-KT43(B)G1 1/20           | 0.4 kW       | 3000 r/min  | 1/20                                   |
|   | HK-KT7M3(B)G1 1/5           | 0.75 kW      | 3000 r/min  | 1/5                                    |
|   | HK-KT7M3(B)G1 1/12          | 0.75 kW      | 3000 r/min  | 1/12                                   |
|   | HK-KT7M3(B)G1 1/20          | 0.75 kW      | 3000 r/min  | 1/20                                   |
| HK-KT series<br>With a flange-output type gear reducer for high precision applications, flange mounting<br><br>B: With an electromagnetic brake | HK-KT053(B)G5 1/5 (40 x 40) | 0.05 kW      | 3000 r/min  | 1/5 (flange dimensions: 40 mm x 40 mm) |
|   | HK-KT053(B)G5 1/5 (60 x 60) | 0.05 kW      | 3000 r/min  | 1/5 (flange dimensions: 60 mm x 60 mm) |
|   | HK-KT053(B)G5 1/9           | 0.05 kW      | 3000 r/min  | 1/9                                    |
|   | HK-KT053(B)G5 1/11          | 0.05 kW      | 3000 r/min  | 1/11                                   |
|   | HK-KT053(B)G5 1/21          | 0.05 kW      | 3000 r/min  | 1/21                                   |
|   | HK-KT053(B)G5 1/33          | 0.05 kW      | 3000 r/min  | 1/33                                   |
|   | HK-KT053(B)G5 1/45          | 0.05 kW      | 3000 r/min  | 1/45                                   |
|   | HK-KT13(B)G5 1/5 (40 x 40)  | 0.1 kW       | 3000 r/min  | 1/5 (flange dimensions: 40 mm x 40 mm) |
|   | HK-KT13(B)G5 1/5 (60 x 60)  | 0.1 kW       | 3000 r/min  | 1/5 (flange dimensions: 60 mm x 60 mm) |
|   | HK-KT13(B)G5 1/11           | 0.1 kW       | 3000 r/min  | 1/11                                   |
|   | HK-KT13(B)G5 1/21           | 0.1 kW       | 3000 r/min  | 1/21                                   |
|   | HK-KT13(B)G5 1/33           | 0.1 kW       | 3000 r/min  | 1/33                                   |
|   | HK-KT13(B)G5 1/45           | 0.1 kW       | 3000 r/min  | 1/45                                   |
|   | HK-KT23(B)G5 1/5            | 0.2 kW       | 3000 r/min  | 1/5                                    |
|   | HK-KT23(B)G5 1/11           | 0.2 kW       | 3000 r/min  | 1/11                                   |
|   | HK-KT23(B)G5 1/21           | 0.2 kW       | 3000 r/min  | 1/21                                   |
|   | HK-KT23(B)G5 1/33           | 0.2 kW       | 3000 r/min  | 1/33                                   |
|   | HK-KT23(B)G5 1/45           | 0.2 kW       | 3000 r/min  | 1/45                                   |
|   | HK-KT43(B)G5 1/5            | 0.4 kW       | 3000 r/min  | 1/5                                    |
|   | HK-KT43(B)G5 1/11           | 0.4 kW       | 3000 r/min  | 1/11                                   |
|   | HK-KT43(B)G5 1/21           | 0.4 kW       | 3000 r/min  | 1/21                                   |
|   | HK-KT43(B)G5 1/33           | 0.4 kW       | 3000 r/min  | 1/33                                   |
|   | HK-KT43(B)G5 1/45           | 0.4 kW       | 3000 r/min  | 1/45                                   |
|   | HK-KT7M3(B)G5 1/5           | 0.75 kW      | 3000 r/min  | 1/5                                    |
|   | HK-KT7M3(B)G5 1/11          | 0.75 kW      | 3000 r/min  | 1/11                                   |
|   | HK-KT7M3(B)G5 1/21          | 0.75 kW      | 3000 r/min  | 1/21                                   |
|   | HK-KT7M3(B)G5 1/33          | 0.75 kW      | 3000 r/min  | 1/33                                   |
|   | HK-KT7M3(B)G5 1/45          | 0.75 kW      | 3000 r/min  | 1/45                                   |

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LVSWires

Product List

Precautions

Support

# Product List

## Rotary servo motors

| Item   | Model                       | Rated output | Rated speed | Reduction ratio                        |
|--|-----------------------------|--------------|-------------|--|
| HK-KT series<br>With a shaft-output type gear reducer for high precision applications, flange mounting<br><br>B: With an electromagnetic brake | HK-KT053(B)G7 1/5 (40 x 40) | 0.05 kW      | 3000 r/min  | 1/5 (flange dimensions: 40 mm x 40 mm) |
|  | HK-KT053(B)G7 1/5 (60 x 60) | 0.05 kW      | 3000 r/min  | 1/5 (flange dimensions: 60 mm x 60 mm) |
|  | HK-KT053(B)G7 1/9           | 0.05 kW      | 3000 r/min  | 1/9                                    |
|  | HK-KT053(B)G7 1/11          | 0.05 kW      | 3000 r/min  | 1/11                                   |
|  | HK-KT053(B)G7 1/21          | 0.05 kW      | 3000 r/min  | 1/21                                   |
|  | HK-KT053(B)G7 1/33          | 0.05 kW      | 3000 r/min  | 1/33                                   |
|  | HK-KT053(B)G7 1/45          | 0.05 kW      | 3000 r/min  | 1/45                                   |
|  | HK-KT13(B)G7 1/5 (40 x 40)  | 0.1 kW       | 3000 r/min  | 1/5 (flange dimensions: 40 mm x 40 mm) |
|  | HK-KT13(B)G7 1/5 (60 x 60)  | 0.1 kW       | 3000 r/min  | 1/5 (flange dimensions: 60 mm x 60 mm) |
|  | HK-KT13(B)G7 1/11           | 0.1 kW       | 3000 r/min  | 1/11                                   |
|  | HK-KT13(B)G7 1/21           | 0.1 kW       | 3000 r/min  | 1/21                                   |
|  | HK-KT13(B)G7 1/33           | 0.1 kW       | 3000 r/min  | 1/33                                   |
|  | HK-KT13(B)G7 1/45           | 0.1 kW       | 3000 r/min  | 1/45                                   |
|  | HK-KT23(B)G7 1/5            | 0.2 kW       | 3000 r/min  | 1/5                                    |
|  | HK-KT23(B)G7 1/11           | 0.2 kW       | 3000 r/min  | 1/11                                   |
|  | HK-KT23(B)G7 1/21           | 0.2 kW       | 3000 r/min  | 1/21                                   |
|  | HK-KT23(B)G7 1/33           | 0.2 kW       | 3000 r/min  | 1/33                                   |
|  | HK-KT23(B)G7 1/45           | 0.2 kW       | 3000 r/min  | 1/45                                   |
|  | HK-KT43(B)G7 1/5            | 0.4 kW       | 3000 r/min  | 1/5                                    |
|  | HK-KT43(B)G7 1/11           | 0.4 kW       | 3000 r/min  | 1/11                                   |
|  | HK-KT43(B)G7 1/21           | 0.4 kW       | 3000 r/min  | 1/21                                   |
|  | HK-KT43(B)G7 1/33           | 0.4 kW       | 3000 r/min  | 1/33                                   |
|  | HK-KT43(B)G7 1/45           | 0.4 kW       | 3000 r/min  | 1/45                                   |
|  | HK-KT7M3(B)G7 1/5           | 0.75 kW      | 3000 r/min  | 1/5                                    |
|  | HK-KT7M3(B)G7 1/11          | 0.75 kW      | 3000 r/min  | 1/11                                   |
|  | HK-KT7M3(B)G7 1/21          | 0.75 kW      | 3000 r/min  | 1/21                                   |
|  | HK-KT7M3(B)G7 1/33          | 0.75 kW      | 3000 r/min  | 1/33                                   |
|  | HK-KT7M3(B)G7 1/45          | 0.75 kW      | 3000 r/min  | 1/45                                   |

Rotary servo motors

| Item  | Flange size [mm] | Model           | Rated output   | Rated speed    |                 |
|---|------------------|-----------------|----------------|----------------|-----------------|
| HK-MT series<br><br>B: With an electromagnetic brake  | HK-MT_W          | 40 x 40         | HK-MT053W(B)   | 0.05 kW        | 3000 r/min      |
|   |                  |                 | HK-MT13W(B)    | 0.1 kW         | 3000 r/min      |
|   |                  |                 | HK-MT1M3W(B)   | 0.15 kW        | 3000 r/min      |
|   |                  | 60 x 60         | HK-MT23W(B)    | 0.2 kW         | 3000 r/min      |
|   |                  |                 | HK-MT43W(B)    | 0.4 kW         | 3000 r/min      |
|   |                  |                 | HK-MT63W(B)    | 0.6 kW         | 3000 r/min      |
|   | 80 x 80          | HK-MT7M3W(B)    | 0.75 kW        | 3000 r/min     |                 |
|   |                  | HK-MT103W(B)    | 1.0 kW         | 3000 r/min     |                 |
|   |                  | HK-MT_VW        | 40 x 40        | HK-MT053VW(B)  | 0.05 kW         |
|   | HK-MT13VW(B)     |                 |                | 0.1 kW         | 3000 r/min      |
|   | HK-MT1M3VW(B)    |                 |                | 0.15 kW        | 3000 r/min      |
|   | 60 x 60          |                 | HK-MT23VW(B)   | 0.2 kW         | 3000 r/min      |
|   |                  |                 | HK-MT43VW(B)   | 0.4 kW         | 3000 r/min      |
|   |                  |                 | HK-MT63VW(B)   | 0.6 kW         | 3000 r/min      |
|   | 80 x 80          | HK-MT7M3VW(B)   | 0.75 kW        | 3000 r/min     |                 |
| HK-MT103VW(B)   |                  | 1.0 kW          | 3000 r/min     |                |                 |
| Servo motors with functional safety<br>HK-MT series<br><br>B: With an electromagnetic brake |                  | HK-MT_W_WS      | 40 x 40        | HK-MT053W(B)WS | 0.05 kW         |
|   | HK-MT13W(B)WS    |                 |                | 0.1 kW         | 3000 r/min      |
|   | HK-MT1M3W(B)WS   |                 |                | 0.15 kW        | 3000 r/min      |
|   | 60 x 60          |                 | HK-MT23W(B)WS  | 0.2 kW         | 3000 r/min      |
|   |                  |                 | HK-MT43W(B)WS  | 0.4 kW         | 3000 r/min      |
|   |                  |                 | HK-MT63W(B)WS  | 0.6 kW         | 3000 r/min      |
|   | 80 x 80          |                 | HK-MT7M3W(B)WS | 0.75 kW        | 3000 r/min      |
|   |                  |                 | HK-MT103W(B)WS | 1.0 kW         | 3000 r/min      |
|   |                  |                 | HK-MT_VW_WS    | 40 x 40        | HK-MT053VW(B)WS |
|   | HK-MT13VW(B)WS   | 0.1 kW          |                |                | 3000 r/min      |
|   | HK-MT1M3VW(B)WS  | 0.15 kW         |                |                | 3000 r/min      |
|   | 60 x 60          | HK-MT23VW(B)WS  |                | 0.2 kW         | 3000 r/min      |
|   |                  | HK-MT43VW(B)WS  |                | 0.4 kW         | 3000 r/min      |
|   |                  | HK-MT63VW(B)WS  |                | 0.6 kW         | 3000 r/min      |
|   | 80 x 80          | HK-MT7M3VW(B)WS | 0.75 kW        | 3000 r/min     |                 |
| HK-MT103VW(B)WS   |                  | 1.0 kW          | 3000 r/min     |                |                 |

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List

Precautions

Support

# Product List

## Rotary servo motors

| Item  | Flange size [mm]  | Model           | Rated output     | Rated speed |            |
|---|---|-----------------|------------------|-------------|------------|
| HK-ST series<br><br>B: With an electromagnetic brake  | 130 x 130   | HK-ST52W(B)     | 0.5 kW           | 2000 r/min  |            |
|   |   | HK-ST102W(B)    | 1.0 kW           | 2000 r/min  |            |
|   |   | HK-ST172W(B)    | 1.75 kW          | 2000 r/min  |            |
|   |   | HK-ST202AW(B)   | 2.0 kW           | 2000 r/min  |            |
|   |   | HK-ST302W(B)    | 3.0 kW           | 2000 r/min  |            |
|   |   | HK-ST353W(B)    | 3.5 kW           | 3000 r/min  |            |
|   | 176 x 176   | HK-ST503W(B)    | 5.0 kW           | 3000 r/min  |            |
|   |   | HK-ST7M2UW(B)   | 0.75 kW          | 2000 r/min  |            |
|   |   | HK-ST172UW(B)   | 1.75 kW          | 2000 r/min  |            |
|   |   | HK-ST202W(B)    | 2.0 kW           | 2000 r/min  |            |
|   |   | HK-ST352W(B)    | 3.5 kW           | 2000 r/min  |            |
|   |   | HK-ST502W(B)    | 5.0 kW           | 2000 r/min  |            |
|   | HK-ST series<br><br>B: With an electromagnetic brake  | 130 x 130       | HK-ST702W(B)     | 7.0 kW      | 2000 r/min |
|   |   |                 | HK-ST524W(B)     | 0.5 kW      | 2000 r/min |
|   |   |                 | HK-ST1024W(B)    | 1.0 kW      | 2000 r/min |
|   |   |                 | HK-ST1724W(B)    | 1.75 kW     | 2000 r/min |
|   |   |                 | HK-ST2024AW(B)   | 2.0 kW      | 2000 r/min |
|   |   |                 | HK-ST3024W(B)    | 3.0 kW      | 2000 r/min |
| 176 x 176   |   | HK-ST3534W(B)   | 3.5 kW           | 3000 r/min  |            |
|   |   | HK-ST5034W(B)   | 5.0 kW           | 3000 r/min  |            |
|   |   | HK-ST2024W(B)   | 2.0 kW           | 2000 r/min  |            |
|   |   | HK-ST3524W(B)   | 3.5 kW           | 2000 r/min  |            |
| Servo motors with functional safety<br>HK-ST series<br><br>B: With an electromagnetic brake | 130 x 130   | HK-ST52W(B)WS   | 0.5 kW           | 2000 r/min  |            |
|   |   | HK-ST102W(B)WS  | 1.0 kW           | 2000 r/min  |            |
|   |   | HK-ST172W(B)WS  | 1.75 kW          | 2000 r/min  |            |
|   |   | HK-ST202AW(B)WS | 2.0 kW           | 2000 r/min  |            |
|   |   | HK-ST302W(B)WS  | 3.0 kW           | 2000 r/min  |            |
|   |   | HK-ST353W(B)WS  | 3.5 kW           | 3000 r/min  |            |
|   | 176 x 176   | HK-ST503W(B)WS  | 5.0 kW           | 3000 r/min  |            |
|   |   | HK-ST7M2UW(B)WS | 0.75 kW          | 2000 r/min  |            |
|   |   | HK-ST172UW(B)WS | 1.75 kW          | 2000 r/min  |            |
|   |   | HK-ST202W(B)WS  | 2.0 kW           | 2000 r/min  |            |
|   |   | HK-ST352W(B)WS  | 3.5 kW           | 2000 r/min  |            |
|   |   | HK-ST502W(B)WS  | 5.0 kW           | 2000 r/min  |            |
|   | Servo motors with functional safety<br>HK-ST series<br><br>B: With an electromagnetic brake | 130 x 130       | HK-ST702W(B)WS   | 7.0 kW      | 2000 r/min |
|   |   |                 | HK-ST524W(B)WS   | 0.5 kW      | 2000 r/min |
|   |   |                 | HK-ST1024W(B)WS  | 1.0 kW      | 2000 r/min |
|   |   |                 | HK-ST1724W(B)WS  | 1.75 kW     | 2000 r/min |
|   |   |                 | HK-ST2024AW(B)WS | 2.0 kW      | 2000 r/min |
|   |   |                 | HK-ST3024W(B)WS  | 3.0 kW      | 2000 r/min |
| 176 x 176   |   | HK-ST3534W(B)WS | 3.5 kW           | 3000 r/min  |            |
|   |   | HK-ST5034W(B)WS | 5.0 kW           | 3000 r/min  |            |
|   |   | HK-ST2024W(B)WS | 2.0 kW           | 2000 r/min  |            |
|   |   | HK-ST3524W(B)WS | 3.5 kW           | 2000 r/min  |            |
| 176 x 176   | HK-ST5024W(B)WS   | 5.0 kW          | 2000 r/min       |             |            |
|   | HK-ST7024W(B)WS   | 7.0 kW          | 2000 r/min       |             |            |

Rotary servo motors

| Item   | Model    | Rated output          | Rated speed | Reduction ratio |      |
|--|----------|-----------------------|-------------|-----------------|------|
| HK-ST series<br>With a gear reducer for<br>general industrial machines<br><br>B: With an electromagnetic<br>brake<br>G1: Flange mounting<br>G1H: Foot mounting | HK-ST_G_ | HK-ST52(B)G1(H) 1/6   | 0.5 kW      | 2000 r/min      | 1/6  |
|  |          | HK-ST52(B)G1(H) 1/11  | 0.5 kW      | 2000 r/min      | 1/11 |
|  |          | HK-ST52(B)G1(H) 1/17  | 0.5 kW      | 2000 r/min      | 1/17 |
|  |          | HK-ST52(B)G1(H) 1/29  | 0.5 kW      | 2000 r/min      | 1/29 |
|  |          | HK-ST52(B)G1(H) 1/35  | 0.5 kW      | 2000 r/min      | 1/35 |
|  |          | HK-ST52(B)G1(H) 1/43  | 0.5 kW      | 2000 r/min      | 1/43 |
|  |          | HK-ST52(B)G1(H) 1/59  | 0.5 kW      | 2000 r/min      | 1/59 |
|  |          | HK-ST102(B)G1(H) 1/6  | 1.0 kW      | 2000 r/min      | 1/6  |
|  |          | HK-ST102(B)G1(H) 1/11 | 1.0 kW      | 2000 r/min      | 1/11 |
|  |          | HK-ST102(B)G1(H) 1/17 | 1.0 kW      | 2000 r/min      | 1/17 |
|  |          | HK-ST102(B)G1(H) 1/29 | 1.0 kW      | 2000 r/min      | 1/29 |
|  |          | HK-ST102(B)G1(H) 1/35 | 1.0 kW      | 2000 r/min      | 1/35 |
|  |          | HK-ST102(B)G1(H) 1/43 | 1.0 kW      | 2000 r/min      | 1/43 |
|  |          | HK-ST102(B)G1(H) 1/59 | 1.0 kW      | 2000 r/min      | 1/59 |
|  |          | HK-ST152(B)G1(H) 1/6  | 1.5 kW      | 2000 r/min      | 1/6  |
|  |          | HK-ST152(B)G1(H) 1/11 | 1.5 kW      | 2000 r/min      | 1/11 |
|  |          | HK-ST152(B)G1(H) 1/17 | 1.5 kW      | 2000 r/min      | 1/17 |
|  |          | HK-ST152(B)G1(H) 1/29 | 1.5 kW      | 2000 r/min      | 1/29 |
|  |          | HK-ST152(B)G1(H) 1/35 | 1.5 kW      | 2000 r/min      | 1/35 |
|  |          | HK-ST152(B)G1(H) 1/43 | 1.5 kW      | 2000 r/min      | 1/43 |
|  |          | HK-ST152(B)G1(H) 1/59 | 1.5 kW      | 2000 r/min      | 1/59 |
|  |          | HK-ST202(B)G1(H) 1/6  | 2.0 kW      | 2000 r/min      | 1/6  |
|  |          | HK-ST202(B)G1(H) 1/11 | 2.0 kW      | 2000 r/min      | 1/11 |
|  |          | HK-ST202(B)G1(H) 1/17 | 2.0 kW      | 2000 r/min      | 1/17 |
|  |          | HK-ST202(B)G1(H) 1/29 | 2.0 kW      | 2000 r/min      | 1/29 |
|  |          | HK-ST202(B)G1(H) 1/35 | 2.0 kW      | 2000 r/min      | 1/35 |
|  |          | HK-ST202(B)G1(H) 1/43 | 2.0 kW      | 2000 r/min      | 1/43 |
|  |          | HK-ST202(B)G1(H) 1/59 | 2.0 kW      | 2000 r/min      | 1/59 |
|  |          | HK-ST352(B)G1(H) 1/6  | 3.5 kW      | 2000 r/min      | 1/6  |
|  |          | HK-ST352(B)G1(H) 1/11 | 3.5 kW      | 2000 r/min      | 1/11 |
|  |          | HK-ST352(B)G1(H) 1/17 | 3.5 kW      | 2000 r/min      | 1/17 |
|  |          | HK-ST352(B)G1(H) 1/29 | 3.5 kW      | 2000 r/min      | 1/29 |
|  |          | HK-ST352(B)G1(H) 1/35 | 3.5 kW      | 2000 r/min      | 1/35 |
|  |          | HK-ST352(B)G1(H) 1/43 | 3.5 kW      | 2000 r/min      | 1/43 |
|  |          | HK-ST352(B)G1(H) 1/59 | 3.5 kW      | 2000 r/min      | 1/59 |
|  |          | HK-ST502(B)G1(H) 1/6  | 5.0 kW      | 2000 r/min      | 1/6  |
|  |          | HK-ST502(B)G1(H) 1/11 | 5.0 kW      | 2000 r/min      | 1/11 |
|  |          | HK-ST502(B)G1(H) 1/17 | 5.0 kW      | 2000 r/min      | 1/17 |
|  |          | HK-ST502(B)G1(H) 1/29 | 5.0 kW      | 2000 r/min      | 1/29 |
|  |          | HK-ST502(B)G1(H) 1/35 | 5.0 kW      | 2000 r/min      | 1/35 |
|  |          | HK-ST502(B)G1(H) 1/43 | 5.0 kW      | 2000 r/min      | 1/43 |
|  |          | HK-ST502(B)G1(H) 1/59 | 5.0 kW      | 2000 r/min      | 1/59 |
| HK-ST702(B)G1(H) 1/6   | 7.0 kW   | 2000 r/min            | 1/6         |                 |      |
| HK-ST702(B)G1(H) 1/11  | 7.0 kW   | 2000 r/min            | 1/11        |                 |      |
| HK-ST702(B)G1(H) 1/17  | 7.0 kW   | 2000 r/min            | 1/17        |                 |      |
| HK-ST702(B)G1(H) 1/29  | 7.0 kW   | 2000 r/min            | 1/29        |                 |      |
| HK-ST702(B)G1(H) 1/35  | 7.0 kW   | 2000 r/min            | 1/35        |                 |      |
| HK-ST702(B)G1(H) 1/43  | 7.0 kW   | 2000 r/min            | 1/43        |                 |      |
| HK-ST702(B)G1(H) 1/59  | 7.0 kW   | 2000 r/min            | 1/59        |                 |      |

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LV/S/Wires
- Product List
- Precautions
- Support

# Product List

## Rotary servo motors

| Item   | Model                  | Rated output | Rated speed | Reduction ratio |
|--|------------------------|--------------|-------------|-----------------|
| HK-ST series<br>With a gear reducer for<br>general industrial machines<br><br>B: With an electromagnetic<br>brake<br>G1: Flange mounting<br>G1H: Foot mounting | HK-ST524(B)G1(H) 1/6   | 0.5 kW       | 2000 r/min  | 1/6             |
|  | HK-ST524(B)G1(H) 1/11  | 0.5 kW       | 2000 r/min  | 1/11            |
|  | HK-ST524(B)G1(H) 1/17  | 0.5 kW       | 2000 r/min  | 1/17            |
|  | HK-ST524(B)G1(H) 1/29  | 0.5 kW       | 2000 r/min  | 1/29            |
|  | HK-ST524(B)G1(H) 1/35  | 0.5 kW       | 2000 r/min  | 1/35            |
|  | HK-ST524(B)G1(H) 1/43  | 0.5 kW       | 2000 r/min  | 1/43            |
|  | HK-ST524(B)G1(H) 1/59  | 0.5 kW       | 2000 r/min  | 1/59            |
|  | HK-ST1024(B)G1(H) 1/6  | 1.0 kW       | 2000 r/min  | 1/6             |
|  | HK-ST1024(B)G1(H) 1/11 | 1.0 kW       | 2000 r/min  | 1/11            |
|  | HK-ST1024(B)G1(H) 1/17 | 1.0 kW       | 2000 r/min  | 1/17            |
|  | HK-ST1024(B)G1(H) 1/29 | 1.0 kW       | 2000 r/min  | 1/29            |
|  | HK-ST1024(B)G1(H) 1/35 | 1.0 kW       | 2000 r/min  | 1/35            |
|  | HK-ST1024(B)G1(H) 1/43 | 1.0 kW       | 2000 r/min  | 1/43            |
|  | HK-ST1024(B)G1(H) 1/59 | 1.0 kW       | 2000 r/min  | 1/59            |
|  | HK-ST1524(B)G1(H) 1/6  | 1.5 kW       | 2000 r/min  | 1/6             |
|  | HK-ST1524(B)G1(H) 1/11 | 1.5 kW       | 2000 r/min  | 1/11            |
|  | HK-ST1524(B)G1(H) 1/17 | 1.5 kW       | 2000 r/min  | 1/17            |
|  | HK-ST1524(B)G1(H) 1/29 | 1.5 kW       | 2000 r/min  | 1/29            |
|  | HK-ST1524(B)G1(H) 1/35 | 1.5 kW       | 2000 r/min  | 1/35            |
|  | HK-ST1524(B)G1(H) 1/43 | 1.5 kW       | 2000 r/min  | 1/43            |
|  | HK-ST1524(B)G1(H) 1/59 | 1.5 kW       | 2000 r/min  | 1/59            |
|  | HK-ST2024(B)G1(H) 1/6  | 2.0 kW       | 2000 r/min  | 1/6             |
|  | HK-ST2024(B)G1(H) 1/11 | 2.0 kW       | 2000 r/min  | 1/11            |
|  | HK-ST2024(B)G1(H) 1/17 | 2.0 kW       | 2000 r/min  | 1/17            |
|  | HK-ST2024(B)G1(H) 1/29 | 2.0 kW       | 2000 r/min  | 1/29            |
|  | HK-ST2024(B)G1(H) 1/35 | 2.0 kW       | 2000 r/min  | 1/35            |
|  | HK-ST2024(B)G1(H) 1/43 | 2.0 kW       | 2000 r/min  | 1/43            |
|  | HK-ST2024(B)G1(H) 1/59 | 2.0 kW       | 2000 r/min  | 1/59            |
|  | HK-ST3524(B)G1(H) 1/6  | 3.5 kW       | 2000 r/min  | 1/6             |
|  | HK-ST3524(B)G1(H) 1/11 | 3.5 kW       | 2000 r/min  | 1/11            |
|  | HK-ST3524(B)G1(H) 1/17 | 3.5 kW       | 2000 r/min  | 1/17            |
|  | HK-ST3524(B)G1(H) 1/29 | 3.5 kW       | 2000 r/min  | 1/29            |
|  | HK-ST3524(B)G1(H) 1/35 | 3.5 kW       | 2000 r/min  | 1/35            |
|  | HK-ST3524(B)G1(H) 1/43 | 3.5 kW       | 2000 r/min  | 1/43            |
|  | HK-ST3524(B)G1(H) 1/59 | 3.5 kW       | 2000 r/min  | 1/59            |
|  | HK-ST5024(B)G1(H) 1/6  | 5.0 kW       | 2000 r/min  | 1/6             |
|  | HK-ST5024(B)G1(H) 1/11 | 5.0 kW       | 2000 r/min  | 1/11            |
|  | HK-ST5024(B)G1(H) 1/17 | 5.0 kW       | 2000 r/min  | 1/17            |
|  | HK-ST5024(B)G1(H) 1/29 | 5.0 kW       | 2000 r/min  | 1/29            |
|  | HK-ST5024(B)G1(H) 1/35 | 5.0 kW       | 2000 r/min  | 1/35            |
|  | HK-ST5024(B)G1(H) 1/43 | 5.0 kW       | 2000 r/min  | 1/43            |
|  | HK-ST5024(B)G1(H) 1/59 | 5.0 kW       | 2000 r/min  | 1/59            |
|  | HK-ST7024(B)G1(H) 1/6  | 7.0 kW       | 2000 r/min  | 1/6             |
|  | HK-ST7024(B)G1(H) 1/11 | 7.0 kW       | 2000 r/min  | 1/11            |
|  | HK-ST7024(B)G1(H) 1/17 | 7.0 kW       | 2000 r/min  | 1/17            |
|  | HK-ST7024(B)G1(H) 1/29 | 7.0 kW       | 2000 r/min  | 1/29            |
|  | HK-ST7024(B)G1(H) 1/35 | 7.0 kW       | 2000 r/min  | 1/35            |
|  | HK-ST7024(B)G1(H) 1/43 | 7.0 kW       | 2000 r/min  | 1/43            |
|  | HK-ST7024(B)G1(H) 1/59 | 7.0 kW       | 2000 r/min  | 1/59            |



Rotary servo motors

| Item  | Model              | Rated output        | Rated speed | Reduction ratio |      |
|---|--------------------|---------------------|-------------|-----------------|------|
| HK-ST series<br>With a flange-output type gear reducer for high precision applications, flange mounting<br><br>B: With an electromagnetic brake | HK-ST_G_           | HK-ST52(B)G5 1/5    | 0.5 kW      | 2000 r/min      | 1/5  |
|   |                    | HK-ST52(B)G5 1/11   | 0.5 kW      | 2000 r/min      | 1/11 |
|   |                    | HK-ST52(B)G5 1/21   | 0.5 kW      | 2000 r/min      | 1/21 |
|   |                    | HK-ST52(B)G5 1/33   | 0.5 kW      | 2000 r/min      | 1/33 |
|   |                    | HK-ST52(B)G5 1/45   | 0.5 kW      | 2000 r/min      | 1/45 |
|   |                    | HK-ST102(B)G5 1/5   | 1.0 kW      | 2000 r/min      | 1/5  |
|   |                    | HK-ST102(B)G5 1/11  | 1.0 kW      | 2000 r/min      | 1/11 |
|   |                    | HK-ST102(B)G5 1/21  | 1.0 kW      | 2000 r/min      | 1/21 |
|   |                    | HK-ST102(B)G5 1/33  | 1.0 kW      | 2000 r/min      | 1/33 |
|   |                    | HK-ST102(B)G5 1/45  | 1.0 kW      | 2000 r/min      | 1/45 |
|   |                    | HK-ST152(B)G5 1/5   | 1.5 kW      | 2000 r/min      | 1/5  |
|   |                    | HK-ST152(B)G5 1/11  | 1.5 kW      | 2000 r/min      | 1/11 |
|   |                    | HK-ST152(B)G5 1/21  | 1.5 kW      | 2000 r/min      | 1/21 |
|   |                    | HK-ST152(B)G5 1/33  | 1.5 kW      | 2000 r/min      | 1/33 |
|   |                    | HK-ST152(B)G5 1/45  | 1.5 kW      | 2000 r/min      | 1/45 |
|   |                    | HK-ST202(B)G5 1/5   | 2.0 kW      | 2000 r/min      | 1/5  |
|   |                    | HK-ST202(B)G5 1/11  | 2.0 kW      | 2000 r/min      | 1/11 |
|   |                    | HK-ST202(B)G5 1/21  | 2.0 kW      | 2000 r/min      | 1/21 |
|   |                    | HK-ST202(B)G5 1/33  | 2.0 kW      | 2000 r/min      | 1/33 |
|   |                    | HK-ST202(B)G5 1/45  | 2.0 kW      | 2000 r/min      | 1/45 |
|   |                    | HK-ST352(B)G5 1/5   | 3.5 kW      | 2000 r/min      | 1/5  |
|   | HK-ST352(B)G5 1/11 | 3.5 kW              | 2000 r/min  | 1/11            |      |
|   | HK-ST352(B)G5 1/21 | 3.5 kW              | 2000 r/min  | 1/21            |      |
|   | HK-ST502(B)G5 1/5  | 5.0 kW              | 2000 r/min  | 1/5             |      |
|   | HK-ST502(B)G5 1/11 | 5.0 kW              | 2000 r/min  | 1/11            |      |
|   | HK-ST702(B)G5 1/5  | 7.0 kW              | 2000 r/min  | 1/5             |      |
|   | HK-ST_4_G_         | HK-ST524(B)G5 1/5   | 0.5 kW      | 2000 r/min      | 1/5  |
|   |                    | HK-ST524(B)G5 1/11  | 0.5 kW      | 2000 r/min      | 1/11 |
|   |                    | HK-ST524(B)G5 1/21  | 0.5 kW      | 2000 r/min      | 1/21 |
|   |                    | HK-ST524(B)G5 1/33  | 0.5 kW      | 2000 r/min      | 1/33 |
|   |                    | HK-ST524(B)G5 1/45  | 0.5 kW      | 2000 r/min      | 1/45 |
|   |                    | HK-ST1024(B)G5 1/5  | 1.0 kW      | 2000 r/min      | 1/5  |
|   |                    | HK-ST1024(B)G5 1/11 | 1.0 kW      | 2000 r/min      | 1/11 |
|   |                    | HK-ST1024(B)G5 1/21 | 1.0 kW      | 2000 r/min      | 1/21 |
|   |                    | HK-ST1024(B)G5 1/33 | 1.0 kW      | 2000 r/min      | 1/33 |
|   |                    | HK-ST1024(B)G5 1/45 | 1.0 kW      | 2000 r/min      | 1/45 |
|   |                    | HK-ST1524(B)G5 1/5  | 1.5 kW      | 2000 r/min      | 1/5  |
|   |                    | HK-ST1524(B)G5 1/11 | 1.5 kW      | 2000 r/min      | 1/11 |
|   |                    | HK-ST1524(B)G5 1/21 | 1.5 kW      | 2000 r/min      | 1/21 |
|   |                    | HK-ST1524(B)G5 1/33 | 1.5 kW      | 2000 r/min      | 1/33 |
|   |                    | HK-ST1524(B)G5 1/45 | 1.5 kW      | 2000 r/min      | 1/45 |
|   |                    | HK-ST2024(B)G5 1/5  | 2.0 kW      | 2000 r/min      | 1/5  |
| HK-ST2024(B)G5 1/11   |                    | 2.0 kW              | 2000 r/min  | 1/11            |      |
| HK-ST2024(B)G5 1/21   |                    | 2.0 kW              | 2000 r/min  | 1/21            |      |
| HK-ST2024(B)G5 1/33   |                    | 2.0 kW              | 2000 r/min  | 1/33            |      |
| HK-ST2024(B)G5 1/45   |                    | 2.0 kW              | 2000 r/min  | 1/45            |      |
| HK-ST3524(B)G5 1/5  |                    | 3.5 kW              | 2000 r/min  | 1/5             |      |
| HK-ST3524(B)G5 1/11   | 3.5 kW             | 2000 r/min          | 1/11        |                 |      |
| HK-ST3524(B)G5 1/21   | 3.5 kW             | 2000 r/min          | 1/21        |                 |      |
| HK-ST5024(B)G5 1/5  | 5.0 kW             | 2000 r/min          | 1/5         |                 |      |
| HK-ST5024(B)G5 1/11   | 5.0 kW             | 2000 r/min          | 1/11        |                 |      |
| HK-ST7024(B)G5 1/5  | 7.0 kW             | 2000 r/min          | 1/5         |                 |      |

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LV/S/Wires
- Product List
- Precautions
- Support

# Product List

## Rotary servo motors

| Item  | Model               | Rated output | Rated speed | Reduction ratio |
|---|---------------------|--------------|-------------|-----------------|
| HK-ST series<br>With a shaft-output type gear<br>reducer for high precision<br>applications, flange mounting<br><br>B: With an electromagnetic<br>brake | HK-ST52(B)G7 1/5    | 0.5 kW       | 2000 r/min  | 1/5             |
|   | HK-ST52(B)G7 1/11   | 0.5 kW       | 2000 r/min  | 1/11            |
|   | HK-ST52(B)G7 1/21   | 0.5 kW       | 2000 r/min  | 1/21            |
|   | HK-ST52(B)G7 1/33   | 0.5 kW       | 2000 r/min  | 1/33            |
|   | HK-ST52(B)G7 1/45   | 0.5 kW       | 2000 r/min  | 1/45            |
|   | HK-ST102(B)G7 1/5   | 1.0 kW       | 2000 r/min  | 1/5             |
|   | HK-ST102(B)G7 1/11  | 1.0 kW       | 2000 r/min  | 1/11            |
|   | HK-ST102(B)G7 1/21  | 1.0 kW       | 2000 r/min  | 1/21            |
|   | HK-ST102(B)G7 1/33  | 1.0 kW       | 2000 r/min  | 1/33            |
|   | HK-ST102(B)G7 1/45  | 1.0 kW       | 2000 r/min  | 1/45            |
|   | HK-ST152(B)G7 1/5   | 1.5 kW       | 2000 r/min  | 1/5             |
|   | HK-ST152(B)G7 1/11  | 1.5 kW       | 2000 r/min  | 1/11            |
|   | HK-ST152(B)G7 1/21  | 1.5 kW       | 2000 r/min  | 1/21            |
|   | HK-ST152(B)G7 1/33  | 1.5 kW       | 2000 r/min  | 1/33            |
|   | HK-ST152(B)G7 1/45  | 1.5 kW       | 2000 r/min  | 1/45            |
|   | HK-ST202(B)G7 1/5   | 2.0 kW       | 2000 r/min  | 1/5             |
|   | HK-ST202(B)G7 1/11  | 2.0 kW       | 2000 r/min  | 1/11            |
|   | HK-ST202(B)G7 1/21  | 2.0 kW       | 2000 r/min  | 1/21            |
|   | HK-ST202(B)G7 1/33  | 2.0 kW       | 2000 r/min  | 1/33            |
|   | HK-ST202(B)G7 1/45  | 2.0 kW       | 2000 r/min  | 1/45            |
|   | HK-ST352(B)G7 1/5   | 3.5 kW       | 2000 r/min  | 1/5             |
|   | HK-ST352(B)G7 1/11  | 3.5 kW       | 2000 r/min  | 1/11            |
|   | HK-ST352(B)G7 1/21  | 3.5 kW       | 2000 r/min  | 1/21            |
|   | HK-ST502(B)G7 1/5   | 5.0 kW       | 2000 r/min  | 1/5             |
|   | HK-ST502(B)G7 1/11  | 5.0 kW       | 2000 r/min  | 1/11            |
|   | HK-ST702(B)G7 1/5   | 7.0 kW       | 2000 r/min  | 1/5             |
|   | HK-ST524(B)G7 1/5   | 0.5 kW       | 2000 r/min  | 1/5             |
|   | HK-ST524(B)G7 1/11  | 0.5 kW       | 2000 r/min  | 1/11            |
|   | HK-ST524(B)G7 1/21  | 0.5 kW       | 2000 r/min  | 1/21            |
|   | HK-ST524(B)G7 1/33  | 0.5 kW       | 2000 r/min  | 1/33            |
|   | HK-ST524(B)G7 1/45  | 0.5 kW       | 2000 r/min  | 1/45            |
|   | HK-ST1024(B)G7 1/5  | 1.0 kW       | 2000 r/min  | 1/5             |
|   | HK-ST1024(B)G7 1/11 | 1.0 kW       | 2000 r/min  | 1/11            |
|   | HK-ST1024(B)G7 1/21 | 1.0 kW       | 2000 r/min  | 1/21            |
|   | HK-ST1024(B)G7 1/33 | 1.0 kW       | 2000 r/min  | 1/33            |
| HK-ST1024(B)G7 1/45   | 1.0 kW              | 2000 r/min   | 1/45        |                 |
| HK-ST1524(B)G7 1/5  | 1.5 kW              | 2000 r/min   | 1/5         |                 |
| HK-ST1524(B)G7 1/11   | 1.5 kW              | 2000 r/min   | 1/11        |                 |
| HK-ST1524(B)G7 1/21   | 1.5 kW              | 2000 r/min   | 1/21        |                 |
| HK-ST1524(B)G7 1/33   | 1.5 kW              | 2000 r/min   | 1/33        |                 |
| HK-ST1524(B)G7 1/45   | 1.5 kW              | 2000 r/min   | 1/45        |                 |
| HK-ST2024(B)G7 1/5  | 2.0 kW              | 2000 r/min   | 1/5         |                 |
| HK-ST2024(B)G7 1/11   | 2.0 kW              | 2000 r/min   | 1/11        |                 |
| HK-ST2024(B)G7 1/21   | 2.0 kW              | 2000 r/min   | 1/21        |                 |
| HK-ST2024(B)G7 1/33   | 2.0 kW              | 2000 r/min   | 1/33        |                 |
| HK-ST2024(B)G7 1/45   | 2.0 kW              | 2000 r/min   | 1/45        |                 |
| HK-ST3524(B)G7 1/5  | 3.5 kW              | 2000 r/min   | 1/5         |                 |
| HK-ST3524(B)G7 1/11   | 3.5 kW              | 2000 r/min   | 1/11        |                 |
| HK-ST3524(B)G7 1/21   | 3.5 kW              | 2000 r/min   | 1/21        |                 |
| HK-ST5024(B)G7 1/5  | 5.0 kW              | 2000 r/min   | 1/5         |                 |
| HK-ST5024(B)G7 1/11   | 5.0 kW              | 2000 r/min   | 1/11        |                 |
| HK-ST7024(B)G7 1/5  | 7.0 kW              | 2000 r/min   | 1/5         |                 |

Rotary servo motors

| Item  | Flange size [mm] | Model     | Rated output    | Rated speed |            |
|---|------------------|-----------|-----------------|-------------|------------|
| HK-RT series<br><br>B: With an electromagnetic brake  | HK-RT_W          | 90 x 90   | HK-RT103W(B)    | 1.0 kW      | 3000 r/min |
|   |                  |           | HK-RT153W(B)    | 1.5 kW      | 3000 r/min |
|   |                  |           | HK-RT203W(B)    | 2.0 kW      | 3000 r/min |
|   |                  | 130 x 130 | HK-RT353W(B)    | 3.5 kW      | 3000 r/min |
|   |                  |           | HK-RT503W(B)    | 5.0 kW      | 3000 r/min |
|   |                  |           | HK-RT703W(B)    | 7.0 kW      | 3000 r/min |
|   | HK-RT_4W         | 90 x 90   | HK-RT1034W(B)   | 1.0 kW      | 3000 r/min |
|   |                  |           | HK-RT1534W(B)   | 1.5 kW      | 3000 r/min |
|   |                  |           | HK-RT2034W(B)   | 2.0 kW      | 3000 r/min |
|   |                  | 130 x 130 | HK-RT3534W(B)   | 3.5 kW      | 3000 r/min |
|   |                  |           | HK-RT5034W(B)   | 5.0 kW      | 3000 r/min |
|   |                  |           | HK-RT7034W(B)   | 7.0 kW      | 3000 r/min |
| Servo motors with functional safety<br>HK-RT series<br><br>B: With an electromagnetic brake | HK-RT_W_WS       | 90 x 90   | HK-RT103W(B)WS  | 1.0 kW      | 3000 r/min |
|   |                  |           | HK-RT153W(B)WS  | 1.5 kW      | 3000 r/min |
|   |                  |           | HK-RT203W(B)WS  | 2.0 kW      | 3000 r/min |
|   |                  | 130 x 130 | HK-RT353W(B)WS  | 3.5 kW      | 3000 r/min |
|   |                  |           | HK-RT503W(B)WS  | 5.0 kW      | 3000 r/min |
|   |                  |           | HK-RT703W(B)WS  | 7.0 kW      | 3000 r/min |
|   | HK-RT_4W_WS      | 90 x 90   | HK-RT1034W(B)WS | 1.0 kW      | 3000 r/min |
|   |                  |           | HK-RT1534W(B)WS | 1.5 kW      | 3000 r/min |
|   |                  |           | HK-RT2034W(B)WS | 2.0 kW      | 3000 r/min |
|   |                  | 130 x 130 | HK-RT3534W(B)WS | 3.5 kW      | 3000 r/min |
|   |                  |           | HK-RT5034W(B)WS | 5.0 kW      | 3000 r/min |
|   |                  |           | HK-RT7034W(B)WS | 7.0 kW      | 3000 r/min |

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LV/S/Wires
- Product List
- Precautions
- Support

# Product List

## Linear servo motors

| Item                                    | Model             | Continuous thrust                                   | Maximum thrust | Maximum speed | Length |
|---|-------------------|---|----------------|---------------|--------|
| LM-H3 series<br>primary side (coil)     | LM-H3P2A-07P-BSS0 | 70 N  | 175 N          | 3.0 m/s       | —      |
|   | LM-H3P3A-12P-CSS0 | 120 N   | 300 N          | 3.0 m/s       | —      |
|   | LM-H3P3B-24P-CSS0 | 240 N   | 600 N          | 3.0 m/s       | —      |
|   | LM-H3P3C-36P-CSS0 | 360 N   | 900 N          | 3.0 m/s       | —      |
|   | LM-H3P3D-48P-CSS0 | 480 N   | 1200 N         | 3.0 m/s       | —      |
|   | LM-H3P7A-24P-ASS0 | 240 N   | 600 N          | 3.0 m/s       | —      |
|   | LM-H3P7B-48P-ASS0 | 480 N   | 1200 N         | 3.0 m/s       | —      |
|   | LM-H3P7C-72P-ASS0 | 720 N   | 1800 N         | 3.0 m/s       | —      |
| LM-H3 series<br>secondary side (magnet) | LM-H3P7D-96P-ASS0 | 960 N   | 2400 N         | 3.0 m/s       | —      |
|   | LM-H3S20-288-BSS0 | —   | —              | —             | 288 mm |
|   | LM-H3S20-384-BSS0 | —   | —              | —             | 384 mm |
|   | LM-H3S20-480-BSS0 | —   | —              | —             | 480 mm |
|   | LM-H3S20-768-BSS0 | —   | —              | —             | 768 mm |
|   | LM-H3S30-288-CSS0 | —   | —              | —             | 288 mm |
|   | LM-H3S30-384-CSS0 | —   | —              | —             | 384 mm |
|   | LM-H3S30-480-CSS0 | —   | —              | —             | 480 mm |
|   | LM-H3S30-768-CSS0 | —   | —              | —             | 768 mm |
|   | LM-H3S70-288-ASS0 | —   | —              | —             | 288 mm |
|   | LM-H3S70-384-ASS0 | —   | —              | —             | 384 mm |
| LM-H3S70-480-ASS0                       | —                 | —   | —              | 480 mm        |        |
| LM-H3S70-768-ASS0                       | —                 | —   | —              | 768 mm        |        |
| LM-AJ series<br>primary side (coil)     | LM-AJP1B-07K-JSS0 | 68.1 N  | 214.7 N        | 6.5 m/s       | —      |
|   | LM-AJP1D-14K-JSS0 | 136.2 N   | 429.4 N        | 6.5 m/s       | —      |
|   | LM-AJP2B-12S-JSS0 | 117.0 N   | 369.0 N        | 4.0 m/s       | —      |
|   | LM-AJP2D-23T-JSS0 | 234.0 N   | 738.1 N        | 5.0 m/s       | —      |
|   | LM-AJP3B-17N-JSS0 | 174.5 N   | 550.2 N        | 2.5 m/s       | —      |
|   | LM-AJP3D-35R-JSS0 | 348.9 N   | 1100.4 N       | 3.5 m/s       | —      |
|   | LM-AJP4B-22M-JSS0 | 223.4 N   | 704.5 N        | 2.0 m/s       | —      |
| LM-AJP4D-45N-JSS0                       | 446.8 N           | 1409.1 N  | 2.5 m/s        | —             |        |
| LM-AJ series<br>secondary side (magnet) | LM-AJS10-080-JSS0 | —   | —              | —             | 80 mm  |
|   | LM-AJS10-200-JSS0 | —   | —              | —             | 200 mm |
|   | LM-AJS10-400-JSS0 | —   | —              | —             | 400 mm |
|   | LM-AJS20-080-JSS0 | —   | —              | —             | 80 mm  |
|   | LM-AJS20-200-JSS0 | —   | —              | —             | 200 mm |
|   | LM-AJS20-400-JSS0 | —   | —              | —             | 400 mm |
|   | LM-AJS30-080-JSS0 | —   | —              | —             | 80 mm  |
|   | LM-AJS30-200-JSS0 | —   | —              | —             | 200 mm |
|   | LM-AJS30-400-JSS0 | —   | —              | —             | 400 mm |
|   | LM-AJS40-080-JSS0 | —   | —              | —             | 80 mm  |
|   | LM-AJS40-200-JSS0 | —   | —              | —             | 200 mm |
| LM-AJS40-400-JSS0                       | —                 | —   | —              | 400 mm        |        |
| LM-F series<br>primary side (coil)      | LM-FP2B-06M-1SS0  | 300 N (natural cooling)/<br>600 N (force cooling)   | 1800 N         | 2.0 m/s       | —      |
|   | LM-FP2D-12M-1SS0  | 600 N (natural cooling)/<br>1200 N (force cooling)  | 3600 N         | 2.0 m/s       | —      |
|   | LM-FP2F-18M-1SS0  | 900 N (natural cooling)/<br>1800 N (force cooling)  | 5400 N         | 2.0 m/s       | —      |
|   | LM-FP4B-12M-1SS0  | 600 N (natural cooling)/<br>1200 N (force cooling)  | 3600 N         | 2.0 m/s       | —      |
|   | LM-FP4D-24M-1SS0  | 1200 N (natural cooling)/<br>2400 N (force cooling) | 7200 N         | 2.0 m/s       | —      |
| LM-F series<br>secondary side (magnet)  | LM-FS20-480-1SS0  | —   | —              | —             | 480 mm |
|   | LM-FS20-576-1SS0  | —   | —              | —             | 576 mm |
|   | LM-FS40-480-1SS0  | —   | —              | —             | 480 mm |
|   | LM-FS40-576-1SS0  | —   | —              | —             | 576 mm |

Linear servo motors

| Item                                    | Model             | Continuous thrust | Maximum thrust | Maximum speed | Length |
|---|-------------------|-------------------|----------------|---------------|--------|
| LM-K2 series<br>primary side (coil)     | LM-K2P1A-01M-2SS1 | 120 N             | 300 N          | 2.0 m/s       | —      |
|   | LM-K2P1C-03M-2SS1 | 360 N             | 900 N          | 2.0 m/s       | —      |
|   | LM-K2P2A-02M-1SS1 | 240 N             | 600 N          | 2.0 m/s       | —      |
|   | LM-K2P2C-07M-1SS1 | 720 N             | 1800 N         | 2.0 m/s       | —      |
|   | LM-K2P2E-12M-1SS1 | 1200 N            | 3000 N         | 2.0 m/s       | —      |
|   | LM-K2P3C-14M-1SS1 | 1440 N            | 3600 N         | 2.0 m/s       | —      |
|   | LM-K2P3E-24M-1SS1 | 2400 N            | 6000 N         | 2.0 m/s       | —      |
| LM-K2 series<br>secondary side (magnet) | LM-K2S10-288-2SS1 | —                 | —              | —             | 288 mm |
|   | LM-K2S10-384-2SS1 | —                 | —              | —             | 384 mm |
|   | LM-K2S10-480-2SS1 | —                 | —              | —             | 480 mm |
|   | LM-K2S10-768-2SS1 | —                 | —              | —             | 768 mm |
|   | LM-K2S20-288-1SS1 | —                 | —              | —             | 288 mm |
|   | LM-K2S20-384-1SS1 | —                 | —              | —             | 384 mm |
|   | LM-K2S20-480-1SS1 | —                 | —              | —             | 480 mm |
|   | LM-K2S20-768-1SS1 | —                 | —              | —             | 768 mm |
|   | LM-K2S30-288-1SS1 | —                 | —              | —             | 288 mm |
|   | LM-K2S30-384-1SS1 | —                 | —              | —             | 384 mm |
| LM-U2 series<br>primary side (coil)     | LM-U2PAB-05M-0SS0 | 50 N              | 150 N          | 2.0 m/s       | —      |
|   | LM-U2PAD-10M-0SS0 | 100 N             | 300 N          | 2.0 m/s       | —      |
|   | LM-U2PAF-15M-0SS0 | 150 N             | 450 N          | 2.0 m/s       | —      |
|   | LM-U2PBB-07M-1SS0 | 75 N              | 225 N          | 2.0 m/s       | —      |
|   | LM-U2PBD-15M-1SS0 | 150 N             | 450 N          | 2.0 m/s       | —      |
|   | LM-U2PBF-22M-1SS0 | 225 N             | 675 N          | 2.0 m/s       | —      |
|   | LM-U2P2B-40M-2SS0 | 400 N             | 1600 N         | 2.0 m/s       | —      |
|   | LM-U2P2C-60M-2SS0 | 600 N             | 2400 N         | 2.0 m/s       | —      |
|   | LM-U2P2D-80M-2SS0 | 800 N             | 3200 N         | 2.0 m/s       | —      |
| LM-U2 series<br>secondary side (magnet) | LM-U2SA0-240-0SS0 | —                 | —              | —             | 240 mm |
|   | LM-U2SA0-300-0SS0 | —                 | —              | —             | 300 mm |
|   | LM-U2SA0-420-0SS0 | —                 | —              | —             | 420 mm |
|   | LM-U2SB0-240-1SS1 | —                 | —              | —             | 240 mm |
|   | LM-U2SB0-300-1SS1 | —                 | —              | —             | 300 mm |
|   | LM-U2SB0-420-1SS1 | —                 | —              | —             | 420 mm |
|   | LM-U2S20-300-2SS1 | —                 | —              | —             | 300 mm |
| LM-U2S20-480-2SS1                       | —                 | —                 | —              | 480 mm        |        |
| LM-AU series<br>primary side (coil)     | LM-AUP3A-03V-JSS0 | 28 N              | 122 N          | 4.5 m/s       | —      |
|   | LM-AUP3B-06V-JSS0 | 57 N              | 274 N          | 4.5 m/s       | —      |
|   | LM-AUP3C-09V-JSS0 | 85 N              | 411 N          | 4.5 m/s       | —      |
|   | LM-AUP3D-11R-JSS0 | 113 N             | 549 N          | 3.5 m/s       | —      |
|   | LM-AUP4A-04R-JSS0 | 44 N              | 280 N          | 3.5 m/s       | —      |
|   | LM-AUP4B-09R-JSS0 | 88 N              | 561 N          | 3.5 m/s       | —      |
|   | LM-AUP4C-13P-JSS0 | 132 N             | 842 N          | 3.0 m/s       | —      |
|   | LM-AUP4D-18M-JSS0 | 176 N             | 970 N          | 2.0 m/s       | —      |
|   | LM-AUP4F-26P-JSS0 | 264 N             | 1684 N         | 3.0 m/s       | —      |
| LM-AUP4H-35M-JSS0                       | 350 N             | 1764 N            | 2.0 m/s        | —             |        |
| LM-AU series<br>secondary side (magnet) | LM-AUS30-120-JSS0 | —                 | —              | —             | 120 mm |
|   | LM-AUS30-180-JSS0 | —                 | —              | —             | 180 mm |
|   | LM-AUS30-240-JSS0 | —                 | —              | —             | 240 mm |
|   | LM-AUS30-300-JSS0 | —                 | —              | —             | 300 mm |
|   | LM-AUS30-600-JSS0 | —                 | —              | —             | 600 mm |
|   | LM-AUS40-120-JSS0 | —                 | —              | —             | 120 mm |
|   | LM-AUS40-180-JSS0 | —                 | —              | —             | 180 mm |
|   | LM-AUS40-240-JSS0 | —                 | —              | —             | 240 mm |
|   | LM-AUS40-300-JSS0 | —                 | —              | —             | 300 mm |
| LM-AUS40-600-JSS0                       | —                 | —                 | —              | 600 mm        |        |

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LV/S/Wires

Product List

Precautions

Support

# Product List

## Direct drive motors

| Item           | Model         | Rated torque | Maximum torque | Rated speed |
|----------------|---------------|--------------|----------------|-------------|
| TM-RG2M series | TM-RG2M002C30 | 2.2 N•m      | 8.8 N•m        | 300 r/min   |
|                | TM-RG2M004E30 | 4.5 N•m      | 13.5 N•m       | 300 r/min   |
|                | TM-RG2M009G30 | 9 N•m        | 27 N•m         | 300 r/min   |
| TM-RU2M series | TM-RU2M002C30 | 2.2 N•m      | 8.8 N•m        | 300 r/min   |
|                | TM-RU2M004E30 | 4.5 N•m      | 13.5 N•m       | 300 r/min   |
|                | TM-RU2M009G30 | 9 N•m        | 27 N•m         | 300 r/min   |
| TM-RFM series  | TM-RFM002C20  | 2 N•m        | 6 N•m          | 200 r/min   |
|                | TM-RFM004C20  | 4 N•m        | 12 N•m         | 200 r/min   |
|                | TM-RFM006C20  | 6 N•m        | 18 N•m         | 200 r/min   |
|                | TM-RFM006E20  | 6 N•m        | 18 N•m         | 200 r/min   |
|                | TM-RFM012E20  | 12 N•m       | 36 N•m         | 200 r/min   |
|                | TM-RFM018E20  | 18 N•m       | 54 N•m         | 200 r/min   |
|                | TM-RFM012G20  | 12 N•m       | 36 N•m         | 200 r/min   |
|                | TM-RFM048G20  | 48 N•m       | 144 N•m        | 200 r/min   |
|                | TM-RFM072G20  | 72 N•m       | 216 N•m        | 200 r/min   |
|                | TM-RFM040J10  | 40 N•m       | 120 N•m        | 100 r/min   |
|                | TM-RFM120J10  | 120 N•m      | 360 N•m        | 100 r/min   |
| TM-RFM240J10   | 240 N•m       | 720 N•m      | 100 r/min      |             |

Cables for rotary servo motors

| Item   | Model               | Length            | Bending life      | IP rating  | Application   |   |
|--|---------------------|-------------------|-------------------|--|---|---|
| Motor cable<br>(dual cable type/<br>direct connection type for 10 m or<br>shorter) | MR-AEPB2CBL2M-A1-H  | 2 m               | Long bending life | IP65   | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Load-side lead<br>With electromagnetic brake wires |   |
|  | MR-AEPB2CBL5M-A1-H  | 5 m               | Long bending life | IP65   |   |   |
|  | MR-AEPB2CBL10M-A1-H | 10 m              | Long bending life | IP65   |   |   |
|  | MR-AEPB2CBL2M-A1-L  | 2 m               | Standard          | IP65   |   |   |
|  | MR-AEPB2CBL5M-A1-L  | 5 m               | Standard          | IP65   |   |   |
|  | MR-AEPB2CBL10M-A1-L | 10 m              | Standard          | IP65   |   |   |
|  | MR-AEPB2CBL2M-A2-H  | 2 m               | Long bending life | IP65   |   |   |
|  | MR-AEPB2CBL5M-A2-H  | 5 m               | Long bending life | IP65   |   |   |
|  | MR-AEPB2CBL10M-A2-H | 10 m              | Long bending life | IP65   |   |   |
|  | MR-AEPB2CBL2M-A2-L  | 2 m               | Standard          | IP65   |   |   |
|  | MR-AEPB2CBL5M-A2-L  | 5 m               | Standard          | IP65   |   |   |
|  | MR-AEPB2CBL10M-A2-L | 10 m              | Standard          | IP65   |   |   |
|  | MR-AEPB2CBL2M-A5-H  | 2 m               | Long bending life | IP65   | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Vertical lead<br>With electromagnetic brake wires  |   |
|  | MR-AEPB2CBL5M-A5-H  | 5 m               | Long bending life | IP65   |   |   |
|  | MR-AEPB2CBL10M-A5-H | 10 m              | Long bending life | IP65   |   |   |
|  | MR-AEPB2CBL2M-A5-L  | 2 m               | Standard          | IP65   |   |   |
|  | MR-AEPB2CBL5M-A5-L  | 5 m               | Standard          | IP65   |   |   |
|  | MR-AEPB2CBL10M-A5-L | 10 m              | Standard          | IP65   |   |   |
|  | MR-AEP2CBL2M-A1-H   | 2 m               | Long bending life | IP65   |   | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Load-side lead<br>Without electromagnetic brake wires |
|  | MR-AEP2CBL5M-A1-H   | 5 m               | Long bending life | IP65   |   |   |
|  | MR-AEP2CBL10M-A1-H  | 10 m              | Long bending life | IP65   |   |   |
|  | MR-AEP2CBL2M-A1-L   | 2 m               | Standard          | IP65   |   |   |
|  | MR-AEP2CBL5M-A1-L   | 5 m               | Standard          | IP65   |   |   |
|  | MR-AEP2CBL10M-A1-L  | 10 m              | Standard          | IP65   |   |   |
|  | MR-AEP2CBL2M-A2-H   | 2 m               | Long bending life | IP65   |   |   |
|  | MR-AEP2CBL5M-A2-H   | 5 m               | Long bending life | IP65   |   |   |
|  | MR-AEP2CBL10M-A2-H  | 10 m              | Long bending life | IP65   |   |   |
|  | MR-AEP2CBL2M-A2-L   | 2 m               | Standard          | IP65   |   |   |
|  | MR-AEP2CBL5M-A2-L   | 5 m               | Standard          | IP65   |   |   |
|  | MR-AEP2CBL10M-A2-L  | 10 m              | Standard          | IP65   |   |   |
| MR-AEP2CBL2M-A5-H  | 2 m                 | Long bending life | IP65              | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Vertical lead<br>Without electromagnetic brake wires |   |   |
| MR-AEP2CBL5M-A5-H  | 5 m                 | Long bending life | IP65              |  |   |   |
| MR-AEP2CBL10M-A5-H   | 10 m                | Long bending life | IP65              |  |   |   |
| MR-AEP2CBL2M-A5-L  | 2 m                 | Standard          | IP65              |  |   |   |
| MR-AEP2CBL5M-A5-L  | 5 m                 | Standard          | IP65              |  |   |   |
| MR-AEP2CBL10M-A5-L   | 10 m                | Standard          | IP65              |  |   |   |

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LVSWires
- Product List
- Precautions
- Support

# Product List

## Cables for rotary servo motors

| Item   | Model                  | Length | Bending life      | IP rating | Application   |
|--|------------------------|--------|-------------------|-----------|---|
| Motor cable <sup>(Note 1)</sup><br>(dual cable type/<br>junction type for over 10 m) | MR-AEPB2J10CBL03M-A1-L | 0.3 m  | Standard          | IP20      | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Load-side lead<br>With electromagnetic brake wires             |
|  | MR-AEPB2J10CBL03M-A2-L | 0.3 m  | Standard          | IP20      | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Opposite to load-side lead<br>With electromagnetic brake wires |
|  | MR-AEPB2J10CBL03M-A5-L | 0.3 m  | Standard          | IP20      | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Vertical lead<br>With electromagnetic brake wires              |
|  | MR-AEP2J10CBL03M-A1-L  | 0.3 m  | Standard          | IP20      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Load-side lead<br>Without electromagnetic brake wires             |
|  | MR-AEP2J10CBL03M-A2-L  | 0.3 m  | Standard          | IP20      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Opposite to load-side lead<br>Without electromagnetic brake wires |
|  | MR-AEP2J10CBL03M-A5-L  | 0.3 m  | Standard          | IP20      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Vertical lead<br>Without electromagnetic brake wires              |
| Encoder cable <sup>(Note 2)</sup>  | MR-AEKCBL20M-H         | 20 m   | Long bending life | IP20      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W  |
|  | MR-AEKCBL30M-H         | 30 m   | Long bending life | IP20      |   |
|  | MR-AEKCBL40M-H         | 40 m   | Long bending life | IP20      |   |
|  | MR-AEKCBL50M-H         | 50 m   | Long bending life | IP20      |   |
|  | MR-AEKCBL20M-L         | 20 m   | Standard          | IP20      |   |
|  | MR-AEKCBL30M-L         | 30 m   | Standard          | IP20      |   |

**Notes:**

1. Use this cable in combination with MR-AEKCBL\_M-H, MR-AEKCBL\_M-L, or MR-ECNM.
2. Use this cable in combination with MR-AEPB2J10CBL03M-\_L or MR-AEP2J10CBL03M-\_L.



Cables for rotary servo motors

| Item   | Model                  | Length | Bending life | IP rating | Application   |
|--|------------------------|--------|--------------|-----------|---|
| Motor cable <sup>(Note 1)</sup><br>(dual cable type/<br>junction type for over 10 m) | MR-AEPB2J20CBL03M-A1-L | 0.3 m  | Standard     | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Load-side lead<br>With electromagnetic brake wires             |
|  | MR-AEPB2J20CBL03M-A2-L | 0.3 m  | Standard     | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Opposite to load-side lead<br>With electromagnetic brake wires |
|  | MR-AEPB2J20CBL03M-A5-L | 0.3 m  | Standard     | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Vertical lead<br>With electromagnetic brake wires              |
|  | MR-AEP2J20CBL03M-A1-L  | 0.3 m  | Standard     | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Load-side lead<br>Without electromagnetic brake wires             |
|  | MR-AEP2J20CBL03M-A2-L  | 0.3 m  | Standard     | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Opposite to load-side lead<br>Without electromagnetic brake wires |
|  | MR-AEP2J20CBL03M-A5-L  | 0.3 m  | Standard     | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Vertical lead<br>Without electromagnetic brake wires              |

Notes:

1. Use this cable in combination with MR-AENSCBL\_M-H, MR-AENSCBL\_M-L, or MR-J3SCNS.

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LVSWires

Product List

Precautions

Support

# Product List

## Connector sets for rotary servo motors

| Item   | Model                               | Description       |                   | IP rating | Application   |
|--|-------------------------------------|-------------------|-------------------|-----------|---|
| Encoder cable  | MR-J3ENSCBL2M-H                     | 2 m               | Long bending life | IP67      | HK-ST series<br>HK-RT353(4)W, 503(4)W, 703(4)W  |
|  | MR-J3ENSCBL5M-H                     | 5 m               | Long bending life | IP67      |   |
|  | MR-J3ENSCBL10M-H                    | 10 m              | Long bending life | IP67      |   |
|  | MR-AENSCBL20M-H <sup>(Note 1)</sup> | 20 m              | Long bending life | IP67      | HK-KT series<br>HK-MT series<br>HK-ST series<br>HK-RT series  |
|  | MR-AENSCBL30M-H <sup>(Note 1)</sup> | 30 m              | Long bending life | IP67      |   |
|  | MR-AENSCBL40M-H <sup>(Note 1)</sup> | 40 m              | Long bending life | IP67      |   |
|  | MR-AENSCBL50M-H <sup>(Note 1)</sup> | 50 m              | Long bending life | IP67      | HK-ST series<br>HK-RT353(4)W, 503(4)W, 703(4)W  |
|  | MR-J3ENSCBL2M-L                     | 2 m               | Standard          | IP67      |   |
|  | MR-J3ENSCBL5M-L                     | 5 m               | Standard          | IP67      |   |
|  | MR-J3ENSCBL10M-L                    | 10 m              | Standard          | IP67      |   |
|  | MR-AENSCBL20M-L <sup>(Note 1)</sup> | 20 m              | Standard          | IP67      |   |
|  | MR-AENSCBL30M-L <sup>(Note 1)</sup> | 30 m              | Standard          | IP67      |   |
| Motor cable<br>(single cable type/<br>direct connection type for 10 m or<br>shorter) | MR-AEPB1CBL2M-A1-H                  | 2 m               | Long bending life | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Load-side lead<br>With electromagnetic brake wires             |
|  | MR-AEPB1CBL5M-A1-H                  | 5 m               | Long bending life | IP65      |   |
|  | MR-AEPB1CBL10M-A1-H                 | 10 m              | Long bending life | IP65      |   |
|  | MR-AEPB1CBL2M-A1-L                  | 2 m               | Standard          | IP65      |   |
|  | MR-AEPB1CBL5M-A1-L                  | 5 m               | Standard          | IP65      |   |
|  | MR-AEPB1CBL10M-A1-L                 | 10 m              | Standard          | IP65      |   |
|  | MR-AEPB1CBL2M-A2-H                  | 2 m               | Long bending life | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Opposite to load-side lead<br>With electromagnetic brake wires |
|  | MR-AEPB1CBL5M-A2-H                  | 5 m               | Long bending life | IP65      |   |
|  | MR-AEPB1CBL10M-A2-H                 | 10 m              | Long bending life | IP65      |   |
|  | MR-AEPB1CBL2M-A2-L                  | 2 m               | Standard          | IP65      |   |
|  | MR-AEPB1CBL5M-A2-L                  | 5 m               | Standard          | IP65      |   |
|  | MR-AEPB1CBL10M-A2-L                 | 10 m              | Standard          | IP65      |   |
|  | MR-AEPB1CBL2M-A5-H                  | 2 m               | Long bending life | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)WB, 153(4)WB, 203(4)WB<br>Vertical lead<br>With electromagnetic brake wires              |
|  | MR-AEPB1CBL5M-A5-H                  | 5 m               | Long bending life | IP65      |   |
|  | MR-AEPB1CBL10M-A5-H                 | 10 m              | Long bending life | IP65      |   |
|  | MR-AEPB1CBL2M-A5-L                  | 2 m               | Standard          | IP65      |   |
|  | MR-AEPB1CBL5M-A5-L                  | 5 m               | Standard          | IP65      |   |
|  | MR-AEPB1CBL10M-A5-L                 | 10 m              | Standard          | IP65      |   |
|  | MR-AEP1CBL2M-A1-H                   | 2 m               | Long bending life | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Load-side lead<br>Without electromagnetic brake wires             |
|  | MR-AEP1CBL5M-A1-H                   | 5 m               | Long bending life | IP65      |   |
|  | MR-AEP1CBL10M-A1-H                  | 10 m              | Long bending life | IP65      |   |
|  | MR-AEP1CBL2M-A1-L                   | 2 m               | Standard          | IP65      |   |
|  | MR-AEP1CBL5M-A1-L                   | 5 m               | Standard          | IP65      |   |
|  | MR-AEP1CBL10M-A1-L                  | 10 m              | Standard          | IP65      |   |
|  | MR-AEP1CBL2M-A2-H                   | 2 m               | Long bending life | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Opposite to load-side lead<br>Without electromagnetic brake wires |
|  | MR-AEP1CBL5M-A2-H                   | 5 m               | Long bending life | IP65      |   |
|  | MR-AEP1CBL10M-A2-H                  | 10 m              | Long bending life | IP65      |   |
|  | MR-AEP1CBL2M-A2-L                   | 2 m               | Standard          | IP65      |   |
|  | MR-AEP1CBL5M-A2-L                   | 5 m               | Standard          | IP65      |   |
|  | MR-AEP1CBL10M-A2-L                  | 10 m              | Standard          | IP65      |   |
|  | MR-AEP1CBL2M-A5-H                   | 2 m               | Long bending life | IP65      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Vertical lead<br>Without electromagnetic brake wires              |
|  | MR-AEP1CBL5M-A5-H                   | 5 m               | Long bending life | IP65      |   |
| MR-AEP1CBL10M-A5-H   | 10 m                                | Long bending life | IP65              |           |   |
| MR-AEP1CBL2M-A5-L  | 2 m                                 | Standard          | IP65              |           |   |
| MR-AEP1CBL5M-A5-L  | 5 m                                 | Standard          | IP65              |           |   |
| MR-AEP1CBL10M-A5-L   | 10 m                                | Standard          | IP65              |           |   |
| Encoder cable  | MR-EKCBL2M-H                        | 2 m               | Long bending life | IP20      | Connecting a load-side encoder  |
|  | MR-EKCBL5M-H                        | 5 m               | Long bending life | IP20      |   |
| Junction cable<br>for fully closed loop control                                      | MR-J4FCCBL03M                       | 0.3 m             | Standard          | —         | Branching a load-side encoder   |

Notes:  
1. When using this cable for HK-KT/HK-MT/HK-RT (1.0 kW to 2.0 kW), use it in combination with MR-AEPB2J20CBL03M-\_-L or MR-AEP2J20CBL03M-\_-L.

## Connector sets for rotary servo motors

| Item                                | Model                         | Description   | IP rating | Application  |
|-------------------------------------|-------------------------------|---|-----------|--|
| Encoder connector set               | MR-ECNM <sup>(Note 1)</sup>   | Encoder connector × 1<br>Servo amplifier connector × 1                          | IP20      | HK-KT series<br>HK-MT series<br>HK-RT103(4)W, 153(4)W, 203(4)W<br>Connecting a load-side encoder                                     |
|                                     | MR-J3SCNS <sup>(Note 2)</sup> | Junction connector or<br>encoder connector × 1<br>Servo amplifier connector × 1 | IP67      | HK-KT series<br>HK-MT series<br>HK-ST series<br>HK-RT series<br>(one-touch connection type)  |
|                                     | MR-ENCNS2                     | Encoder connector × 1<br>Servo amplifier connector × 1                          | IP67      | HK-ST series<br>HK-RT353(4)W, 503(4)W, 703(4)W<br>(straight type) (screw type)   |
|                                     | MR-J3SCNSA                    | Encoder connector × 1<br>Servo amplifier connector × 1                          | IP67      | HK-ST series<br>HK-RT353(4)W, 503(4)W, 703(4)W<br>(angle type) (one-touch connection type)   |
|                                     | MR-ENCNS2A                    | Encoder connector × 1<br>Servo amplifier connector × 1                          | IP67      | HK-ST series<br>HK-RT353(4)W, 503(4)W, 703(4)W<br>(angle type) (screw type)  |
| Power connector set                 | MR-APWCNS4                    | Power connector × 1   | IP67      | HK-ST52(4)(W), 102(4)(W),<br>172(4)W, 202(4)AW, 302(4)W,<br>353(4)W, 503(4)W <sup>(Note 3)</sup><br>(one-touch connection type)      |
|                                     | MR-APWCNS5                    | Power connector × 1   | IP67      | HK-ST7M2UW, 172UW,<br>202(4)(W), 352(4)(W), 502(4)(W),<br>702(4)(W)<br>HK-RT353(4)W, 503(4)W, 703(4)W<br>(one-touch connection type) |
| Electromagnetic brake connector set | MR-BKCNS1                     | Electromagnetic brake connector × 1   | IP67      | HK-ST series<br>HK-RT353(4)WB, 503(4)WB, 703(4)WB<br>(straight type) (one-touch connection type)                                     |
|                                     | MR-BKCNS2                     | Electromagnetic brake connector × 1   | IP67      | HK-ST series<br>HK-RT353(4)WB, 503(4)WB, 703(4)WB<br>(straight type) (screw type)  |
|                                     | MR-BKCNS1A                    | Electromagnetic brake connector × 1   | IP67      | HK-ST series<br>HK-RT353(4)WB, 503(4)WB, 703(4)WB<br>(angle type) (one-touch connection type)  |
|                                     | MR-BKCNS2A                    | Electromagnetic brake connector × 1   | IP67      | HK-ST series<br>HK-RT353(4)WB, 503(4)WB, 703(4)WB<br>(angle type) (screw type)   |
| Encoder connector set               | MR-J3CN2                      | Servo amplifier connector × 1   | —         | Connecting a load side encoder   |
| Connector set                       | MR-J3THMCN2                   | Junction connector × 2<br>Servo amplifier connector × 1                         | —         | Branching a load-side encoder  |

## Notes:

- When using this connector set for HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series, use it in combination with MR-AEPB2J10CBL03M\_-L or MR-AEP2J10CBL03M\_-L.
- When using this connector set for HK-KT series/HK-MT series/HK-RT (1.0 kW to 2.0 kW) series, use it in combination with MR-AEPB2J20CBL03M\_-L or MR-AEP2J20CBL03M\_-L.
- When using HK-ST503W for a machine that is required to comply with UL/CSA standards, do not use MR-APWCNS4. Use a cable (SC-PWC403C\_M-SBLL or SC-PWC403C\_M-SBLH) manufactured by Mitsubishi Electric System & Service Co., Ltd., and fabricate an extension cable with wires of AWG 10. For details of SC-PWC403C\_M-SBLL and SC-PWC403C\_M-SBLH, please contact Mitsubishi Electric System & Service Co., Ltd. OVERSEAS SERVICE SECTION. (Email: osb.webmaster@melsc.jp)

Common Specifications

Servo System Controllers

Servo Amplifiers

Rotary Servo Motors

Linear Servo Motors

Direct Drive Motors

Options/Peripheral Equipment

LVSWires

Product List

Precautions

Support

## Product List

### Cables and connector sets for linear servo motors

| Item                                   | Model         | Description   |                   | IP rating | Application                                 |
|--|---------------|---|-------------------|-----------|---|
| Encoder cable                          | MR-EKCBL2M-H  | 2 m   | Long bending life | IP20      | Connecting a linear encoder                 |
|  | MR-EKCBL5M-H  | 5 m   | Long bending life | IP20      |   |
| Junction cable for linear servo motors | MR-J4THCBL03M | 0.3 m   | Standard          | —         | Branching a thermistor                      |
| Encoder connector set                  | MR-ECNM       | Junction connector × 1<br>Servo amplifier connector × 1 |                   | IP20      | Connecting a linear encoder                 |
|  | MR-J3CN2      | Servo amplifier connector × 1                           |                   | —         | Connecting a linear encoder or a thermistor |
| Connector set                          | MR-J3THMCN2   | Junction connector × 2<br>Servo amplifier connector × 1 |                   | —         | Branching a thermistor                      |

### Connector sets for direct drive motors

| Item                  | Model      | Description  |  | IP rating | Application  |
|-----------------------|------------|--|--|-----------|--|
| Encoder connector set | MR-J3DDCNS | Encoder connector or absolute position storage unit connector × 1<br>Servo amplifier connector × 1 |  | IP67      | TM-RG2M series<br>TM-RU2M series<br>TM-RFM series<br>(For connecting a direct drive motor and a servo amplifier, or an absolute position storage unit and a servo amplifier) |
|                       | MR-J3DDSPS | Encoder connector × 1<br>Absolute position storage unit connector × 1                              |  | IP67      | TM-RG2M series<br>TM-RU2M series<br>TM-RFM series<br>(For connecting a direct drive motor and an absolute position storage unit)   |
| Power connector set   | MR-PWCNF   | Power connector × 1  |  | IP67      | TM-RG2M series<br>TM-RU2M series<br>TM-RFM_C20<br>TM-RFM_E20   |
|                       | MR-PWCNS4  | Power connector × 1  |  | IP67      | TM-RFM_G20   |
|                       | MR-PWCNS5  | Power connector × 1  |  | IP67      | TM-RFM040J10,<br>TM-RFM120J10  |
|                       | MR-PWCNS3  | Power connector × 1  |  | IP67      | TM-RFM240J10   |

## Connectors for servo amplifiers/drive units

| Item          | Model      | Description                                     | IP rating | Application <sup>(Note 1)</sup> |
|---------------|------------|---|-----------|---------------------------------|
| Connector set | MR-CCN1    | Servo amplifier connector × 1                   | —         | MR-J5-_G_/MR-J5-_B_             |
|               | MR-J2CMP2  | Servo amplifier connector × 1                   | —         | MR-J5W_-_G/MR-J5W_-_B           |
|               | MR-ECN1    | Servo amplifier connector × 20                  | —         |                                 |
|               | MR-ADCN3   | Drive unit connector × 1                        | —         | MR-J5D_-_G4                     |
|               | MR-J3CN1   | Servo amplifier connector × 1                   | —         | MR-J5-_A_                       |
|               | MR-CVCN24S | Power regeneration converter unit connector × 1 | —         | MR-CV_                          |

## SSCNET III cables/SSCNET III connector set

| Item   | Model         | Length | Bending life      | Application           |
|--|---------------|--------|-------------------|-----------------------|
| SSCNET III cable<br>(standard cord inside cabinet)<br>compatible with SSCNET III/H   | MR-J3BUS015M  | 0.15 m | Standard          | MR-J5-_B_/_MR-J5W_-_B |
|  | MR-J3BUS03M   | 0.3 m  | Standard          | MR-J5-_B_/_MR-J5W_-_B |
|  | MR-J3BUS05M   | 0.5 m  | Standard          | MR-J5-_B_/_MR-J5W_-_B |
|  | MR-J3BUS1M    | 1 m    | Standard          | MR-J5-_B_/_MR-J5W_-_B |
|  | MR-J3BUS3M    | 3 m    | Standard          | MR-J5-_B_/_MR-J5W_-_B |
| SSCNET III cable<br>(standard cable outside cabinet)<br>compatible with SSCNET III/H | MR-J3BUS5M-A  | 5 m    | Standard          | MR-J5-_B_/_MR-J5W_-_B |
|  | MR-J3BUS10M-A | 10 m   | Standard          | MR-J5-_B_/_MR-J5W_-_B |
|  | MR-J3BUS20M-A | 20 m   | Standard          | MR-J5-_B_/_MR-J5W_-_B |
| SSCNET III cable<br>(long distance cable)<br>compatible with SSCNET III/H            | MR-J3BUS30M-B | 30 m   | Long bending life | MR-J5-_B_/_MR-J5W_-_B |
|  | MR-J3BUS40M-B | 40 m   | Long bending life | MR-J5-_B_/_MR-J5W_-_B |
|  | MR-J3BUS50M-B | 50 m   | Long bending life | MR-J5-_B_/_MR-J5W_-_B |
| SSCNET III connector set<br>compatible with SSCNET III/H                             | MR-J3BCN1     | —      | —                 | MR-J5-_B_/_MR-J5W_-_B |

## Bus bars

| Item                               | Model           | Length | Application <sup>(Note 1)</sup>  |
|------------------------------------|-----------------|--------|--|
| Bus bar                            | MR-DCBAR077-B02 | —      | Connecting between power regeneration converter unit and drive unit, and between drive units |
|                                    | MR-DCBAR092-B02 | —      |  |
|                                    | MR-DCBAR097-B02 | —      |  |
|                                    | MR-DCBAR112-B02 | —      | Connecting between power regeneration converter unit and drive unit                          |
|                                    | MR-DCBAR099-B03 | —      |  |
|                                    | MR-DCBAR114-B03 | —      |  |
| Adjustment bar <sup>(Note 2)</sup> | MR-DCBAR024-B05 | —      | —  |

## Junction terminal blocks/Junction terminal block cables

| Item                              | Model            | Length | Application <sup>(Note 1)</sup>                    |
|-----------------------------------|------------------|--------|--|
| Junction terminal block (26 pins) | MR-TB26A         | —      | MR-J5W_-_G/MR-J5W_-_B                              |
| Junction terminal block (50 pins) | MR-TB50          | —      | MR-J5-_A_  |
| Junction terminal block cable     | MR-J2HBUS05M     | 0.5 m  | Connecting MR-J5-_G_/_MR-J5-_B_ and PS7DW-20V14B-F |
|                                   | MR-J2HBUS1M      | 1 m    |  |
|                                   | MR-J2HBUS5M      | 5 m    |  |
|                                   | MR-TBNATBL05M    | 0.5 m  | Connecting MR-J5W_-_G/MR-J5W_-_B and MR-TB26A      |
|                                   | MR-TBNATBL1M     | 1 m    |  |
|                                   | MR-J2M-CN1TBL05M | 0.5 m  | Connecting MR-J5-_A_ and MR-TB50                   |
|                                   | MR-J2M-CN1TBL1M  | 1 m    |  |

## Batteries/Battery cases/Battery cables

| Item                   | Model          | Length | Application <sup>(Note 1)</sup>   |
|------------------------|----------------|--------|---|
| Battery                | MR-BAT6V1SET   | —      | MR-J5-_G_/_MR-J5-_B_/_MR-J5-_A_   |
|                        | MR-BAT6V1SET-A | —      |   |
|                        | MR-BAT6V1      | —      |   |
| Battery case           | MR-BT6VCASE    | —      | MR-J5-_G_/_MR-J5W_-_G/MR-J5-_B_/_MR-J5W_-_B/MR-J5-_A_                             |
| Battery cable          | MR-BT6V1CBL03M | 0.3 m  | Connecting MR-J5-_G_/_MR-J5W_-_G/MR-J5-_B_/_MR-J5W_-_B/MR-J5-_A_ with MR-BT6VCASE |
|                        | MR-BT6V1CBL1M  | 1 m    |   |
| Junction battery cable | MR-BT6V2CBL03M | 0.3 m  | MR-J5-_G_/_MR-J5W_-_G/MR-J5-_B_/_MR-J5W_-_B/MR-J5-_A_                             |
|                        | MR-BT6V2CBL1M  | 1 m    |   |

## Notes:

- Note that options/peripheral equipment necessary for servo amplifiers with special specifications are the same as those for standard servo amplifiers. Refer to the servo amplifiers with the same rated output.
- When an even number of MR-J5D\_-\_G4 drive units is connected to the power regeneration converter unit, use the adjustment bars. Each of the bar models in the table includes a set of two bus bars.

# Product List

## Regenerative options

| Item                        | Model     | Permissible regenerative power | Resistance value | Application <sup>(Note 1)</sup>   |
|-----------------------------|-----------|--------------------------------|------------------|---|
| Regenerative option (200 V) | MR-RB032  | 30 W                           | 40 Ω             | MR-J5-10G/B/A to 60G/B/A  |
|                             | MR-RB12   | 100 W                          | 40 Ω             | MR-J5-20G/B/A to 60G/B/A  |
|                             | MR-RB14   | 100 W                          | 26 Ω             | MR-J5-70G/B/A, 100G/B/A<br>MR-J5W2-22G/B, 44G/B<br>MR-J5W3-222G/B, 444G/B |
|                             | MR-RB30   | 300 W                          | 13 Ω             | MR-J5-200G/B/A  |
|                             | MR-RB3N   | 300 W                          | 9 Ω              | MR-J5-350G/B/A<br>MR-J5W2-77G/B, 1010G/B                                  |
|                             | MR-RB31   | 300 W                          | 6.7 Ω            | MR-J5-500G/B/A  |
|                             | MR-RB3Z   | 300 W                          | 5.5 Ω            | MR-J5-700G/B/A  |
|                             | MR-RB34   | 300 W                          | 26 Ω             | MR-J5-70G/B/A, 100G/B/A<br>MR-J5W3-222G/B, 444G/B                         |
|                             | MR-RB50   | 500 W                          | 13 Ω             | MR-J5-200G/B/A  |
|                             | MR-RB5N   | 500 W                          | 9 Ω              | MR-J5-350G/B/A  |
|                             | MR-RB51   | 500 W                          | 6.7 Ω            | MR-J5-500G/B/A  |
|                             | MR-RB5Z   | 500 W                          | 5.5 Ω            | MR-J5-700G/B/A  |
| Regenerative option (400 V) | MR-RB1H-4 | 100 W                          | 82 Ω             | MR-J5-60G4/B4/A4, 100G4/B4/A4   |
|                             | MR-RB3M-4 | 300 W                          | 120 Ω            | MR-J5-60G4/B4/A4, 100G4/B4/A4   |
|                             | MR-RB3G-4 | 300 W                          | 47 Ω             | MR-J5-200G4/B4/A4   |
|                             | MR-RB3Y-4 | 300 W                          | 36 Ω             | MR-J5-350G4/B4/A4   |
|                             | MR-RB34-4 | 300 W                          | 26 Ω             | MR-J5-500G4/B4/A4   |
|                             | MR-RB3U-4 | 300 W                          | 22 Ω             | MR-J5-700G4/B4/A4   |
|                             | MR-RB5G-4 | 500 W                          | 47 Ω             | MR-J5-200G4/B4/A4   |
|                             | MR-RB5Y-4 | 500 W                          | 36 Ω             | MR-J5-350G4/B4/A4   |
|                             | MR-RB54-4 | 500 W                          | 26 Ω             | MR-J5-500G4/B4/A4   |
|                             | MR-RB5U-4 | 500 W                          | 22 Ω             | MR-J5-700G4/B4/A4   |

## Peripheral units

| Item                           | Model       | Application <sup>(Note 1)</sup>   |
|--------------------------------|-------------|---|
| Safety logic unit              | MR-J3-D05   | MR-J5- <u>  </u> G /MR-J5W- <u>  </u> G/MR-J5D- <u>  </u> G4/MR-J5- <u>  </u> B /MR-J5W- <u>  </u> B/MR-J5- <u>  </u> A |
| Absolute position storage unit | MR-BTAS01   | MR-J5- <u>  </u> G/MR-J5W- <u>  </u> G/MR-J5- <u>  </u> B/MR-J5W- <u>  </u> B/MR-J5- <u>  </u> A                        |
| Replacement fan unit           | MR-J5-FAN1  | MR-J5-70G/B/A, 100G/B/A   |
|                                | MR-J5-FAN6  | MR-J5-200G /B /A, 350G /B /A  |
|                                | MR-J5-FAN3  | MR-J5-500G/B/A  |
|                                | MR-J5-FAN4  | MR-J5-700G/B/A  |
|                                | MR-J5-FAN7  | MR-J5-500G4/B4/A4, 700G4/B4/A4  |
|                                | MR-J5W-FAN1 | MR-J5W2-44G/B   |
|                                | MR-J5W-FAN3 | MR-J5W2-77G/B, 1010G/B  |
|                                | MR-J5W-FAN2 | MR-J5W3-222G/B, 444G/B  |
|                                | MR-J5D-FAN1 | MR-J5D1-500G4, 700G4<br>MR-J5D2-200G4, 350G4<br>MR-J5D3-200G4   |
|                                | MR-J5D-FAN2 | MR-J5D2-500G4, 700G4  |
| AC reactor                     | MR-AL-11K4  | MR-CV11K4   |
|                                | MR-AL-18K4  | MR-CV18K4   |
|                                | MR-AL-30K4  | MR-CV30K4   |
|                                | MR-AL-37K4  | MR-CV37K4   |
|                                | MR-AL-45K4  | MR-CV45K4   |
|                                | MR-AL-55K4  | MR-CV55K4   |
|                                | MR-AL-75K4  | MR-CV75K4   |

- Notes:
- Note that options/peripheral equipment necessary for servo amplifiers with special specifications are the same as those for standard servo amplifiers. Refer to the servo amplifiers with the same rated output.

## Peripheral cables/connector sets

| Item  | Model             | Length       | Application <sup>(Note 1)</sup>  |
|---|-------------------|--------------|--|
| Personal computer communication cable (USB cable) | MR-J3USBCBL3M     | 3 m          | MR-J5-_G_/MR-J5W_-_G/MR-J5D_-_G4/<br>MR-J5-_B_/MR-J5W_-_B/MR-J5-_A_  |
| Monitor cable                                     | MR-ACN6CBL1M      | 1 m          | MR-J5-_G_/MR-J5-_A_  |
|   | MR-J3CN6CBL1M     | 1 m          | MR-J5W_-_G   |
| Analog monitor and A/B/Z-phase pulse output cable | MR-AHSCN7CBL2M10M | 10 m/<br>2 m | MR-J5-_G4-HS   |
| STO cable   | MR-D05UDL3M-B     | 3 m          | Connecting MR-J3-D05 or a safety control device with MR-J5-_G_/MR-J5W_-_G/MR-J5D_-_G4/MR-J5-_B_/MR-J5W_-_B/MR-J5-_A_ |
| Protection coordination cable                     | MR-ACDL02M        | 0.2 m        | Connecting between power regeneration converter unit and drive unit  |
|   | MR-ACDL05M        | 0.5 m        |  |
|   | MR-ADDL02M        | 0.2 m        | Connecting between drive units   |
| Daisy chain power connector                       | MR-J5CNP12-J1     | —            | MR-J5-10G/B/A to MR-J5-100G/B/A<br>MR-J5W2-22G/B, MR-J5W2-44G/B<br>MR-J5W3-222G/B, and MR-J5W3-444G/B                |
|   | MR-J5CNP12-J2     | —            | MR-J5-200G/B/A<br>MR-J5W2-77G/B, 1010G/B   |

## Peripheral attachments

| Item  | Model        | Description  | Application <sup>(Note 1)</sup>  |
|---|--------------|--|--|
| Cabinet-mounting attachment   | J5-CHP07-10P | Components (1 pc.)<br>Attachment × 1<br>Flat head screw (M4 × 10) × 1<br>Packing quantity: 10 pcs./packing | MR-J5-10G/_B/_A_ to 350G/_B/_A_<br>MR-J5W_-_G/B<br>MR-CM3K                 |
| Grounding terminal attachment   | J5-CHP08     | Attachment × 1<br>Cable clamp × 2<br>Screw (M4 × 12) × 4   | MR-J5-10G/_B/_A_ to 350G/_B/_A_  |
| Shield clamp attachment   | MR-ASCHP06   | Attachment × 1<br>Cable clamp × 2<br>Flat head screw (M4) × 2  | MR-J5-500G4/B4/A4, 700G4/B4/A4   |
| Mounting attachment<br>(Power regeneration converter unit attachment) | MR-ADCACN090 | Attachment × 1   | MR-CV11K4, 18K4  |
|   | MR-ADCACN150 | Attachment × 1   | MR-CV30K4 to 45K4  |
|   | MR-ADCACN300 | Attachment × 1   | MR-CV55K4 to 75K4  |
| Mounting attachment<br>(Drive unit attachment)                        | MR-ADACN060  | Attachment × 1   | MR-J5D1-100G4 to 700G4,<br>MR-J5D2-100G4 to 350G4,<br>MR-J5D3-100G4, 200G4 |
|   | MR-ADACN075  | Attachment × 1   | MR-J5D2-500G4, 700G4   |
| Side protection cover   | MR-J5DCASE01 | Side protection cover × 1  | MR-J5D_-_G4  |

## Notes:

- Note that options/peripheral equipment necessary for servo amplifiers with special specifications are the same as those for standard servo amplifiers. Refer to the servo amplifiers with the same rated output.

# Product List

## Engineering software

| Item  | Model         | Application   |
|---|---------------|---|
| MELSOFT iQ Works                            | SW2DND-IQWK-E | FA engineering software   |
| MELSOFT GX Works3                           | SW1DND-GXW3-E | Programmable controller engineering software (including motion control setting) |
| MELSOFT MT Works2                           | SW1DND-MTW2-E | Motion controller engineering software  |
| MELSOFT MR Configurator2 <sup>(Note1)</sup> | SW1DNC-MRC2-E | Servo engineering software  |

Notes:

1. MR Configurator2 can be obtained by either of the following:

- Purchase MR Configurator2 alone.
- Purchase GX Works3 or MT Works2: MR Configurator2 is included in GX Works3 and MT Works2 with software version 1.34L or later.



MEMO

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LVSWires
- Product List**
- Precautions
- Support

# Precautions

## For your safety

- To use the products given in this catalog safely, read the User's Manuals and the appended document prior to use.
- In this catalog, the safety instruction levels are classified into "WARNING" and "CAUTION".

### WARNING

Indicates that incorrect handling may cause hazardous conditions, resulting in death or severe injury.

### CAUTION

Indicates that incorrect handling may cause hazardous conditions, resulting in medium or slight injury.

Note that the CAUTION level may lead to a serious consequence depending on conditions.

Please follow the instructions of both levels because they are important to personnel safety.

In the following precautions, a term of servo amplifier includes a combination of a drive unit and a converter unit.

## Safety instructions

### WARNING

#### [Wiring]

- To prevent an electric shock, turn off the servo amplifier power and wait for 15 minutes or more before starting wiring and/or inspection. For the drive unit, wait for 20 minutes or more before starting wiring and/or inspection.
- To prevent an electric shock, ground the servo amplifier.
- To prevent an electric shock, any person who is involved in wiring should be fully competent to do the work.
- To prevent an electric shock, mount the servo amplifier and the servo motor before wiring.
- To prevent an electric shock, connect the grounding wire to the cabinet protective earth (PE) terminal via the servo amplifier protective earth (PE) terminal.
- To prevent an electric shock, do not touch the conductive parts.
- To prevent an electric shock and burn injury, do not operate the servo amplifier and the servo motor with wet hands.

#### [Operation]

- To prevent an electric shock and burn injury, do not operate the servo amplifier and the servo motor with wet hands.


#### [Maintenance]

- To prevent an electric shock, any person who is involved in wiring should be fully competent to do the work.
- To prevent an electric shock and burn injury, do not operate the servo amplifier and the servo motor with wet hands.

### CAUTION

#### [Transportation/installation]

- To prevent injury, transport the products correctly according to their mass.
- To prevent injury, do not touch the sharp edges of the servo motor, shaft keyway, or others with bare hands when handling the servo motor.
- For the linear servo motor, attraction force is generated between the permanent magnet on the secondary side and the magnetic materials. To prevent injury to fingers and other body parts due to the attraction force between the secondary side and the magnetic material side, take special care in handling the linear servo motor.

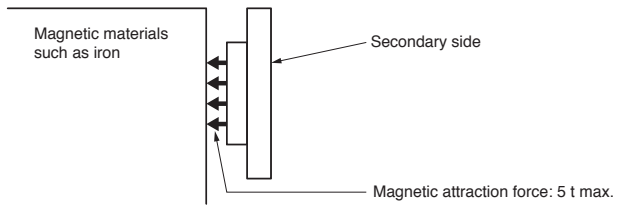

#### [Operation]

- To prevent injury, do not touch the rotor of the servo motor during operation.

#### [Disposal of linear servo motors]

- To prevent burn injury, do not touch the secondary side after the demagnetization of the secondary side by heating over 300 °C until it becomes cool enough.


## For proper use

- To use the products given in this catalog properly, read the User's Manuals and the appended document prior to use.
- In this catalog, instructions for incorrect handling which may cause physical damage, instructions for other functions, and so on are classified into "NOTICES".
- In the following precautions, a term of servo amplifier includes a combination of a drive unit and a converter unit.

## ! NOTICES

### [Model selection]

- Select a rotary servo motor or a direct drive motor which has the rated torque equal to or higher than the continuous effective torque.
- Select a linear servo motor which has the continuous thrust equal to or higher than the continuous effective load thrust.
- When the linear servo motor is used for vertical axis, it is necessary to have an anti-drop mechanism using springs and counter balances in the machine side.
- For the system where the unbalanced torque occurs, such as a vertical axis, the unbalanced torque of the machine should be kept at 70 % or lower of the rated torque.
- Create operation patterns by considering the settling time ( $t_s$ ) to complete positioning.
- Load to motor inertia ratio or load to mass ratio must be below the recommended ratio. If the ratio is too large, the expected performance may not be achieved, and the dynamic brake may be damaged.
- Use the servo motor with the specified servo amplifier.

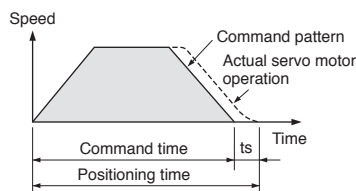

### [Transportation/installation]

- To prevent a malfunction, do not drop or strike the servo amplifier and servo motor.
- When fumigants that contain halogen materials, such as fluorine, chlorine, bromine, and iodine, are used for disinfecting and protecting wooden packaging from insects, they cause a malfunction when entering our products. Please take necessary precautions to ensure that any residual materials from fumigant do not enter our products, or perform disinfection and pest control using methods other than fumigation, such as heat treatment. Perform disinfection and pest control at timbering stage before packing the products.
- Do not get on or place heavy objects on the servo amplifier or the servo motor.
- The system must withstand high speeds and high acceleration/deceleration.
- To enable high-accuracy positioning, ensure the machine rigidity, and keep the machine resonance point at a high level.
- Install the servo amplifier and the servo motor on incombustible material. Installing them directly or close to combustibles will lead to smoke or a fire. In addition, the servo amplifier must be installed in a metal cabinet.
- The regenerative option becomes hot (the temperature rise of 100 °C or higher) with frequent use. Do not install within combustibles or objects subject to thermal deformation. Make sure that wires do not come into contact with the unit.
- Securely fix the servo motor onto the machine. If attached insecurely, the motor may come off during operation.
- Install electrical and mechanical stoppers at the stroke end.
- Mount the servo amplifier on a perpendicular wall in the correct vertical direction.

- To prevent a malfunction, do not block the intake and exhaust areas of the servo amplifier.
- When installing multiple servo amplifiers in a row in a sealed cabinet, leave space around the servo amplifiers as described in User's Manuals. To ensure the service life and reliability of the servo amplifiers, prevent heat accumulation by keeping space as open as possible toward the top plate.
- Do not disassemble, repair, or modify the product.

### [Environment]

- Use the servo amplifier and the servo motor in the designated environment.
- Avoid installing the servo amplifier and the servo motor in areas with oil mist or dust. When installing in such areas, enclose the servo amplifier in a sealed cabinet, and protect the servo motor by furnishing a cover or by taking similar measures.
- In the condition where cutting fluid or lubricating oil are constantly applied, and condensation occurs due to excessive humidity, continuous operation of the servo motor for a long period of time may result in the deterioration on the insulation of the servo motor. Provide measures such as oil proof, dust proof cover, and dew condensation prevention to protect the servo motor.
- To prevent a malfunction or a failure, do not use the servo system products under a strong electric field, magnetic field, or radiation environment.

### [Wiring]

- To prevent a fire, use a molded-case circuit breaker or a fuse for the main circuit power supply (L1/L2/L3) of the servo amplifier.
- Connect a magnetic contactor between the power supply and the main circuit power supply (L1/L2/L3) of the servo amplifier so that the main circuit power supply can be shut off when a malfunction or an alarm occurs in the servo amplifier.
- The grounding must be connected to prevent faults such as a position mismatch.
- Do not supply power to the output terminals (U/V/W) of the servo amplifier or the input terminals (U/V/W) of the servo motor. Doing so damages the servo amplifier and the servo motor.
- To prevent abnormal operation and malfunction, connect the servo amplifier power outputs (U/V/W) to the servo motor power inputs (U/V/W) directly. Do not connect a magnetic contactor and others between them.
- The phases (U/V/W) of the servo amplifier power outputs and the phases (U/V/W) of the servo motor power inputs should match with each other.
- Check the wiring and sequence program thoroughly before switching the power on.
- Carefully select the cable clamping method, and make sure that bending stress and the stress of the cable's own weight are not applied on the cable connection section.
- In an application where the servo motor moves, determine the cable bending radius based on the cable bending life and wire type.
- To prevent malfunction, avoid bundling the servo amplifier's power lines (input/output) and signal cables together or running them in parallel to each other. Separate the power lines from the signal cables.
- Do not apply excessive tension on the cable when cabling.

## Precautions

- The minimum bending radius of the SSCNET III cable is 25 mm for MR-J3BUS\_M and 50 mm for MR-J3BUS\_M-A/-B. If using these cables under the minimum bending radius, performance cannot be guaranteed.
- If the ends of the SSCNET III cable are dirty, the light will be obstructed, causing malfunctions. Keep the ends clean.
- Do not tighten the SSCNET III cable with cable ties, etc.
- Do not look at the light directly when the SSCNET III cable is not connected.

### [Initial settings]

- For MR-J5-A\_, select a control mode from position, speed or torque with [Pr. PA01.0]. Position control mode is set as default. Change the parameter setting value when using the other control modes. For MR-J5\_-G\_ and MR-J5\_-B\_, the control mode is set by the controller.
- When using the regenerative option, change [Pr. PA02.0-1]. The regenerative option is disabled as default.

### [Operation]

- Do not use a product which is damaged or has missing parts. In that case, replace the product.
- Turn on the stroke limit signals (FLS/RLS), or the stroke end signals (LSP/LSN) in position or speed control mode. The servo motor will not start if the signals are off.
- When a magnetic contactor is installed on the primary side of the servo amplifier, do not perform frequent starts and stops with the magnetic contactor. Doing so may damage the servo amplifier.
- Do not use the dynamic brake to stop in a normal operation as it is the function to stop in emergency.
- Note that the number of operation times of the dynamic brake is limited. For example, when a machine operates at the recommended load to motor inertia ratio or less and decelerates from the rated speed to a stop once in 10 minutes, the estimated number of operation times is 1000.
- If the protective functions of the servo amplifier activate, turn the power off immediately. Remove the cause before turning the power on again.
- The servo amplifier, the regenerative resistor, and the servo motor can be very hot. Take safety measures such as covering them. In addition, do not directly touch the servo amplifier, the regenerative resistor, and the servo motor during or right after operation.

### [Maintenance]

- When an error occurs, ensure safety by turning the power off, etc., before dealing with the error. Otherwise, it may cause an accident.
- Before wiring or inspection, turn off the power, wait for 15 minutes or more until the charge light turns off, and then check the voltage between P+ and N- with a voltage tester. For the drive unit, turn off the power, wait for 20 minutes or more until the charge light turns off, and then check the voltage between L+ and L- with a voltage tester.
- In a maintenance inspection, make sure that the emergency stop circuit operates properly such that an operation can be stopped immediately and a power can be shut off by the emergency stop switch.

### [Use of rotary servo motors and direct drive motors]

- To prevent a malfunction on the encoder, do not apply shocks, e.g. hit with a hammer, when coupling the shaft end of the rotary drive motor.
- When mounting a pulley to the rotary servo motor with a keyed shaft, use the screw hole in the shaft end.
- When removing the pulley, use a pulley remover to protect the shaft from excessive load and impact.
- Do not apply a load exceeding the tolerable load onto the rotary servo motor shaft or the direct drive motor rotor. The shaft or the rotor may break.
- When the rotary servo motor is mounted with the shaft vertical (shaft up), provide measures so that the servo motor is not exposed to oil and water entering from the machine side, gear box, etc.
- Mount the rotary servo motor in the specified direction.
- When the direct drive motor is used in a machine such as vertical axis which generates unbalanced torque, use it in absolute position detection system.
- Do not use the 24 V DC interface power supply for the electromagnetic brake. To prevent malfunction, use the power supply designed exclusively for the electromagnetic brake.
- Do not apply the electromagnetic brake when the servo is on. Doing so may cause the servo amplifier overload or shorten the brake life. Apply the electromagnetic brake when the servo is off.
- Torque may drop due to temperature increase of the rotary servo motor or the direct drive motor. Use the motor within the specified ambient temperature.
- The temperature rise of the rotary servo motors and the direct drive motors varies depending on the installation environment and the operation conditions. Conduct a test run on the servo motors before an actual operation to make sure that no alarm occurs.

### [Use of linear encoders]

- When the linear encoder is incorrectly installed, an alarm or a position mismatch may occur. In this case, refer to the following checking points for the linear encoder to check the mounting condition.
- Checking points for the linear encoder
  - (a) Check that the gap between the head and scale is proper.
  - (b) Check the scale head for rolling and yawing (decrease in rigidity of scale head section).
  - (c) Check the scale surface for dust and scratches.
  - (d) Check that the vibration and temperature are within the specified range.
  - (e) Check that the speed is within the permissible range without overshooting.

**[Use of linear servo motors]**

- The linear servo system uses powerful magnets on the secondary side. Magnetic force is inversely proportional to the square of the distance from the magnetic material. Therefore, the magnetic force will be significantly stronger as closer to the magnetic material. When mounting the secondary side of linear servo motor, ensure the sufficient distance from the magnetic bodies around it and securely fix those magnetic bodies.
- One who uses a medical device like a pacemaker must keep away from the product and equipment.
- Do not wear metals such as watches, pierced earrings, necklaces, etc.
- Do not put magnetic cards, watches, portable phones, etc. close to the motor.
- Place a caution sign such as "CAUTION! POWERFUL MAGNET" to give warning against the machine.
- Use non-magnetic tools, when installing or working near the linear servo motor.  
e.g., explosion-proof beryllium copper alloy safety tools (BEALON manufactured by NGK Insulators, Ltd.)
- If the linear servo motor is used in such an environment where there is magnetic powder, the powder may adhere to the permanent magnets of the secondary side and cause a damage. In that case, take measures to prevent the magnetic powder or pieces from being attracted to the permanent magnets of the secondary side or from going into the gap between primary side and secondary side.
- The linear servo motor is rated IP00. Provide protection measures to prevent dust and oil, etc., as necessary.
- Install the linear servo motor so that the thrust is applied to the center of gravity of the moving part. Failing to do so will cause a moment to occur.
- The cables such as the power cable deriving from the primary side cannot withstand the long-term bending action. Avoid the bending action by fixing the cables to the moving part or others. Also, use the cable that can withstand the long-term bending action for the wiring to the servo amplifier.
- Increase in the temperature of the linear servo motor causes a thrust drop. Use the motor within the specified ambient temperature.

**[Disposal of linear servo motors]**

- Dispose the primary side as industrial waste.
- Demagnetize the secondary side with a heat of 300 °C or higher, and dispose as industrial waste.
- Do not leave the product unattended.

**For safety enhancement**

When the MELSERVO-J5 series servo amplifiers, servo motors, options, and peripheral equipment are installed in machines/systems, make sure the machines/systems conform to relevant standards and regulations.

The entire system shall observe the following:

- (1) For safety circuits, use parts and/or devices whose safety are confirmed or which comply with safety standards for the application.
- (2) For details regarding the use of the servo amplifiers and other cautionary information, refer to relevant User's Manuals.
- (3) Perform risk assessment on the entire machine/system. Using Certification Body for final safety certification is recommended.

## Servo system controller

### Warranty

#### 1. Warranty period and coverage

We will repair any failure or defect hereinafter referred to as "failure" in our FA equipment hereinafter referred to as the "Product" arisen during warranty period at no charge due to causes for which we are responsible through the distributor from which you purchased the Product or our service provider. However, we will charge the actual cost of dispatching our engineer for an on-site repair work on request by customer in Japan or overseas countries. We are not responsible for any on-site readjustment and/or trial run that may be required after a defective unit is repaired or replaced.

#### [Term]

For terms of warranty, please contact your original place of purchase.

#### [Limitations]

- (1) You are requested to conduct an initial failure diagnosis by yourself, as a general rule.  
It can also be carried out by us or our service company upon your request and the actual cost will be charged.  
However, it will not be charged if we are responsible for the cause of the failure.
- (2) This limited warranty applies only when the condition, method, environment, etc. of use are in compliance with the terms and conditions and instructions that are set forth in the instruction manual and user manual for the Product and the caution label affixed to the Product.
- (3) Even during the term of warranty, the repair cost will be charged on you in the following cases;
  - (i) a failure caused by your improper storing or handling, carelessness or negligence, etc., and a failure caused by your hardware or software problem
  - (ii) a failure caused by any alteration, etc. to the Product made on your side without our approval
  - (iii) a failure which may be regarded as avoidable, if your equipment in which the Product is incorporated is equipped with a safety device required by applicable laws and has any function or structure considered to be indispensable according to a common sense in the industry
  - (iv) a failure which may be regarded as avoidable if consumable parts designated in the instruction manual, etc. are duly maintained and replaced
  - (v) any replacement of consumable parts (battery, fan, smoothing capacitor, etc.)
  - (vi) a failure caused by external factors such as inevitable accidents, including without limitation fire and abnormal fluctuation of voltage, and acts of God, including without limitation earthquake, lightning and natural disasters
  - (vii) a failure generated by an unforeseeable cause with a scientific technology that was not available at the time of the shipment of the Product from our company
  - (viii) any other failures which we are not responsible for or which you acknowledge we are not responsible for

#### 2. Term of warranty after the stop of production

- (1) We may accept the repair at charge for another seven (7) years after the production of the product is discontinued. The announcement of the stop of production for each model can be seen in our Sales and Service, etc.
- (2) Please note that the Product (including its spare parts) cannot be ordered after its stop of production.

#### 3. Service in overseas countries

Our regional FA Center in overseas countries will accept the repair work of the Product. However, the terms and conditions of the repair work may differ depending on each FA Center. Please ask your local FA Center for details.

#### 4. Exclusion of loss in opportunity and secondary loss from warranty liability

Regardless of the gratis warranty term, Mitsubishi shall not be liable for compensation to:

- (1) Damages caused by any cause found not to be the responsibility of Mitsubishi.
- (2) Loss in opportunity, lost profits incurred to the user by Failures of Mitsubishi products.
- (3) Special damages and secondary damages whether foreseeable or not, compensation for accidents, and compensation for damages to products other than Mitsubishi products.
- (4) Replacement by the user, maintenance of on-site equipment, start-up test run and other tasks.

#### 5. Change of Product specifications

Specifications listed in our catalogs, manuals or technical documents may be changed without notice.

#### 6. Application and use of the Product

- (1) For the use of our servo system controller, its applications should be those that may not result in a serious damage even if any failure or malfunction occurs in the servo system controller, and a backup or fail-safe function should operate on an external system to the servo system controller when any failure or malfunction occurs.
- (2) Our servo system controller is designed and manufactured as general purpose product for use at general industries. Therefore, applications substantially influential on the public interest for such as atomic power plants and other power plants of electric power companies, and also which require a special quality assurance system, including applications for railway companies and government or public offices are not recommended, and we assume no responsibility for any failure caused by these applications when used.  
In addition, applications which may be substantially influential to human lives or properties for such as airlines, medical treatments, railway service, incineration and fuel systems, man-operated material handling equipment, entertainment machines, safety machines, etc. are not recommended, and we assume no responsibility for any failure caused by these applications when used.  
We will review the acceptability of the abovementioned applications, if you agree not to require a specific quality for a specific application. Please contact us for consultation.
- (3) Mitsubishi Electric shall have no responsibility or liability for any problems involving programmable controller trouble and system trouble caused by DoS attacks, unauthorized access, computer viruses, and other cyberattacks.

## AC servo

## Warranty

## 1. Warranty period and coverage

We will repair any failure or defect hereinafter referred to as "failure" in our FA equipment hereinafter referred to as the "Product" arisen during warranty period at no charge due to causes for which we are responsible through the distributor from which you purchased the Product or our service provider. However, we will charge the actual cost of dispatching our engineer for an on-site repair work on request by customer in Japan or overseas countries. We are not responsible for any on-site readjustment and/or trial run that may be required after a defective unit is repaired or replaced.

**[Term]**

For terms of warranty, please contact your original place of purchase.

**[Limitations]**

- (1) You are requested to conduct an initial failure diagnosis by yourself, as a general rule. It can also be carried out by us or our service company upon your request and the actual cost will be charged. However, it will not be charged if we are responsible for the cause of the failure.
- (2) This limited warranty applies only when the condition, method, environment, etc. of use are in compliance with the terms and conditions and instructions that are set forth in the instruction manual and user manual for the Product and the caution label affixed to the Product.
- (3) Even during the term of warranty, the repair cost will be charged on you in the following cases;
  - (i) a failure caused by your improper storing or handling, carelessness or negligence, etc., and a failure caused by your hardware or software problem
  - (ii) a failure caused by any alteration, etc. to the Product made on your side without our approval
  - (iii) a failure which may be regarded as avoidable, if your equipment in which the Product is incorporated is equipped with a safety device required by applicable laws and has any function or structure considered to be indispensable according to a common sense in the industry
  - (iv) a failure which may be regarded as avoidable if consumable parts designated in the instruction manual, etc. are duly maintained and replaced
  - (v) any replacement of consumable parts (battery, fan, smoothing capacitor, etc.)
  - (vi) a failure caused by external factors such as inevitable accidents, including without limitation fire and abnormal fluctuation of voltage, and acts of God, including without limitation earthquake, lightning and natural disasters
  - (vii) a failure generated by an unforeseeable cause with a scientific technology that was not available at the time of the shipment of the Product from our company
  - (viii) any other failures which we are not responsible for or which you acknowledge we are not responsible for

## 2. Term of warranty after the stop of production

- (1) We may accept the repair at charge for another seven (7) years after the production of the product is discontinued. The announcement of the stop of production for each model can be seen in our Sales and Service, etc.
- (2) Please note that the Product (including its spare parts) cannot be ordered after its stop of production.

## 3. Service in overseas countries

Our regional FA Center in overseas countries will accept the repair work of the Product. However, the terms and conditions of the repair work may differ depending on each FA Center. Please ask your local FA Center for details.

## 4. Exclusion of loss in opportunity and secondary loss from warranty liability

Regardless of the gratis warranty term, Mitsubishi shall not be liable for compensation to:

- (1) Damages caused by any cause found not to be the responsibility of Mitsubishi.
- (2) Loss in opportunity, lost profits incurred to the user by Failures of Mitsubishi products.
- (3) Special damages and secondary damages whether foreseeable or not, compensation for accidents, and compensation for damages to products other than Mitsubishi products.
- (4) Replacement by the user, maintenance of on-site equipment, start-up test run and other tasks.

## 5. Change of Product specifications

Specifications listed in our catalogs, manuals or technical documents may be changed without notice.

## 6. Application and use of the Product

- (1) For the use of our AC Servo, its applications should be those that may not result in a serious damage even if any failure or malfunction occurs in AC Servo, and a backup or fail-safe function should operate on an external system to AC Servo when any failure or malfunction occurs.
- (2) Our AC Servo is designed and manufactured as a general purpose product for use at general industries. Therefore, applications substantially influential on the public interest for such as atomic power plants and other power plants of electric power companies, and also which require a special quality assurance system, including applications for railway companies and government or public offices are not recommended, and we assume no responsibility for any failure caused by these applications when used.

In addition, applications which may be substantially influential to human lives or properties for such as airlines, medical treatments, railway service, incineration and fuel systems, man-operated material handling equipment, entertainment machines, safety machines, etc. are not recommended, and we assume no responsibility for any failure caused by these applications when used.

- We will review the acceptability of the abovementioned applications, if you agree not to require a specific quality for a specific application. Please contact us for consultation.
- (3) Mitsubishi Electric shall have no responsibility or liability for any problems involving programmable controller trouble and system trouble caused by DoS attacks, unauthorized access, computer viruses, and other cyberattacks.

# Extensive global support coverage providing expert help whenever needed

## ■ Global FA centers

### ■ EMEA

#### Europe FA Center

MITSUBISHI ELECTRIC EUROPE B.V. Polish Branch  
Tel: +48-12-347-65-00

#### Germany FA Center

MITSUBISHI ELECTRIC EUROPE B.V. German Branch  
Tel: +49-2102-486-0

#### UK FA Center

MITSUBISHI ELECTRIC EUROPE B.V. UK Branch  
Tel: +44-1707-27-8780

#### Czech Republic FA Center

MITSUBISHI ELECTRIC EUROPE B.V. Czech Branch  
Tel: +420-734-402-587

#### Italy FA Center

MITSUBISHI ELECTRIC EUROPE B.V. Italian Branch  
Tel: +39-039-60531

#### Turkey FA Center

MITSUBISHI ELECTRIC TURKEY Elektrik Urunleri A.S.  
Tel: +90-216-969-2500

### ■ Asia-Pacific

#### China

##### Beijing FA Center

MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD.  
Beijing FA Center  
Tel: +86-10-6518-8830

##### Guangzhou FA Center

MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD.  
Guangzhou FA Center  
Tel: +86-20-8923-6730

##### Shanghai FA Center

MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD.  
Shanghai FA Center  
Tel: +86-21-2322-3030

##### Tianjin FA Center

MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD.  
Tianjin FA Center  
Tel: +86-22-2813-1015

#### Taiwan

##### Taipei FA Center

SETSUYO ENTERPRISE CO., LTD.  
Tel: +886-2-2299-9917

#### Korea

##### Korea FA Center

MITSUBISHI ELECTRIC AUTOMATION KOREA CO., LTD.  
Tel: +82-2-3660-9630

#### Thailand

##### Thailand FA Center

MITSUBISHI ELECTRIC FACTORY AUTOMATION (THAILAND) CO., LTD.  
Tel: +66-2682-6522 to 31

#### ASEAN

##### ASEAN FA Center

MITSUBISHI ELECTRIC ASIA PTE. LTD.  
Tel: +65-6470-2475

#### Malaysia

##### Malaysia FA Center

Malaysia FA Center  
Tel: +60-3-7626-5080

#### Indonesia

##### Indonesia FA Center

PT. MITSUBISHI ELECTRIC INDONESIA  
Cikarang Office  
Tel: +62-21-2961-7797

#### Vietnam

##### Hanoi FA Center

MITSUBISHI ELECTRIC VIETNAM COMPANY LIMITED  
Hanoi Branch Office  
Tel: +84-24-3937-8075

##### Ho Chi Minh FA Center

MITSUBISHI ELECTRIC VIETNAM COMPANY LIMITED  
Tel: +84-28-3910-5945

#### Philippines

##### Philippines FA Center

MELCO Factory Automation Philippines Inc.  
Tel: +63-(0)2-8256-8042

#### India

##### India Ahmedabad FA Center

MITSUBISHI ELECTRIC INDIA PVT. LTD.  
Ahmedabad Branch  
Tel: +91-7965120063

##### India Bangalore FA Center

MITSUBISHI ELECTRIC INDIA PVT. LTD.  
Bangalore Branch  
Tel: +91-80-4020-1600

##### India Chennai FA Center

MITSUBISHI ELECTRIC INDIA PVT. LTD.  
Chennai Branch  
Tel: +91-4445548772

##### India Coimbatore FA Center

MITSUBISHI ELECTRIC INDIA PVT. LTD.  
Coimbatore Branch  
Tel: +91-422-438-5606

##### India Gurgaon FA Center

MITSUBISHI ELECTRIC INDIA PVT. LTD.  
Gurgaon Head Office  
Tel: +91-124-463-0300

##### India Pune FA Center

MITSUBISHI ELECTRIC INDIA PVT. LTD.  
Pune Branch  
Tel: +91-20-2710-2000

### ■ Americas

#### USA

##### North America FA Center

MITSUBISHI ELECTRIC AUTOMATION, INC.  
Tel: +1-847-478-2100

#### Mexico

##### Mexico City FA Center

MITSUBISHI ELECTRIC AUTOMATION, INC.  
Mexico Branch  
Tel: +52-55-3067-7500

##### Mexico FA Center

MITSUBISHI ELECTRIC AUTOMATION, INC.  
Queretaro Office  
Tel: +52-442-153-6014

##### Mexico Monterrey FA Center

MITSUBISHI ELECTRIC AUTOMATION, INC.  
Monterrey Office  
Tel: +52-55-3067-7599

#### Brazil

##### Brazil FA Center

MITSUBISHI ELECTRIC DO BRASIL COMERCIO E SERVICOS LTDA.  
Tel: +55-11-4689-3000



MEMO

- Common Specifications
- Servo System Controllers
- Servo Amplifiers
- Rotary Servo Motors
- Linear Servo Motors
- Direct Drive Motors
- Options/Peripheral Equipment
- LVSWires
- Product List
- Precautions
- Support

## List of Instruction Manuals

Relevant manuals are listed below:

### Servo System Controller

| Manual name   | Manual No.         |
|---|--------------------|
| MELSEC iQ-R Motion Module User's Manual (Application for Simple Motion Mode)                    | IB-0300572ENG      |
| MELSEC iQ-R Motion Module (Simple Motion Mode) Function Block Reference                         | BCN-B62005-1040ENG |
| MELSEC iQ-R Motion Module User's Manual (Advanced Synchronous Control for Simple Motion Mode)   | IB-0300575ENG      |
| MELSEC iQ-R Motion Module User's Manual (Startup)   | IB-0300406ENG      |
| MELSEC iQ-R Motion Module User's Manual (Application)   | IB-0300411ENG      |
| MELSEC iQ-R Motion Module User's Manual (Network)   | IB-0300426ENG      |
| MELSEC iQ-R Programming Manual (Motion Module Instructions, Standard Functions/Function Blocks) | IB-0300431ENG      |
| MELSEC iQ-R Programming Manual (Motion Control Function Blocks)                                 | IB-0300533ENG      |
| MELSEC iQ-F FX5 Motion Module/Simple Motion Module User's Manual (Startup)                      | IB-0300251ENG      |
| MELSEC iQ-F FX5 Motion Module/Simple Motion Module User's Manual (Application)                  | IB-0300253ENG      |
| MELSEC iQ-F FX5 Motion Module/Simple Motion Module User's Manual (Advanced Synchronous Control) | IB-0300255ENG      |
| MELSEC iQ-F FX5 Motion Module User's Manual (CC-Link IE TSN)                                    | IB-0300568ENG      |
| MELSEC iQ-F FX5 Motion Module/Simple Motion Module Function Block Reference                     | BCN-B62005-719     |
| Motion Control Software SWM-G User's Manual (Startup)   | IB-0300562ENG      |
| Motion Control Software SWM-G Operating Manual  | IB-0300563ENG      |
| MELSEC iQ-R Motion Controller User's Manual   | IB-0300235         |
| MELSEC iQ-R Motion Controller Programming Manual (Common)                                       | IB-0300237         |
| MELSEC iQ-R Motion Controller Programming Manual (Program Design)                               | IB-0300239         |
| MELSEC iQ-R Motion Controller Programming Manual (Positioning Control)                          | IB-0300241         |
| MELSEC iQ-R Motion Controller Programming Manual (Advanced Synchronous Control)                 | IB-0300243         |
| MELSEC iQ-R Motion Controller Programming Manual (Machine Control)                              | IB-0300309         |
| MELSEC iQ-R Motion Controller Programming Manual (G-Code Control)                               | IB-0300371         |
| MELSEC iQ-R Simple Motion Module User's Manual (Startup)  | IB-0300245ENG      |
| MELSEC iQ-R Simple Motion Module User's Manual (Application)                                    | IB-0300247ENG      |
| MELSEC iQ-R Simple Motion Module User's Manual (Advanced Synchronous Control)                   | IB-0300249ENG      |
| MELSEC iQ-R Simple Motion Module Function Block Reference                                       | BCN-B62005-691ENG  |
| Q173D(S)CPU/Q172D(S)CPU Motion Controller User's Manual   | IB-0300133         |
| Q173D(S)CPU/Q172D(S)CPU Motion Controller Programming Manual (COMMON)                           | IB-0300134         |
| Q173D(S)CPU/Q172D(S)CPU Motion Controller (SV13/SV22) Programming Manual (Motion SFC)           | IB-0300135         |
| Q173D(S)CPU/Q172D(S)CPU Motion Controller (SV13/SV22) Programming Manual (REAL MODE)            | IB-0300136         |
| Q173D(S)CPU/Q172D(S)CPU Motion Controller (SV22) Programming Manual (VIRTUAL MODE)              | IB-0300137         |
| Q173D(S)CPU/Q172D(S)CPU Motion Controller Programming Manual (Safety Observation)               | IB-0300183         |
| Q173DSCPU/Q172DSCPU Motion Controller (SV22) Programming Manual (Advanced Synchronous Control)  | IB-0300198         |
| Q170MSCPU User's Manual   | IB-0300212         |
| MELSEC-Q QD77MS Simple Motion Module User's Manual (Positioning Control)                        | IB-0300185         |
| MELSEC-Q/L QD77MS/QD77GF/LD77MS/LD77MH Simple Motion Module User's Manual (Synchronous Control) | IB-0300174         |

**Servo Amplifier**

| Manual name   | Manual No.    |
|---|---------------|
| MR-J5 User's Manual (Hardware)                                | SH-030298ENG  |
| MR-J5 User's Manual (Function)                                | SH-030300ENG  |
| MR-J5 User's Manual (Adjustment)                              | SH-030306ENG  |
| MR-J5 User's Manual (Troubleshooting)                         | SH-030312ENG  |
| MR-J5-G/MR-J5W-G User's Manual (Introduction)                 | SH-030294ENG  |
| MR-J5-G/MR-J5W-G User's Manual (Parameters)                   | SH-030308ENG  |
| MR-J5-G/MR-J5W-G User's Manual (Communication Function)       | SH-030302ENG  |
| MR-J5-G/MR-J5W-G User's Manual (Object Dictionary)            | SH-030304ENG  |
| MR-J5-G-N1/MR-J5W-G-N1 User's Manual (Introduction)           | SH-030366ENG  |
| MR-J5-G-N1/MR-J5W-G-N1 User's Manual (Communication Function) | SH-030371ENG  |
| MR-J5-G-N1/MR-J5W-G-N1 User's Manual (Object Dictionary)      | SH-030376ENG  |
| MR-J5D User's Manual (Hardware)                               | IB-0300548ENG |
| MR-J5D-G User's Manual (Introduction)                         | IB-0300538ENG |
| MR-J5D-G-N1 User's Manual (Introduction)                      | IB-0300543ENG |
| MR-CV Power Regeneration Converter Unit User's Manual         | IB-0300553ENG |
| MR-J5-B/MR-J5W-B User's Manual (Introduction)                 | IB-0300578ENG |
| MR-J5-B/MR-J5W-B User's Manual (Parameters)                   | IB-0300581ENG |
| MR-J5-A User's Manual (Introduction)                          | SH-030296ENG  |
| MR-J5-A User's Manual (Parameters)                            | SH-030310ENG  |

**Servo Motor**

| Manual name   | Manual No.    |
|---|---------------|
| Rotary Servo Motor User's Manual (For MR-J5)              | SH-030314ENG  |
| Linear Servo Motor User's Manual (LM-H3/LM-U2/LM-F/LM-K2) | SH-030316ENG  |
| Linear Servo Motor User's Manual (LM-AJ/LM-AU)            | IB-0300518ENG |
| Direct Drive Motor User's Manual                          | SH-030318ENG  |

**Others**

| Manual name                           | Manual No.   |
|---------------------------------------|--------------|
| EMC Installation Guidelines           | IB-67310     |
| MR-J5 Partner's Encoder User's Manual | SH-030320ENG |

Android and Google Play are trademarks of Google LLC.  
Apple, iPad, iPad Air, iPad mini, and App Store are trademarks of Apple Inc., registered in the U.S. and other countries.  
Microsoft, Windows, Visual C++, Visual Studio, and IntelliSense are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.  
Celeron and Pentium are either registered trademarks or trademarks of Intel Corporation in the United States and/or other countries.  
PLCopen and related logos are registered trademarks of PLCopen.  
EtherCAT is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.  
All other company names and product names used in this document are trademarks or registered trademarks of their respective companies.

#### Precautions before use

This publication explains the typical features and functions of the products herein and does not provide restrictions or other information related to usage and module combinations. Before using the products, always read the product user manuals. Mitsubishi Electric will not be held liable for damage caused by factors found not to be the cause of Mitsubishi Electric; opportunity loss or lost profits caused by faults in Mitsubishi Electric products; damage, secondary damage, or accident compensation, whether foreseeable or not, caused by special factors; damage to products other than Mitsubishi Electric products; or any other duties.

#### For safe use

- To use the products given in this publication properly, always read the relevant manuals before beginning operation.
- The products have been manufactured as general-purpose parts for general industries, and are not designed or manufactured to be incorporated in a device or system used in purposes related to human life.
- Before using the products for special purposes such as nuclear power, electric power, aerospace, medicine or passenger-carrying vehicles, consult with Mitsubishi Electric.
- The products have been manufactured under strict quality control. However, when installing the products where major accidents or losses could occur if the products fail, install appropriate backup or fail-safe functions in the system.

## Creating Solutions Together.



Low-voltage Power Distribution Products



Transformers, Med-voltage Distribution Products



Power Monitoring and Energy Saving Products



Power (UPS) and Environmental Products



Compact and Modular Controllers



Servos, Motors and Inverters



Visualization: HMIs



Edge Computing Products



Numerical Control (NC)



Collaborative and Industrial Robots



Processing machines: EDM, Lasers



SCADA, analytics and simulation software

Mitsubishi Electric's product lineup, from various controllers and drives to energy-saving devices and processing machines, all help you to automate your world. They are underpinned by software, innovative data monitoring, and modelling systems supported by advanced industrial networking and Edgecross IT/OT connectivity. Together with a worldwide partner ecosystem, Mitsubishi Electric factory automation (FA) has everything to make IoT and Digital Manufacturing a reality.

With a complete portfolio and comprehensive capabilities that combine synergies with diverse business units, Mitsubishi Electric provides a one-stop approach to how companies can tackle the shift to clean energy and energy conservation, carbon neutrality and sustainability, which are now a universal requirement of factories, buildings, and social infrastructure.

We at Mitsubishi Electric FA are your solution partners waiting to work with you as you take a step toward the realization of sustainable manufacturing and society through the application of automation. Let's automate the world together!

# Mitsubishi Electric AC Servo System MELSERVO-J5

| Country/Region | Sales office   | Tel                     |
|----------------|--|-------------------------|
| USA            | Mitsubishi Electric Automation, Inc.<br>500 Corporate Woods Parkway, Vernon Hills, IL 60061, U.S.A.  | Tel : +1-847-478-2100   |
| Mexico         | Mitsubishi Electric Automation, Inc. Mexico Branch<br>Boulevard Miguel de Cervantes Saavedra 301, Torre Norte Piso 5, Int. 502, Ampliacion Granada,<br>Miguel Hidalgo, Ciudad de Mexico, Mexico, C.P.11520 | Tel : +52-55-3067-7500  |
| Brazil         | Mitsubishi Electric do Brasil Comercio e Servicos Ltda.<br>Avenida Adelino Cardana, 293, 21 andar, Bethaville, Barueri SP, Brazil  | Tel : +55-11-4689-3000  |
| Germany        | Mitsubishi Electric Europe B.V. German Branch<br>Mitsubishi-Electric-Platz 1, 40882 Ratingen, Germany  | Tel : +49-2102-486-0    |
| UK             | Mitsubishi Electric Europe B.V. UK Branch<br>Travellers Lane, UK-Hatfield, Hertfordshire, AL10 8XB, U.K.   | Tel : +44-1707-28-8780  |
| Italy          | Mitsubishi Electric Europe B.V. Italian Branch<br>Campus, Energy Park Via Energy Park 14, Vimercate 20871 (MB) Italy   | Tel : +39-039-60531     |
| Spain          | Mitsubishi Electric Europe B.V. Spanish Branch<br>Carretera de Rubi, 76-80-Adpo. 420, E-08174 Sant Cugat del Valles (Barcelona), Spain   | Tel : +34-935-65-3131   |
| France         | Mitsubishi Electric Europe B.V. French Branch<br>2, rue de l'Union-92565 Rueil-Malmaison Cedex-France  | Tel : +33-1-55-68-55-68 |
| Czech Republic | Mitsubishi Electric Europe B.V. Czech Branch, Prague Office<br>Pekarska 621/7, 155 00 Praha 5, Czech Republic  | Tel : +420-734-402-587  |
| Poland         | Mitsubishi Electric Europe B.V. Polish Branch<br>ul. Krakowska 48, 32-083 Balice, Poland   | Tel : +48-12-347-65-00  |
| Sweden         | Mitsubishi Electric Europe B.V. (Scandinavia)<br>Hedvig Mollersgata 6, 223 55 Lund, Sweden   | Tel : +46-8-625-10-00   |
| Turkey         | Mitsubishi Electric Turkey Elektrik Urunleri A.S.<br>Serifali Mah. Kale Sok. No:41 Umraniye / Istanbul, Turkey   | Tel : +90-216-969-2500  |
| UAE            | Mitsubishi Electric Europe B.V. Dubai Branch<br>Dubai Silicon Oasis, P.O.BOX 341241, Dubai, U.A.E.   | Tel : +971-4-3724716    |
| South Africa   | Adroit Technologies<br>20 Waterford Office Park, 189 Witkoppen Road, Fourways, South Africa  | Tel : +27-11-658-8100   |
| China          | Mitsubishi Electric Automation (China) Ltd.<br>Mitsubishi Electric Automation Center, No.1386 Hongqiao Road, Shanghai, China   | Tel : +86-21-2322-3030  |
| Taiwan         | SETSUYO ENTERPRISE CO., LTD.<br>5F, No.105, Wugong 3rd Road, Wugu District, New Taipei City 24889, Taiwan  | Tel : +886-2-2299-2499  |
| Korea          | Mitsubishi Electric Automation Korea Co., Ltd.<br>7F to 9F, Gangseo Hangang Xi-tower A, 401, Yangcheon-ro, Gangseo-Gu, Seoul, Korea  | Tel : +82-2-6103-9474   |
| Singapore      | Mitsubishi Electric Asia Pte. Ltd.<br>307 Alexandra Road, Mitsubishi Electric Building, Singapore 159943   | Tel : +65-6473-2486     |
| Thailand       | Mitsubishi Electric Factory Automation (Thailand) Co., Ltd.<br>101, True Digital Park Office, 5th Floor, Sukhumvit Road, Bang Chak, Prakanong, Bangkok,<br>Thailand  | Tel : +66-2092-8600     |
| Indonesia      | PT. Mitsubishi Electric Indonesia<br>Gedung Jaya 8th Floor, JL. MH. Thamrin No.12, Jakarta Pusat 10340, Indonesia  | Tel : +62-21-3192-6461  |
| Vietnam        | Mitsubishi Electric Vietnam Company Limited<br>11th & 12th Floor, Viettel Tower B, 285 Cach Mang Thang Tam Street, Ward 12, District 10, Ho<br>Chi Minh City, Vietnam.                                     | Tel : +84-28-3910-5945  |
| India          | Mitsubishi Electric India Pvt. Ltd. Pune Branch<br>ICC-Devi Gaurav Technology Park, Unit no. 402, Fourth Floor, Survey no. 191-192 (P),<br>Opp. Vallabh Nagar Bus Depot, Pune - 411018, Maharashtra, India | Tel : +91-20-4624-2100  |
| Australia      | Mitsubishi Electric Australia Pty. Ltd.<br>348 Victoria Road, P.O. Box 11, Rydalmere, N.S.W 2116, Australia  | Tel : +61-2-9684-7777   |



Mitsubishi Electric's e-F@ctory concept utilizes both FA and IT technologies, to reduce the total cost of development, production and maintenance, with the aim of achieving manufacturing that is a "step ahead of the times". It is supported by the e-F@ctory Alliance Partners covering software, devices, and system integration, creating the optimal e-F@ctory architecture to meet the end users needs and investment plans.



## MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN  
NAGOYA WORKS: 1-14, YADA-MINAMI 5-CHOME, HIGASHI-KU, NAGOYA 461-8670, JAPAN